
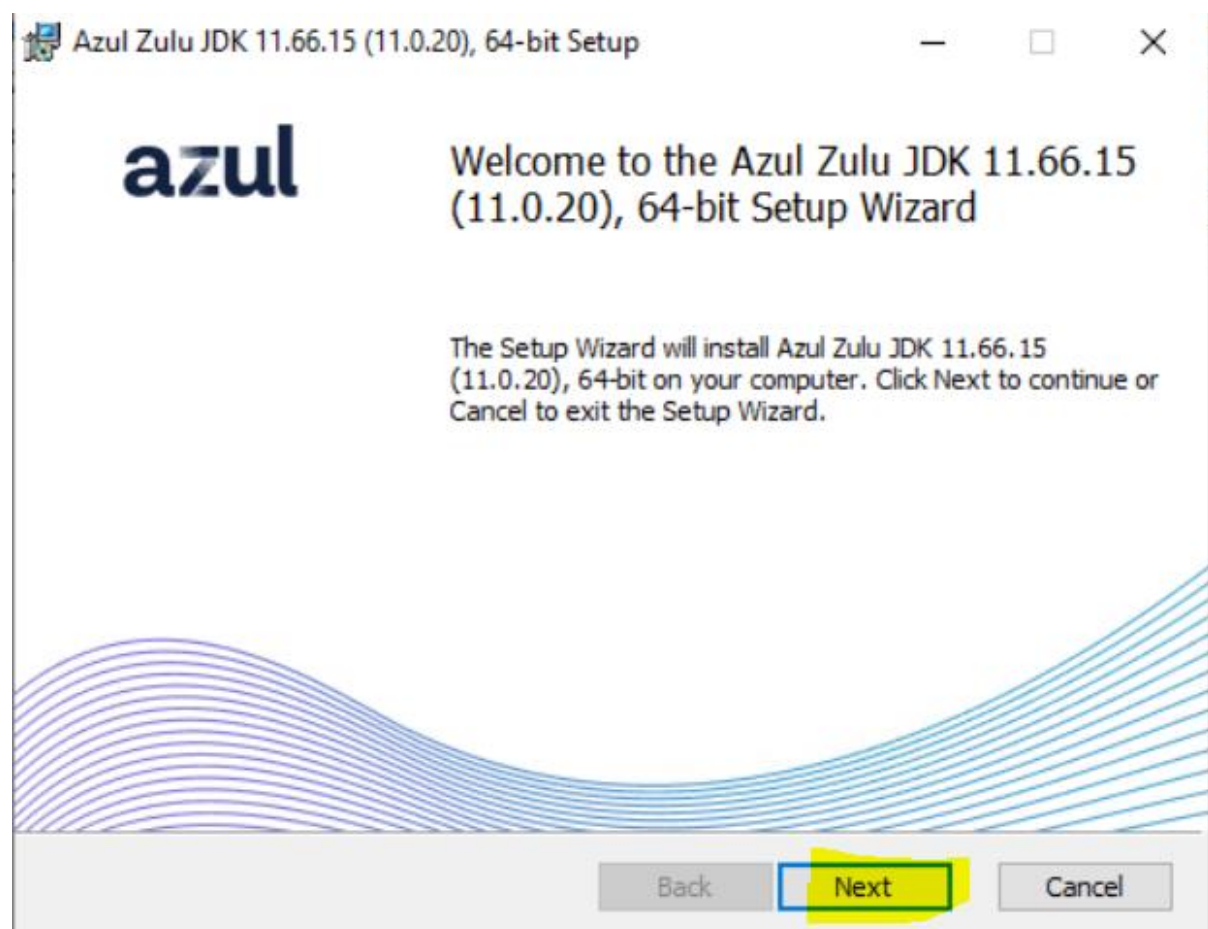


Azul Zulu Java Installation

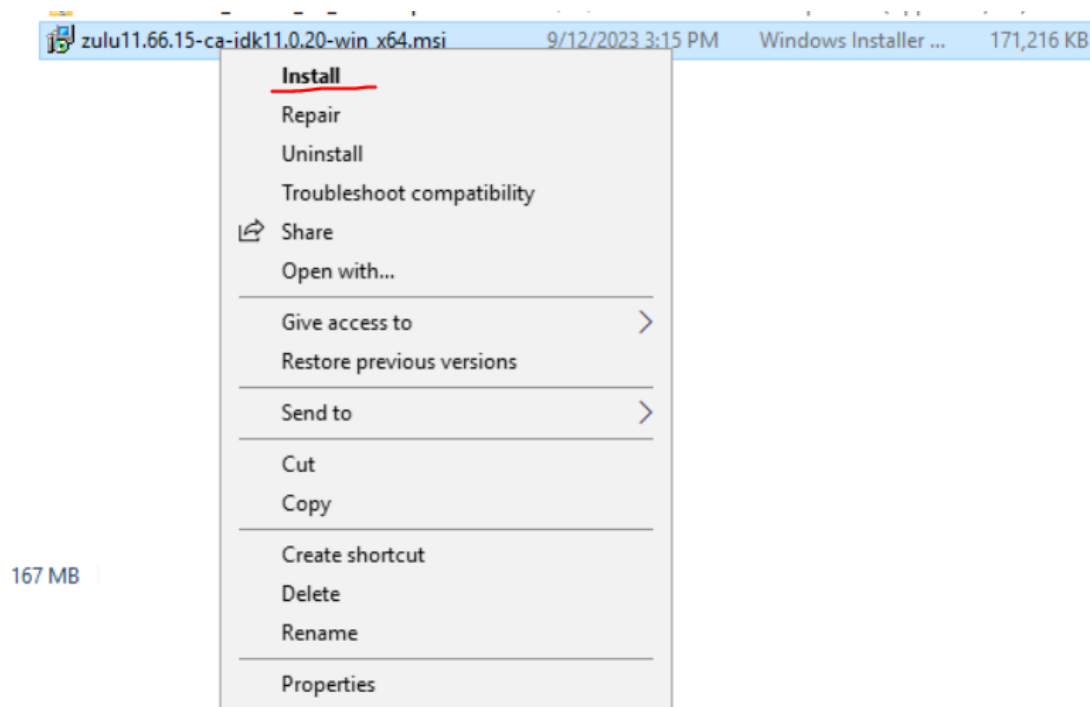


Custom Setup

Select the way you want features to be installed.

azul

Click the icons in the tree below to change the way features will be installed.

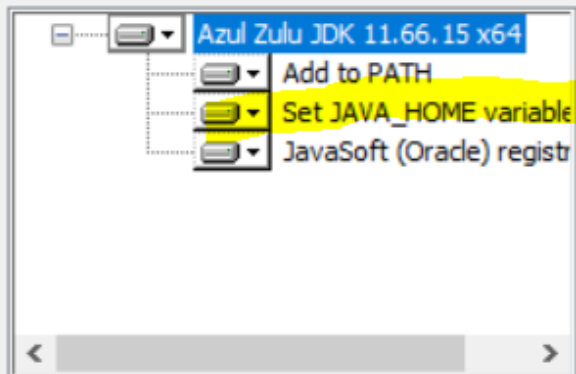

This feature requires 301MB on your hard drive. It has 3 of 3 subfeatures selected. The subfeatures require 2KB on your hard drive.

Location: C:\Program Files\Zulu\zulu-11\

Browse...

Reset

Disk Usage

Back

Next

Cancel



Azul Zulu JDK 11.66.15 (11.0.20), 64-bit Setup



Ready to install Azul Zulu JDK 11.66.15 (11.0.20), 64-bit

azul

Click Install to begin the installation. Click Back to review or change any of your installation settings. Click Cancel to exit the wizard.

Back

Install

Cancel

Azul Zulu JDK 11.66.15 (11.0.20), 64-bit Setup

azul

Completed the Azul Zulu JDK 11.66.15
(11.0.20), 64-bit Setup Wizard


Click the Finish button to exit the Setup Wizard.

Back

Finish

Cancel

Oracle 19c Database Installation

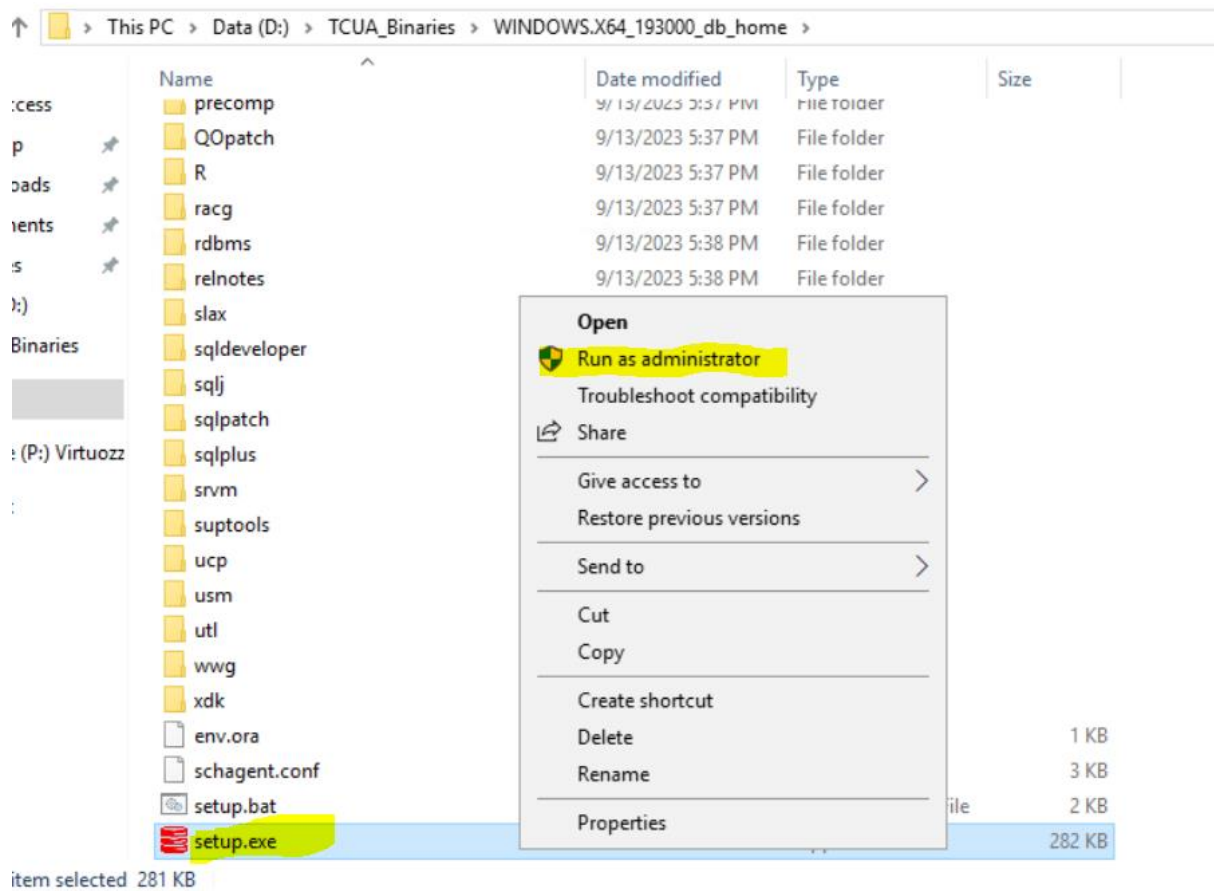

Select Configuration Option

19^c ORACLE[®]
Database

Configuration Option

Database Installation Options

- Install Type
- Oracle Home User
- Installation Location
- Configuration Type
- Database Identifiers
- Configuration Options
- Database Storage
- Management Options
- Recovery Options
- Schema Passwords
- Prerequisite Checks
- Summary
- Install Product
- Finish

Select any of the following install options.

☐ Create and configure a single instance database.

This option creates a starter database.

 **Set Up Software Only**

Note 1: For RAC install, do 'Set Up Software Only' and then execute DBCA (Database Configuration Assistant) from the oracle home.

Note 2: To upgrade an Oracle Database, do 'Set Up Software Only' and then execute DBUA (Database Upgrade Assistant) from the oracle home.

Help

< Back

Next >

Install

Cancel

Select Database Installation Option

19^c ORACLE[®]
Database

- Configuration Option
- Database Installation Options**
- Install Type
 - Oracle Home User
 - Installation Location
 - Prerequisite Checks
 - Summary
 - Install Product
 - Finish

Select the type of database installation you want to perform.

- ☒ Single instance database installation
- ☐ Oracle Real Application Clusters database installation

Help

< Back

Next >

Install

Cancel

Select Database Edition

19^c ORACLE[®]
Database[Configuration Option](#)[Database Installation Options](#)**[Database Edition](#)**[Oracle Home User](#)[Installation Location](#)[Prerequisite Checks](#)[Summary](#)[Install Product](#)[Finish](#)

Which database edition do you want to install?

☒ **Enterprise Edition**

Oracle Database 19c Enterprise Edition is a self-managing database that has the scalability, performance, high availability, and security features required to run the most demanding, mission-critical applications.

☐ **Standard Edition 2**

Oracle Database 19c Standard Edition 2 is a full-featured data management solution ideally suited to the needs of medium-sized businesses.

[Help](#)

< Back

Next >

Install

Cancel

Specify Oracle Home User

19^c ORACLE[®]
Database[Configuration Option](#)[Database Installation Options](#)[Database Edition](#)**[Oracle Home User](#)**[Installation Location](#)[Prerequisite Checks](#)[Summary](#)[Install Product](#)[Finish](#)

For enhanced security, you may choose to run Windows Services from this Oracle home with a non-administrator account. Oracle recommends that you choose a Virtual Account or specify a standard Windows User Account for this purpose.

 **Use Virtual Account**☐ Use Existing Windows User

User Name:

Password:

☐ Create New Windows User

User Name:

Password:

Confirm Password:

The newly created user is denied Windows logon privileges.

☐ Use Windows Built-in Account[Help](#)

< Back

Next >

Install

Cancel

Specify Installation Location

- [Configuration Option](#)
- [Database Installation Options](#)
- [Database Edition](#)
- [Oracle Home User](#)
- [Installation Location](#)**
- [Prerequisite Checks](#)
- [Summary](#)
- [Install Product](#)
- [Finish](#)

Specify a path to place all Oracle software and configuration-related files installed by this installation owner. This location is the Oracle base directory for the installation owner.

Oracle base:

This software directory is the Oracle Database home directory.

Software location: D:\TCUA_Binaries\WINDOWS.X64_193000_db_home

[Help](#)

Summary

- [Configuration Option](#)
- [Database Installation Options](#)
- [Database Edition](#)
- [Oracle Home User](#)
- [Installation Location](#)
- [Prerequisite Checks](#)
- [Summary](#)**
- [Install Product](#)
- [Finish](#)

Oracle Database 19c Installer

Global settings

Oracle Home User: [Virtual Account \[Edit\]](#)
Database edition: Enterprise Edition (Set Up Software Only) [\[Edit\]](#)
Oracle base: [C:\Oracle19c\orabase \[Edit\]](#)
Software location: [D:\TCUA_Binaries\WINDOWS.X64_193000_db_home](#)
OraMTS Port Number: 49152

[Save Response File...](#)

[Help](#)

[< Back](#)

[Next >](#)

[Install](#)

[Cancel](#)

Finish

19^c ORACLE[®]
Database

- Configuration Option
- Database Installation Options
- Database Edition
- Oracle Home User
- Installation Location
- Prerequisite Checks
- Summary
- Install Product

Finish

The registration of Oracle Database was successful.

Help


< Back

Next >

Install

Close

Run Database Configuration Assistant as Administrator.

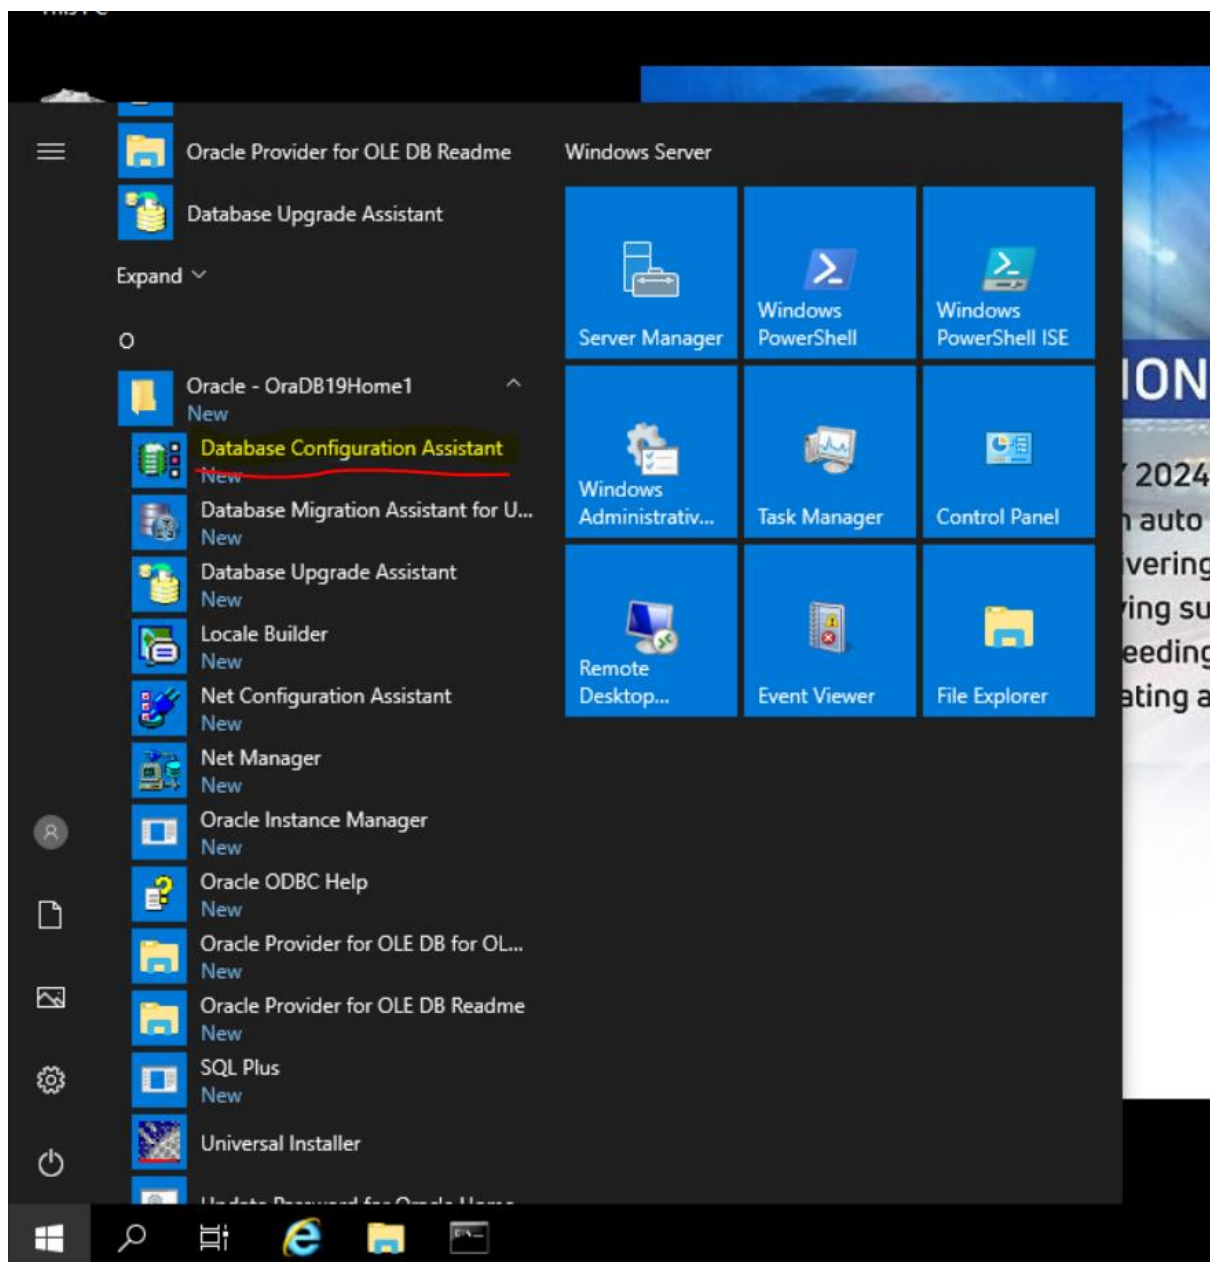

Database Configuration Assistant - Application - Step 1 of 14

19c ORACLE Database

Select Database Operation

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

Select the operation that you want to perform.

☒ Create a database

☐ Configure an existing database

☐ Delete database

☐ Manage templates

☐ Manage Pluggable databases

☐ Oracle RAC database instance management

Help

< Back

Next >

Finish

Cancel

Select Database Creation Mode

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

☐ Typical configuration

Global database name: orcl.tmindia.tatamotors.com

Storage type: File System

Database files location: {ORACLE_BASE}\oradata\{DB_UNIQUE_NAME}

Browse...

Fast Recovery Area (FRA): {ORACLE_BASE}\fast_recovery_area\{DB_UNIQUE_NAME}

Browse...

Database character set: AL32UTF8 - Unicode UTF-8 Universal character set

Administrative password:

Confirm password:

☒ Create as Container database

Pluggable database name:

☒ Advanced configuration

Help

< Back

Next >

Finish

Cancel

Database Configuration Assistant - Create a database - Step 3 of 14

19^c ORACLE[®] Database

Database Operation

Creation Mode

Deployment Type

Database Identification

Storage Option

Fast Recovery Option

Database Options

Configuration Options

Management Options

User Credentials

Creation Option

Summary

Progress Page

Finish

Select the type of database you want to create.

Database type:

Oracle Single Instance database

Configuration type:

Admin Managed

Select a template for your database.

Templates that include datafiles contain pre-created databases. They allow you to create a new database quickly. Use templates without datafiles only when necessary, such as when you need to change attributes like block size that cannot be altered after database creation.

	Template name	Include datafiles	Details
☐	Data Warehouse	Yes	View details
☒	General Purpose or Transaction Processing	Yes	View details
☐	Custom Database	No	View details

Template location: D:\TCUA_Binaries\WINDOWS.X64_193000_db_home\assistants\dbc\templates

Change...

Help

< Back

Next >

Finish

Cancel

Specify Database Identification Details

19^c ORACLE[®]
Database

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification**
- Storage Option
- Fast Recovery Option
- Database Options
- Configuration Options
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

Provide a unique database identifier information. An Oracle database is uniquely identified by a Global database name, typically of the form "name.domain".

Global database name:

SID:

Service name:

☐ Create as Container database

A Container database can be used for consolidating multiple databases into a single database, and it enables database virtualization. A Container database (CDB) can have zero or more pluggable databases (PDB).

☒ Use Local Undo tablespace for PDBs

☐ Create an empty Container database

☒ Create a Container database with one or more PDBs

Number of PDBs:

PDB name:

[Help](#)

< Back

Next >

Finish

Cancel

Select Database Storage Option

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option**
- Fast Recovery Option
- Database Options
- Configuration Options
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

☐ Use template file for database storage attributes

Storage type and location for database files will be picked up from the specified template (General Purpose or Transaction Processing).

☒ Use following for the database storage attributes

All the database files will be put at the specified location below. You can customize the name and location of each datafile in the subsequent screen.

Database files storage type: File System

Database files location: {ORACLE_BASE}\oradata\{DB_UNIQUE_NAME} Browse...

Oracle Managed files option will enable Oracle to automatically generate the names of the datafiles for simplified database management.

☐ Use Oracle-Managed Files (OMF)

Multiplex redo logs and control files...File location variables...Help< BackNext >FinishCancel

Select Database Storage Option

File location variables

Variables are used to specify parameterized file locations for datafiles, control files, redo logs, and any other files used by database.

For example, a control file may be specified as
{ORACLE_BASE}/oradata/{DB_NAME}/control01.ctl

Name	Value
ORACLE_BASE_HOME	D:\TCUA_Binaries\WINDOWS.X64_193000_db_home
DB_UNIQUE_NAME	SIMSOFT
ORACLE_BASE	C:\Oracle19c\orabase
PDB_NAME	
DB_NAME	SIMSOFT
ORACLE_HOME	D:\TCUA_Binaries\WINDOWS.X64_193000_db_home
SID	SIMSOFT

Help

OK

Cancel

Help

< Back

Next >

Finish

Cancel

ked up from the specified template (General Purpose or

n below. You can customize the name and location of

ta\{DB_UNIQUE_NAME}

Browse...

natically generate the names of the datafiles for

Multiplex redo logs and control files...

File location variables...

Select Fast Recovery Option

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option
- Fast Recovery Option**
- Database Options
- Configuration Options
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

Choose the recovery options for the database.

☒ **Specify Fast Recovery Area**

Recovery files storage type: File System

Fast Recovery Area: {ORACLE_BASE}\fast_recovery_area\{DB_UNIQUE_NAME} Browse...

Fast Recovery Area size: 8256 MB

☐ Enable archiving Edit archive mode parameters...

Help

< Back

Next >

Finish

Cancel

Specify Network Configuration Details

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option
- [Fast Recovery Option](#)
- Network Configuration**
- [Configuration Options](#)
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

Listener selection

Listeners from current Oracle home are listed below. Specify the listener name and port to create a new listener in current Oracle home.

Name	Port	Oracle home	Status

☒ **Create a new listener**Listener name: Listener port:

Oracle home: D:\TCUA_Binaries\WINDOWS.X64_193000_db_home

[Help](#)

< Back

Next >

Finish

Cancel

Select Oracle Data Vault Config Option

19^c ORACLE[®]
Database

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option
- Fast Recovery Option
- Network Configuration
- **Data Vault Option**
- Configuration Options
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

☐ Configure Oracle Database VaultDatabase Vault owner: Password: Confirm password: ☐ Create a separate account managerAccount manager: Password: Confirm password: ☐ Configure Oracle Label Security☐ Configure Oracle Label Security with OJD

Help

< Back

Next >

Finish

Cancel

Specify Configuration Options

Database Operation
Creation Mode
Deployment Type
Database Identification
Storage Option
Fast Recovery Option
Network Configuration
Data Vault Option
Configuration Options
Management Options
User Credentials
Creation Option
Summary
Progress Page
Finish

Memory Sizing Character sets Connection mode Sample schemas

☒ **Use Automatic Shared Memory Management**

SGA size: 12287 MB 390 16383 40959

PGA Size: 4096 MB

☐ Use Manual Shared Memory Management

Shared pool size: 0 MB

Buffer cache size: 0 MB

Java pool size: 0 MB

Large pool size: 0 MB

PGA size: 0 MB

Total memory for database 0 MB

☐ Use Automatic Memory Management

Memory target: 16383 MB 390 16383 40959 39%

Help < Back Next > Finish Cancel

Specify Configuration Options

19^c ORACLE[®]
Database

Database Operation
Creation Mode
Deployment Type
Database Identification
Storage Option
Fast Recovery Option
Network Configuration
Data Vault Option
Configuration Options
Management Options
User Credentials
Creation Option
Summary
Progress Page
Finish

Memory **Sizing** Character sets Connection mode Sample schemas

A block is the smallest unit of storage for allocation and for I/O. It cannot be changed once the database is created.

Block size: 8192 BYTES

Specify the maximum number of operating system user processes that can be simultaneously connected to this database. The value of this parameter includes the user processes and the Oracle background processes.

Processes: 640

Help < Back Next > Finish Cancel

Specify Configuration Options

19^c ORACLE[®]
Database

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option
- Fast Recovery Option
- Network Configuration
- Data Vault Option
- Configuration Options**
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

Memory Sizing **Character sets** Connection mode Sample schemas

The database character set determines how character data is stored in the database.

☒ **Use Unicode (AL32UTF8)**

Setting character set to Unicode (AL32UTF8) enables you to store multiple language groups.

☐ Use OS character set (WE8MSWIN1252)

Character set is based on the language setting of this operating system.

☐ Choose from the list of character sets

Database character set: AL32UTF8 - Unicode UTF-8 Universal character set

☒ Show recommended character sets only

National character set: AL16UTF16 - Unicode UTF-16 Universal character set

Default language: American

Default territory: United States

Help

< Back

Next >

Finish

Cancel

Specify Configuration Options

19^c ORACLE[®]
Database

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option
- Fast Recovery Option
- Network Configuration
- Data Vault Option
- **Configuration Options**
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

Memory Sizing Character sets **Connection mode** Sample schemas☒ **Dedicated server mode**

The database will allocate a dedicated resource for each client connection in this mode. Use this mode when the number of total client connections is expected to be small or when clients will be making persistent, long-running requests to the database.

☐ **Shared server mode**

The database will use a shared pool of allocated resources for all client connections in this mode. Use this mode when a large number of users need to connect to the database simultaneously while efficiently utilizing system resources.

Specify the number of Shared Servers, which will be the number of processes that will be created when the instance is started.

Shared servers:

[Help](#)< [Back](#)[Next](#) >[Finish](#)[Cancel](#)

Specify Configuration Options

19^c ORACLE[®]
Database

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option
- Fast Recovery Option
- Network Configuration
- Data Vault Option
- Configuration Options**
- Management Options
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

Memory Sizing Character sets Connection mode **Sample schemas**

Installing sample schema configures the Human Resources schema. The contents are stored under the SYSAUX tablespace.

☐ Add sample schemas to the database

Help

< Back

Next >

Finish

Cancel

Specify Management Options

19^c ORACLE[®]
Database

- Database Operation
- Creation Mode
- Deployment Type
- Database Identification
- Storage Option
- Fast Recovery Option
- Network Configuration
- Data Vault Option
- Configuration Options
- Management Options**
- User Credentials
- Creation Option
- Summary
- Progress Page
- Finish

Specify the management options for the database.

☒ **Configure Enterprise Manager (EM) database express**

EM database express port: 5500

☐ Register with Enterprise Manager (EM) cloud controlO_MS host:O_MS port:

EM admin username:

EM admin password:

Help

< Back

Next >

Finish

Cancel

Specify Database User Credentials

19^c ORACLE[®]
Database

You must specify passwords for the following user accounts in the new database for security reasons.

☐ Use different administrative passwords

	Password	Confirm password
<u>S</u> YS		
<u>S</u> YSTEM		

☒ Use the same administrative password for all accounts

Password: Confirm password:

Password: Oracle19c

Select Database Creation Option

Select the database creation options.

☒ **Create database**

Specify the SQL scripts you want to run after the database is created. The scripts are run in the order listed below.

Post DB creation scripts:

☐ Save as a database template

Template name:

Template location:

Description:

☒ **Generate database creation scripts**

Destination directory:

Following advanced configuration options can be used to configure initialization parameters and customize database storage locations.

Summary

- [Database Operation](#)
- [Creation Mode](#)
- [Deployment Type](#)
- [Database Identification](#)
- [Storage Option](#)
- [Fast Recovery Option](#)
- [Network Configuration](#)
- [Data Vault Option](#)
- [Configuration Options](#)
- [Management Options](#)
- [User Credentials](#)
- [Creation Option](#)

Summary

Progress Page

Finish

Database Configuration Assistant**Global Settings**

Global database name: SIMSOFT.tmindia.tatamotors.com
Configuration type: Oracle Single Instance database
SID: SIMSOFT
Create as Container database: No
Database Files Storage Type: File System
Memory Configuration Type: Automatic Shared Memory Management
Template name: General Purpose

Initialization Parameters

audit_file_dest: {ORACLE_BASE}\admin\{DB_UNIQUE_NAME}\adump
audit_trail: db
compatible: 19.0.0
control_files: (" {ORACLE_BASE}\oradata\{DB_UNIQUE_NAME}\control01.ctl", " {ORACLE_BASE}\fa
db_block_size: 8192 BYTES
db_domain: tmindia.tatamotors.com
db_name: SIMSOFT
db_recovery_file_dest: {ORACLE_BASE}\fast_recovery_area\{DB_UNIQUE_NAME}
db_recovery_file_dest_size: 8256 MB
diagnostic_dest: {ORACLE_BASE}

Save Response File...



Help



< Back

Next >


Finish

Cancel

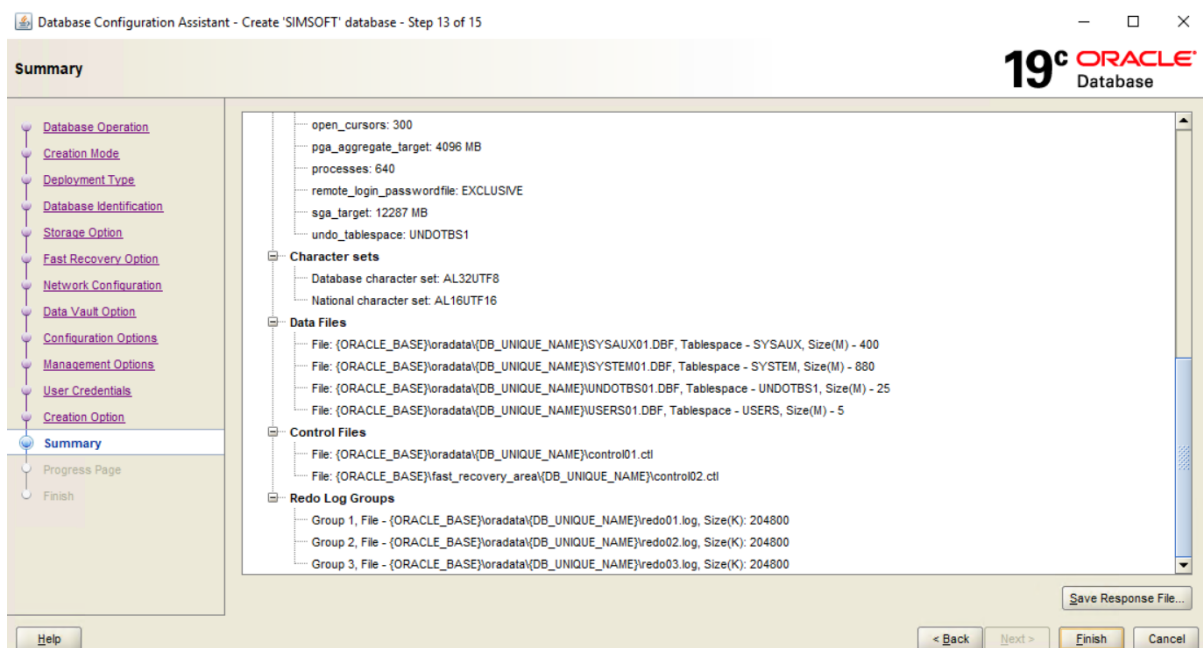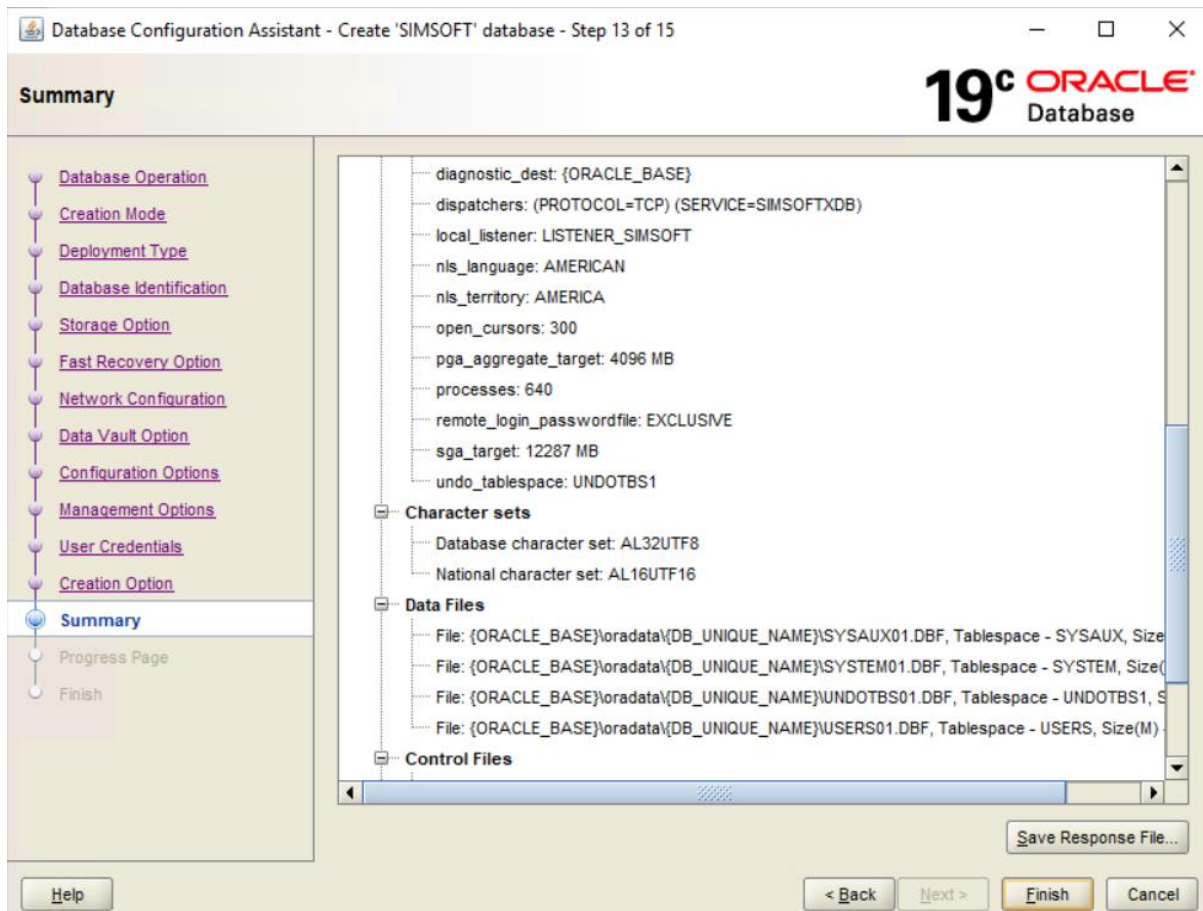


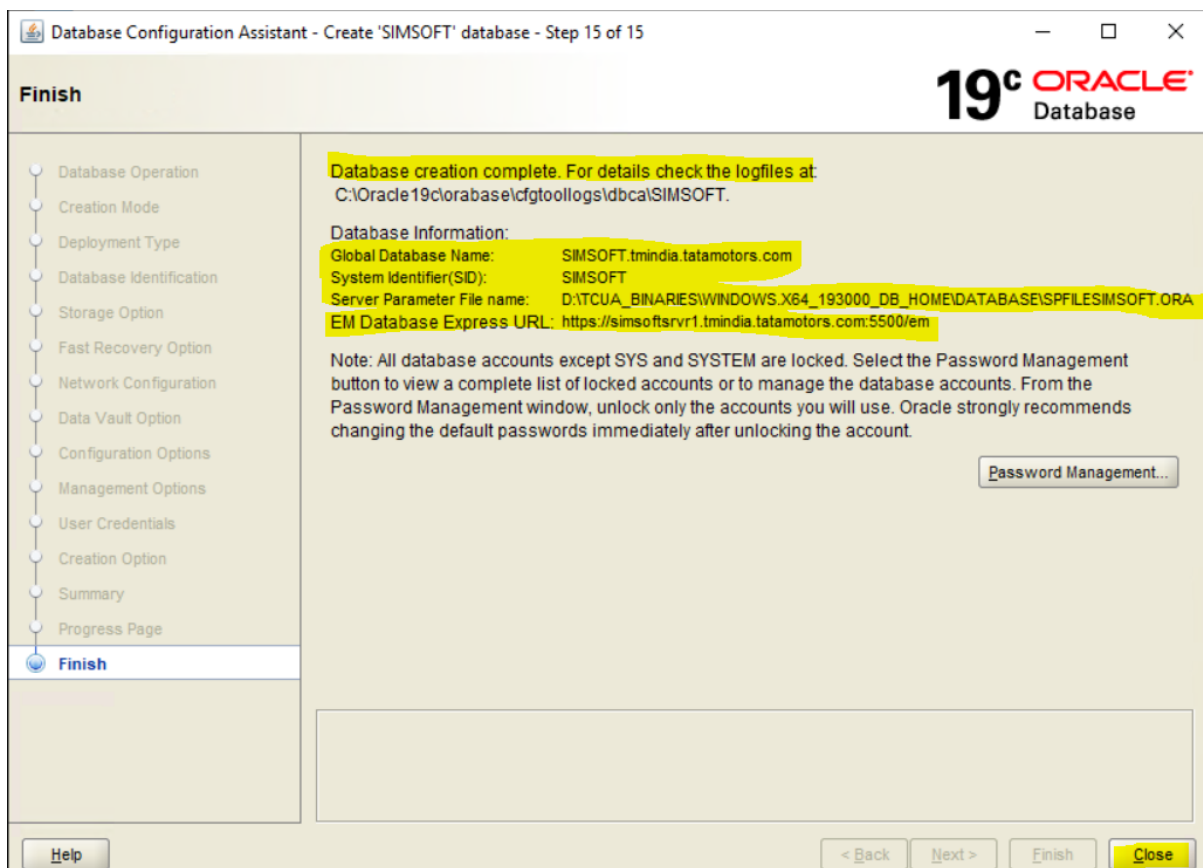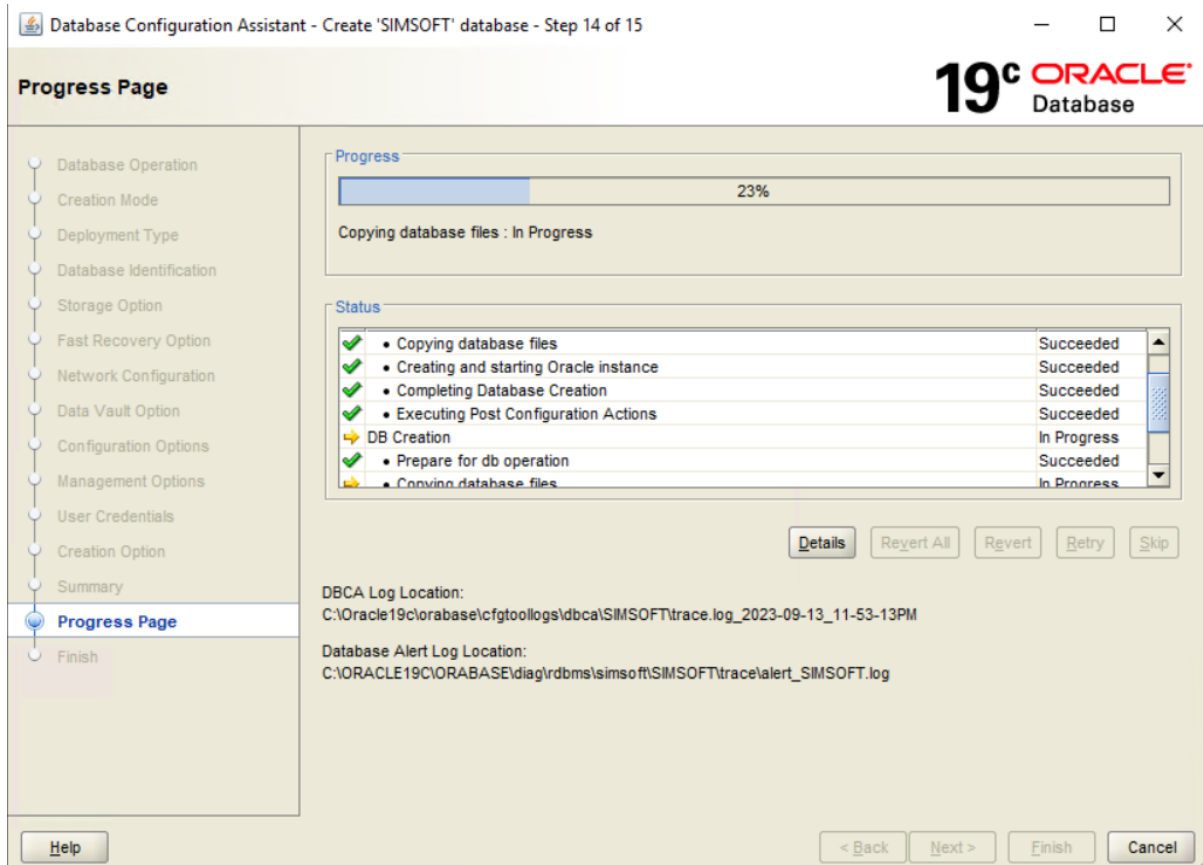

Open Net Manager as Administrator

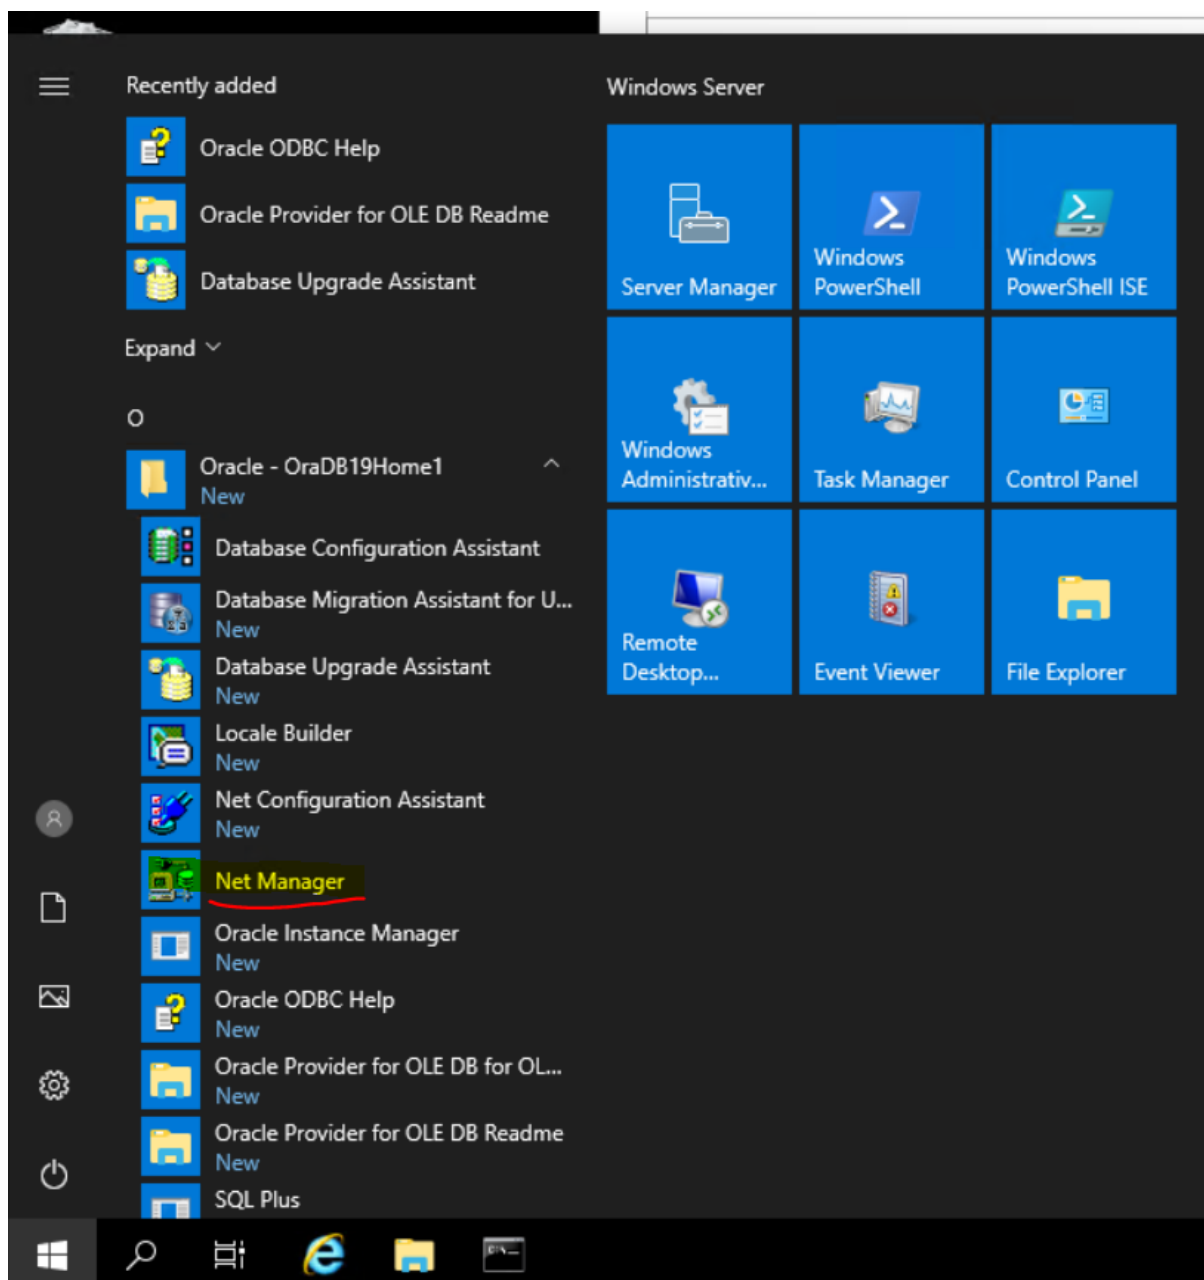

Below UI opens

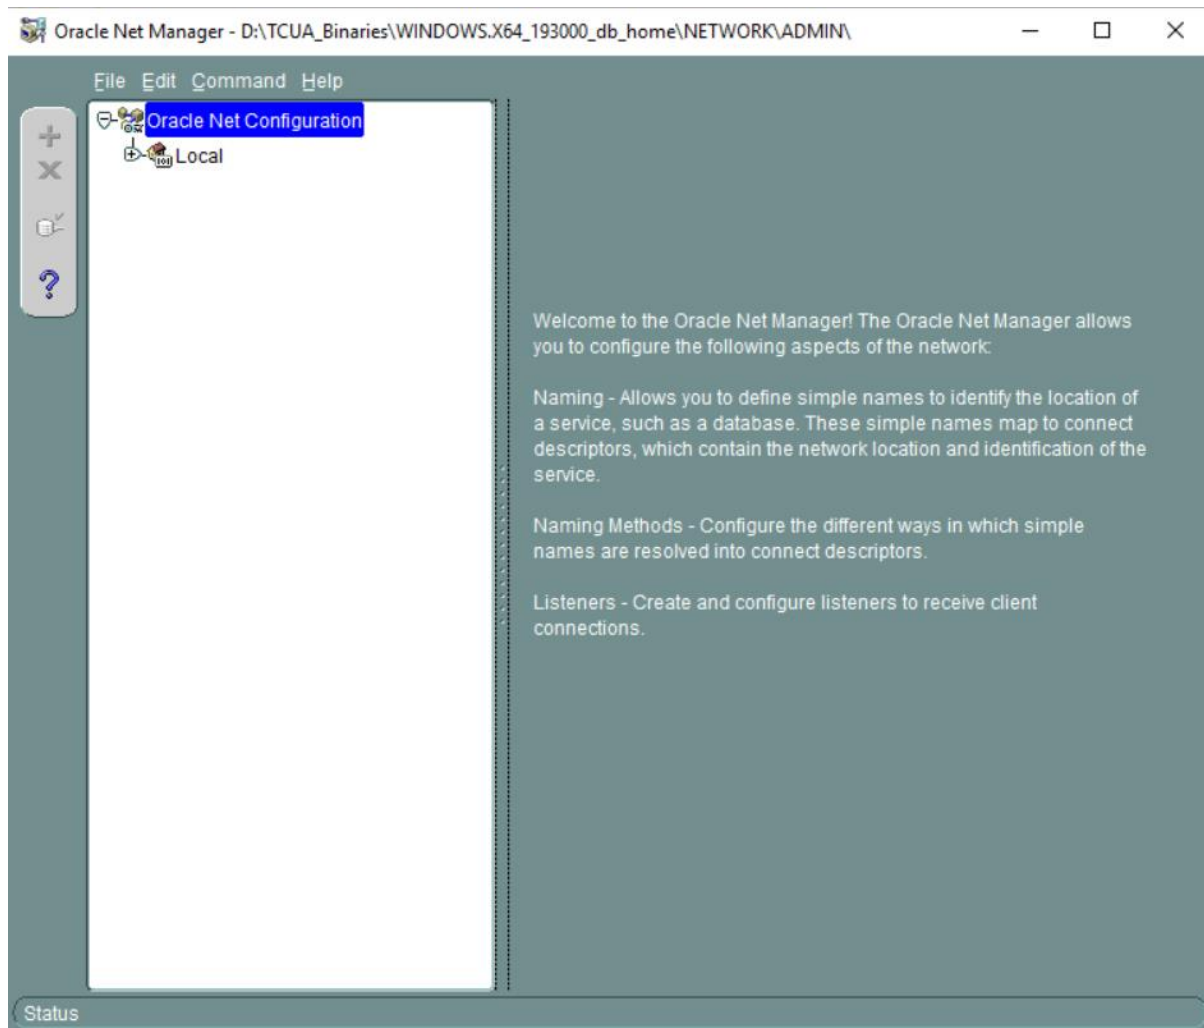

Expand the tree on left pane and select LISTENER name

File Edit Command Help

Oracle Net Configuration

- Local
 - Profile
 - Service Naming
 - oraclr_connection_data
 - simsoft
 - Listeners
 - LISTENER**

Listening Locations

Address1 Address2

Network Address

Protocol: IPC

Key: EXTPROC1521

Show Advanced

Add Address Remove Address Help

File Edit Command Help

Oracle Net Configuration

- Local
 - Profile
 - Service Naming
 - oracdr_connection_data
 - simsoft
 - Listeners
 - LISTENER**

Listening Locations

Address1 Address2

Network Address

Protocol: TCP/IP


Host: ✓ simsoftsvr1.tmindia.tatamotors.

Port: ✓ 1521

Show Advanced

Add Address Remove Address Help

File Edit Command Help

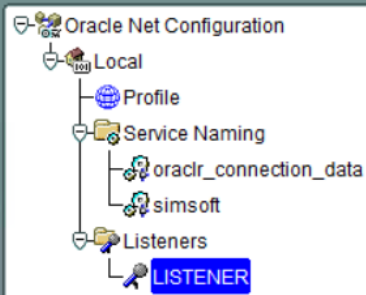

Listening Locations

Address1 Address2

Network Address

Protocol: IPC

Key: EXTPROC1521

Show Advanced

Add Address Remove Address Help

File Edit Command Help

Oracle Net Configuration

- Local
 - Profile
 - Service Naming
 - oraclr_connection_data
 - simsoft
 - Listeners
 - LISTENER**

Database Services


Database1

Global Database Name: SIMSOFT.tmindia.tatamotors.com

Oracle Home Directory: D:\TCUA_Binaries\WINDOWS.X64_193000_db_home

SID: SIMSOFT

Add Database Remove Database Help

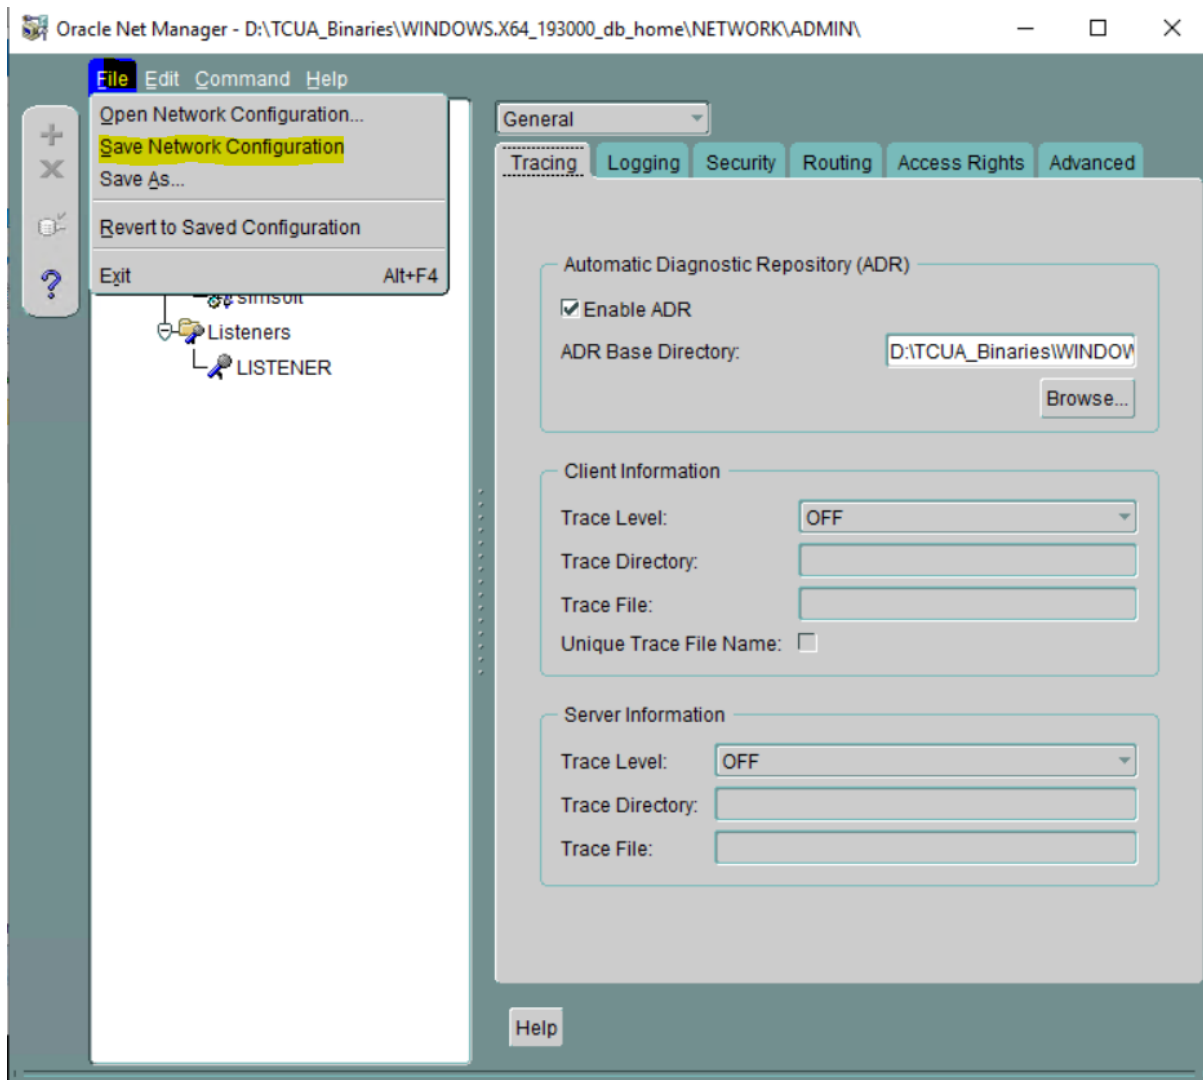

```
Administrator: Command Prompt
Copyright (c) 1991, 2019, Oracle. All rights reserved.

Connecting to (DESCRIPTION=(ADDRESS=(PROTOCOL=TCP)(HOST=simsoftsrvr1.tmindia.tatamotors.com)(PORT=1521)))
STATUS of the LISTENER
-----
Alias                     LISTENER
Version                  TNSLSNR for 64-bit Windows: Version 19.0.0.0 - Production
Start Date               14-SEP-2023 00:22:04
Uptime                   0 days 0 hr. 34 min. 47 sec
Trace Level              off
Security                 ON: Local OS Authentication
SNMP                     OFF
Listener Parameter File  D:\TCUA_Binaries\WINDOWS.X64_193000_db_home\network\admin\listener.ora
Listener Log File        C:\Oracle19c\orabase\diag\tnslsnr\simsoftsrvr1\listener>alert\log.xml
Listening Endpoints Summary...
  (DESCRIPTION=(ADDRESS=(PROTOCOL=tcp)(HOST=simsoftsrvr1.tmindia.tatamotors.com)(PORT=1521)))
  (DESCRIPTION=(ADDRESS=(PROTOCOL=ipc)(PIPENAME=\\.\pipe\EXTPROC1521ipc)))
  (DESCRIPTION=(ADDRESS=(PROTOCOL=tcps)(HOST=simsoftsrvr1.tmindia.tatamotors.com)(PORT=5500))(Security=(my_wallet_direct
ory=C:\ORACLE19C\ORABASE\admin\SIMSOFT\xdb_wallet))(Presentation=HTTP)(Session=RAW))
Services Summary...
Service "CLRExtProc" has 1 instance(s).
  Instance "CLRExtProc", status UNKNOWN, has 1 handler(s) for this service...
Service "SIMSOFT.tmindia.tatamotors.com" has 1 instance(s).
  Instance "simsoft", status READY, has 1 handler(s) for this service...
Service "SIMSOFTXDB.tmindia.tatamotors.com" has 1 instance(s).
  Instance "simsoft", status READY, has 1 handler(s) for this service...
The command completed successfully

C:\Users\DC.TTL>
```

```
C:\Users\DC.TTL>sqlplus / as sysdba
```

```
SQL*Plus: Release 19.0.0.0.0 - Production on Thu Sep 14 01:01:09 2023  
Version 19.3.0.0.0
```

```
Copyright (c) 1982, 2019, Oracle. All rights reserved.
```

```
Connected to:  
Oracle Database 19c Enterprise Edition Release 19.0.0.0.0 - Production  
Version 19.3.0.0.0
```

```
SQL> _
```

```
SQL> connect as sysdba  
Enter user-name: system  
Enter password:  
Connected.  
SQL> _
```

Administrator: Command Prompt - sqlplus / as sysdba

```
SQL> select name from v$database;
```


```
NAME  
-----  
SIMSOFT
```

```
SQL> select * from v$database;
```


```
          DBID NAME          CREATED   RESETLOGS_CHANGE# RESETLOGS  
-----  
PRIOR_RESETLOGS_CHANGE# PRIOR_RES LOG_MODE    CHECKPOINT_CHANGE#  
-----  
ARCHIVE_CHANGE# CONTROL CONTROLFI CONTROLFILE_SEQUENCE# CONTROLFILE_CHANGE#  
-----  
CONTROLFI OPEN_RESETL VERSION_T OPEN_MODE      PROTECTION_MODE  
-----  
PROTECTION_LEVEL      REMOTE_A ACTIVATION# SWITCHOVER# DATABASE_ROLE  
-----  
ARCHIVELOG_CHANGE# ARCHIVEL SWITCHOVER_STATUS  DATAGUAR GUARD_S SUPPLEME SUP  
-----  
SUP FORCE_LOGGING      PLATFORM_ID  
-----  
PLATFORM_NAME  
-----  
RECOVERY_TARGET_INCARNATION# LAST_OPEN_INCARNATION# CURRENT_SCN  
-----  
FLASHBACK_ON          SUP SUP DB_UNIQUE_NAME  
-----  
STANDBY_BECAME_PRIMARY_SCN FS FAILOVER_MODE    FS FAILOVER_STATUS
```


Installation of Teamcenter


Installation of Corporate Server, Volume Server

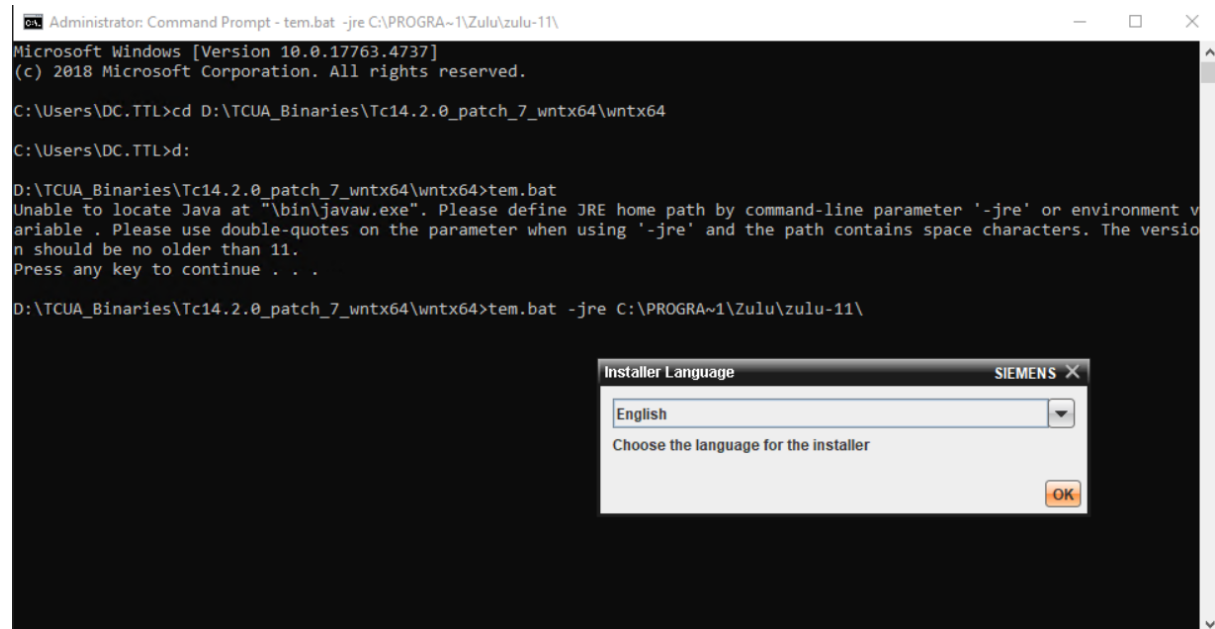



```
Administrator: Command Prompt - tem.bat -jre C:\PROGRA~1\Zulu\zulu-11\  
Microsoft Windows [Version 10.0.17763.4737]  
(c) 2018 Microsoft Corporation. All rights reserved.  
  
C:\Users\DC.TTL>cd D:\TCUA_Binaries\Tc14.2.0_patch_7_wntx64\wntx64  
  
C:\Users\DC.TTL>d:  
  
D:\TCUA_Binaries\Tc14.2.0_patch_7_wntx64\wntx64>tem.bat  
Unable to locate Java at "bin\javaw.exe". Please define JRE home path by command-line parameter '-jre' or environment variable. Please use double-quotes on the parameter when using '-jre' and the path contains space characters. The version should be no older than 11.  
Press any key to continue . . .  
  
D:\TCUA_Binaries\Tc14.2.0_patch_7_wntx64\wntx64>tem.bat -jre C:\PROGRA~1\Zulu\zulu-11\  
  
Installer Language  
English  
Choose the language for the installer  
OK
```

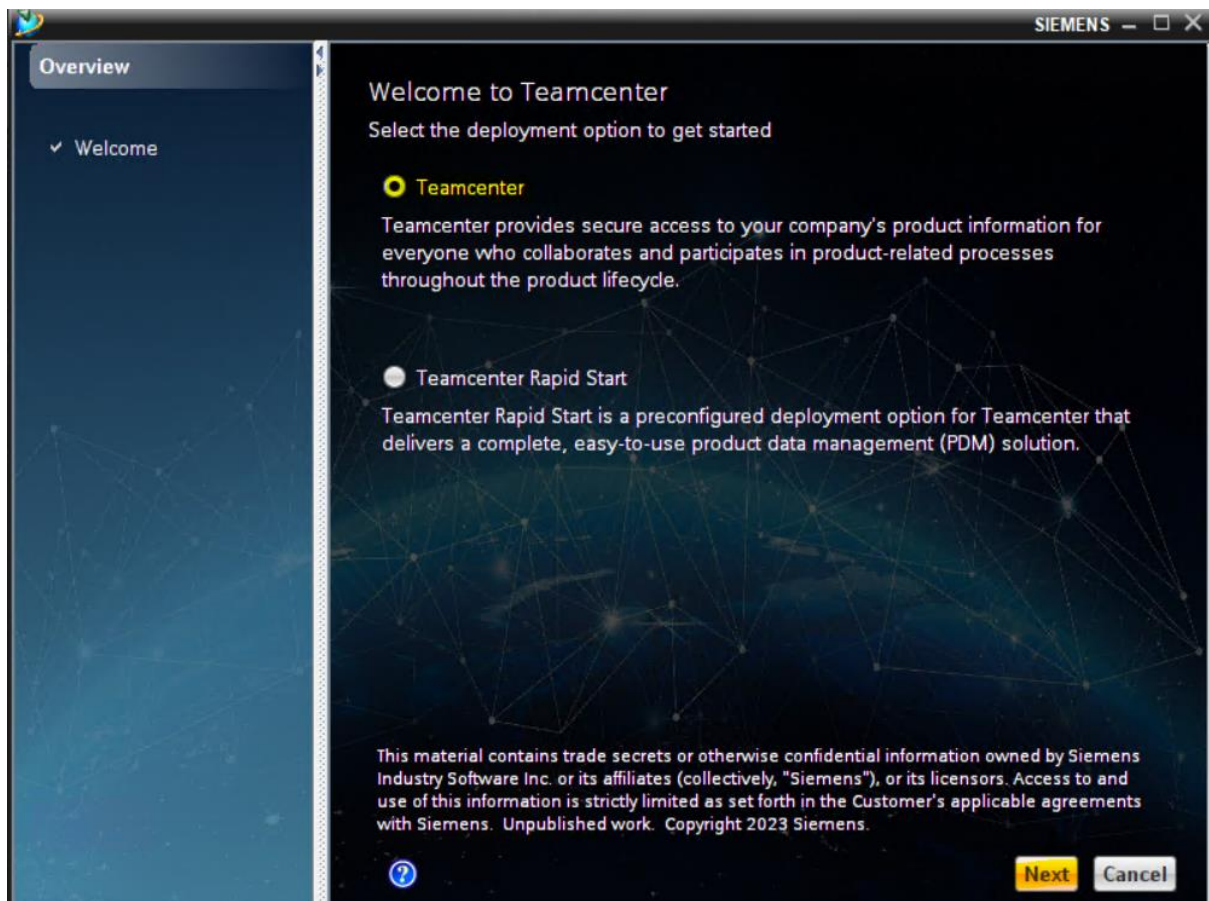


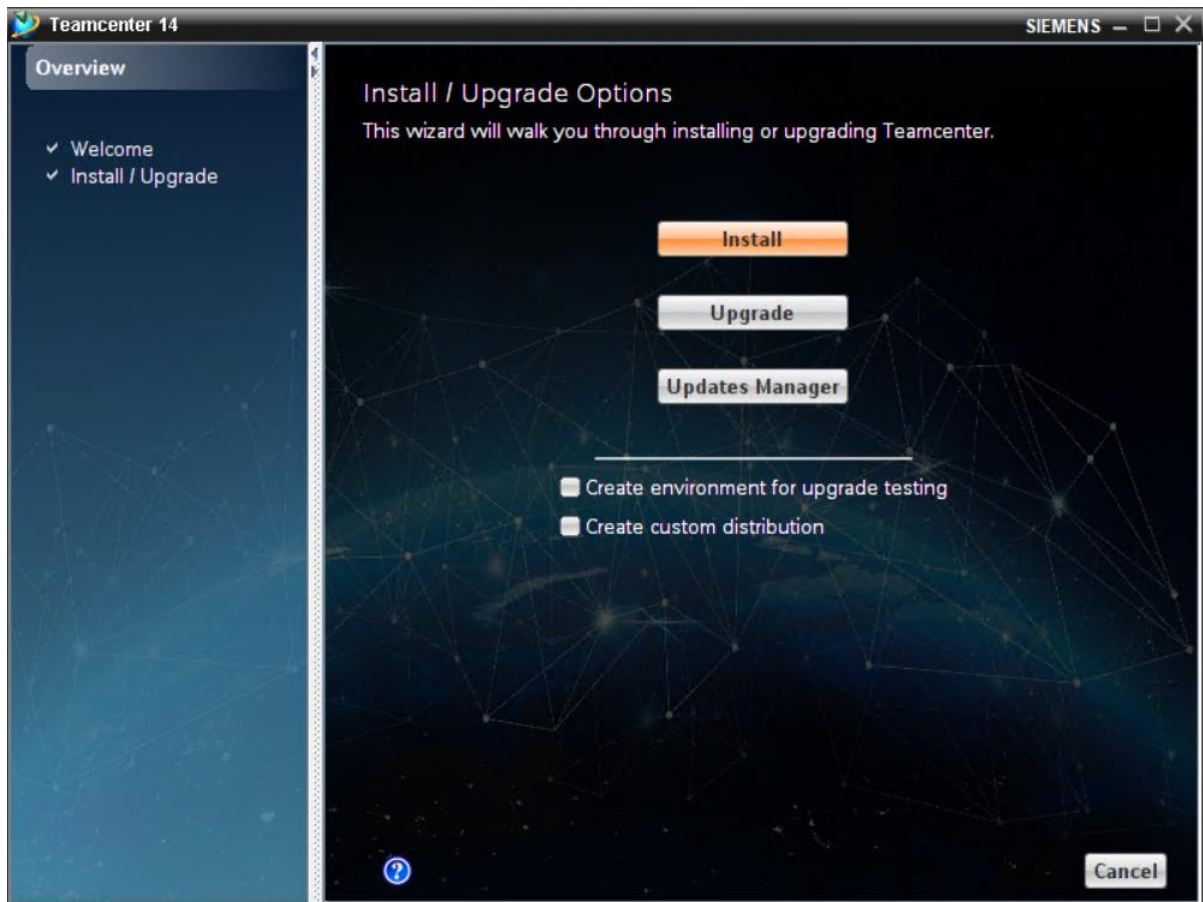


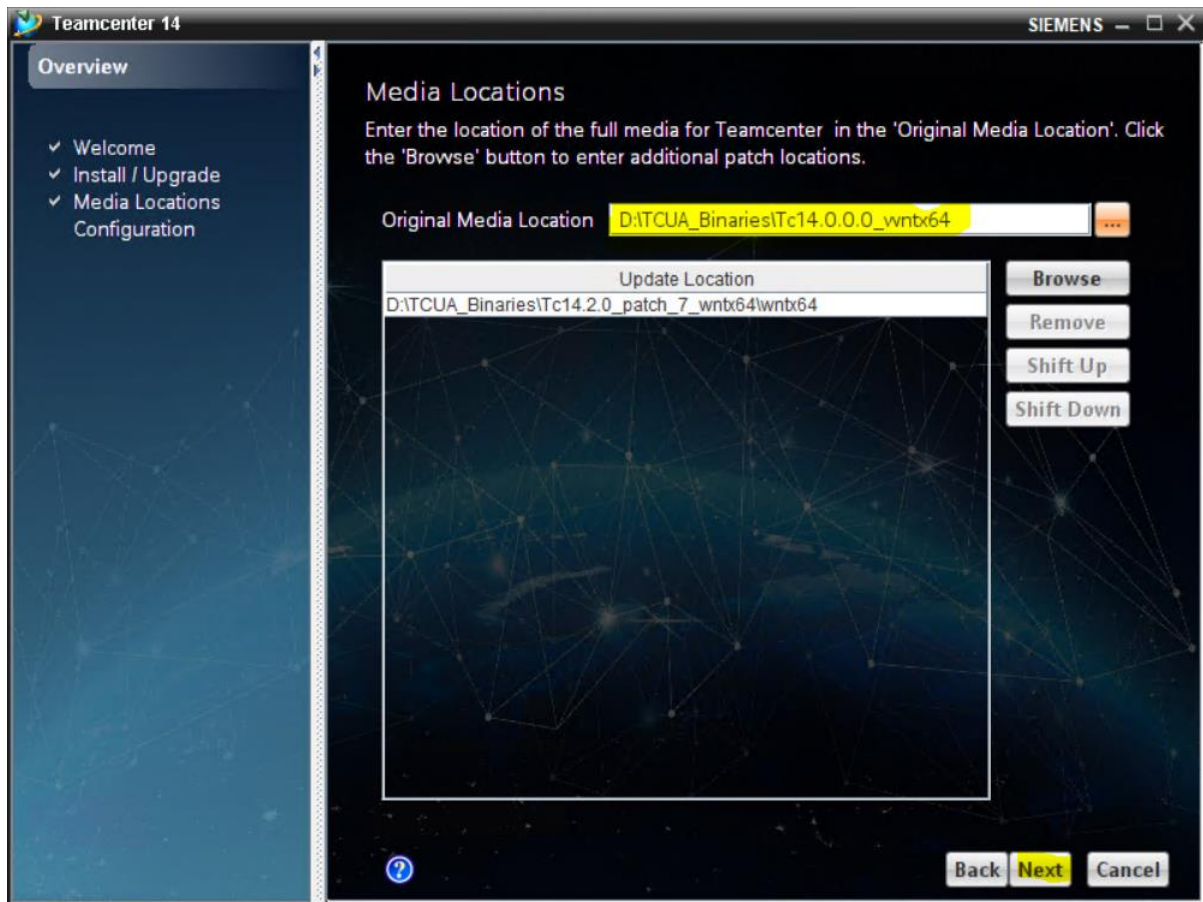

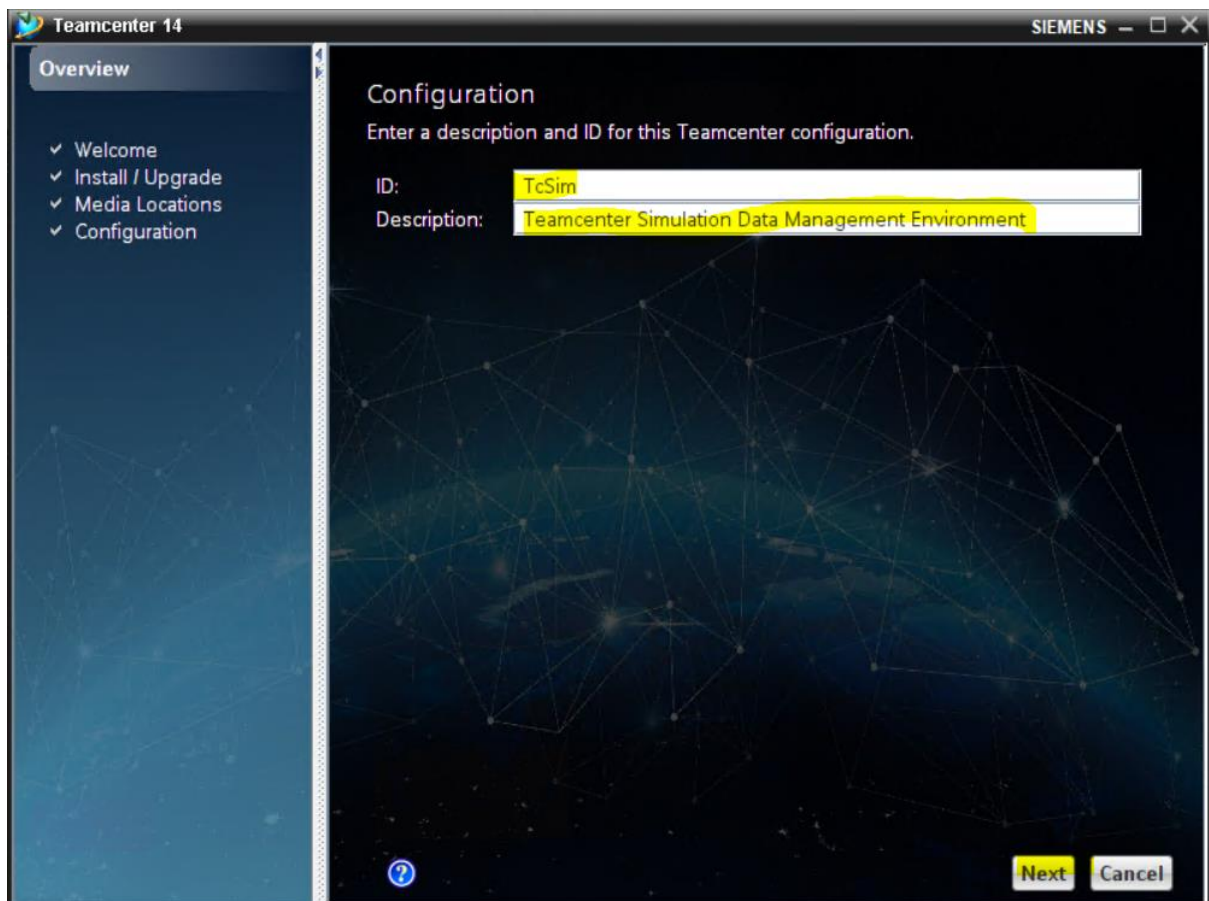

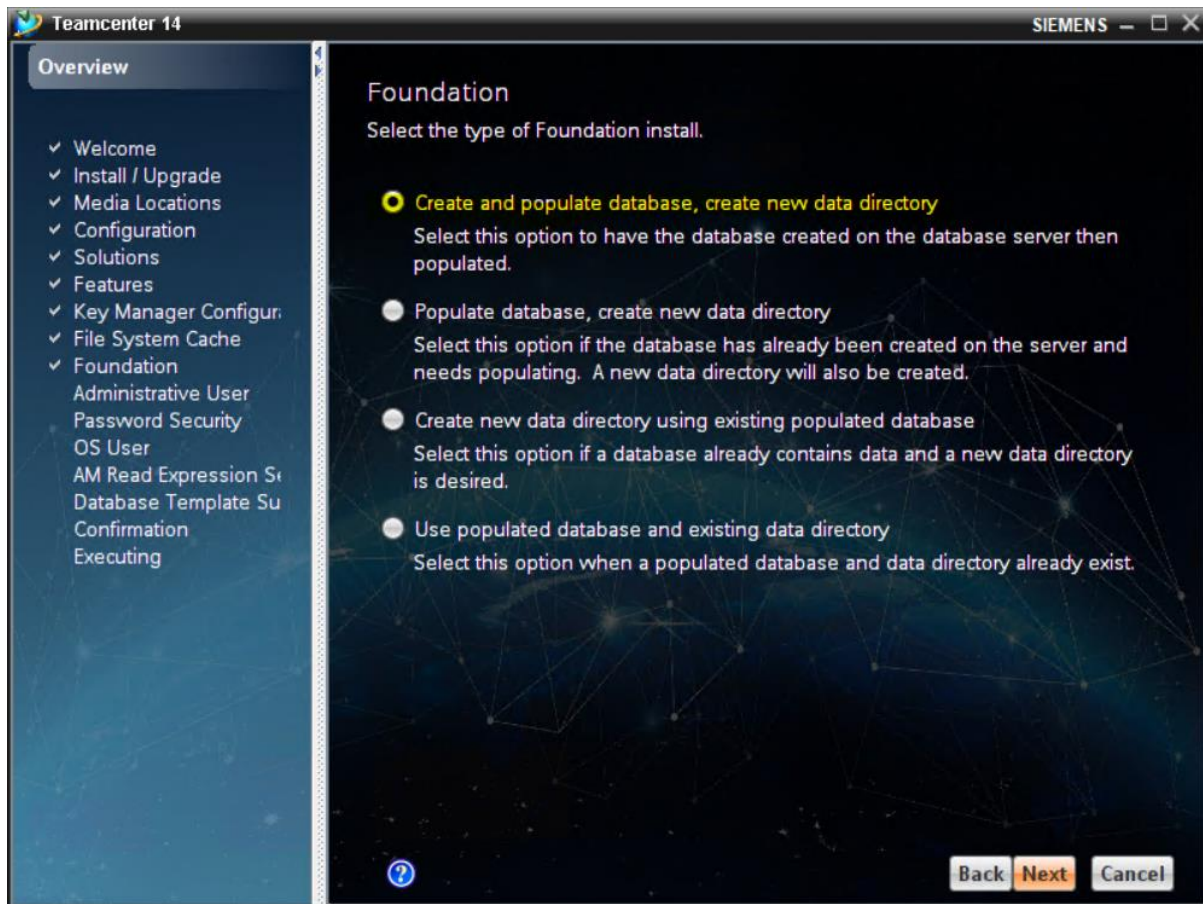

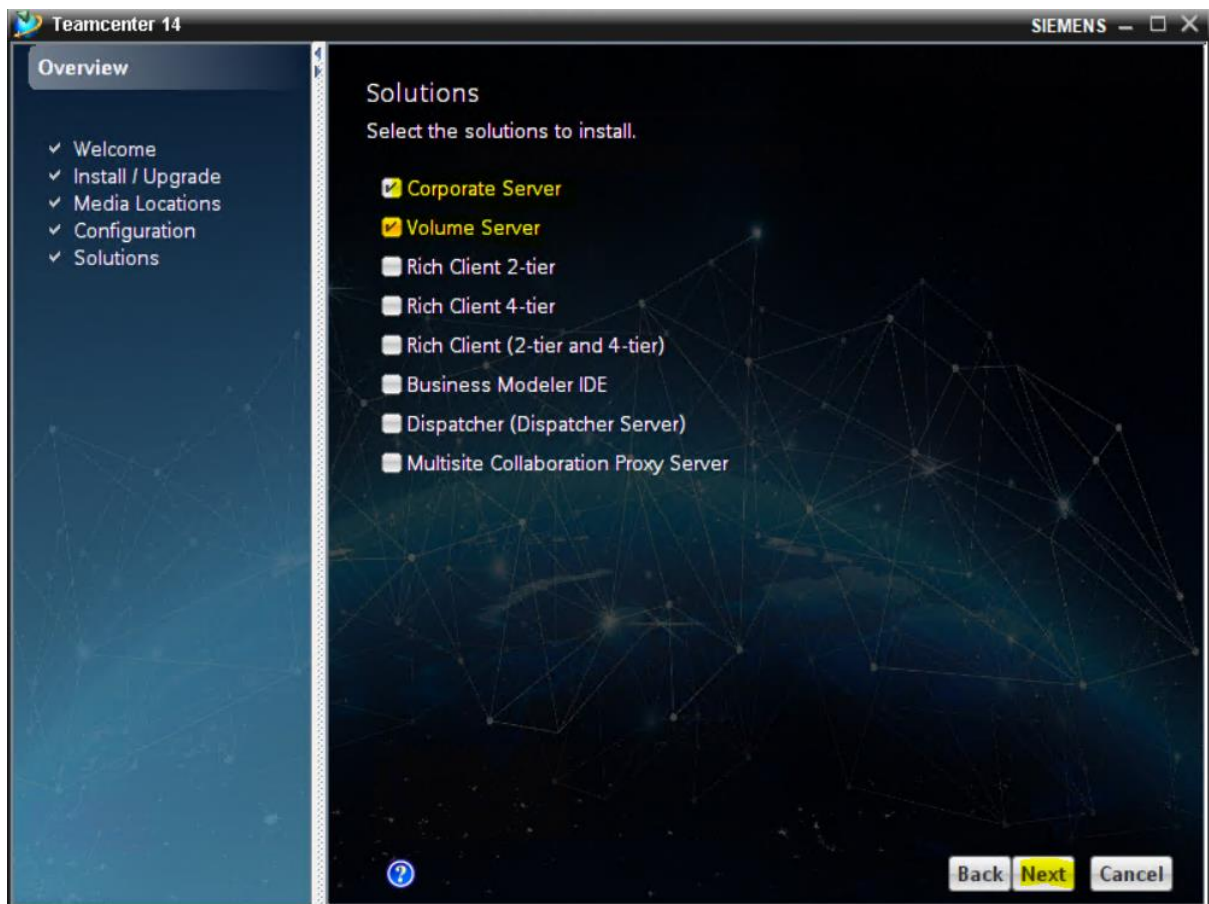

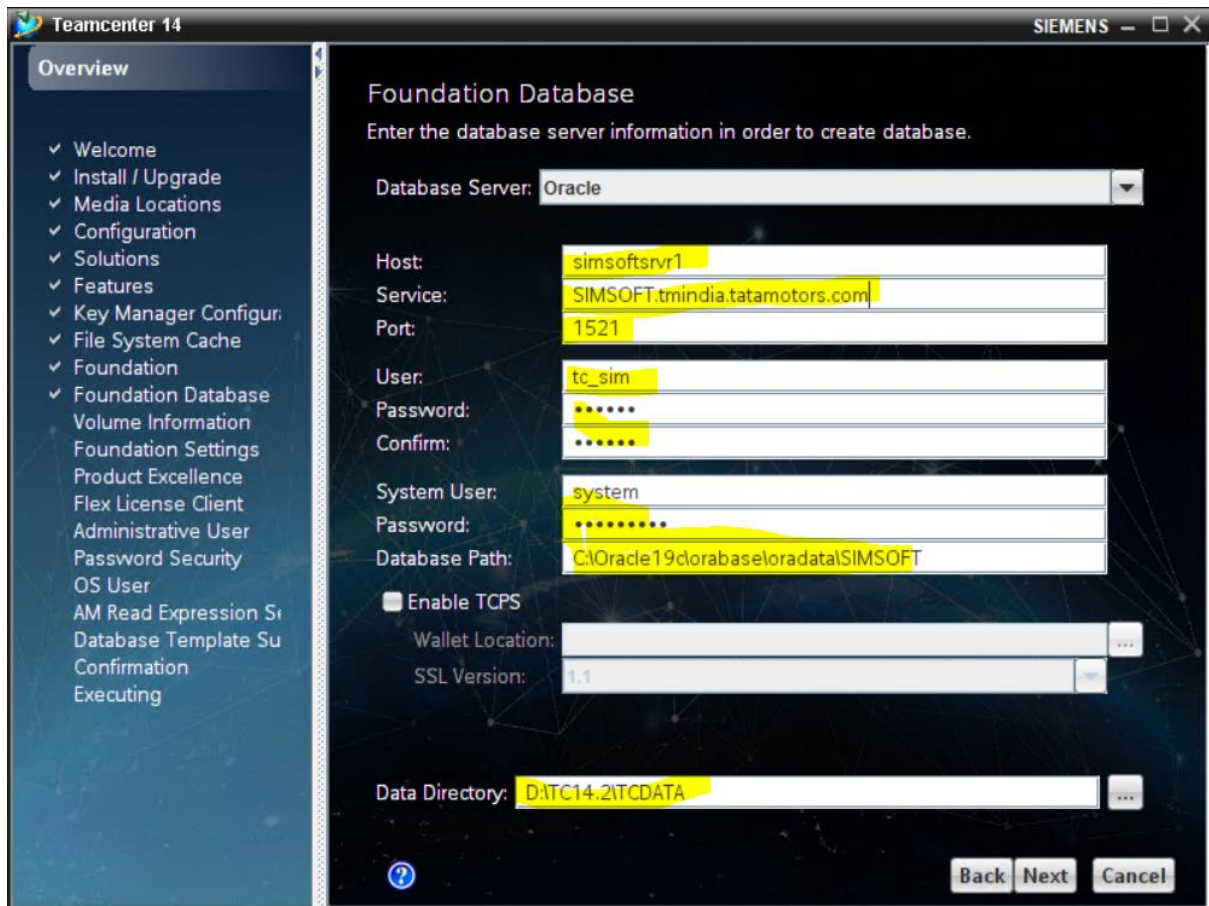

Host: simsoftserver1

Service: SIMSOFT.tmindia.tatamotors.com

Port:1521


User: tc_sim


Password: oracle


System User: system


Password: Oracle19c


Database Path: C:\Oracle19c\orabase\oradata\SIMSOFT

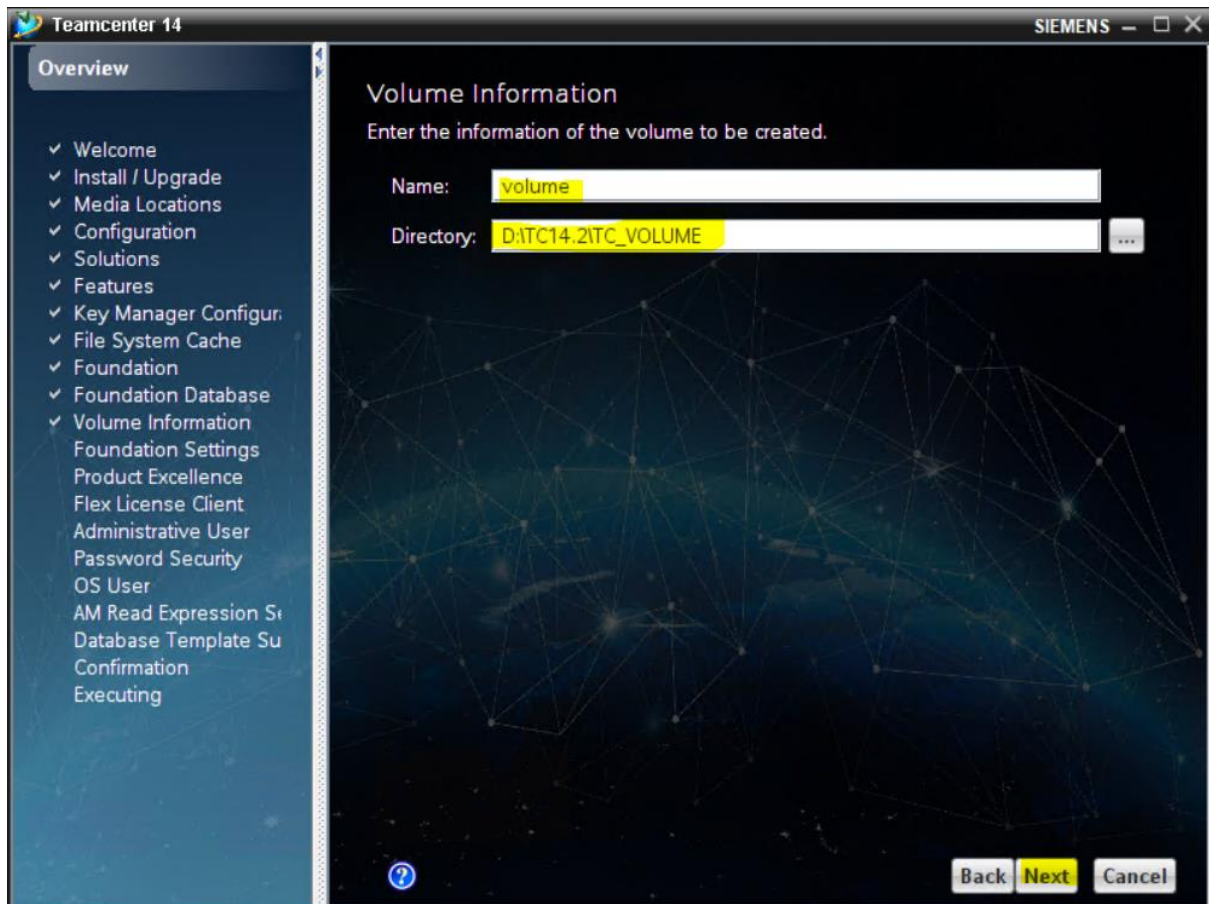


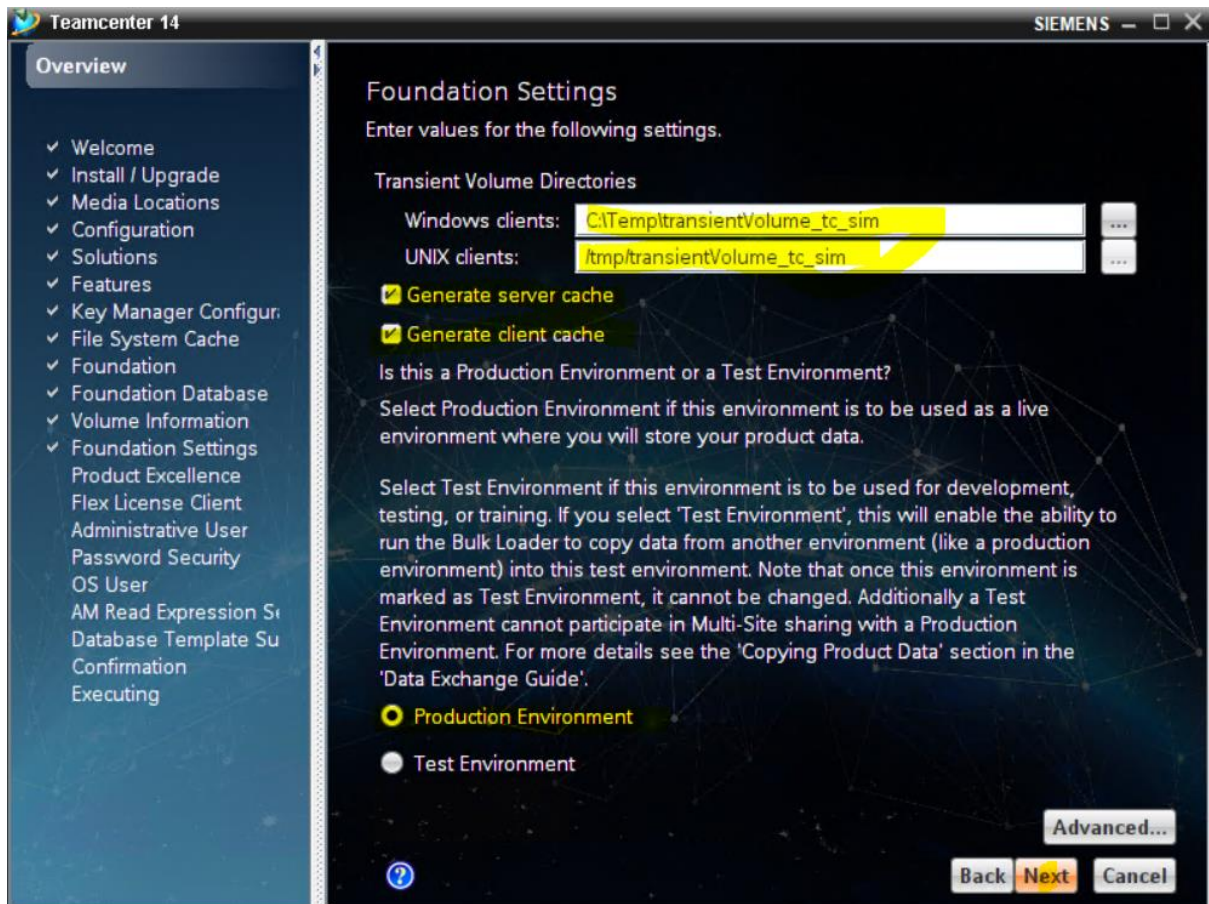


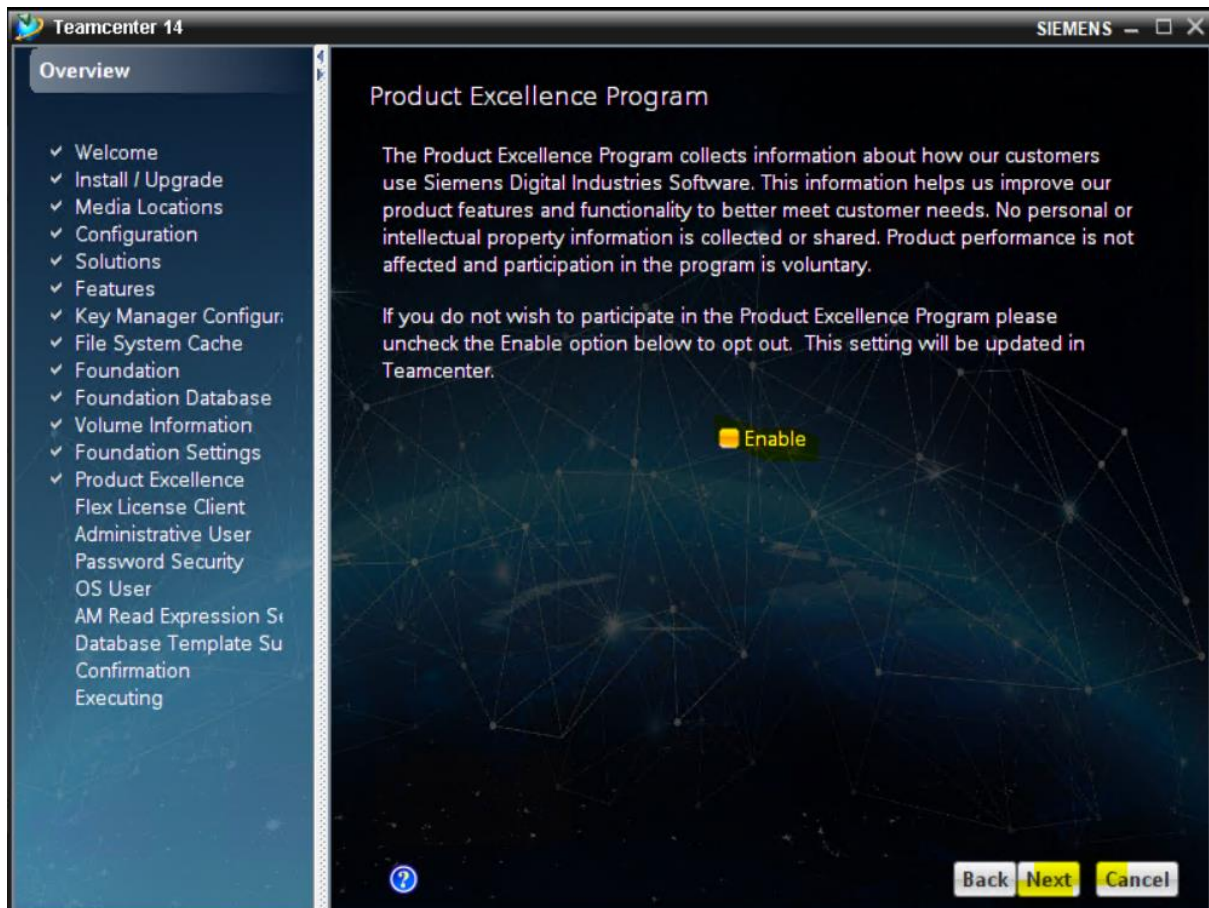


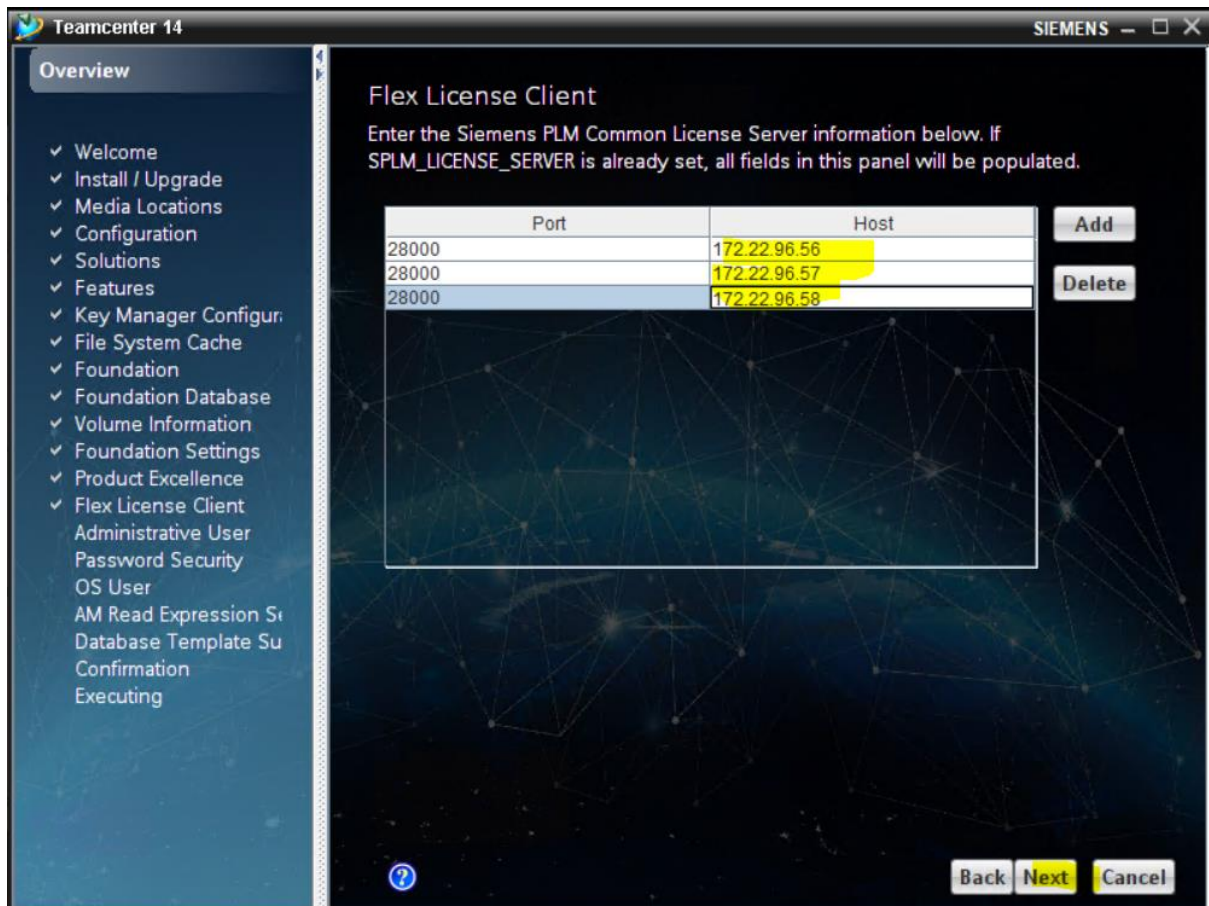


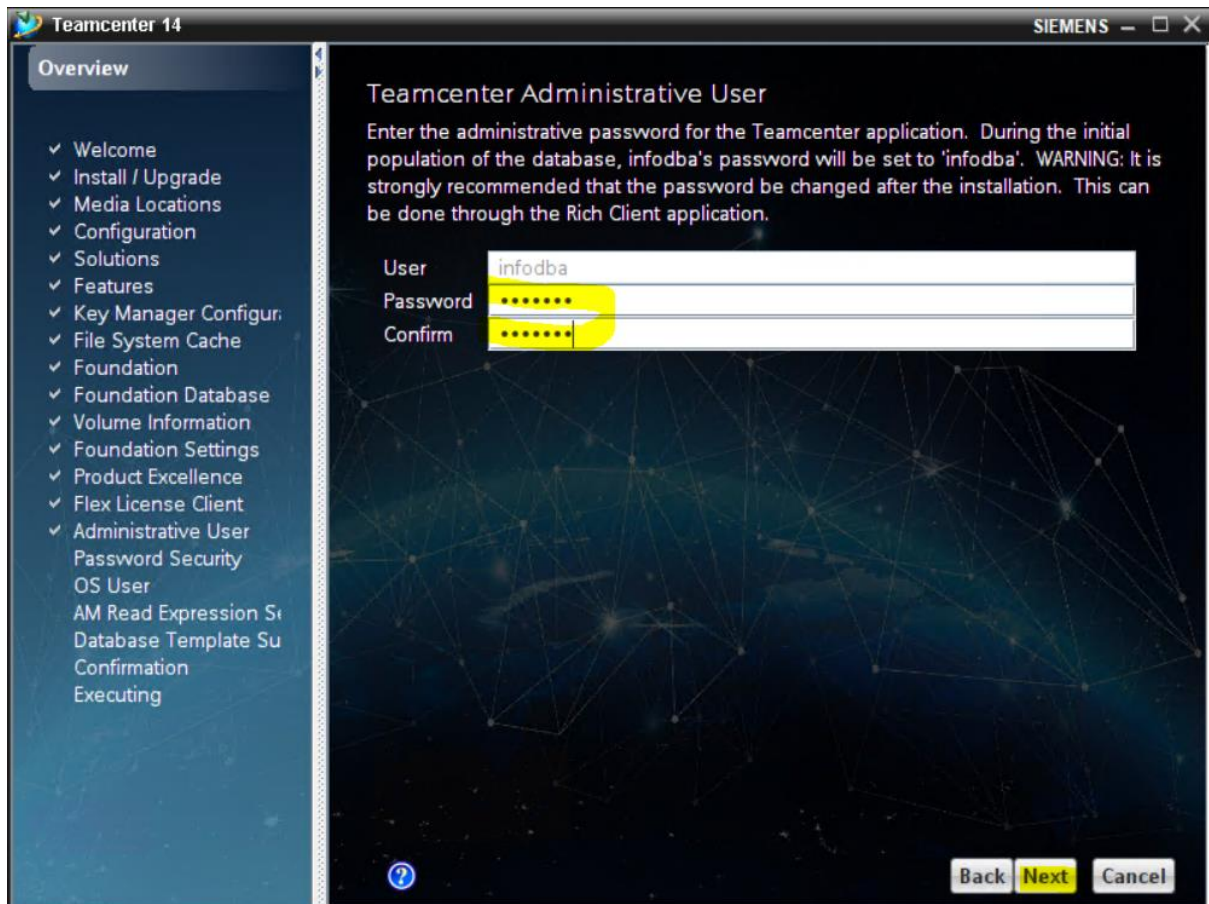


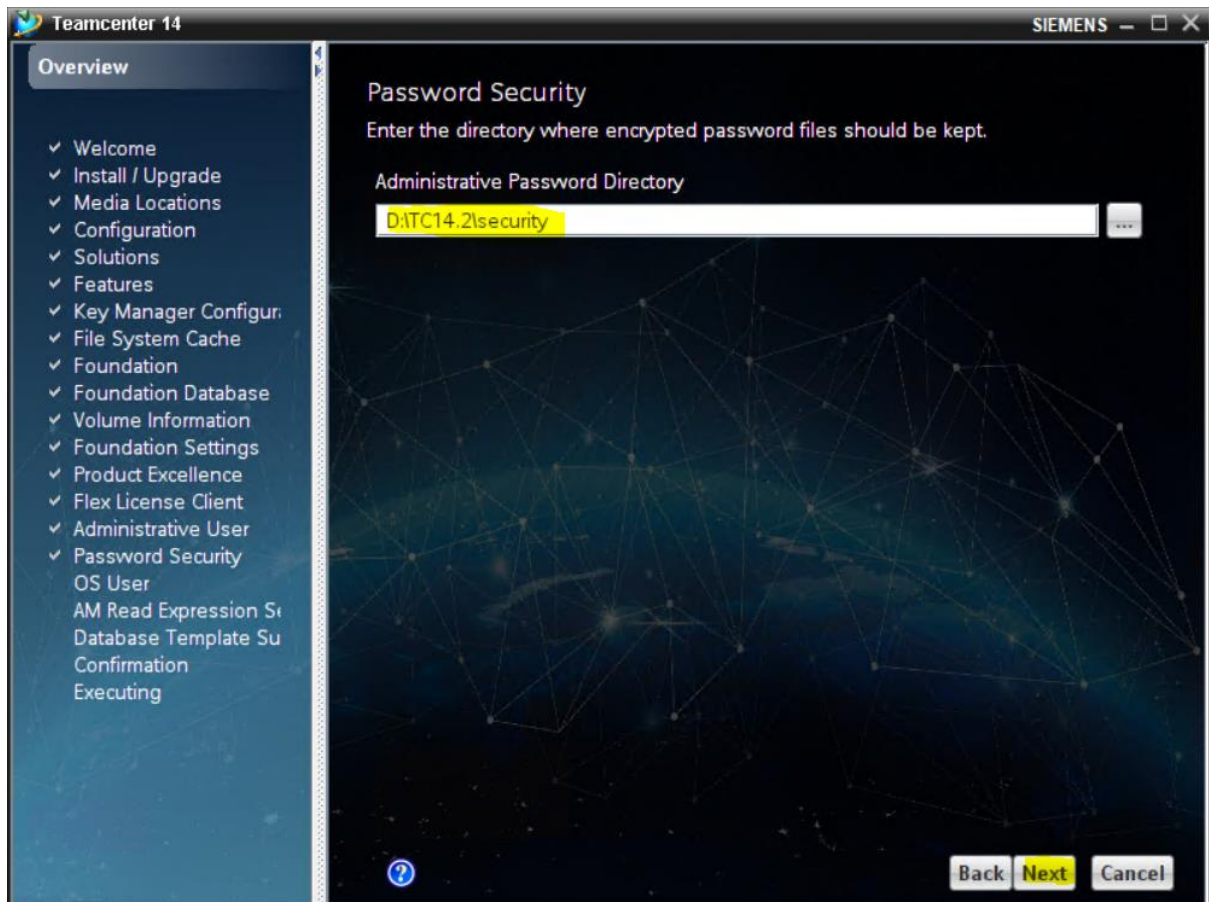


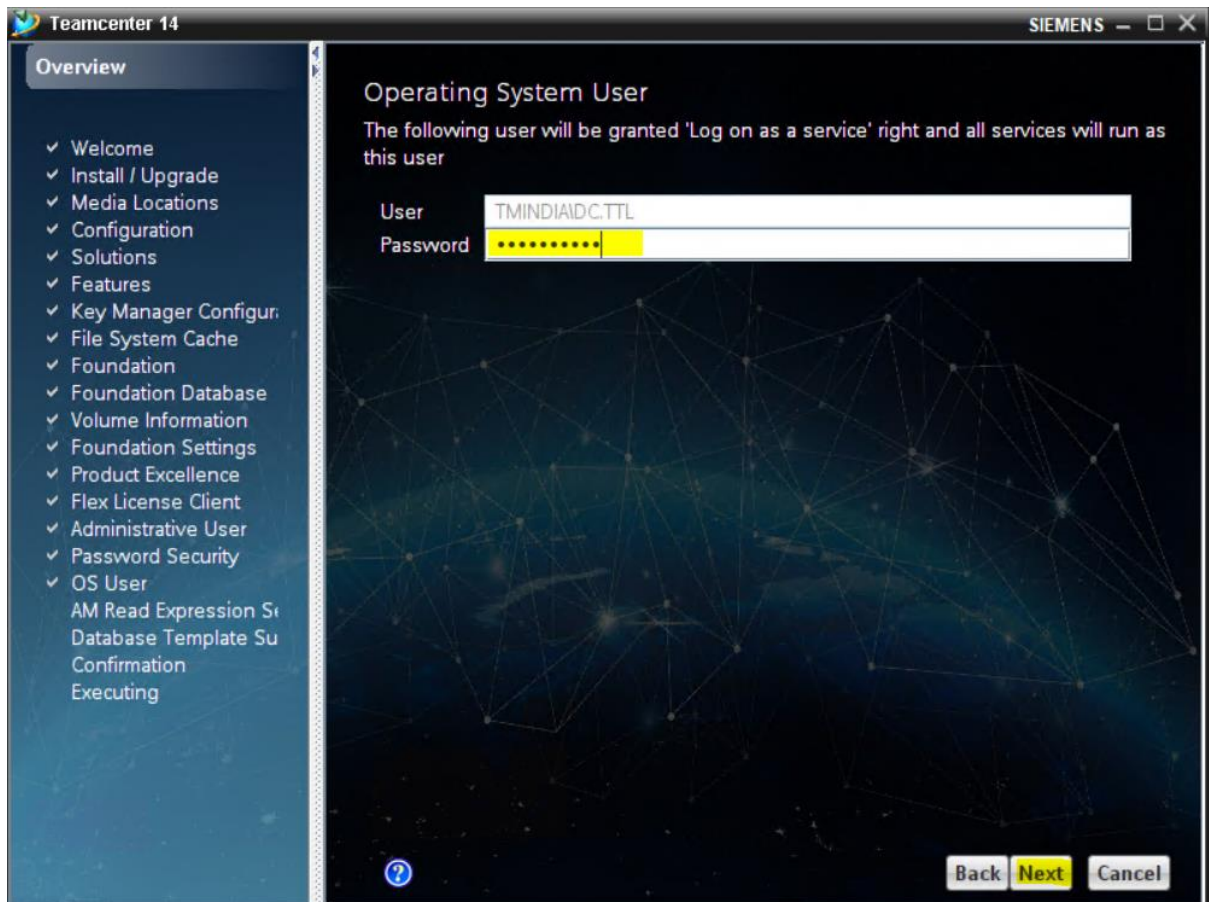


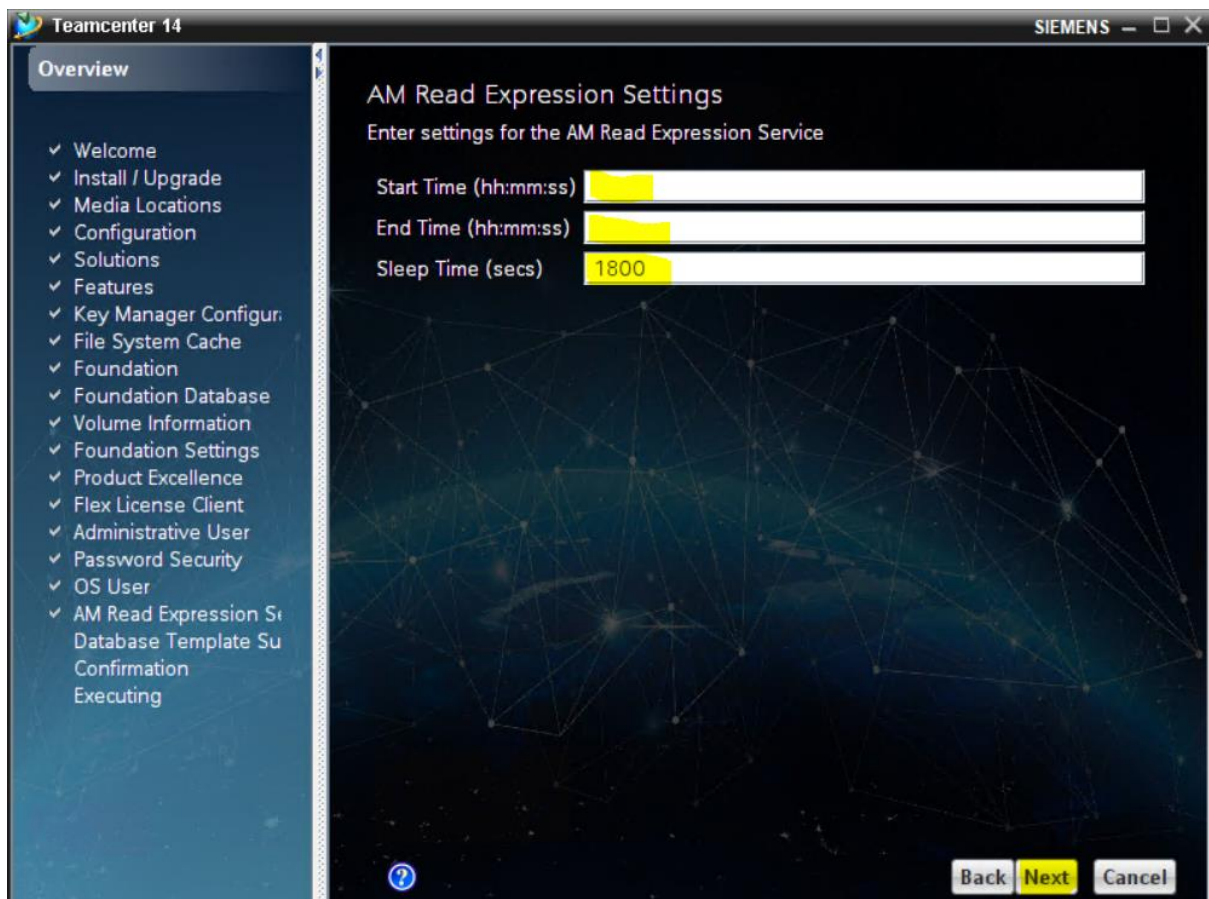


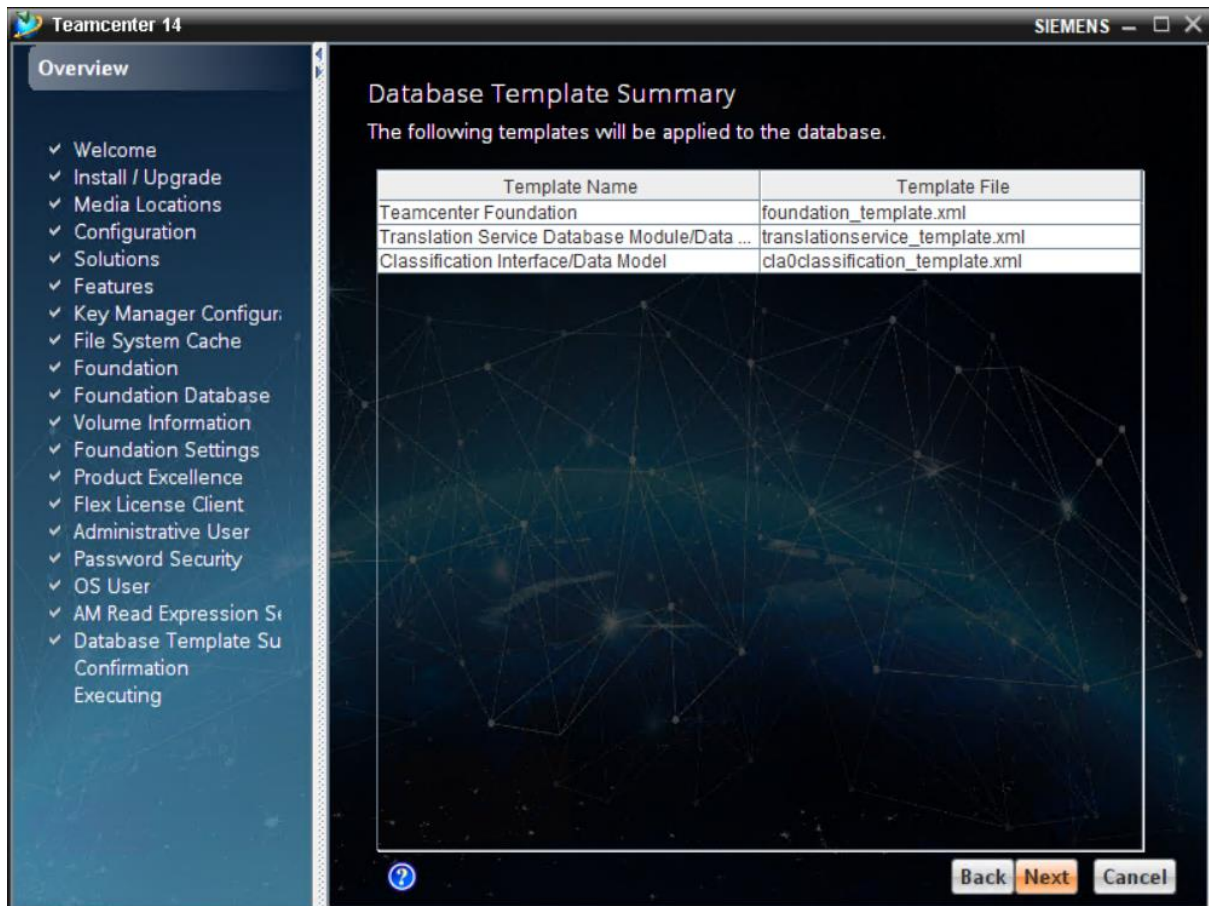


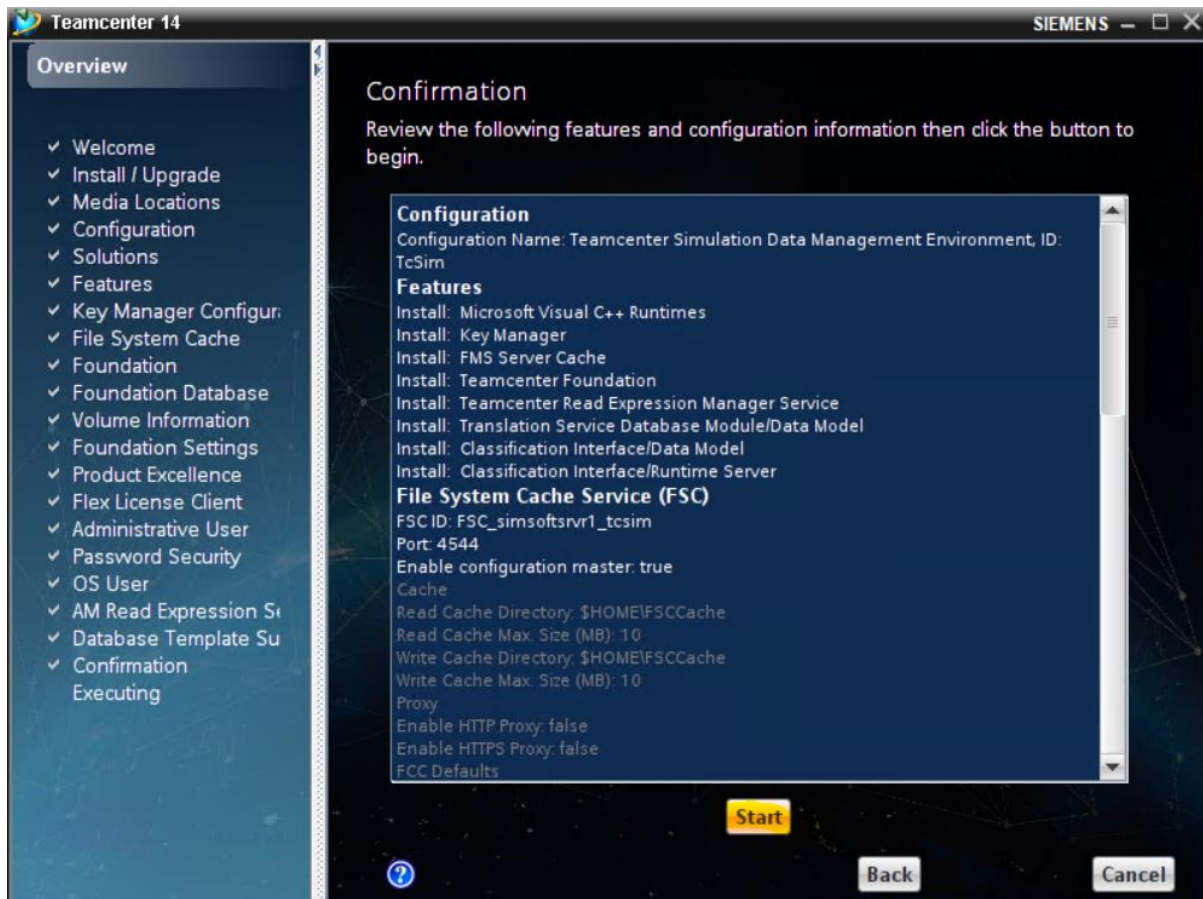


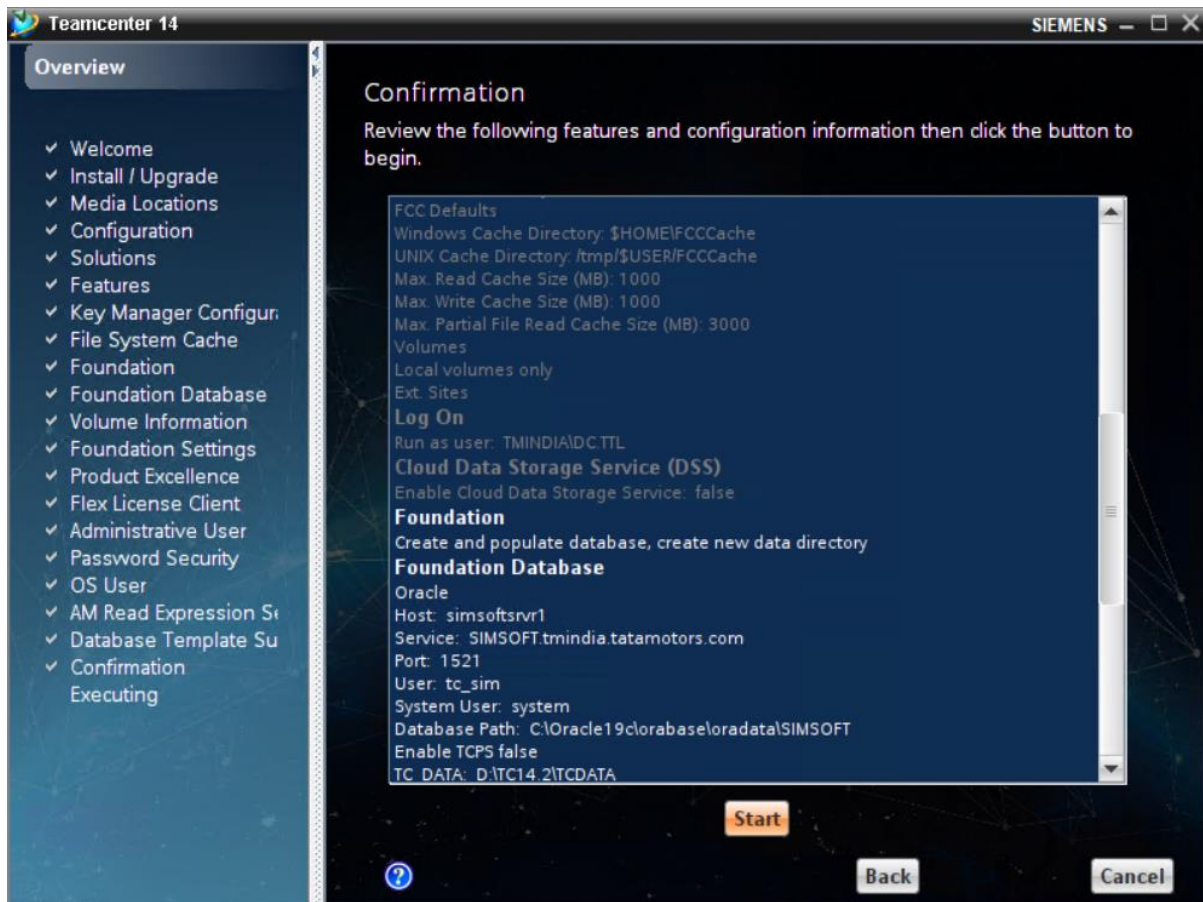


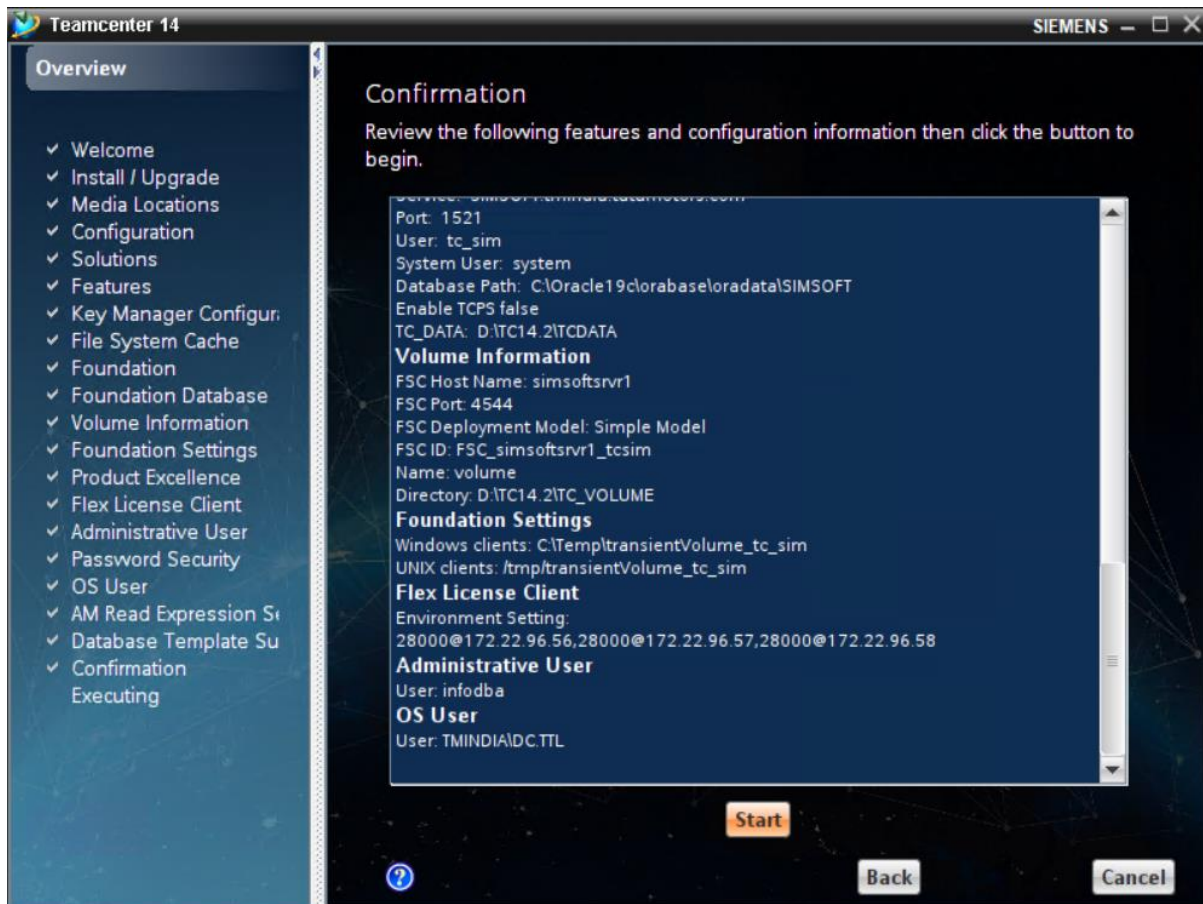


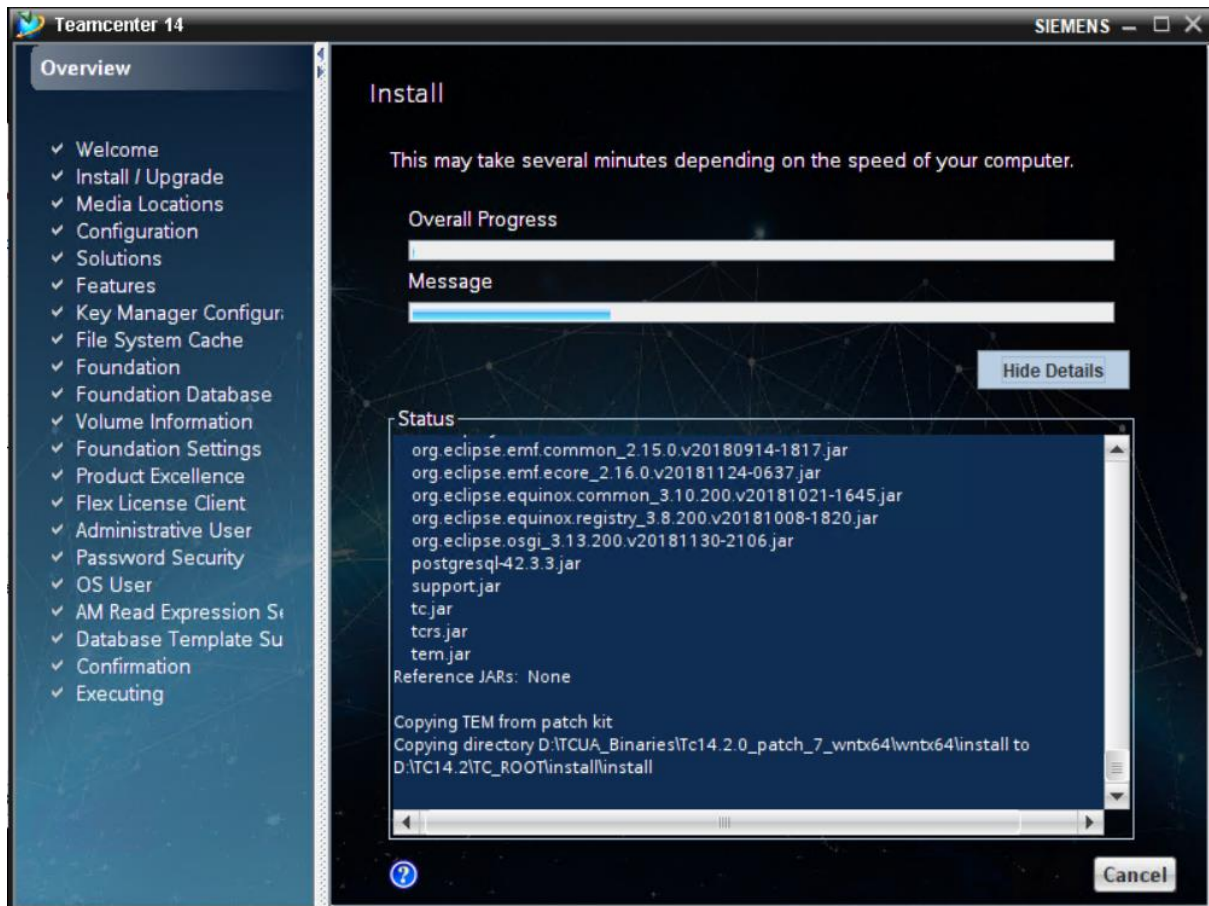

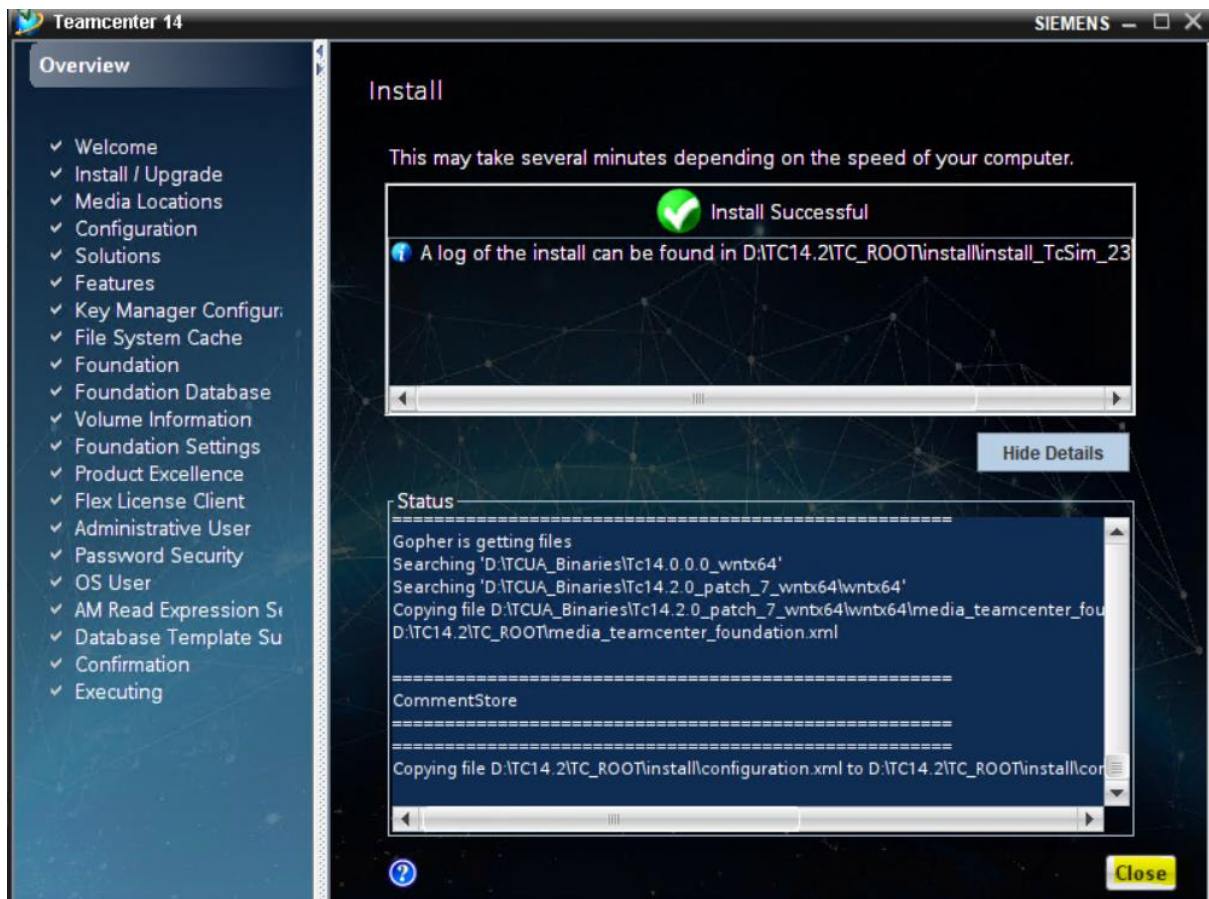

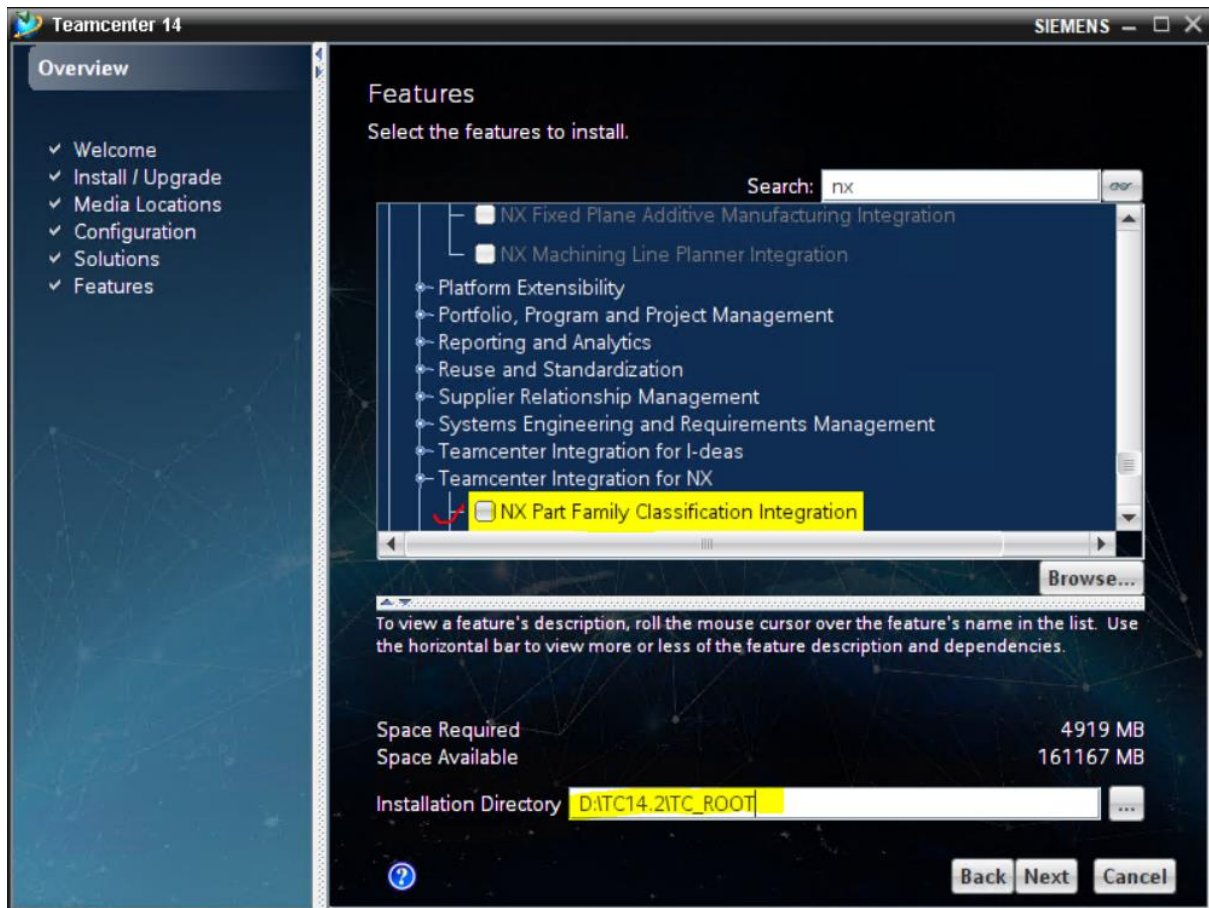


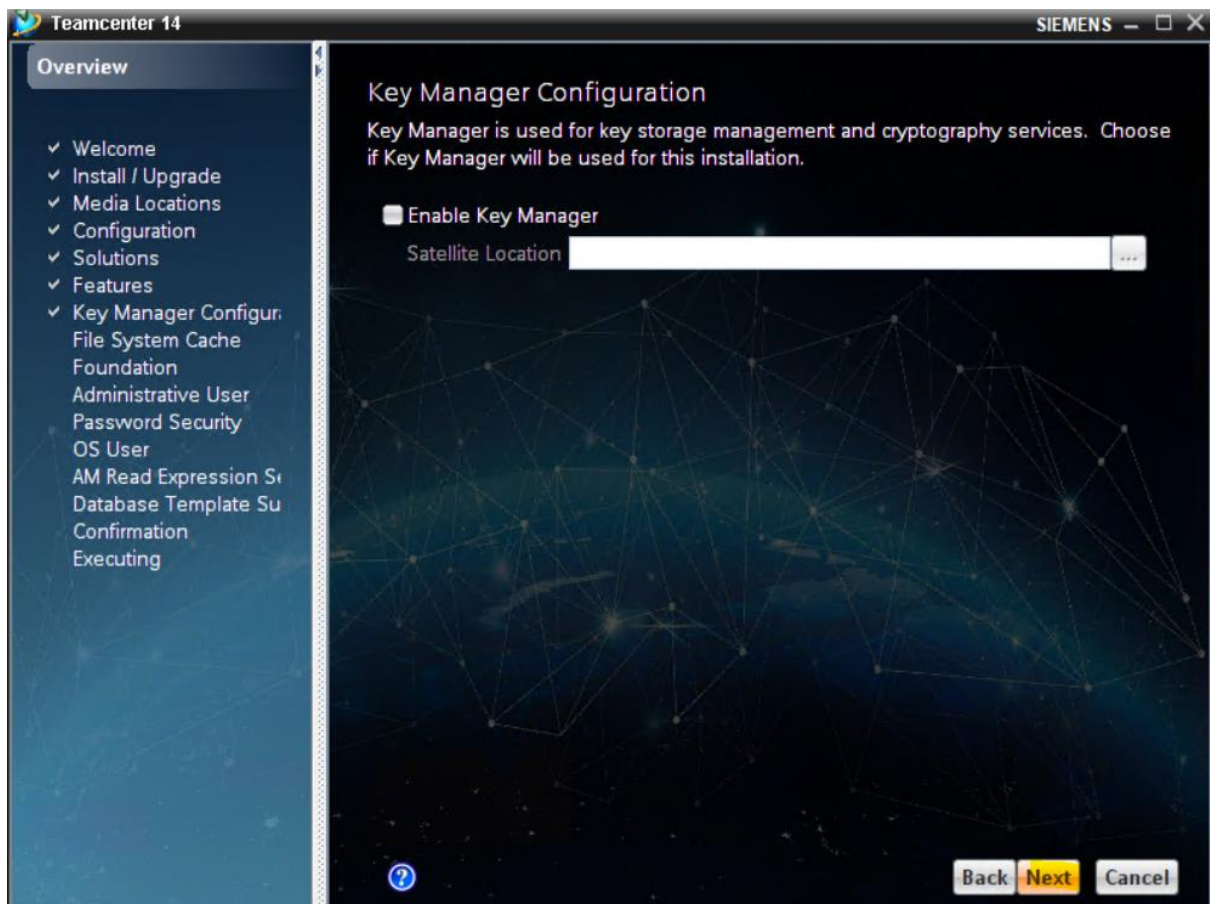


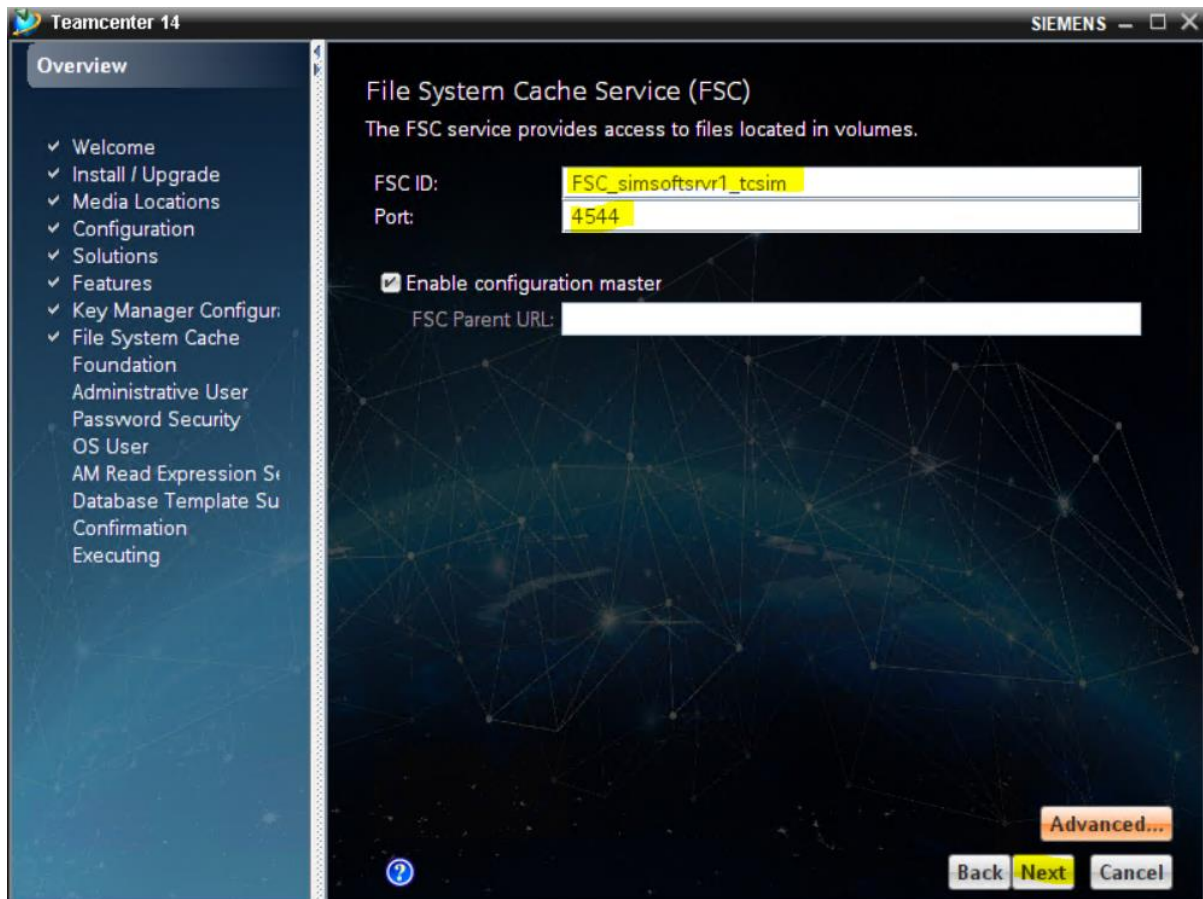



Install Rich Client 4-tier


Go to "<Teamcenter Installation Directory>/TC_ROOT/install" and launch tem.bat as administrator.

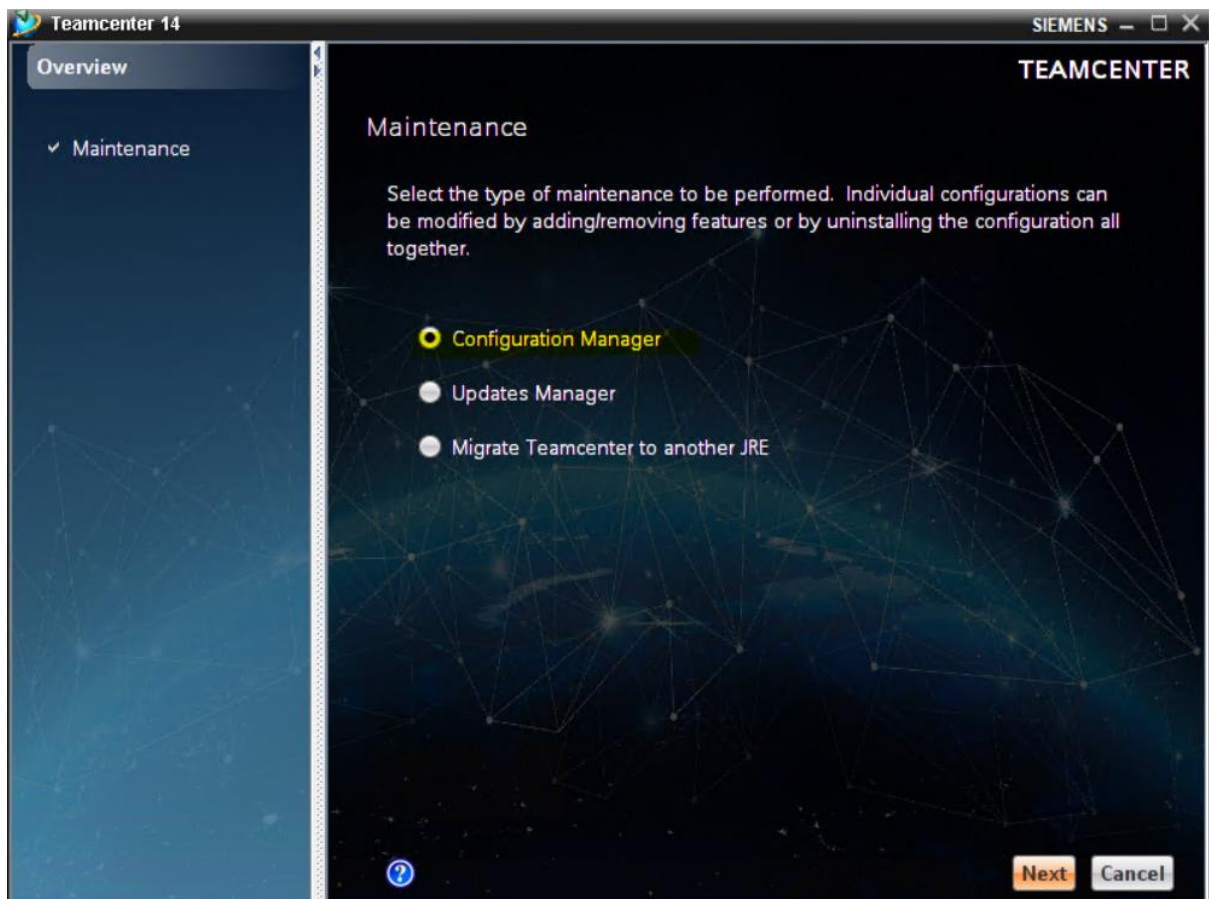


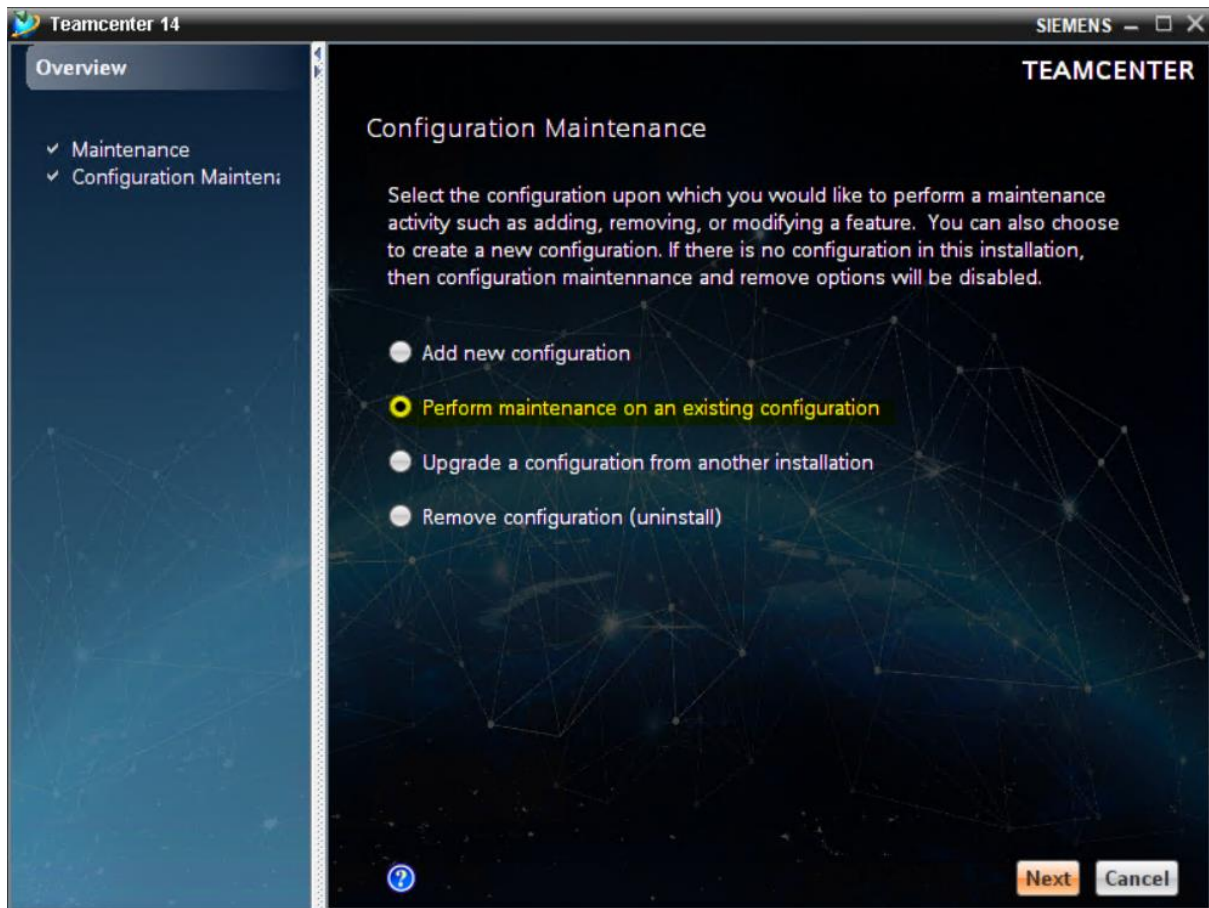


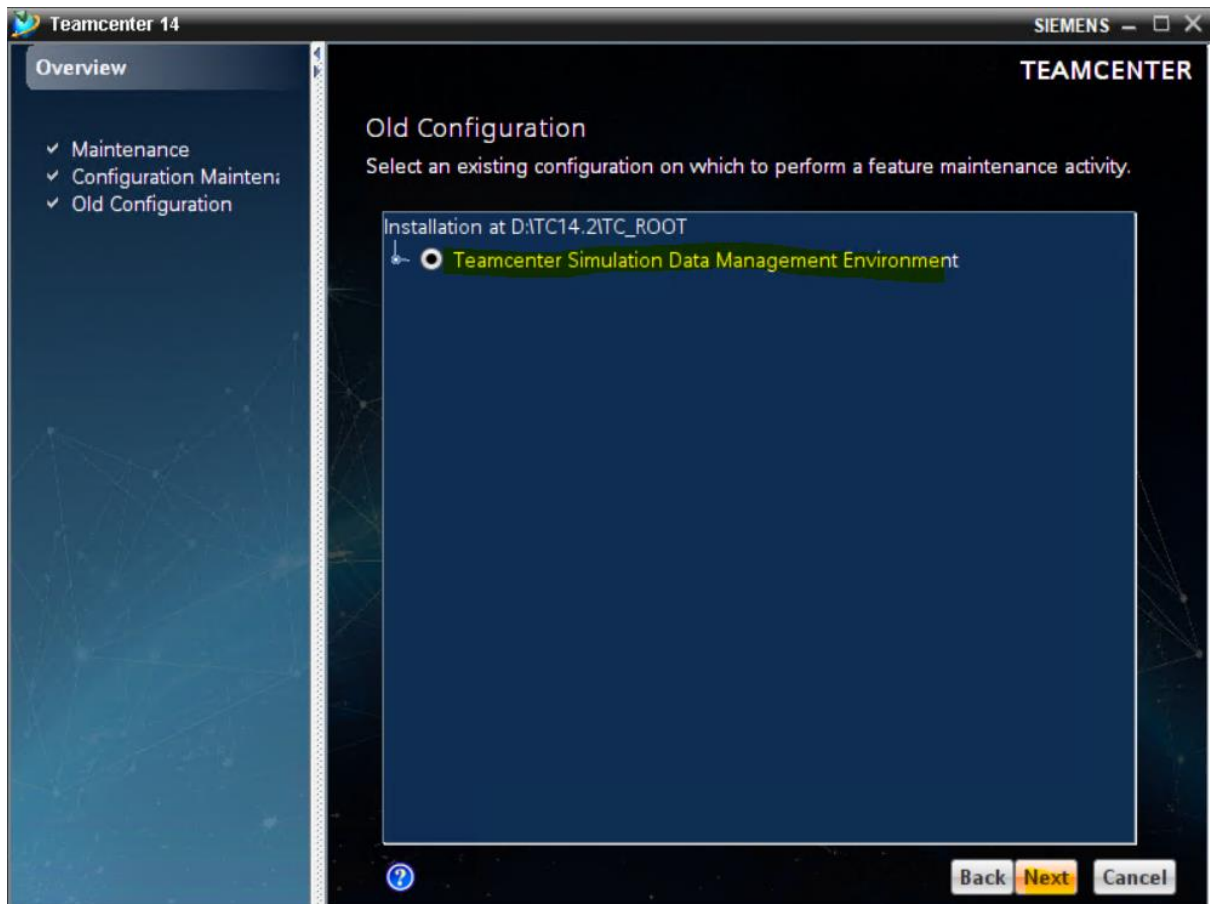


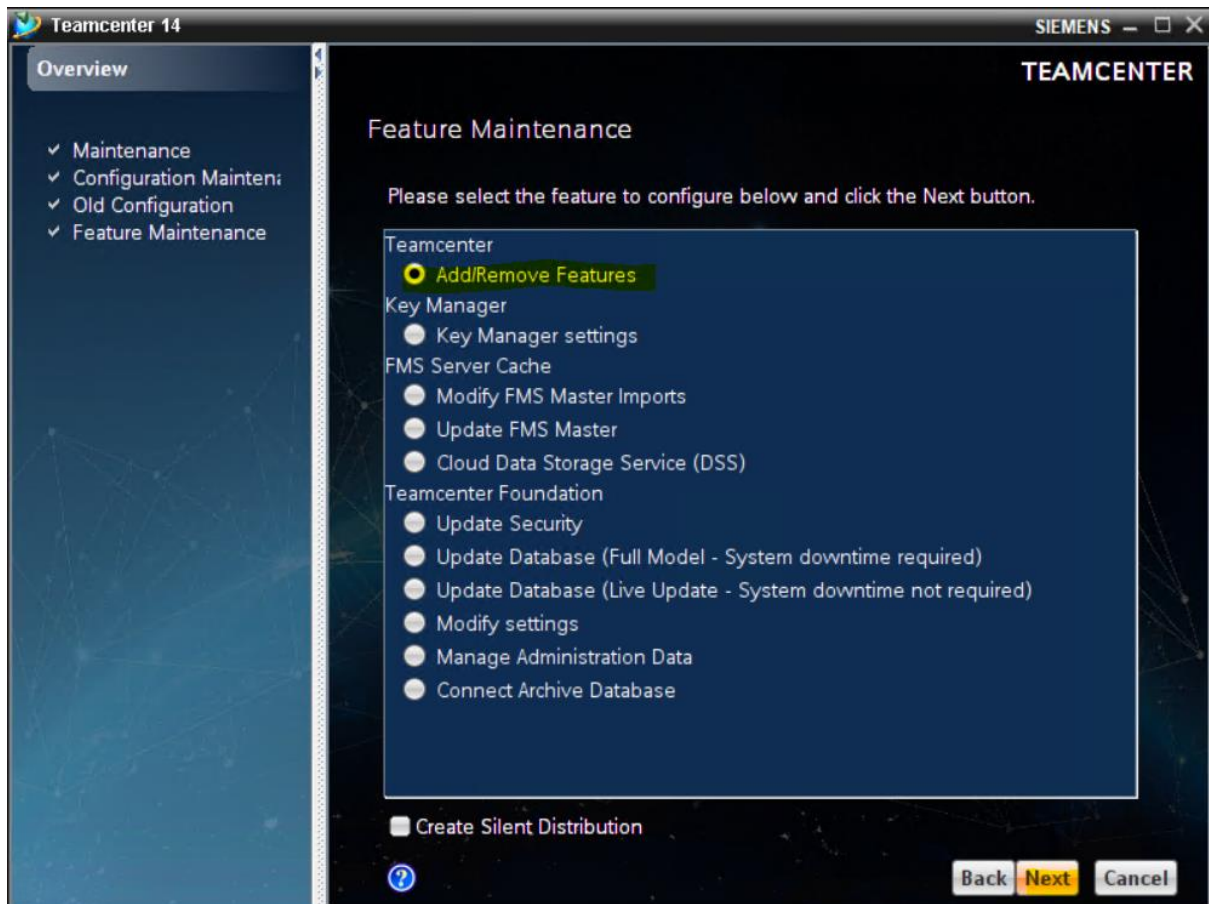


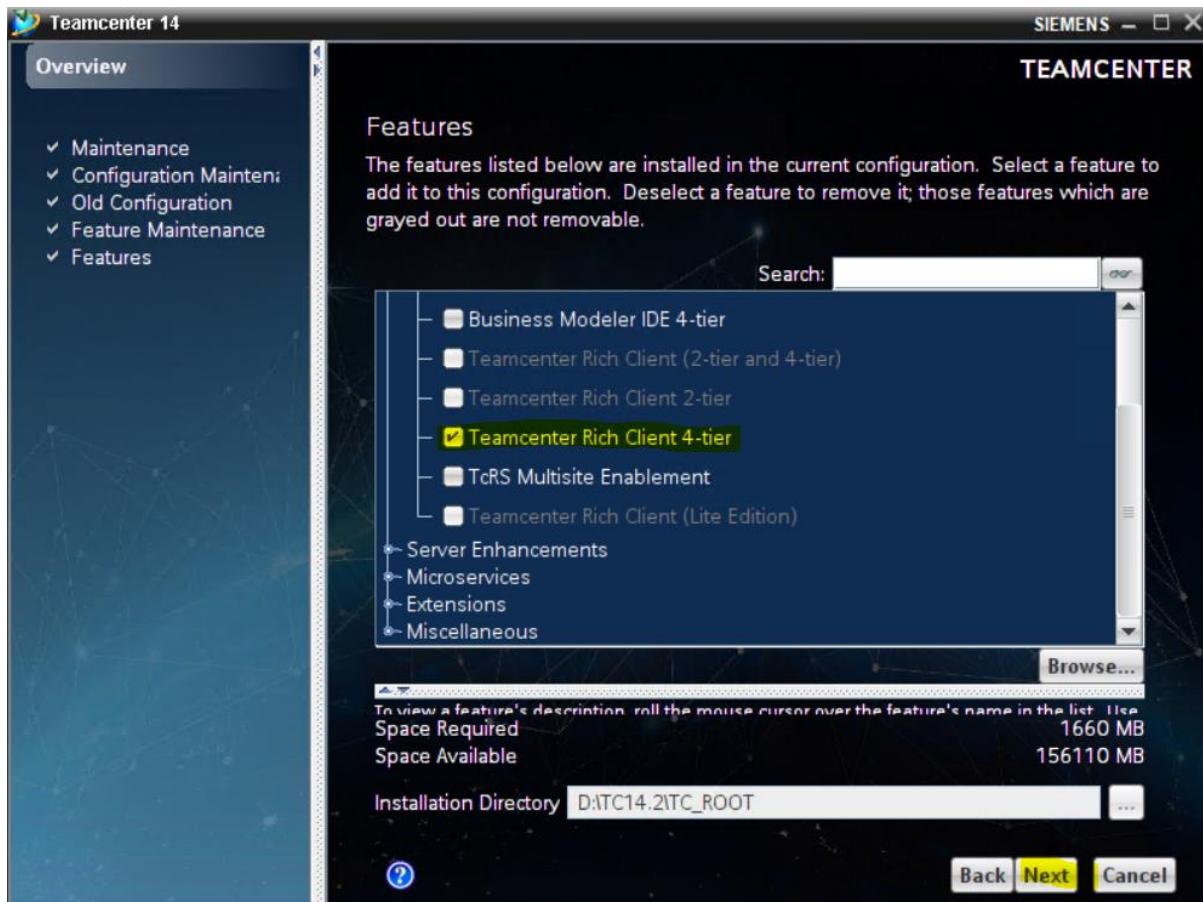


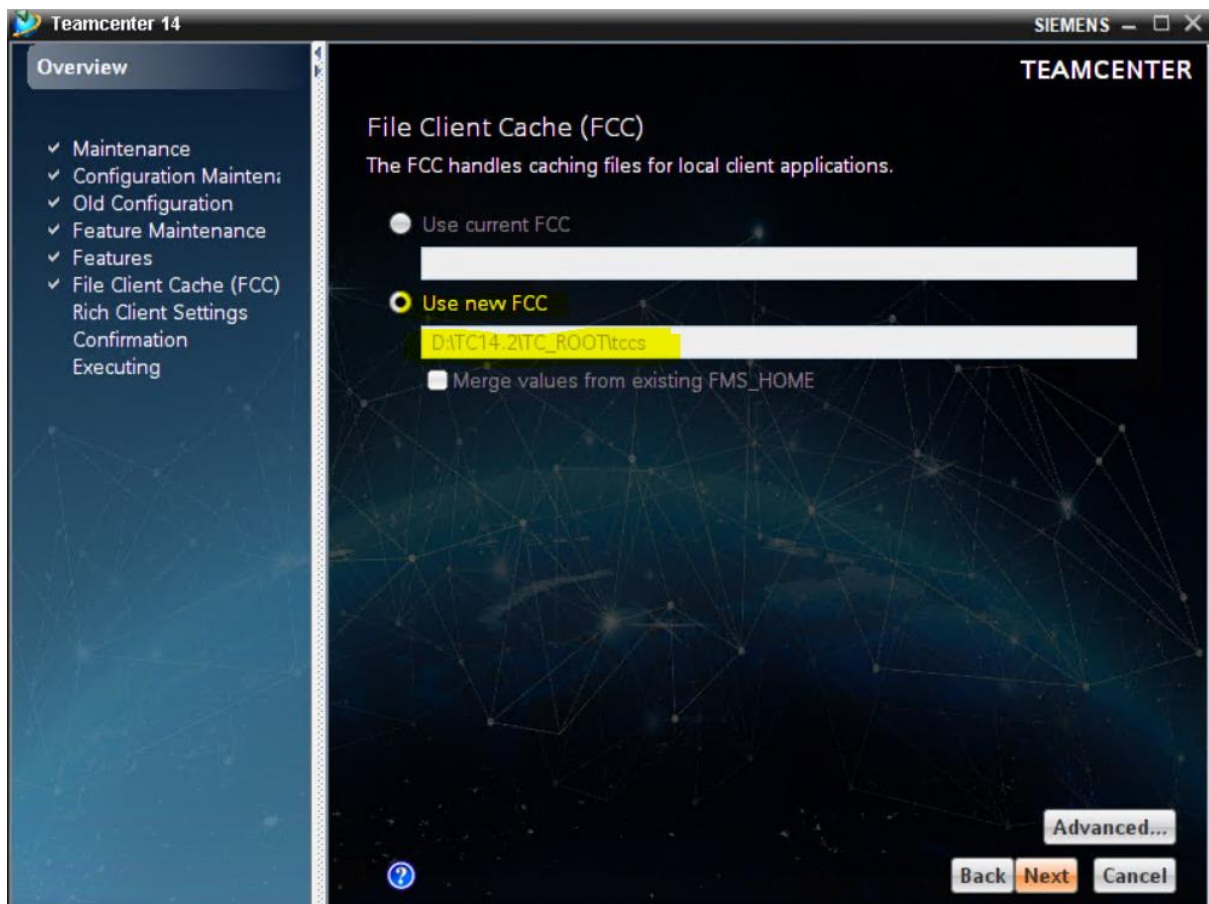


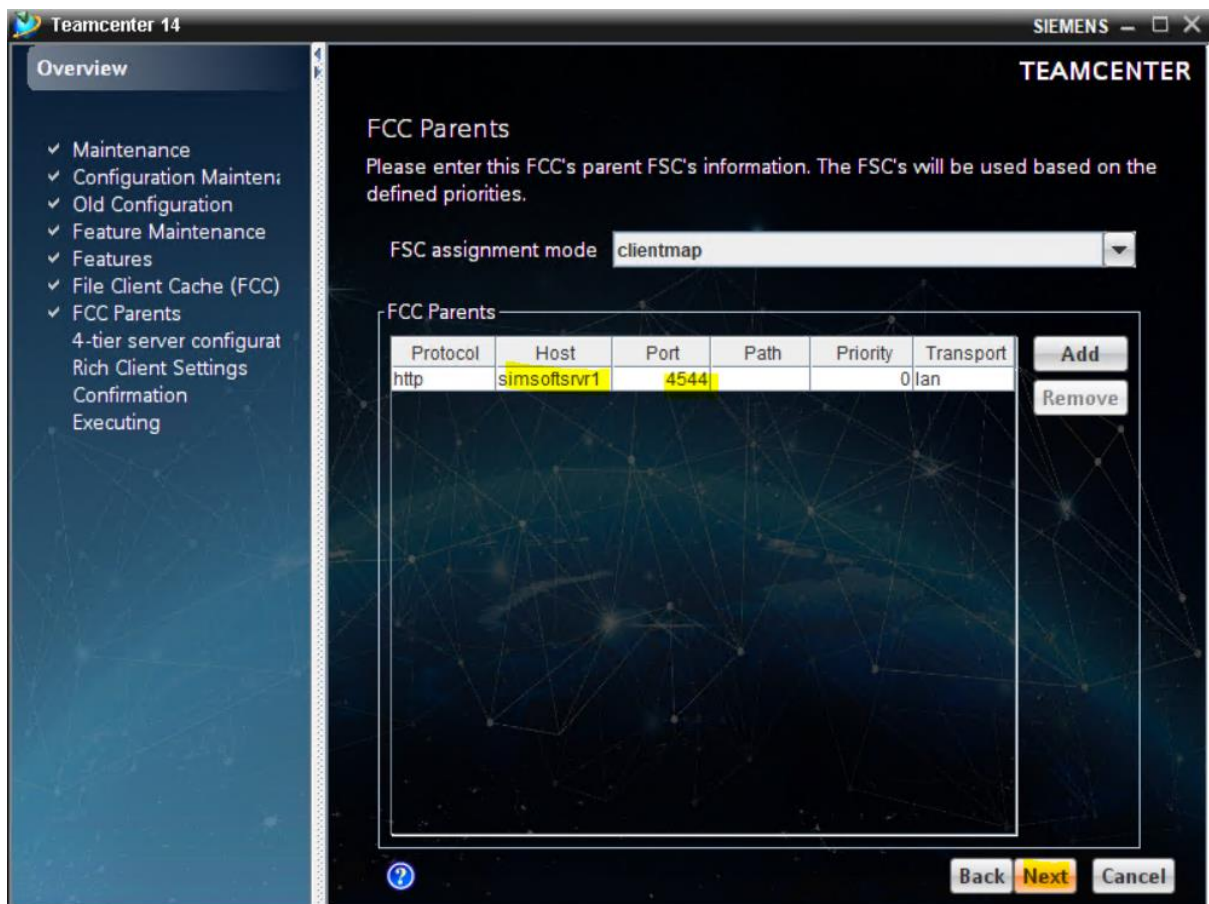


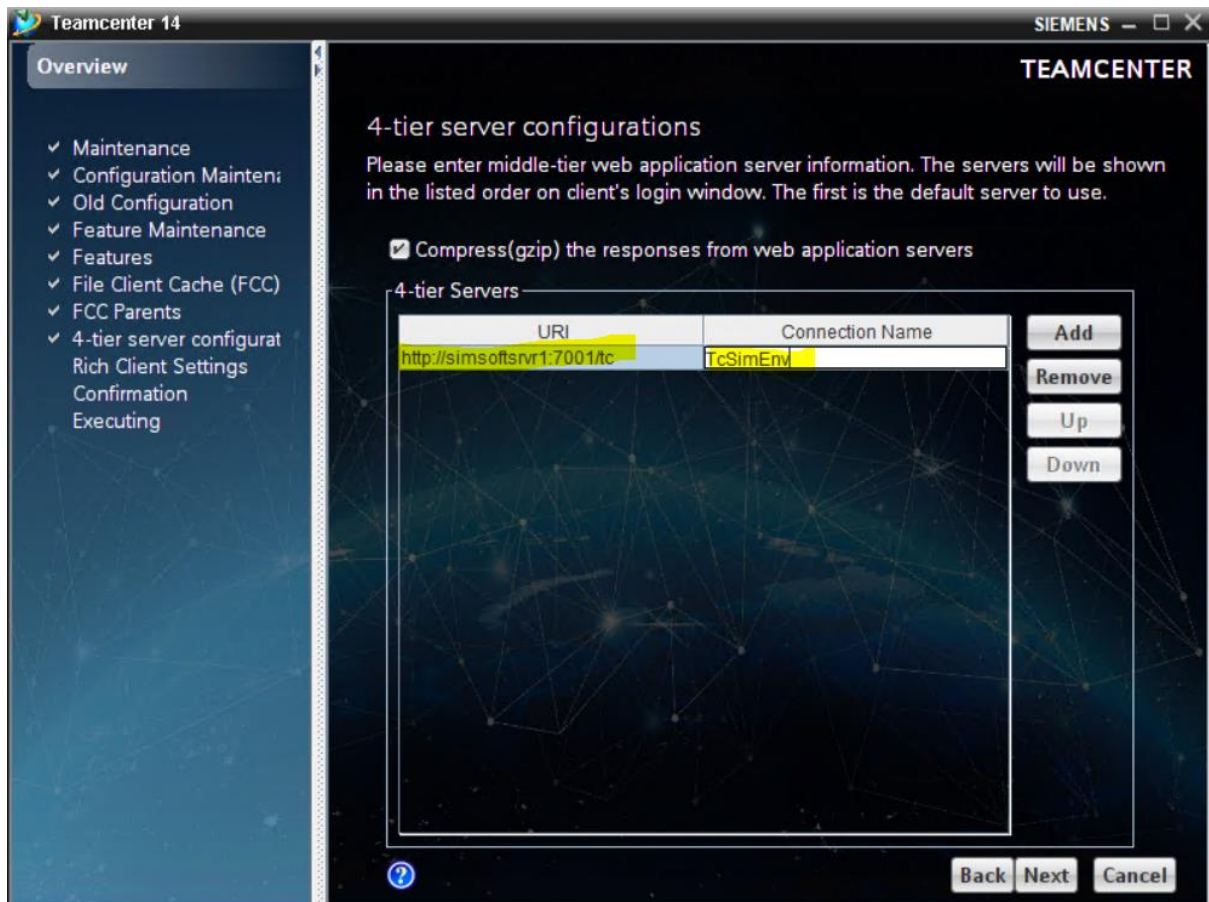

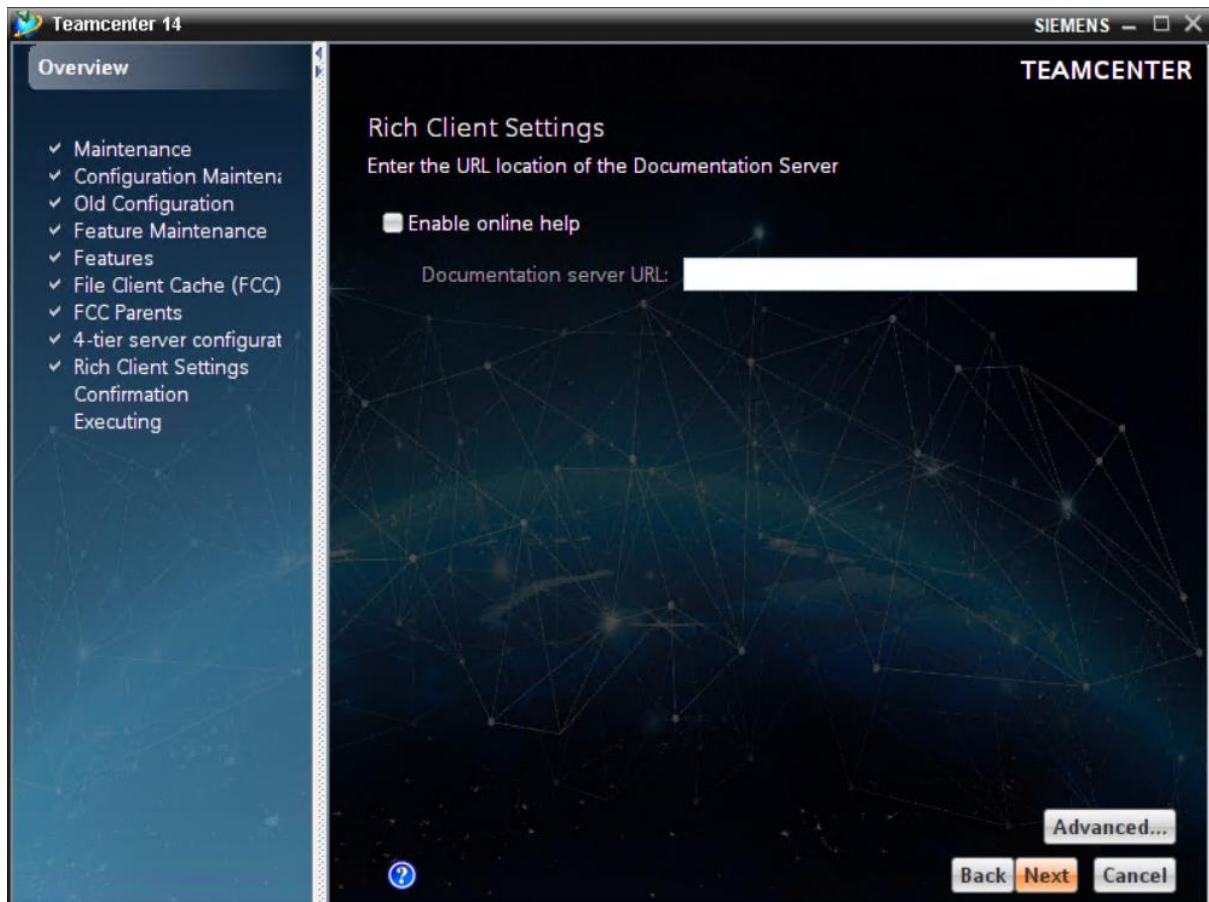

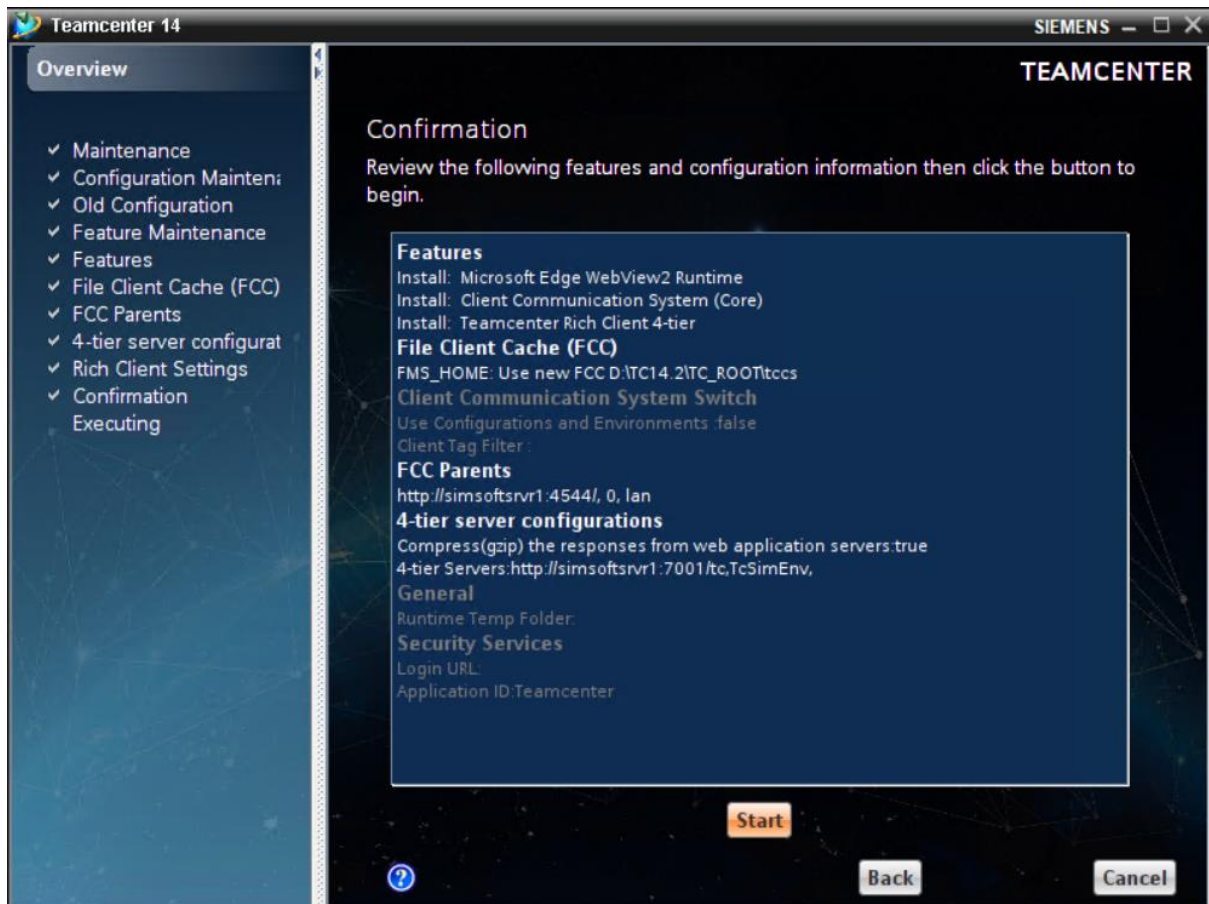


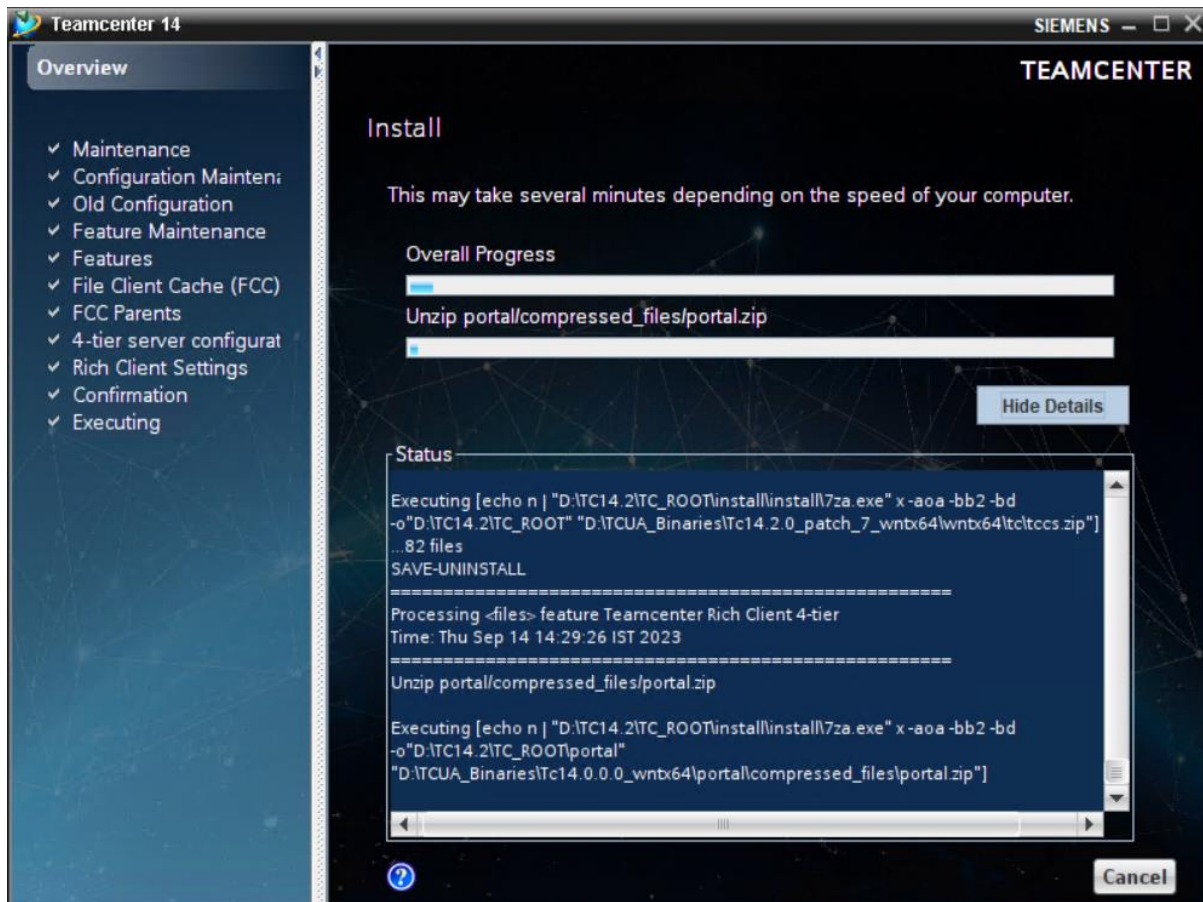


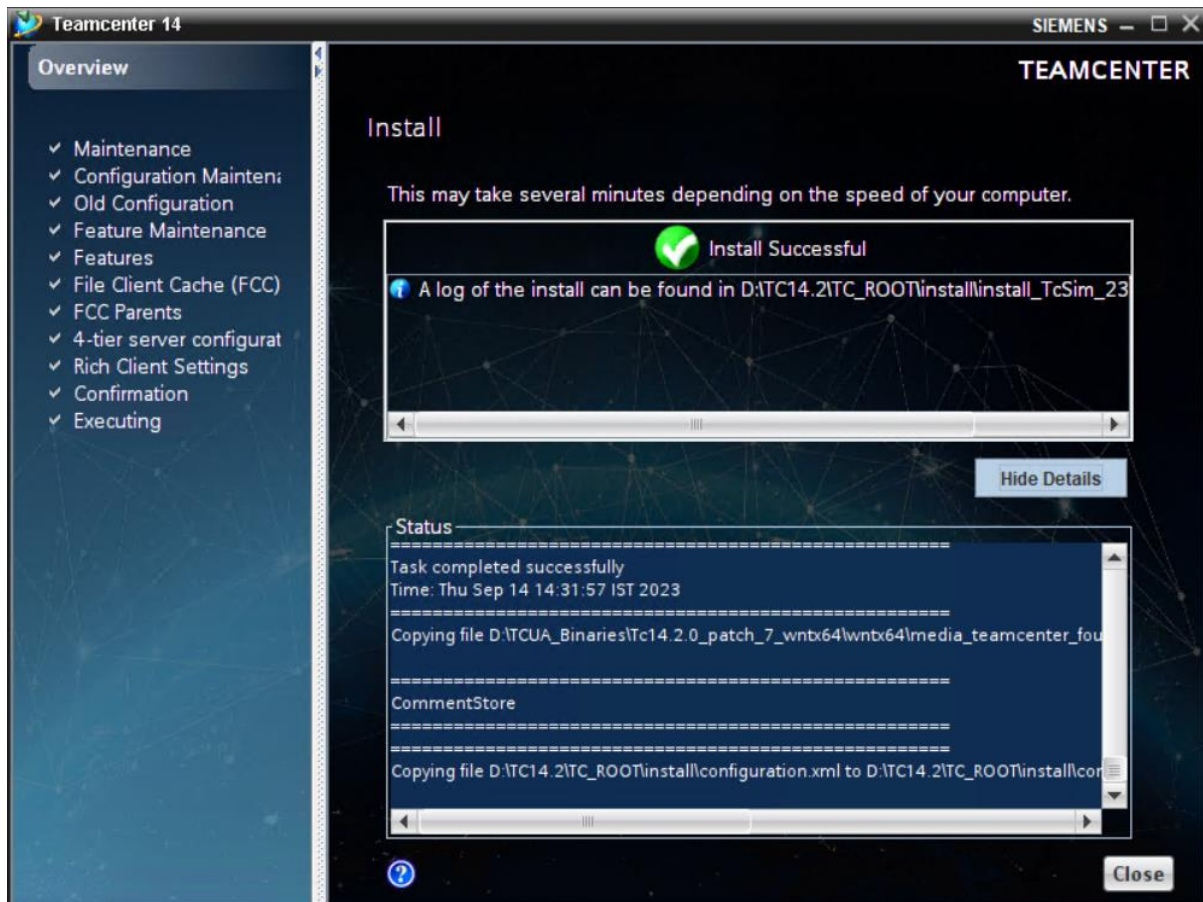



Installation of Pool Manager:


Launch tem.bat from tc_root/install folder and proceed till 'Features' panel.

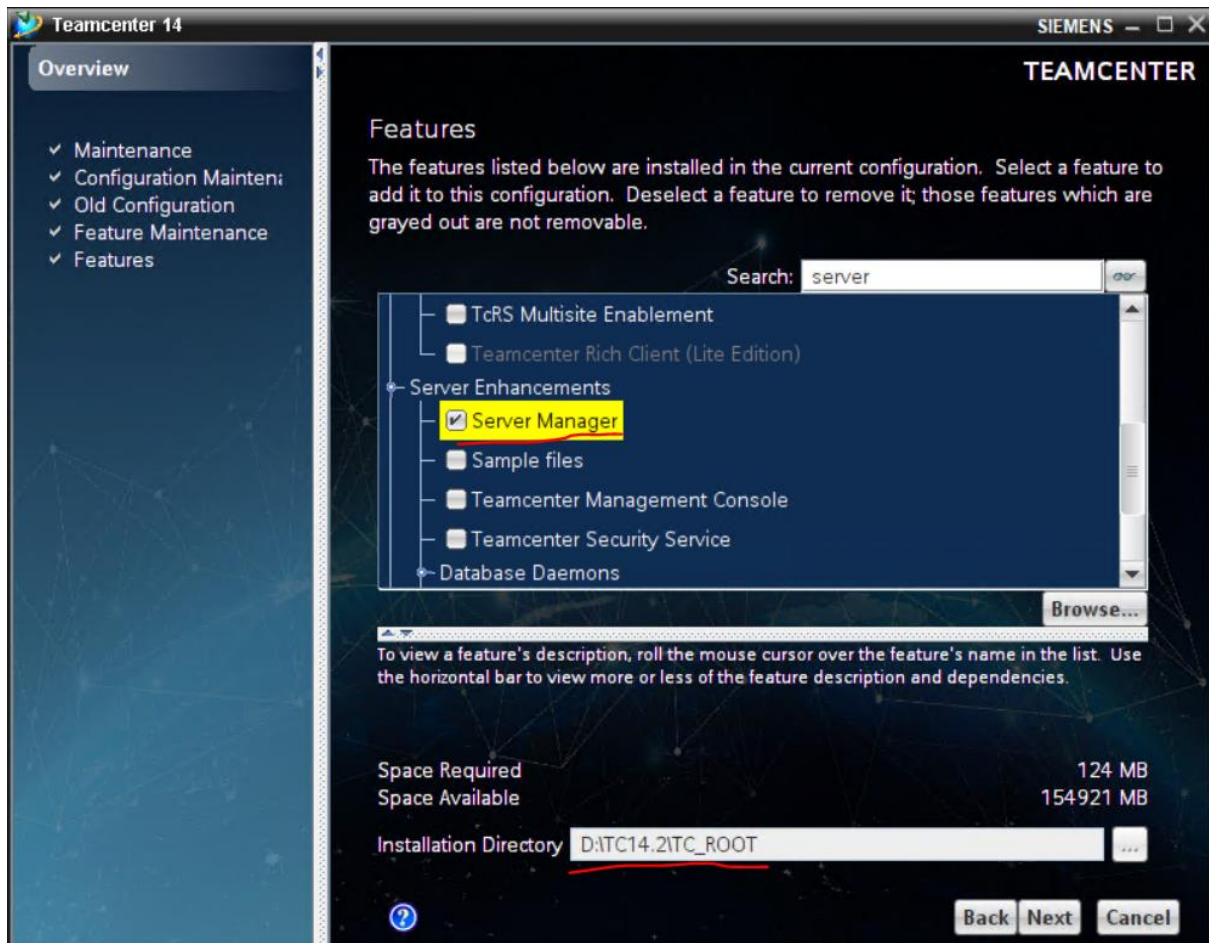


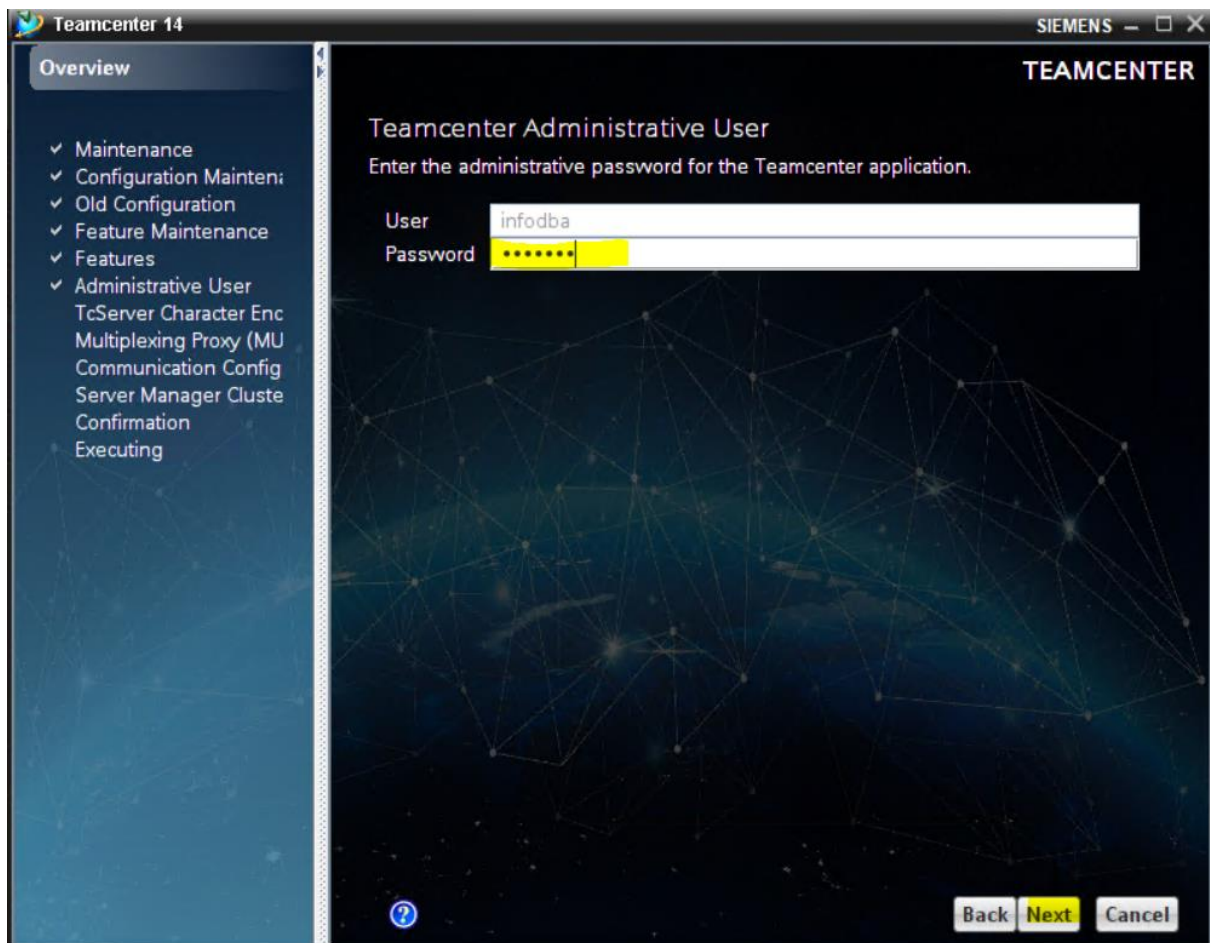


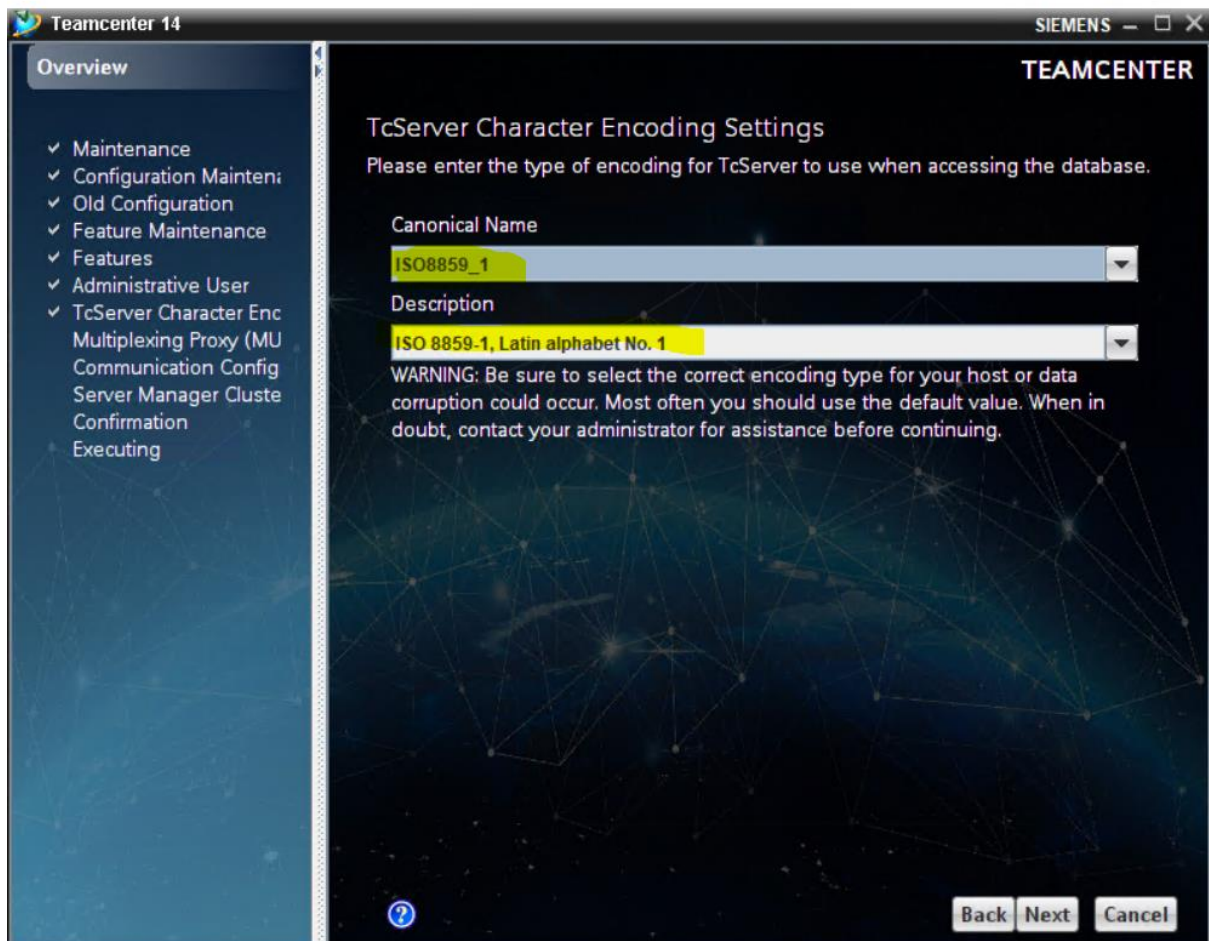


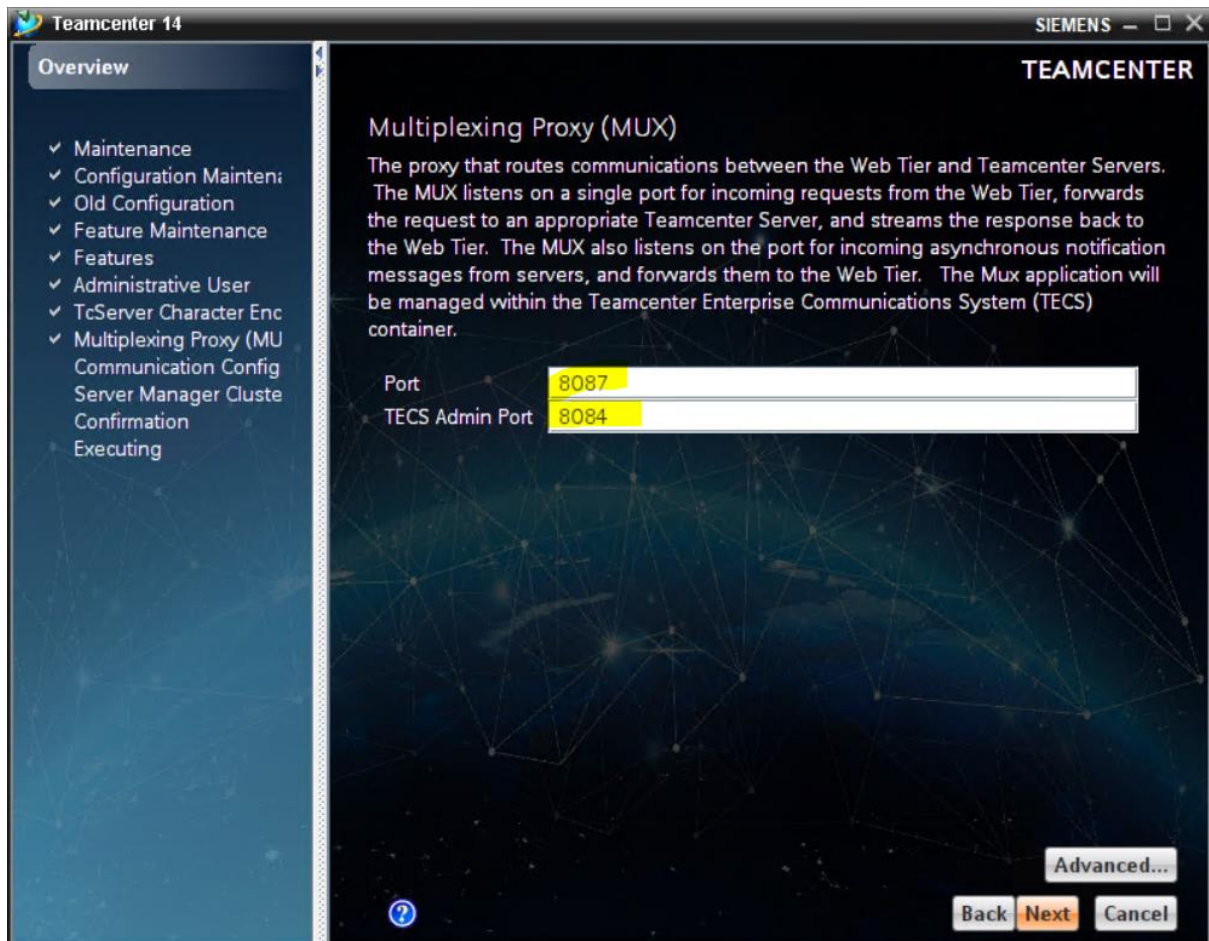

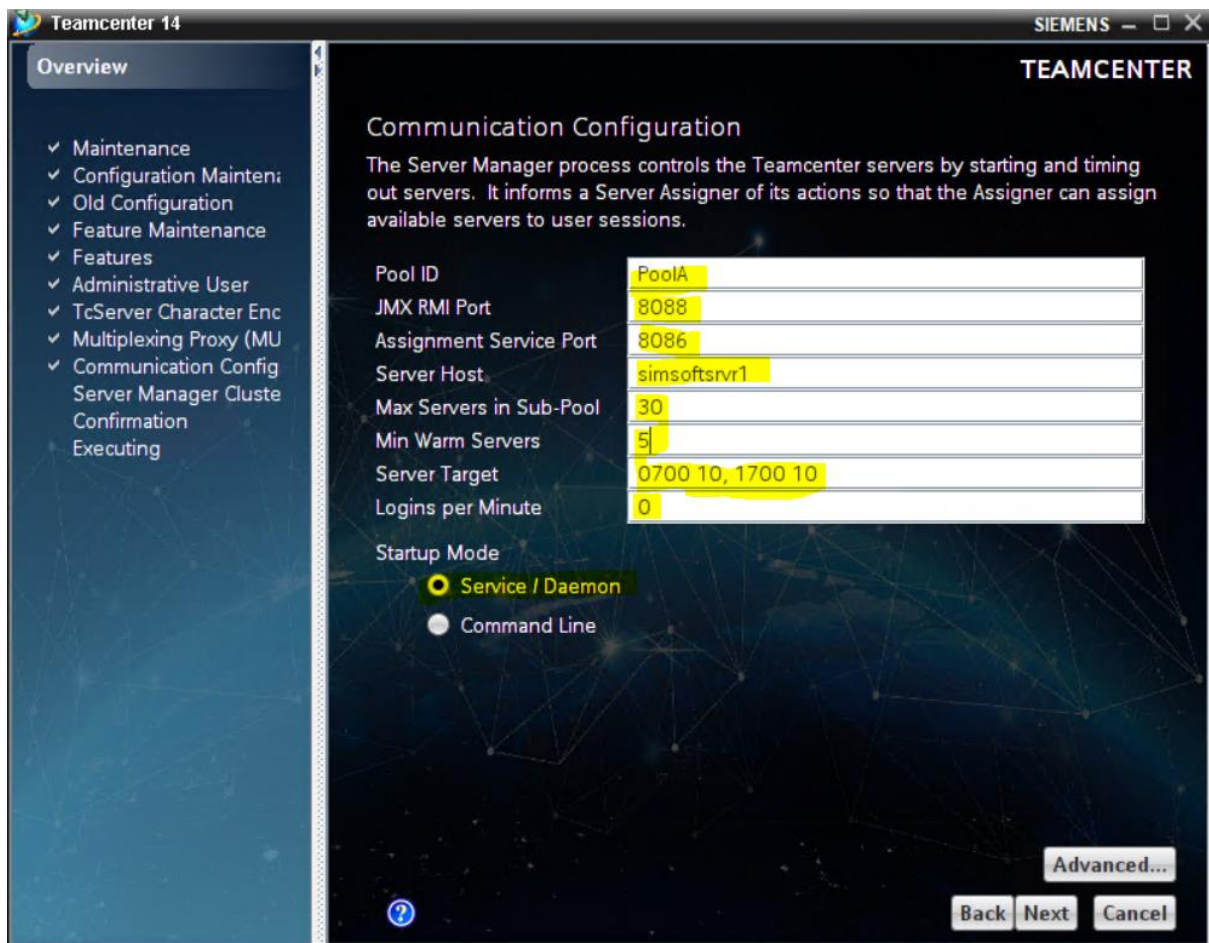

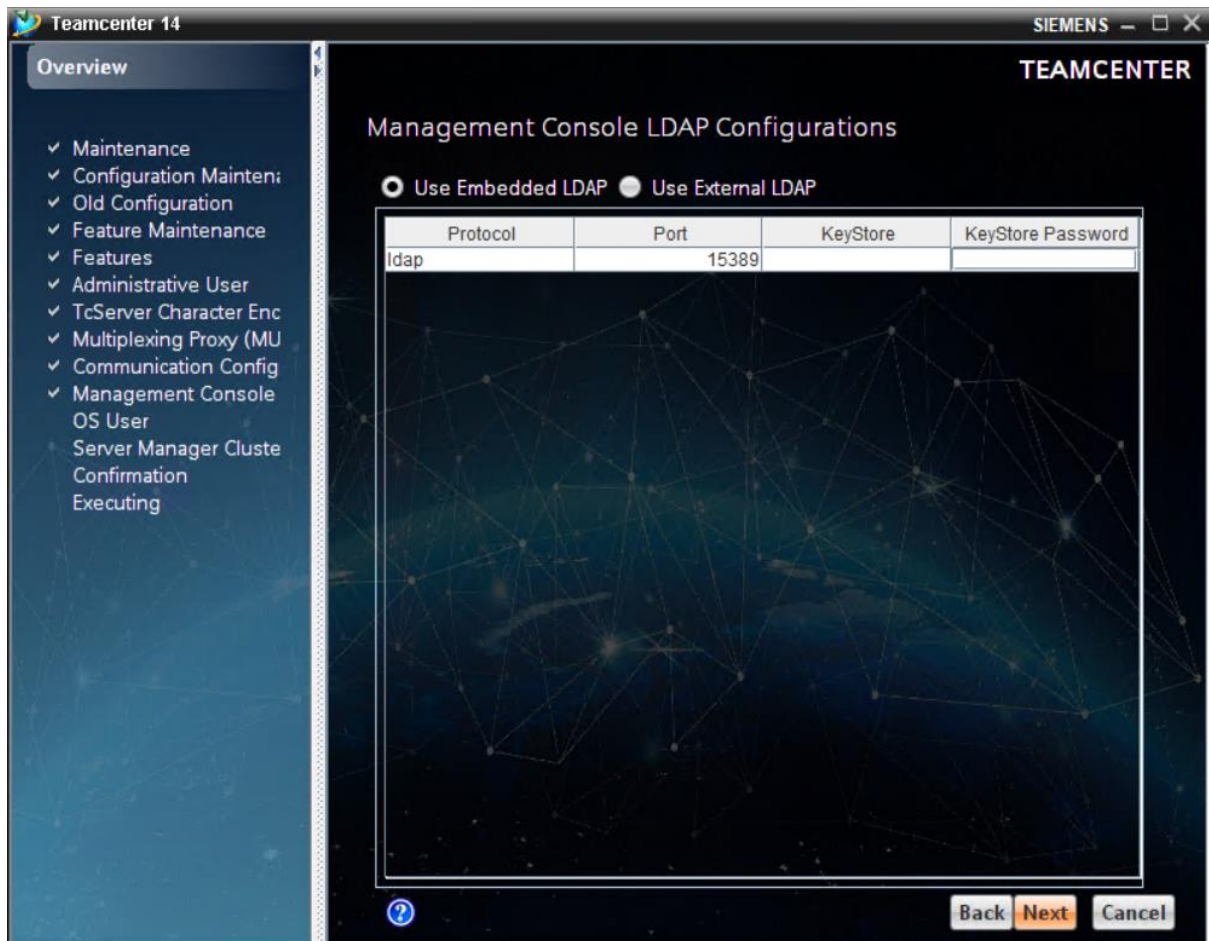

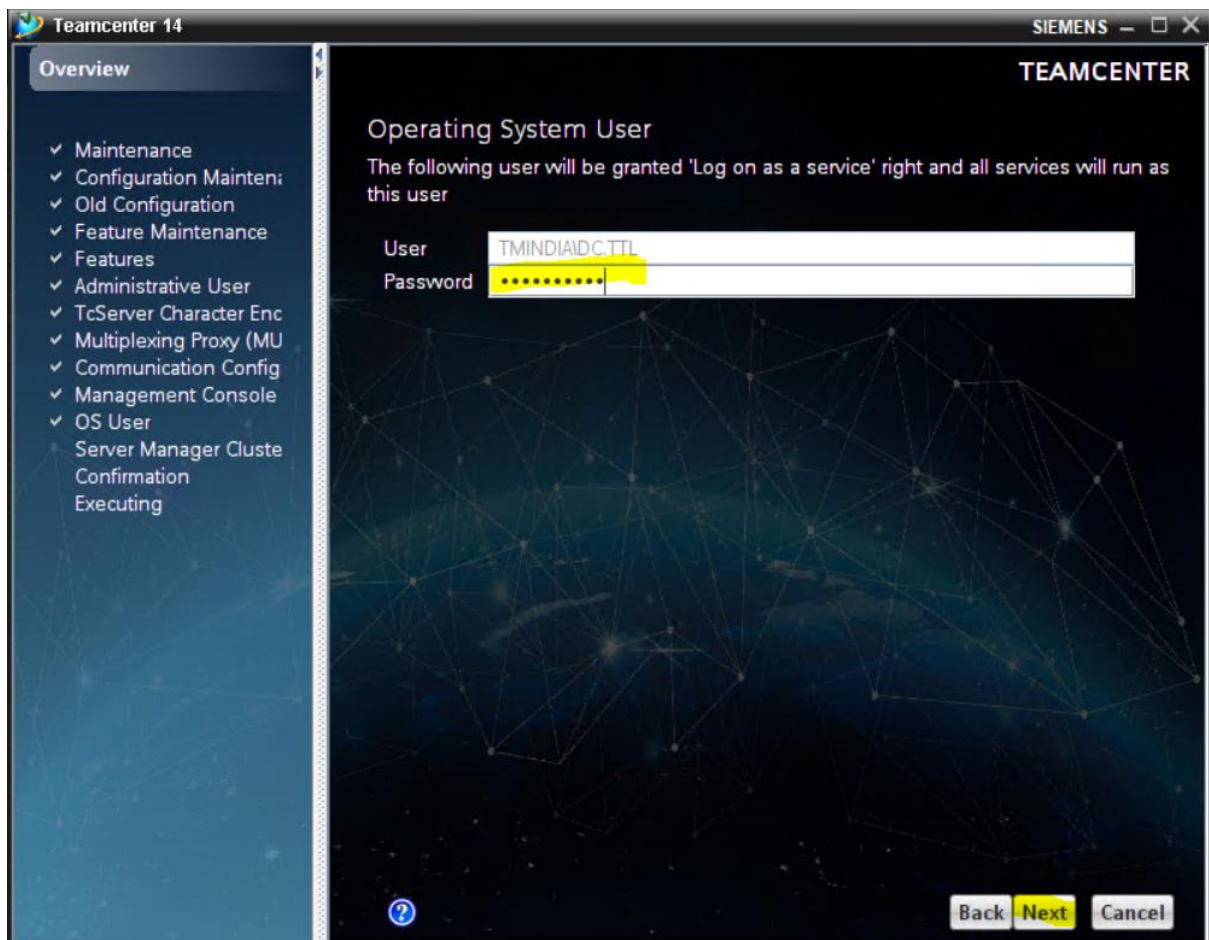

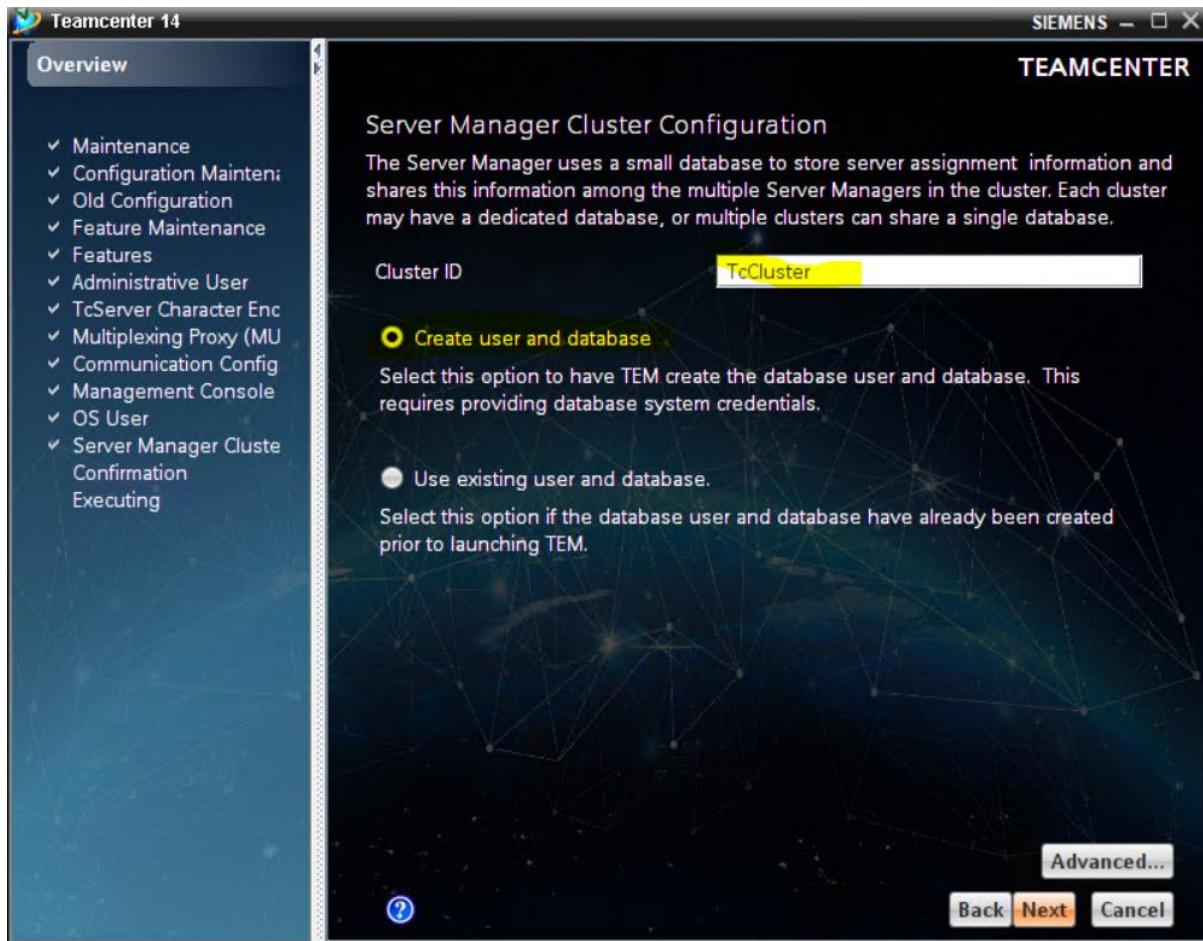

Teamcenter 14 SIEMENS

Overview

- ✓ Maintenance
- ✓ Configuration Mainteni
- ✓ Old Configuration
- ✓ Feature Maintenance
- ✓ Features
- ✓ Administrative User
- ✓ TcServer Character Enc
- ✓ Multiplexing Proxy (MU
- ✓ Communication Config
- ✓ Management Console
- ✓ OS User
- ✓ Server Manager Cluste
- ✓ Server Manager Cluste
- Confirmation
- Executing

Server Manager Database

Enter the database server information for the existing database.

Database Server: Oracle

Host: simsoftsrvr1

Service: SIMSOFT.tnindia.tatamotors.com

Port: 1521

User: TcClusterDB

Password:

Confirm:

System User: system

Password:

Database Path: C:\Oracle19\orabase\oradata\SIMSOFT

☐ Enable TCPS

Wallet Location:

SSL Version: 1.1


[?](#) [Back](#) [Next](#) [Cancel](#)


User: TcClusterDB


Password: oracle


System User: system

Password: Oracle19c

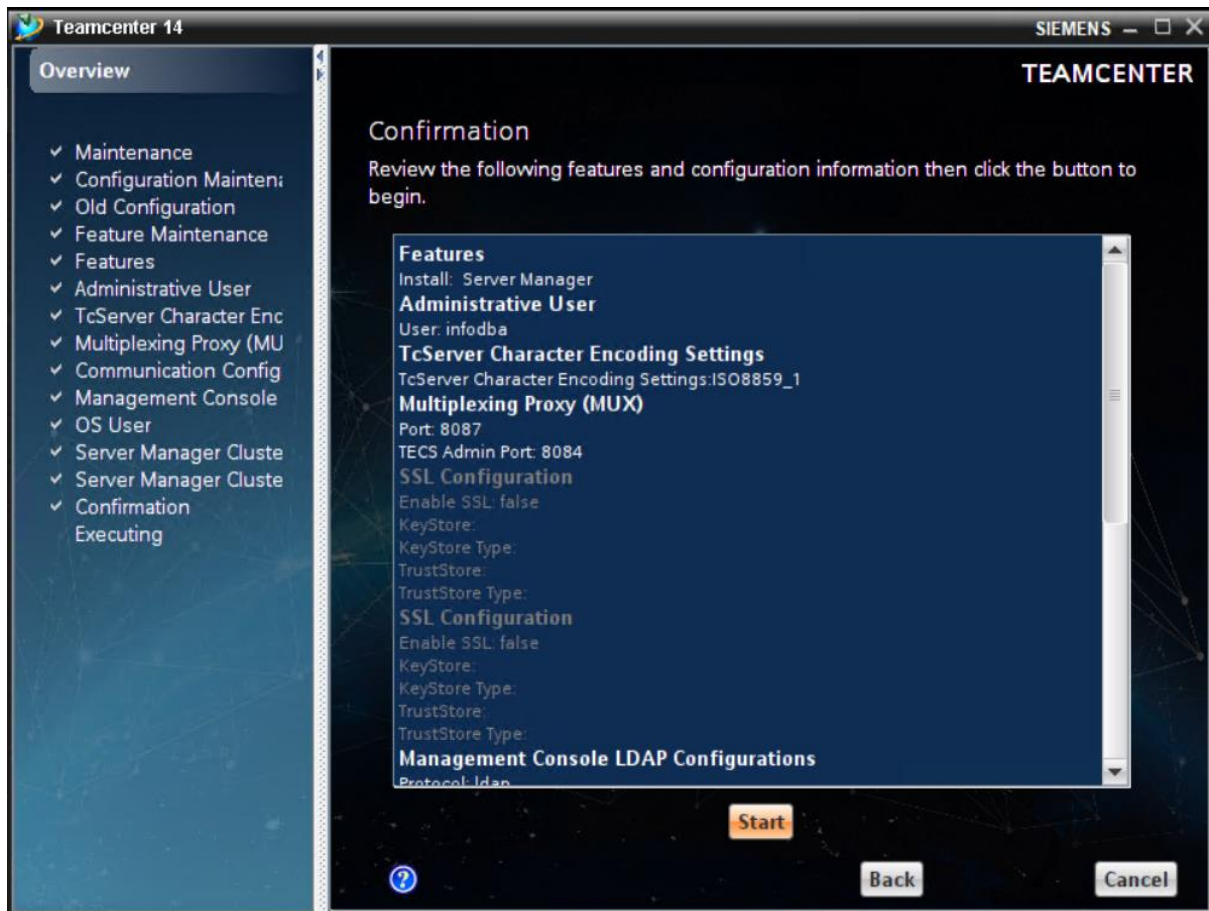


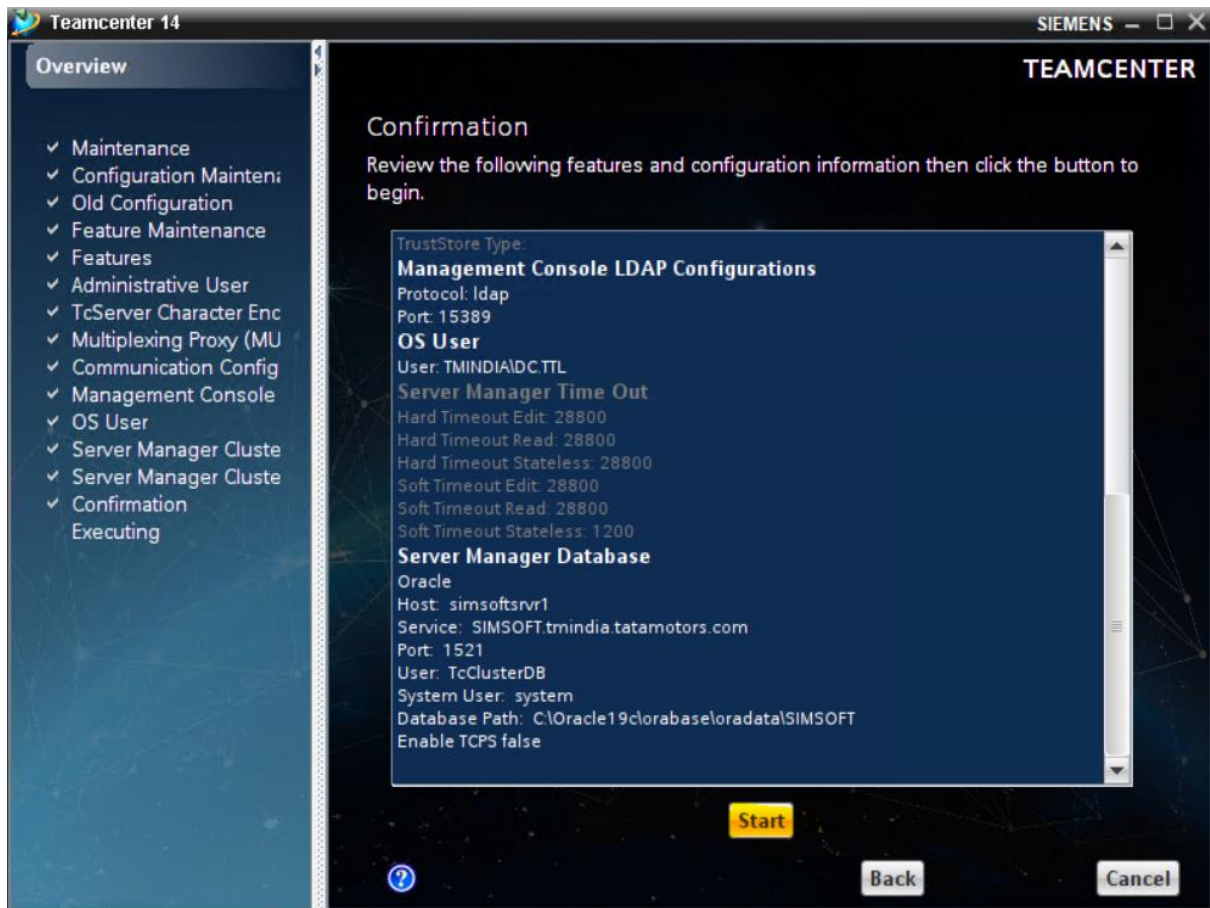


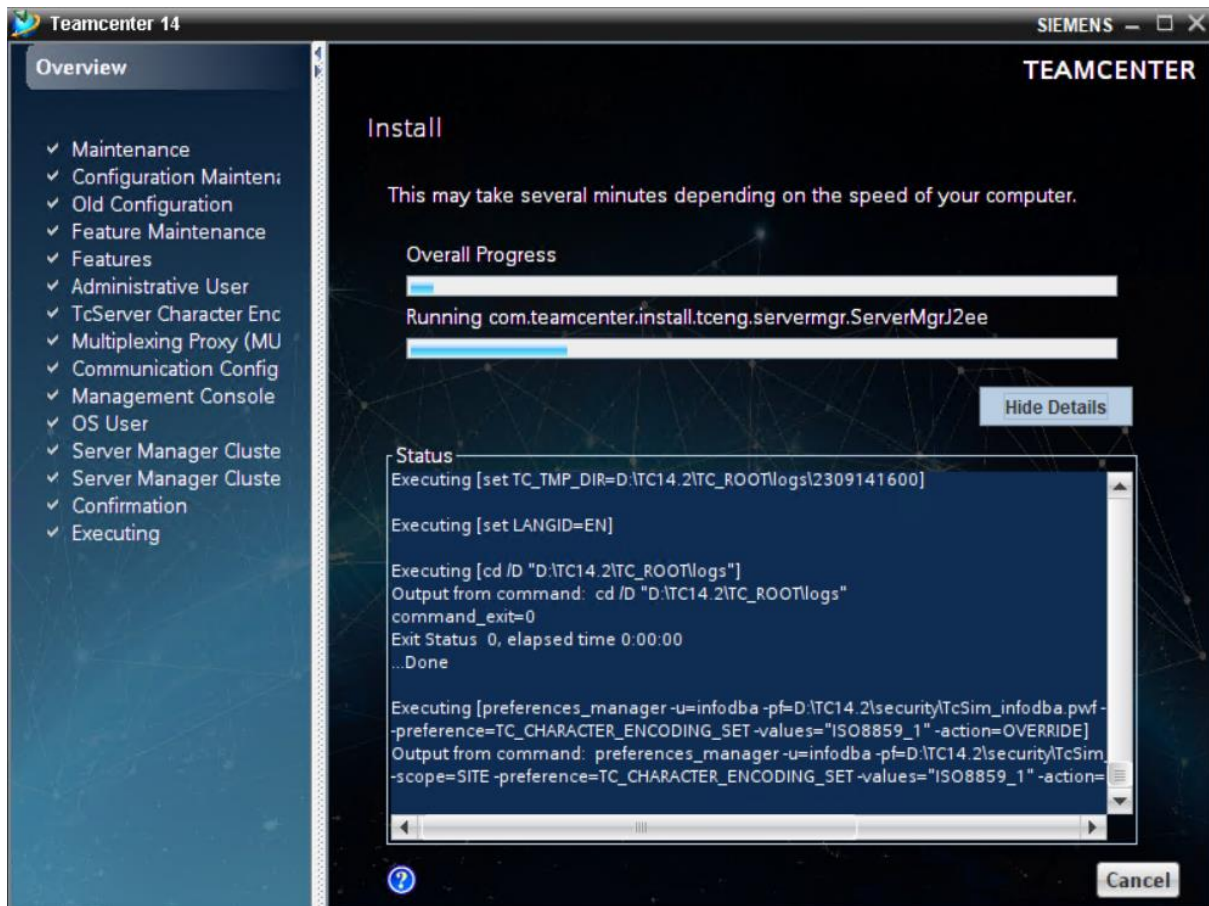


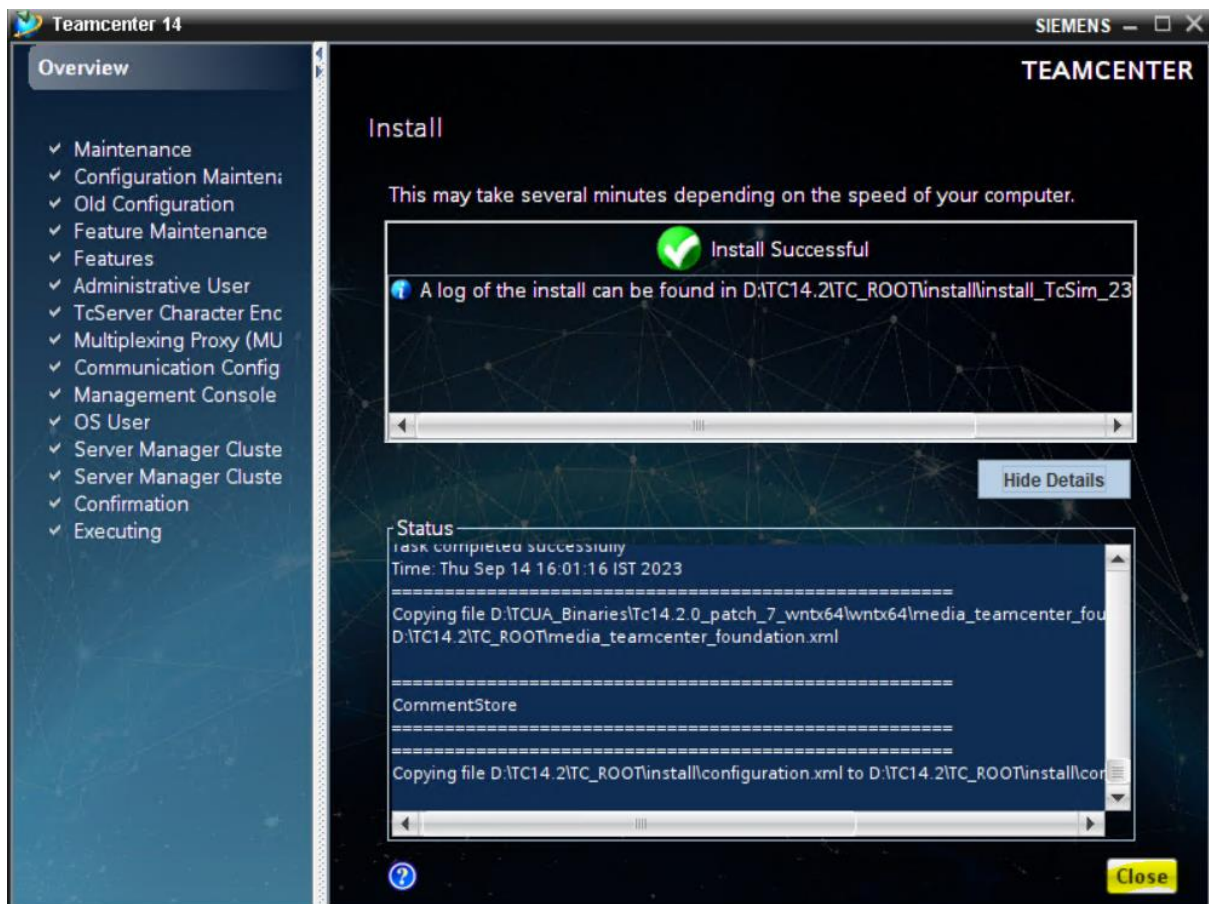


Update Microservice Kit

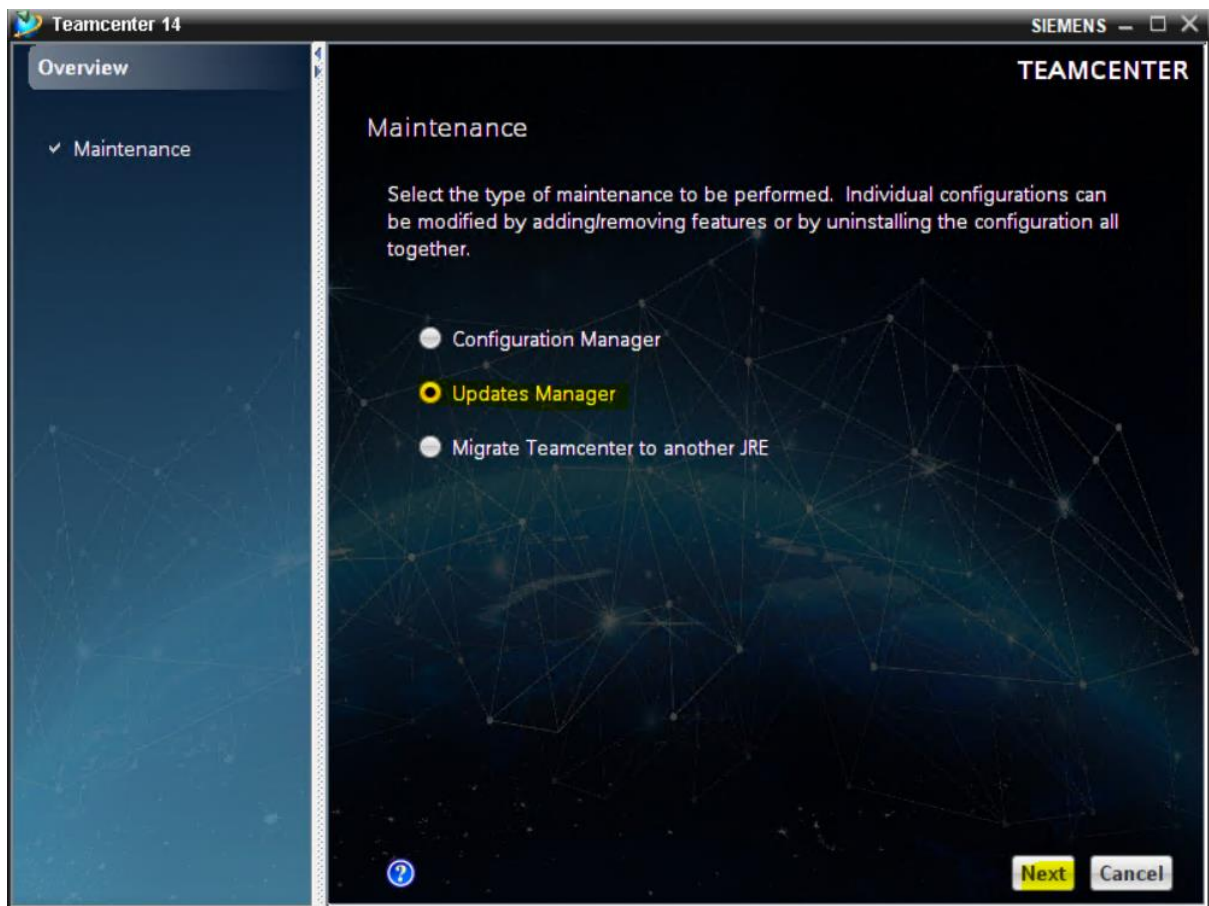


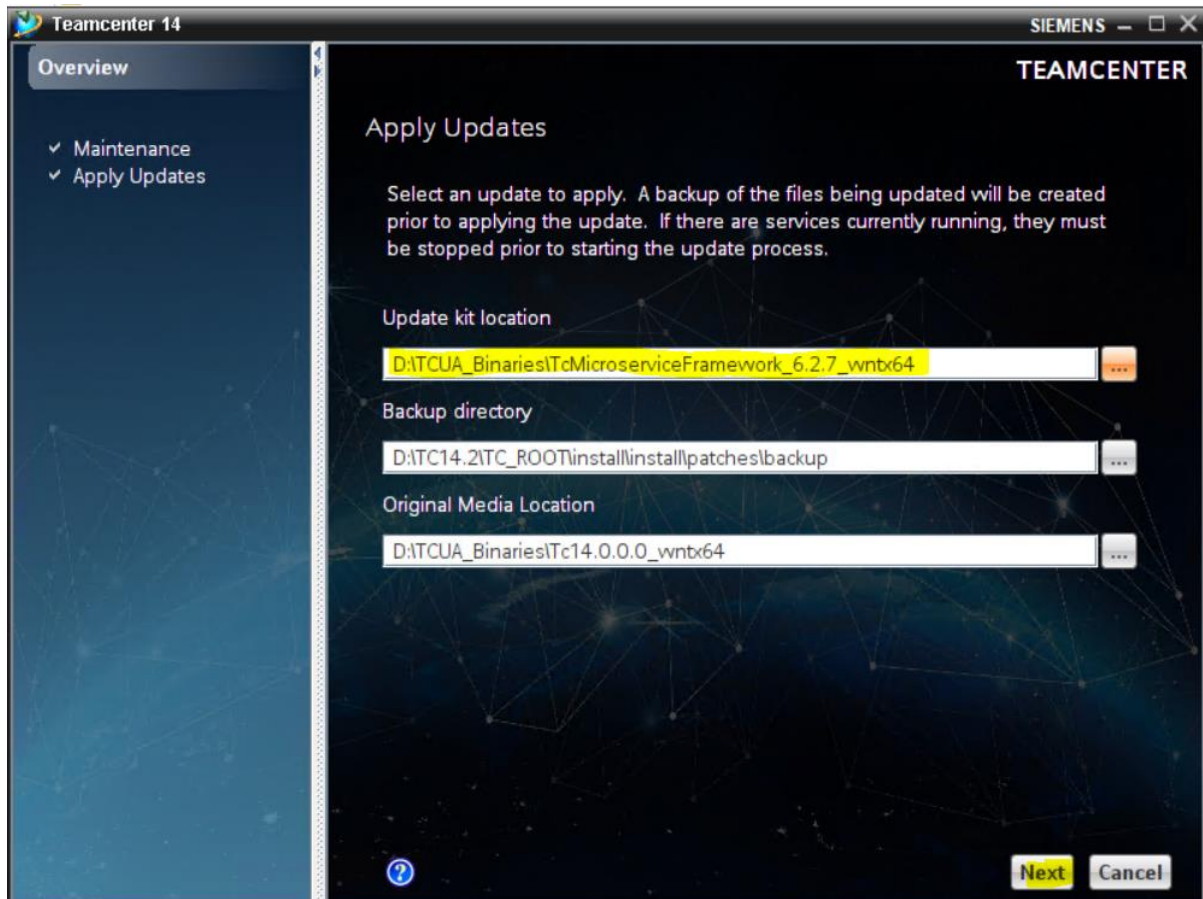


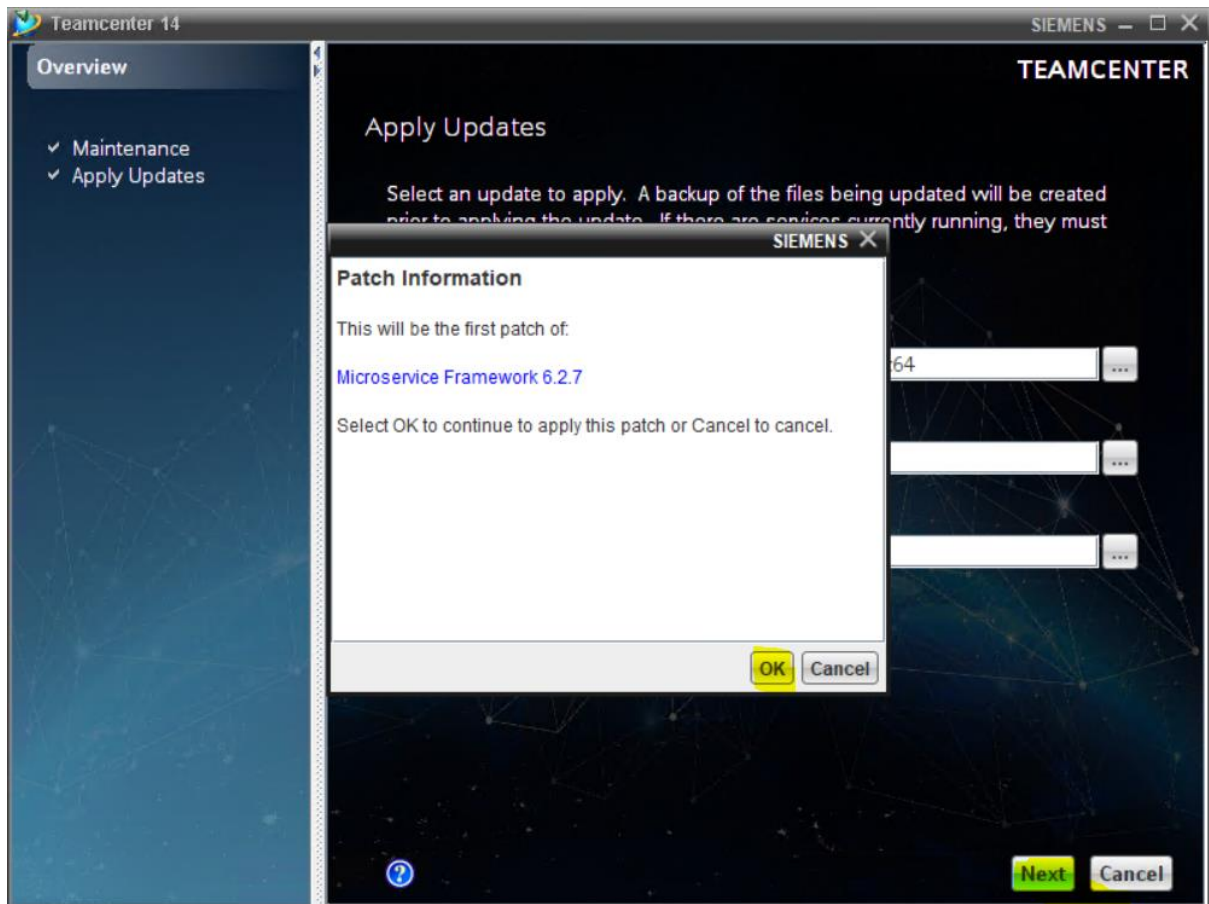


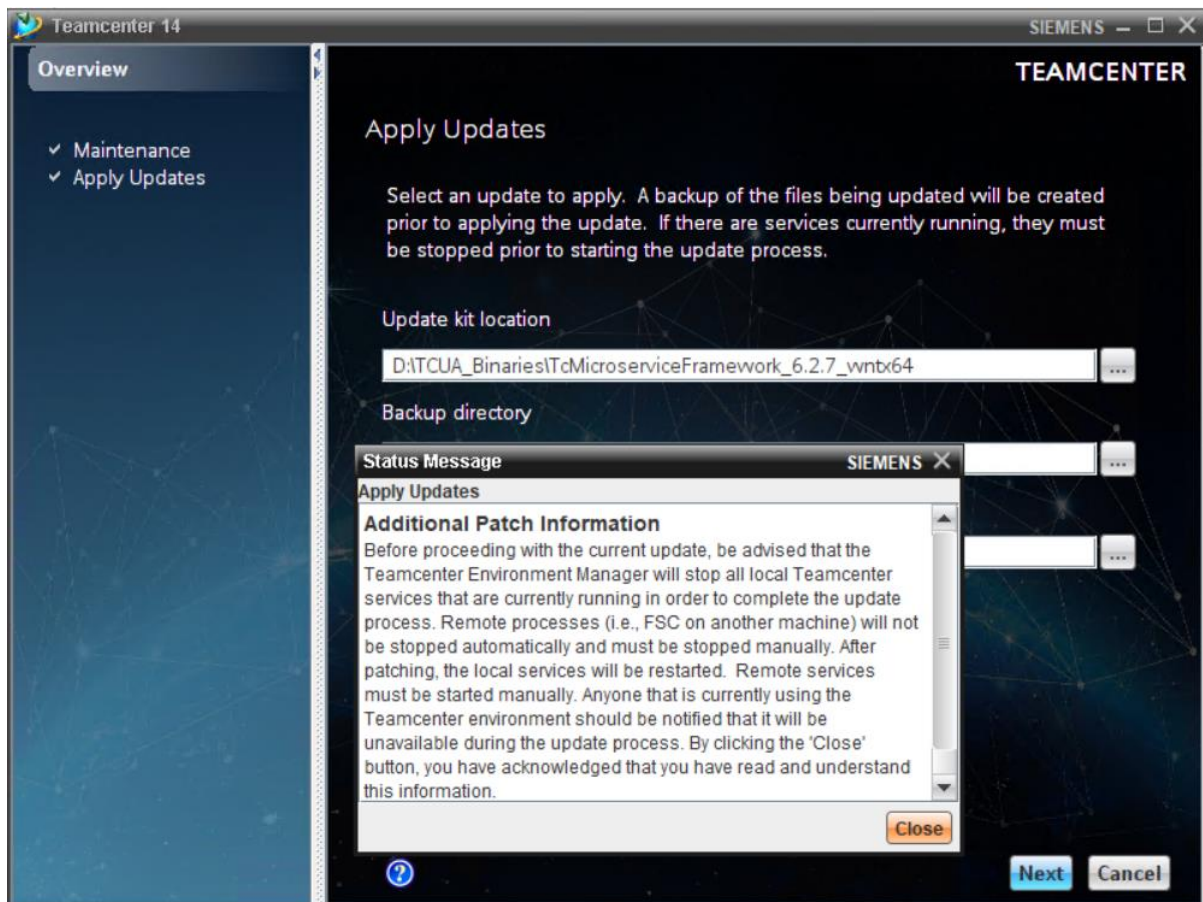



Give path to any folder to generate logs for this process.

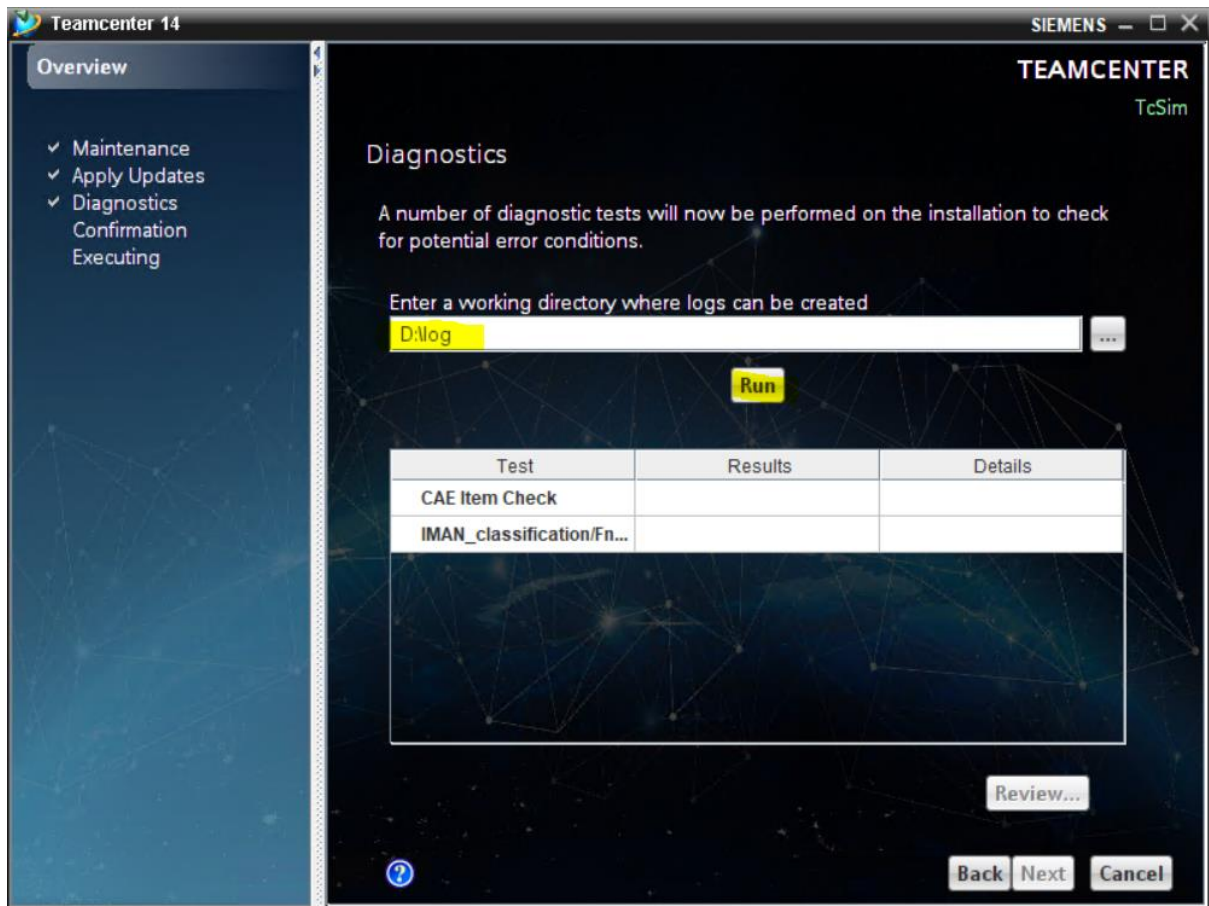

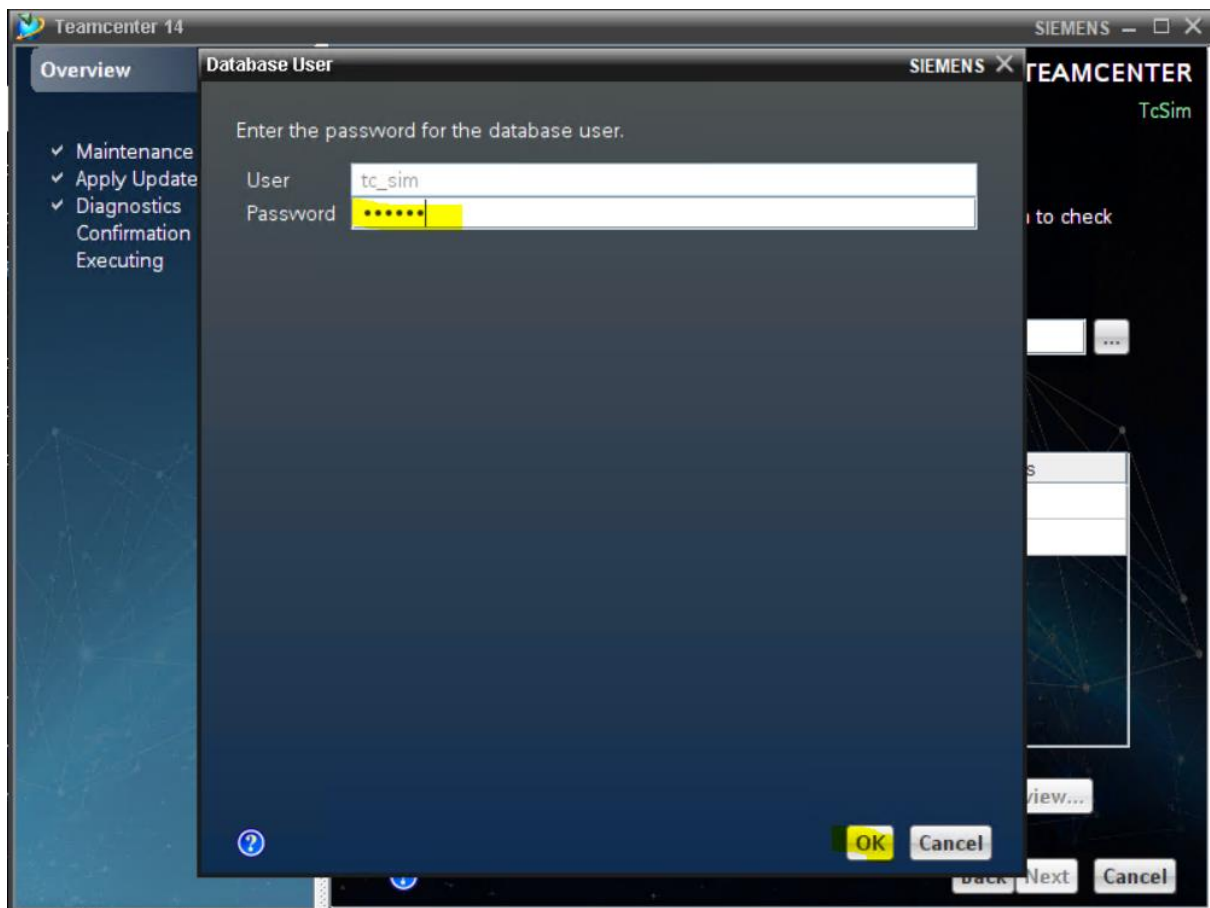

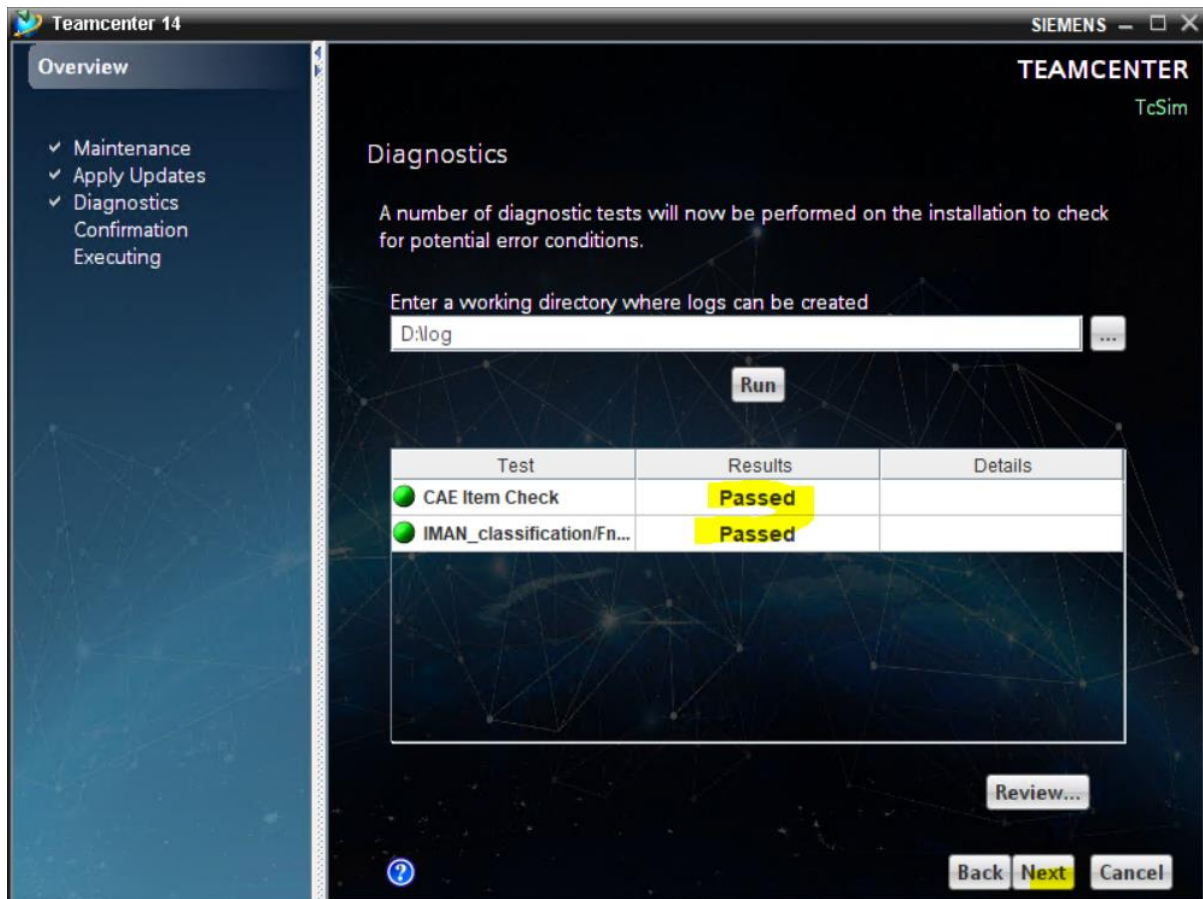


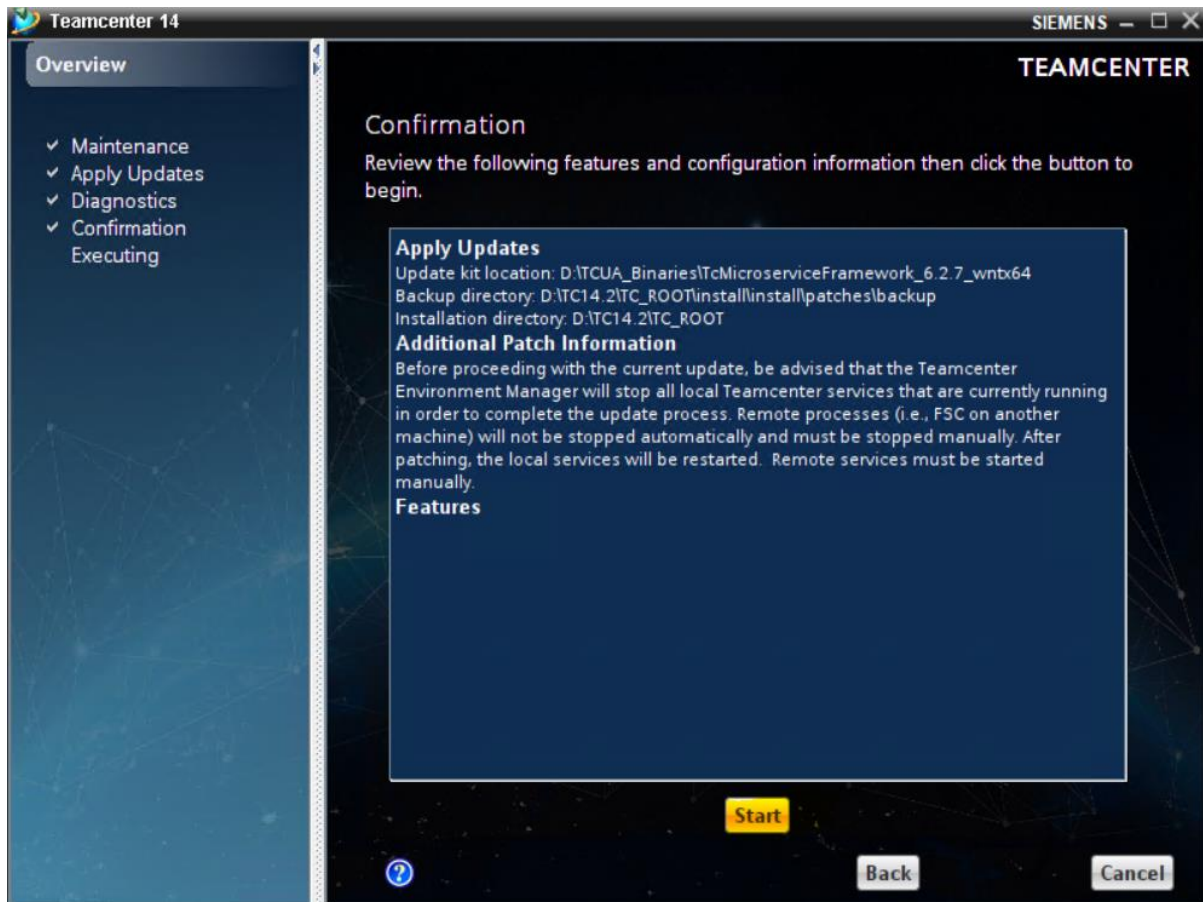


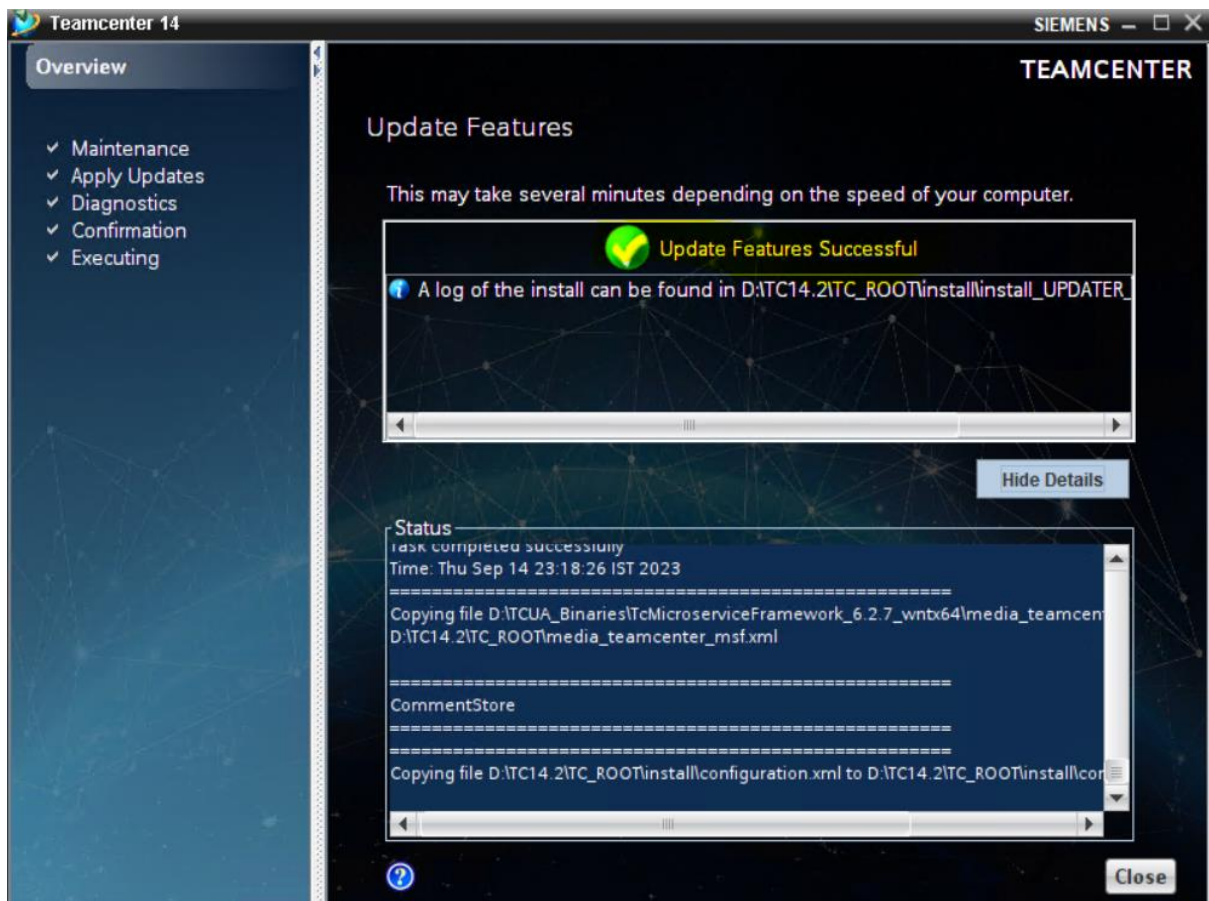



Install Microservice Features


Launch tem.bat from tc_root/install folder

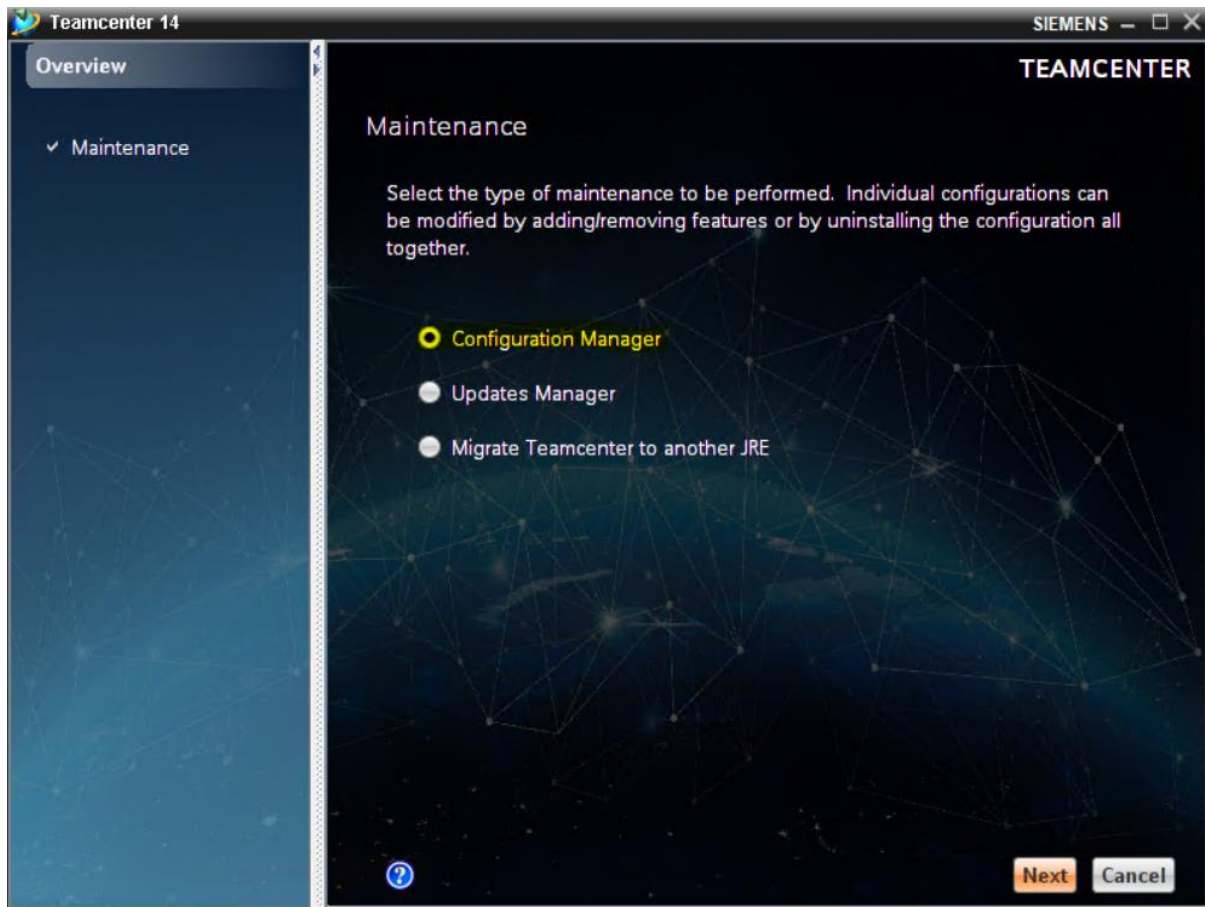


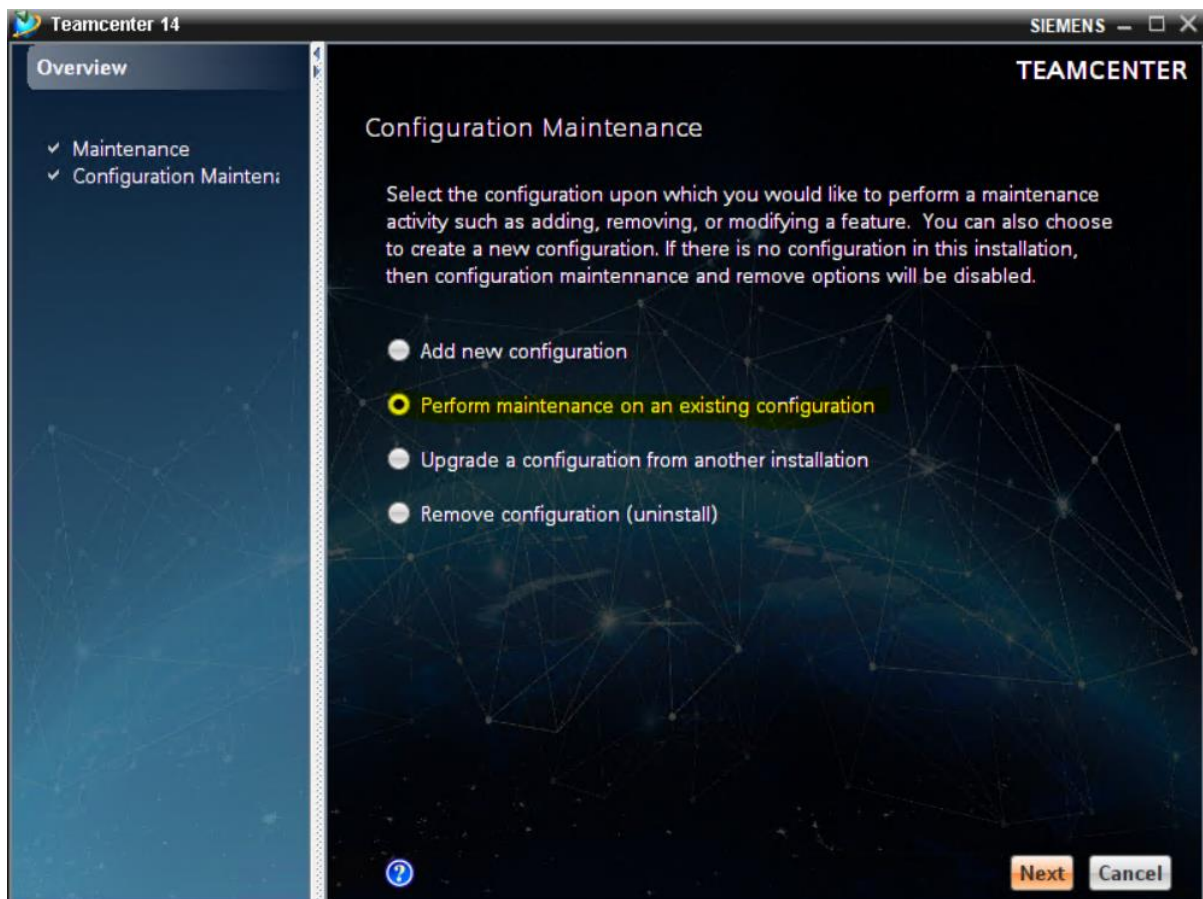

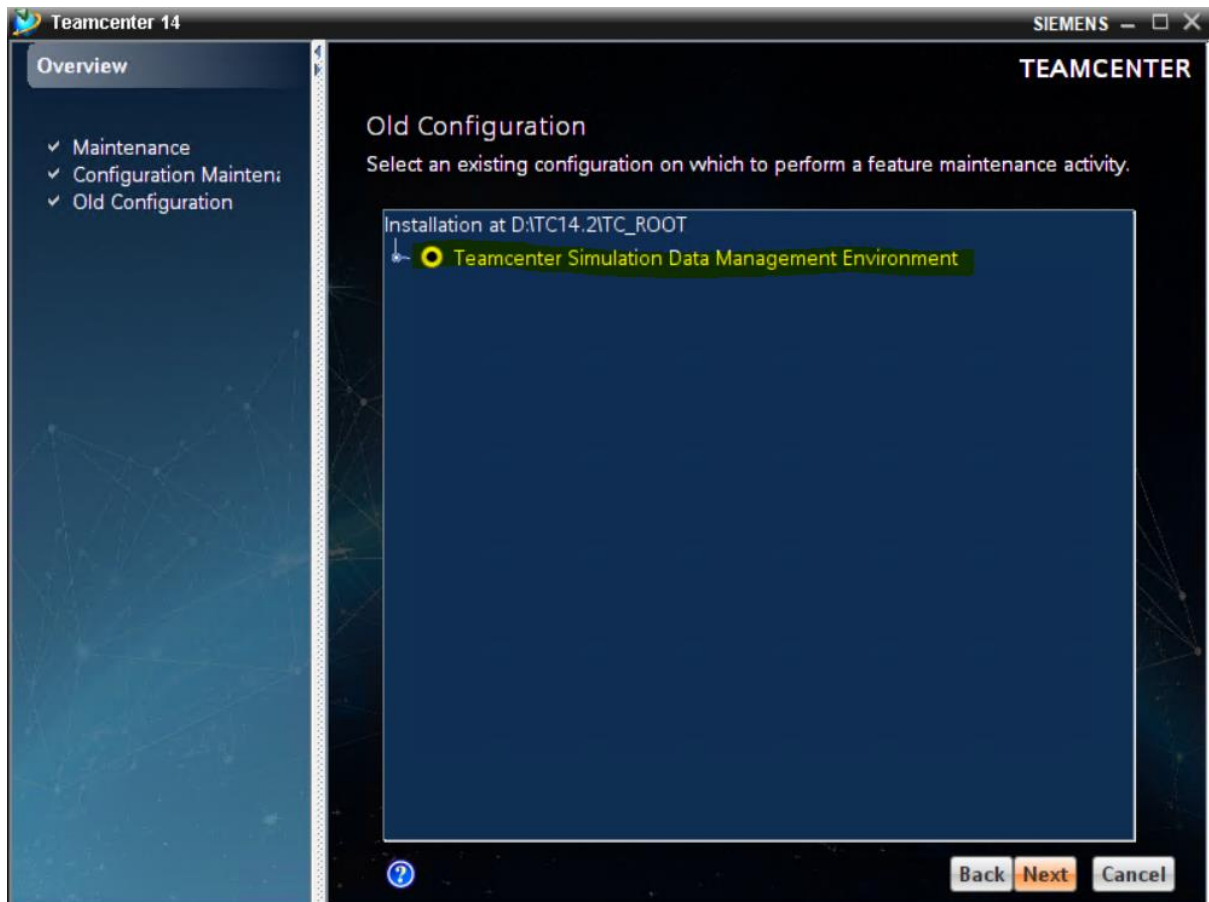

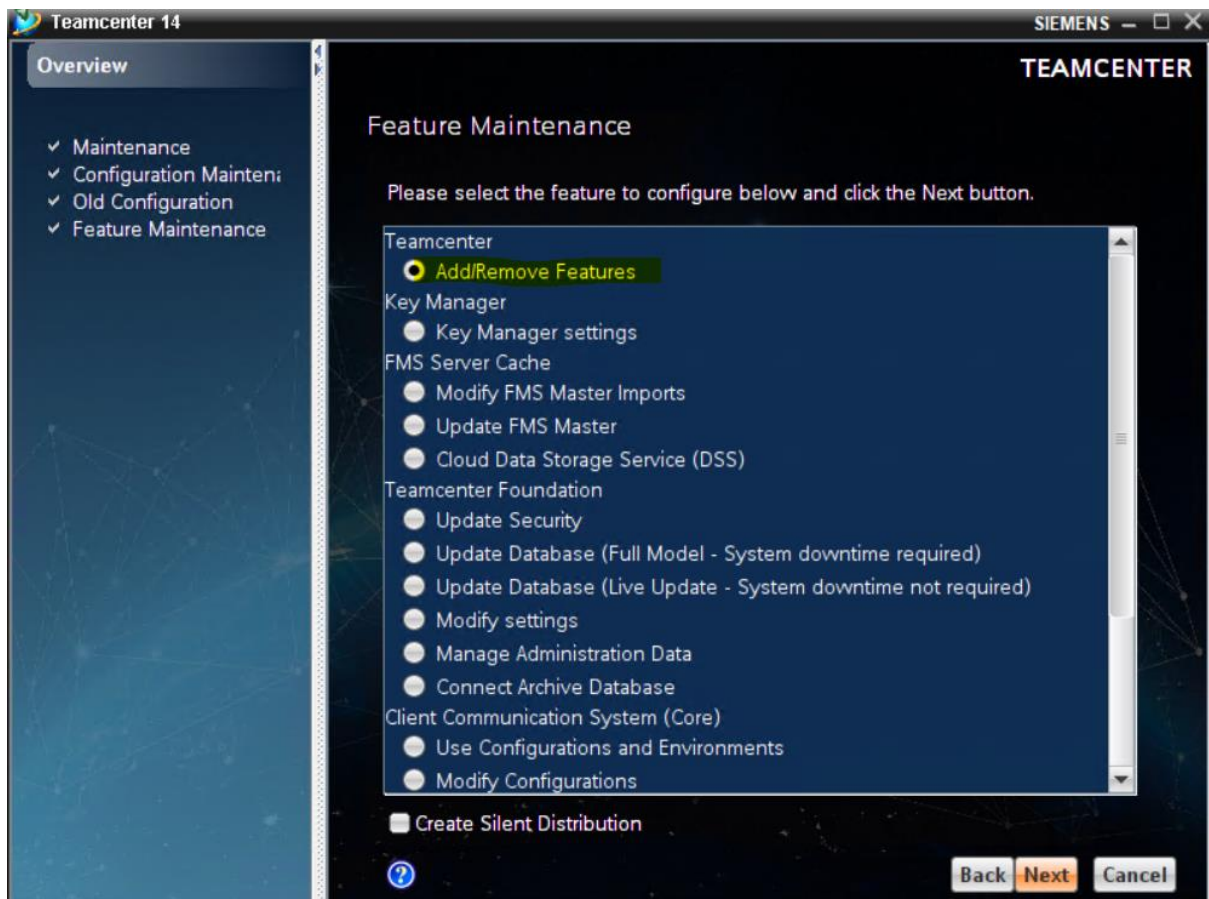


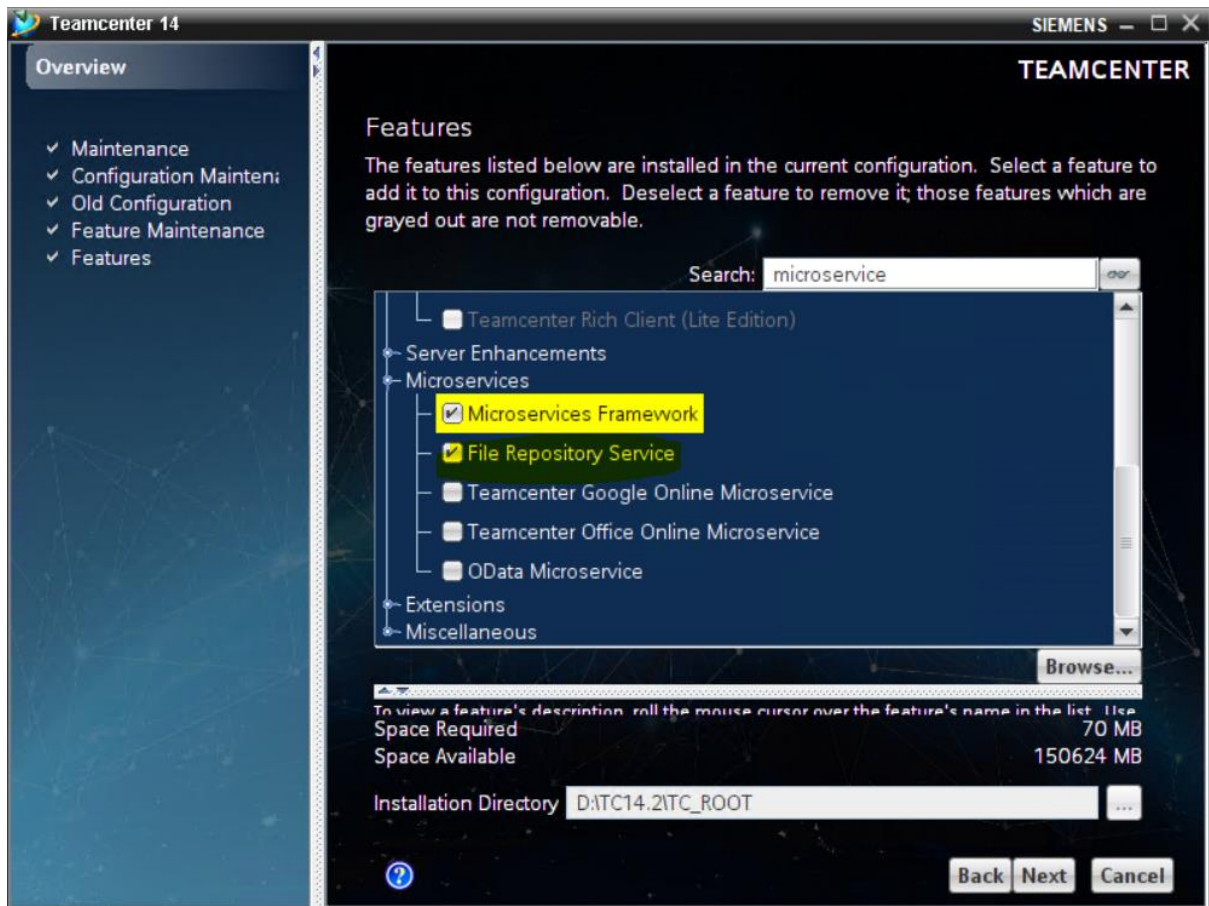

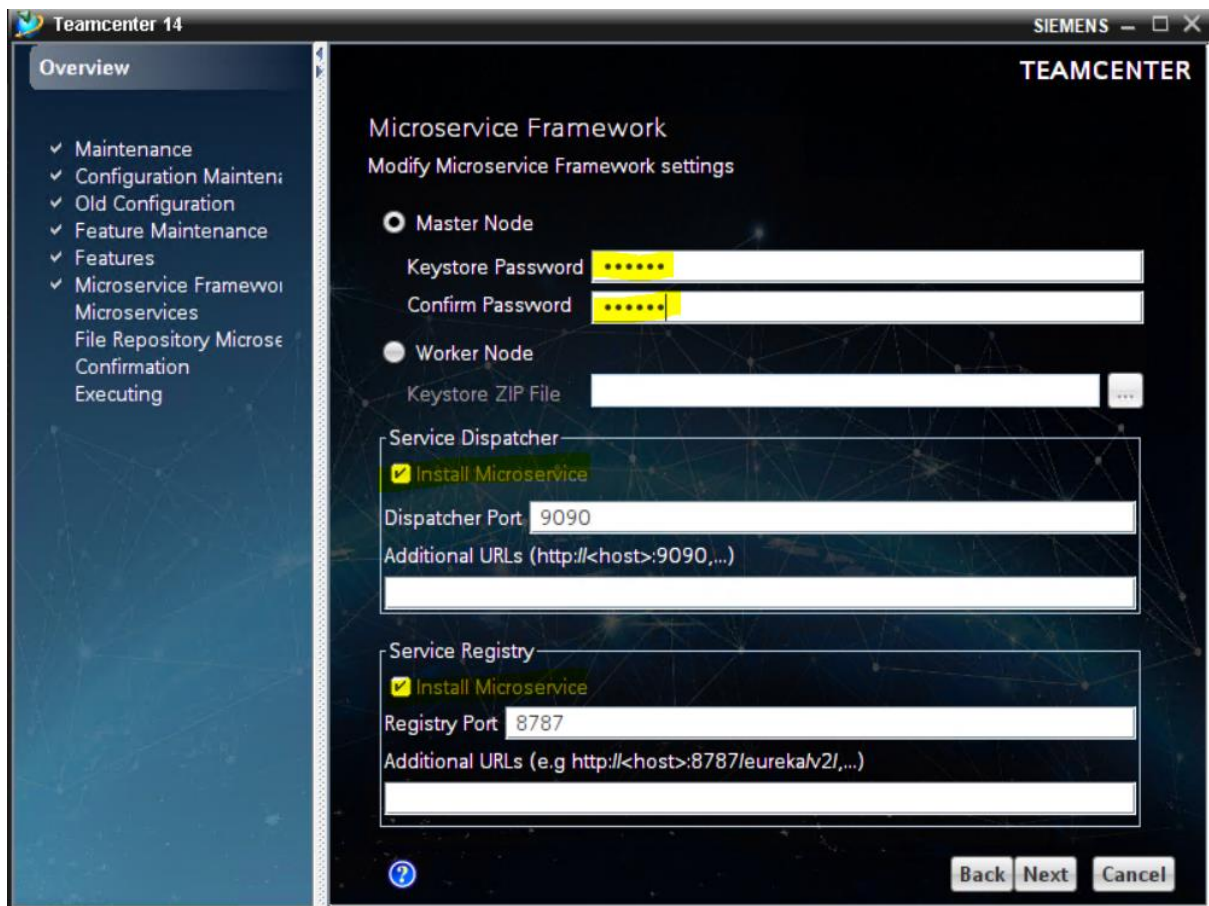



Master Node



Keystore Password: oracle

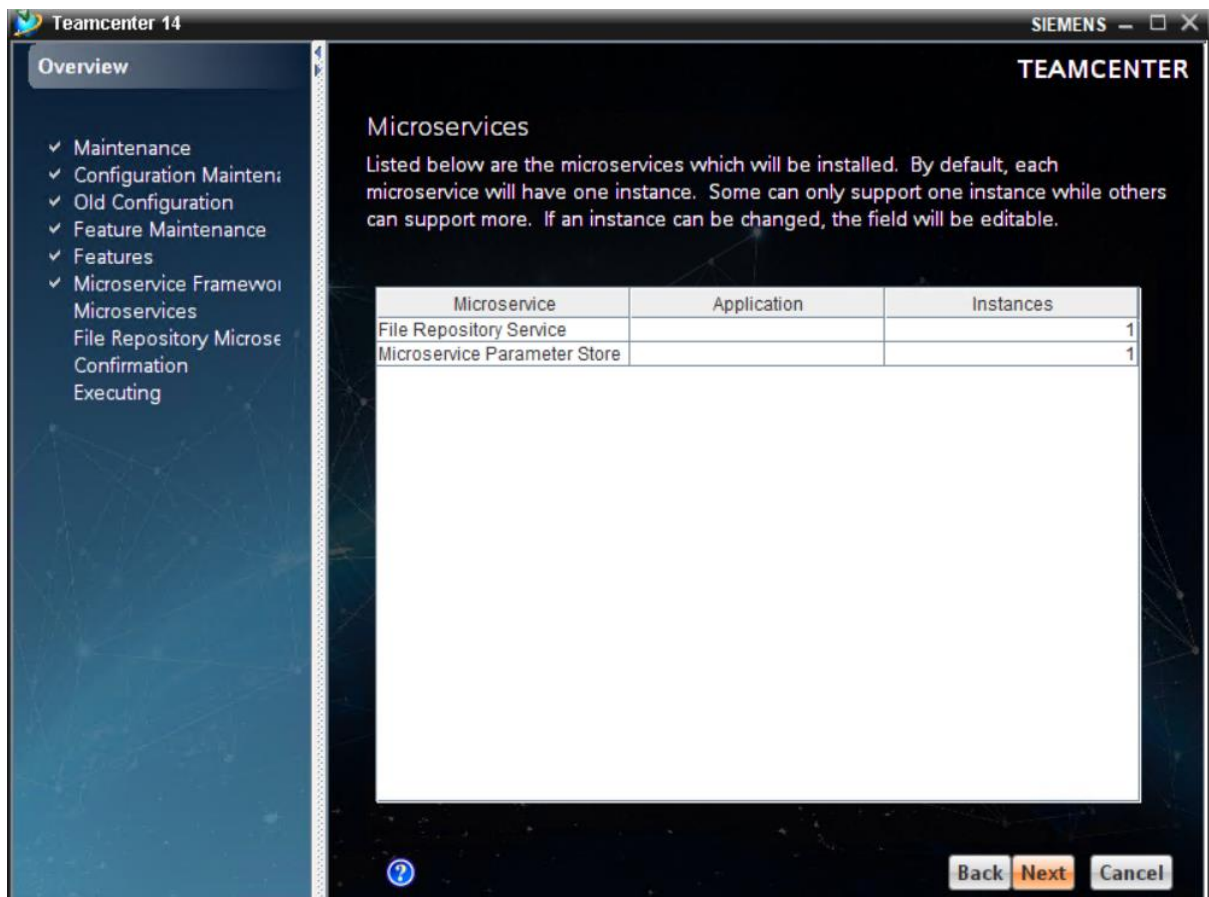


Create a folder for file repository and provide path

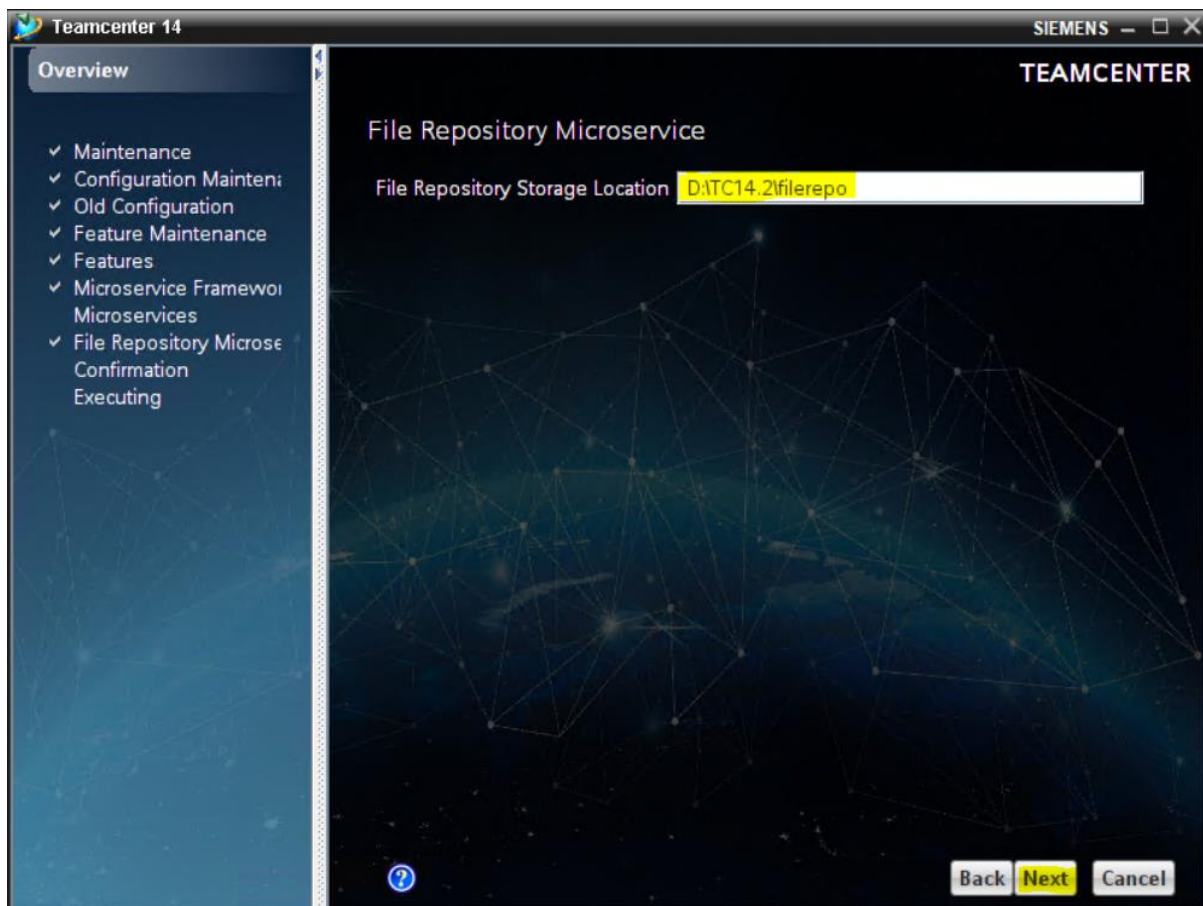


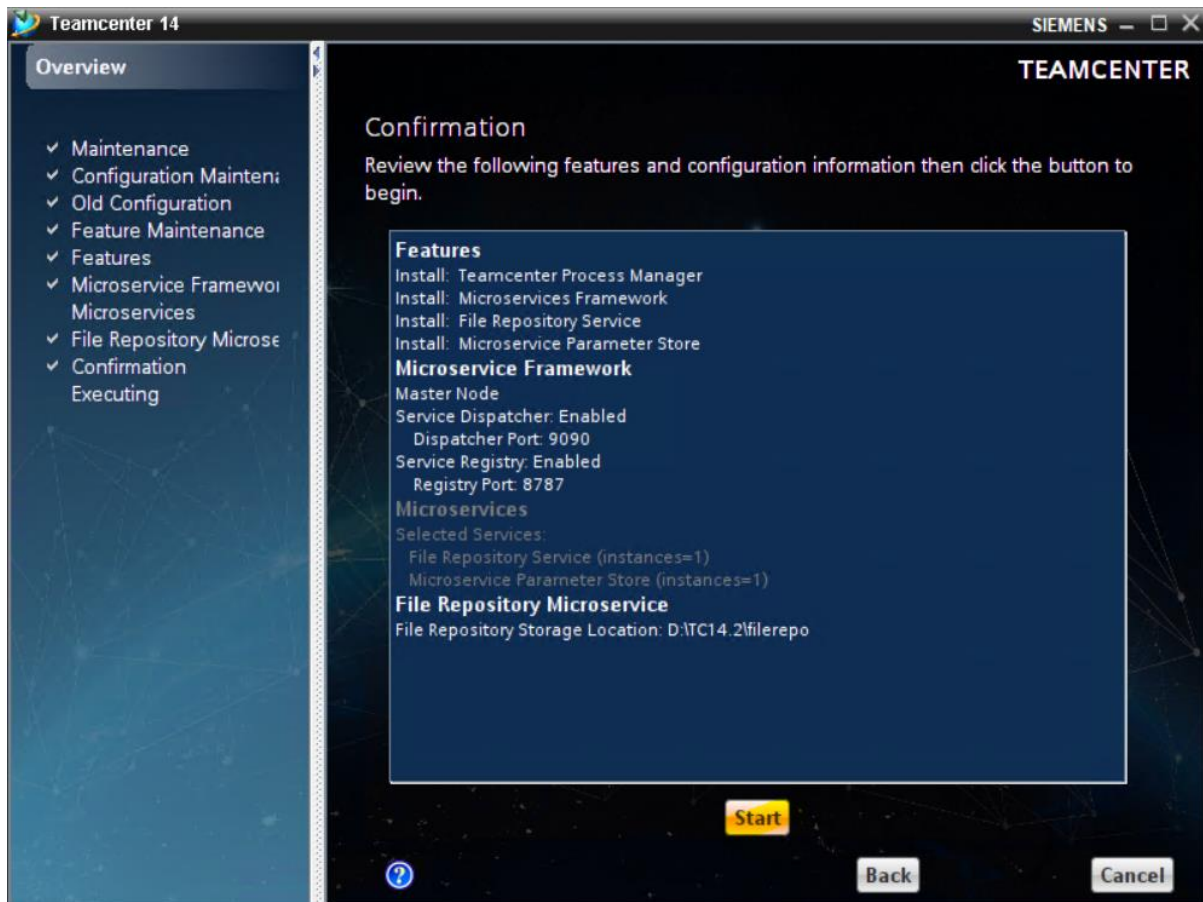


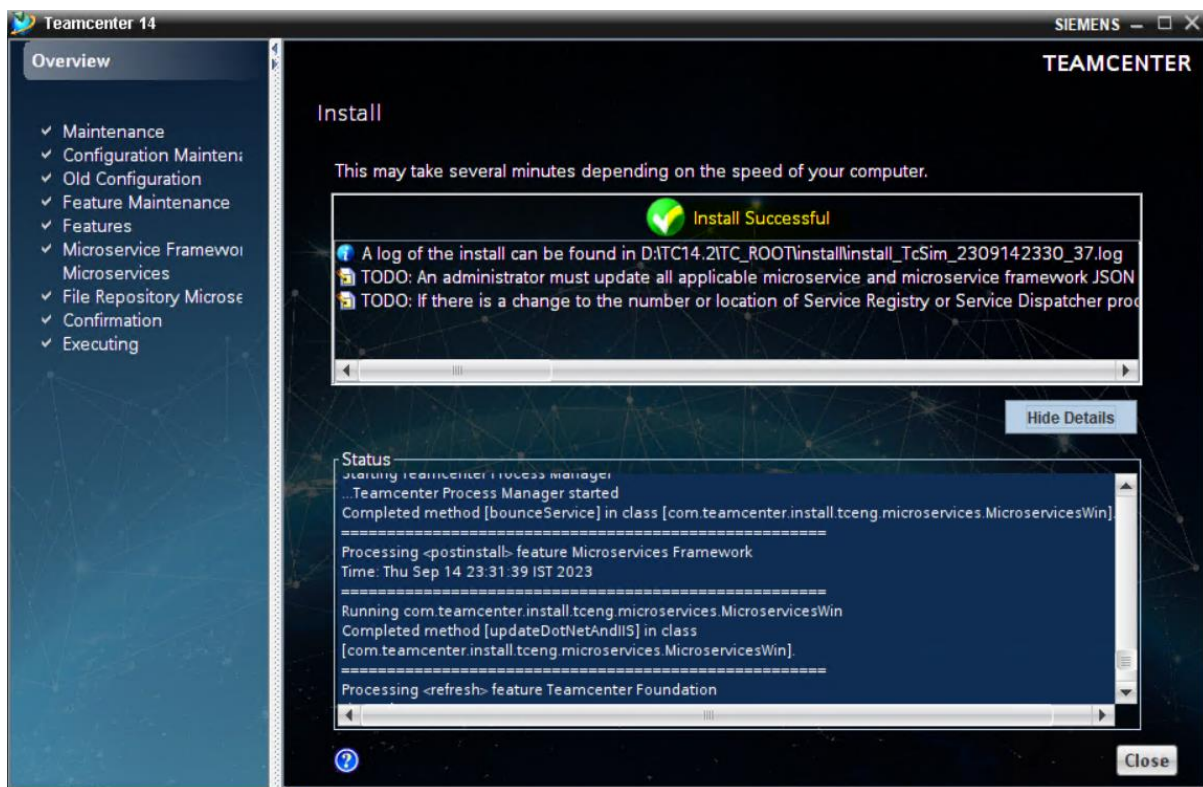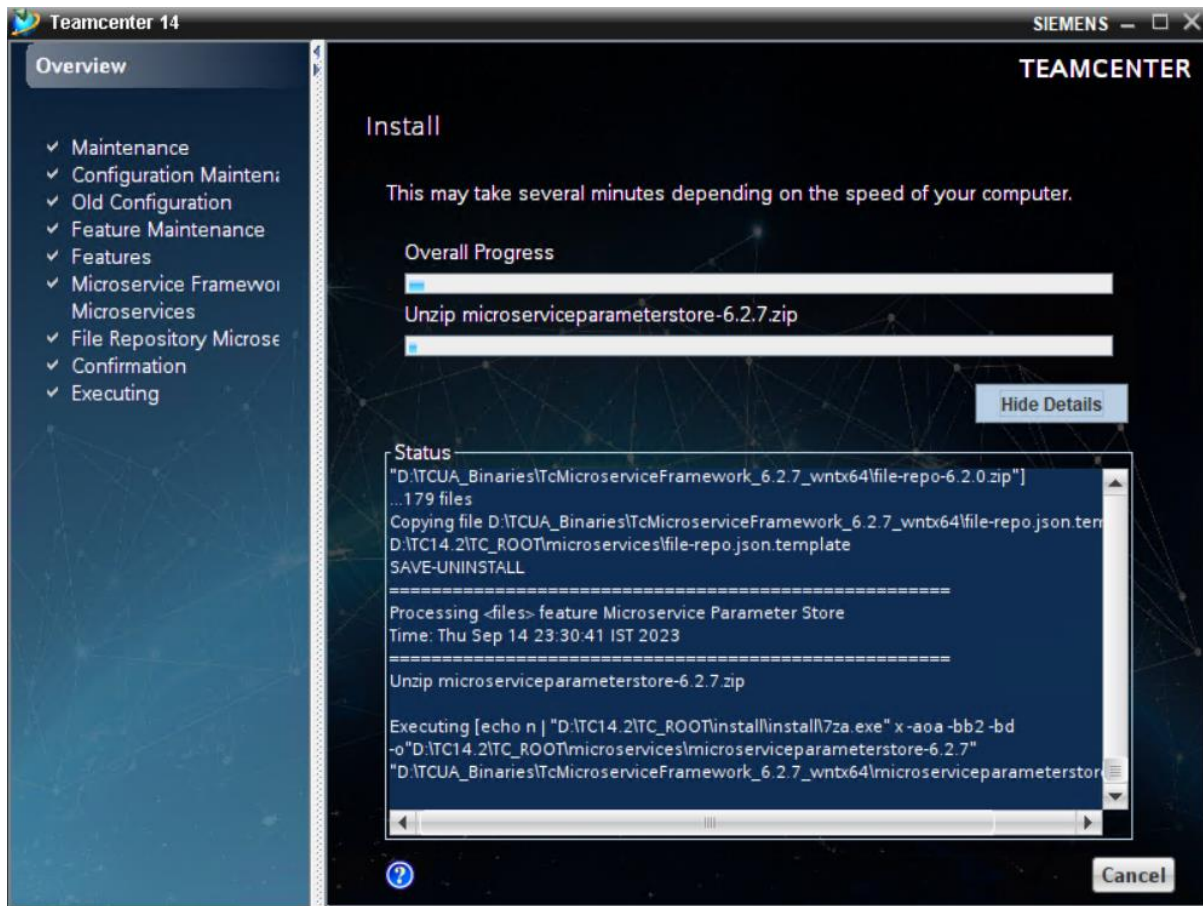



Update Active Workspace Kit

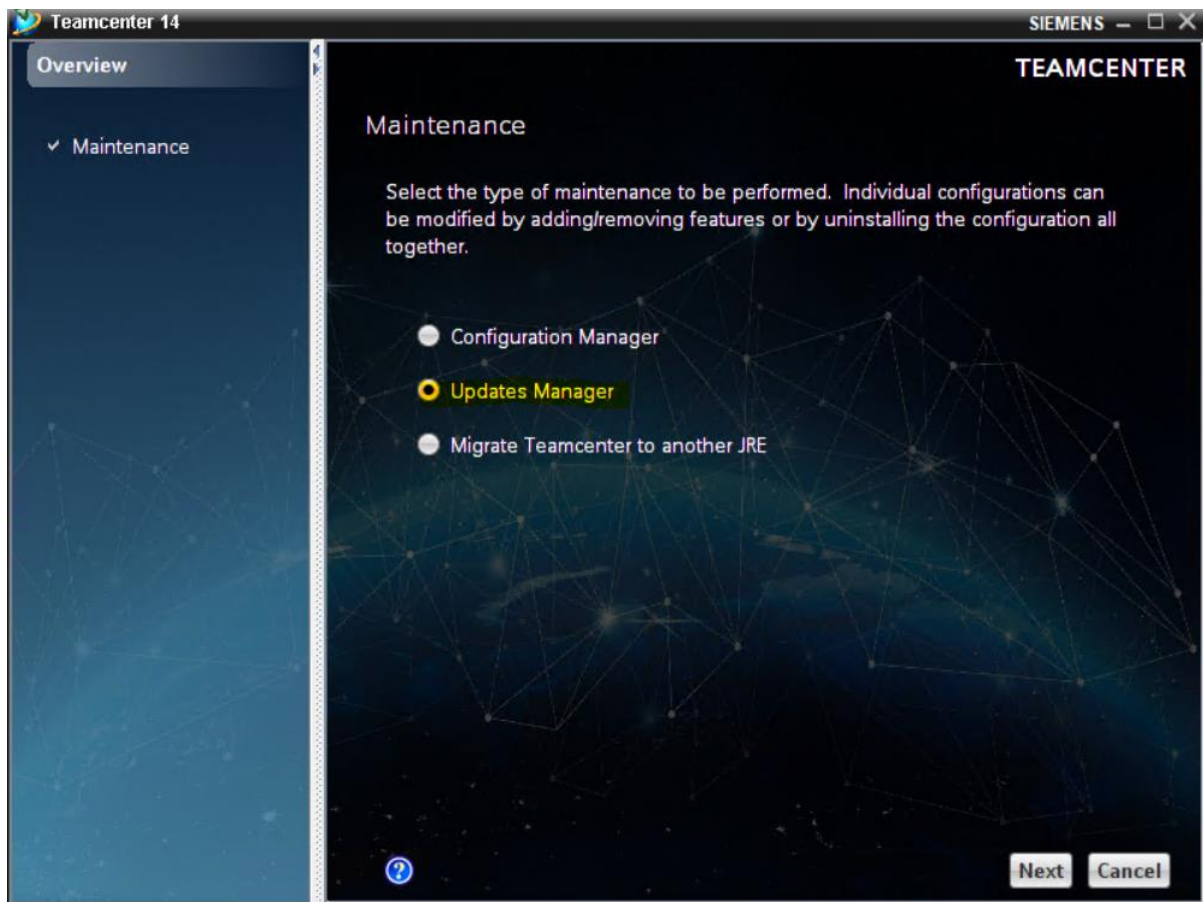


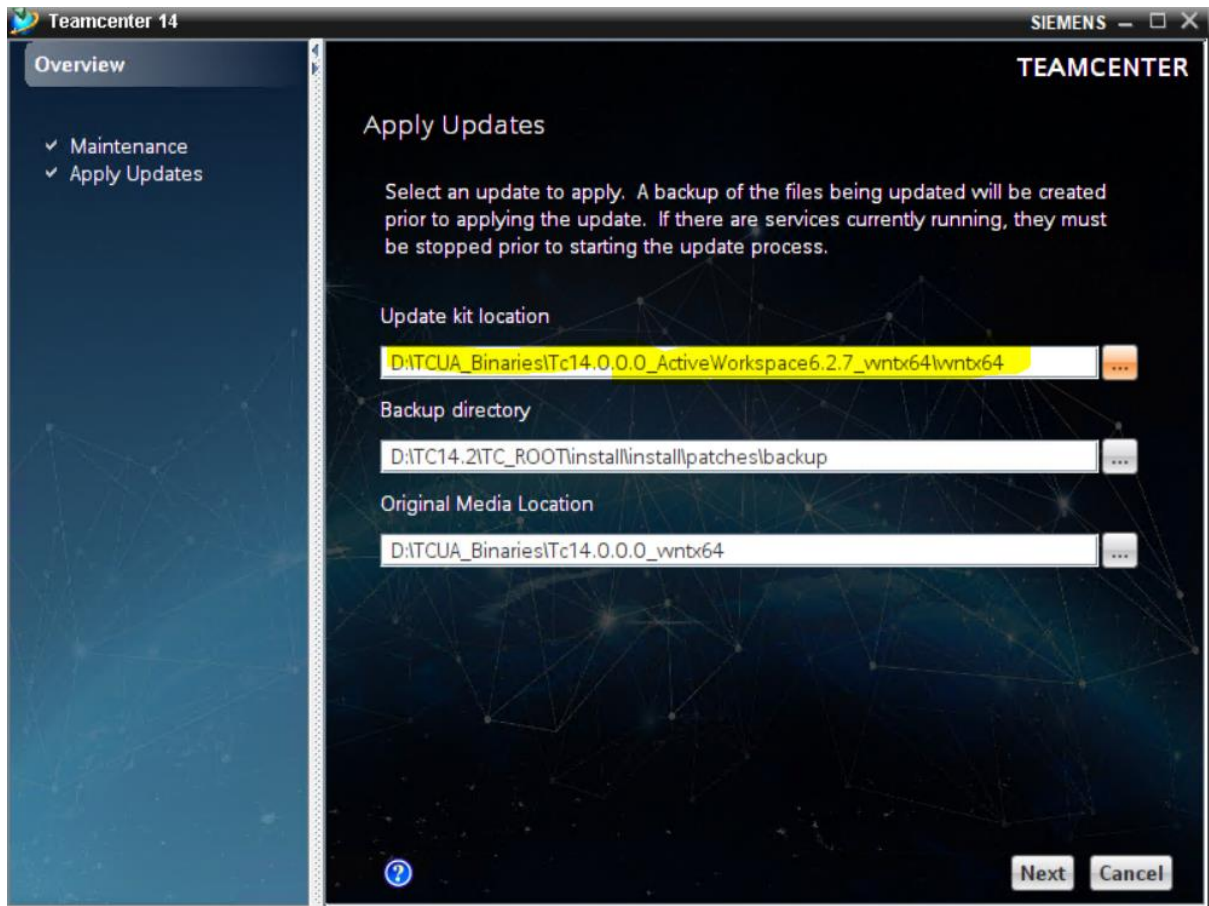


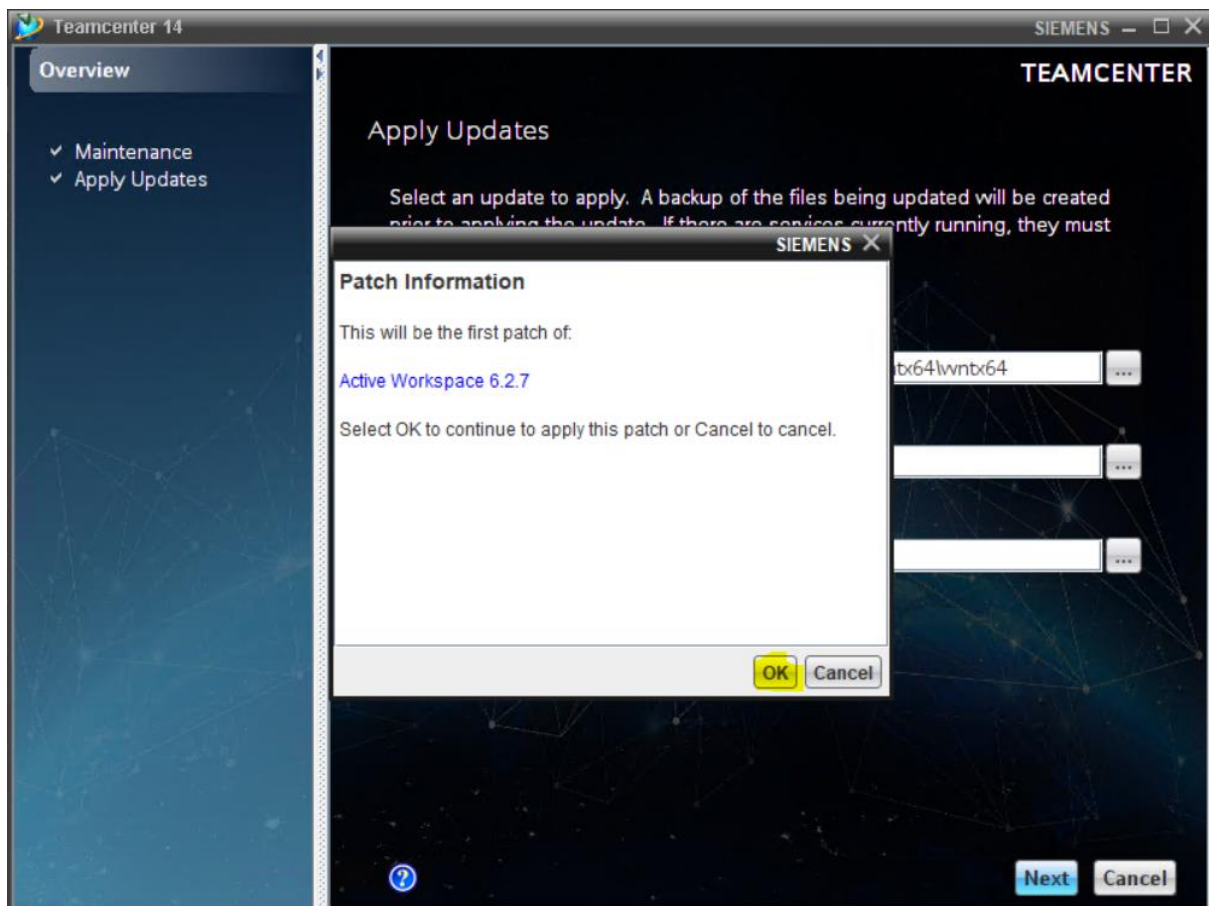


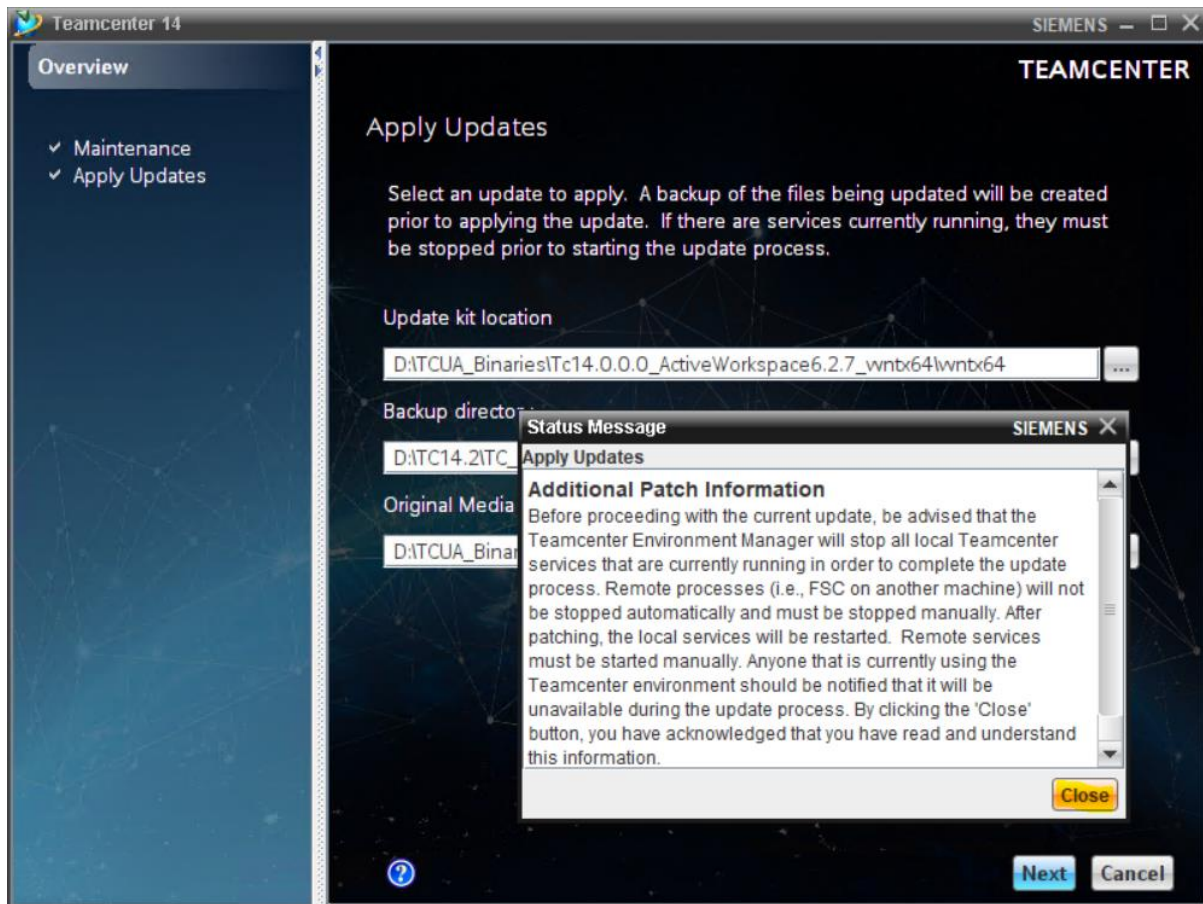


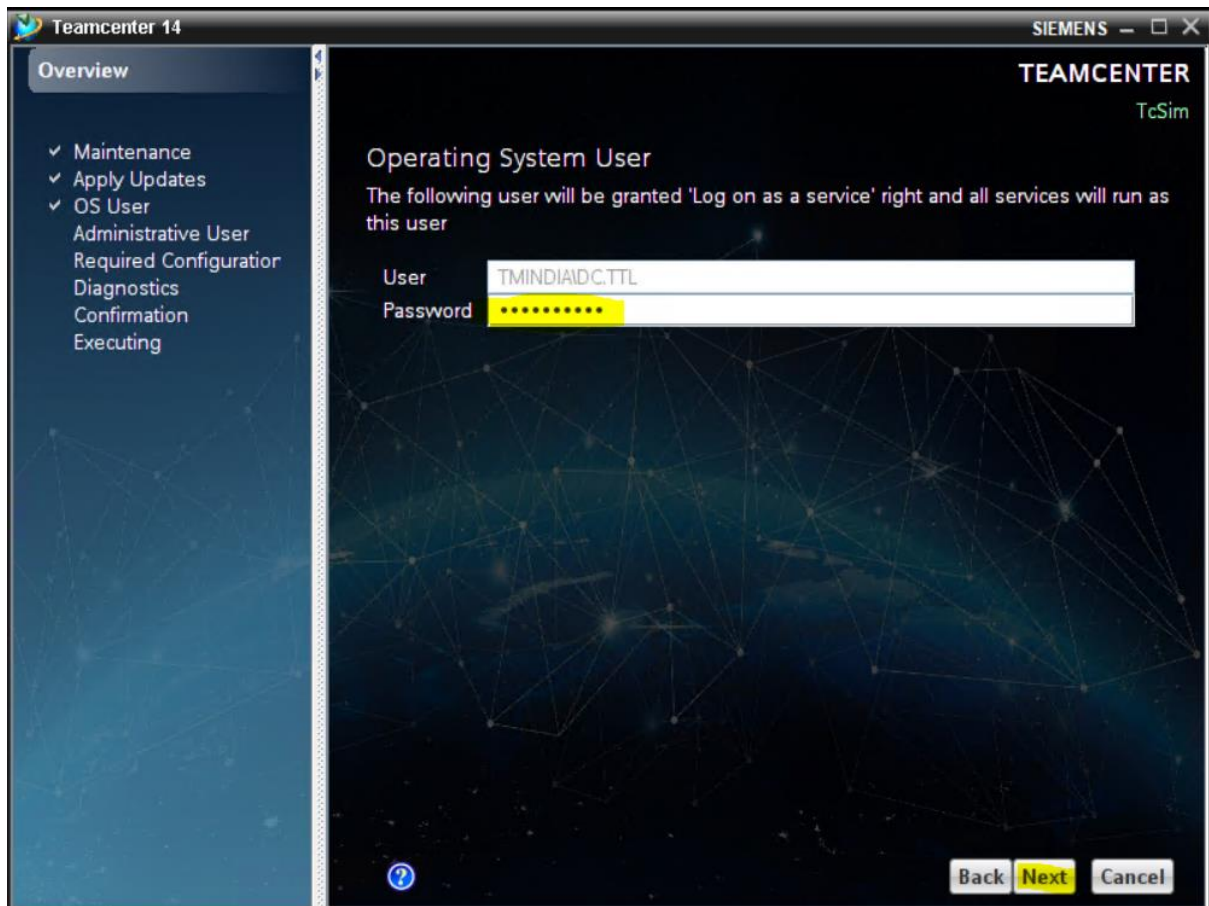


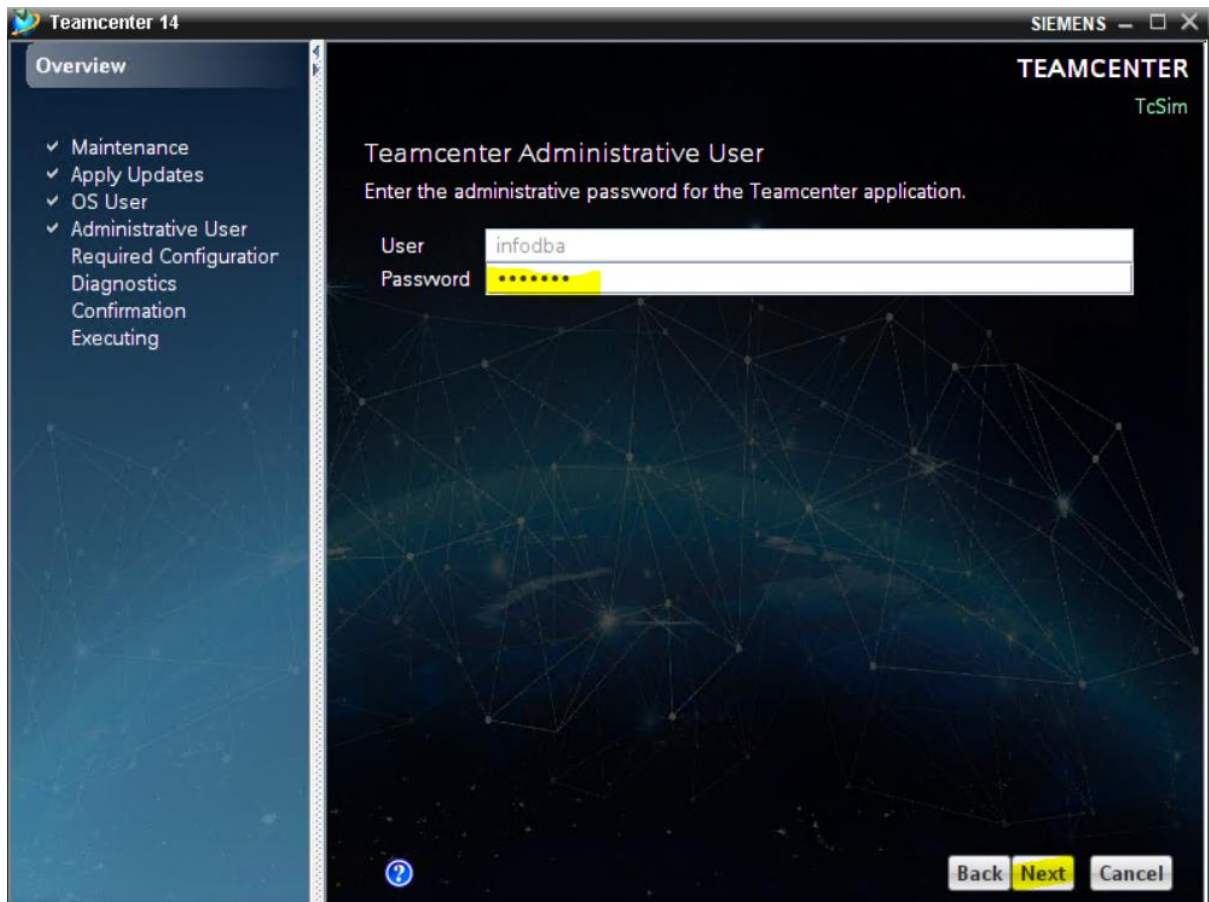


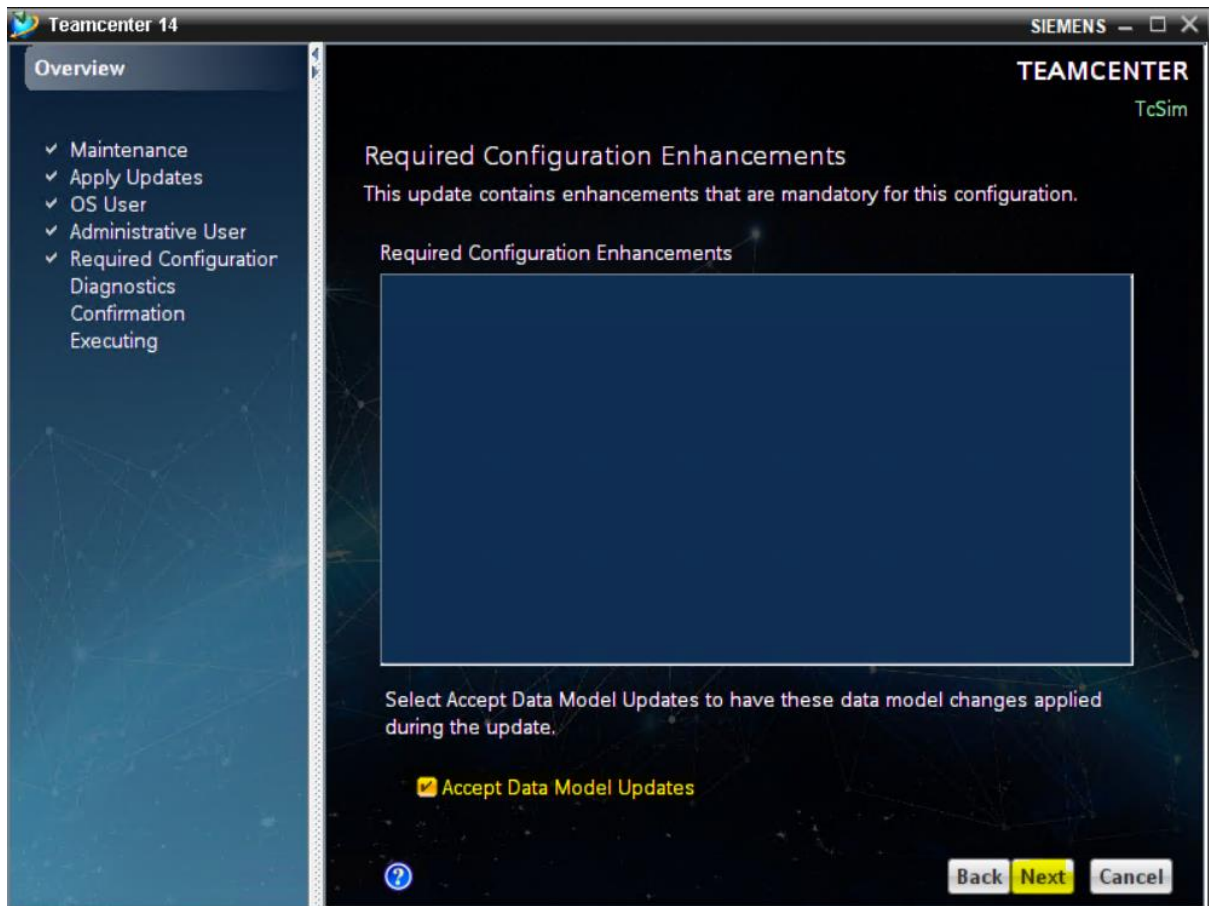


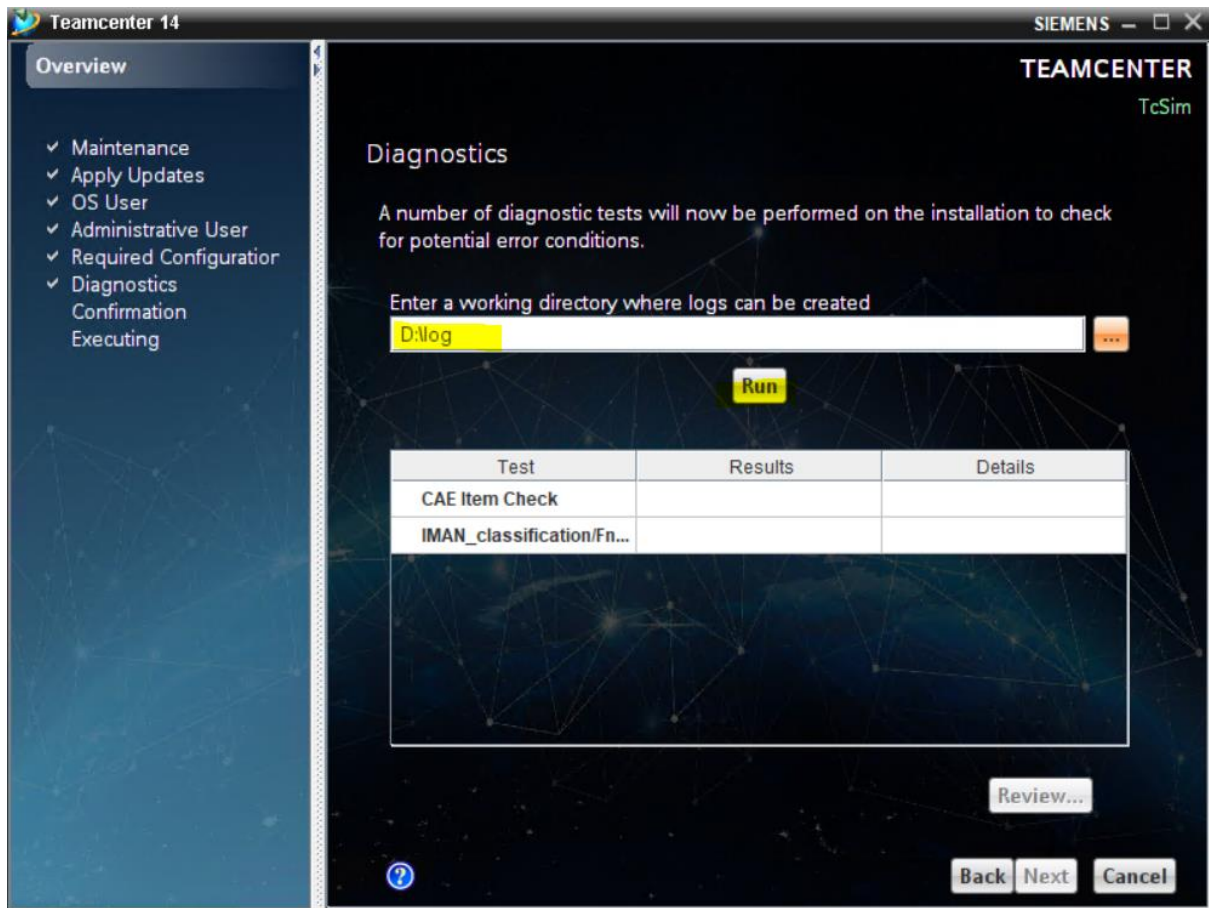

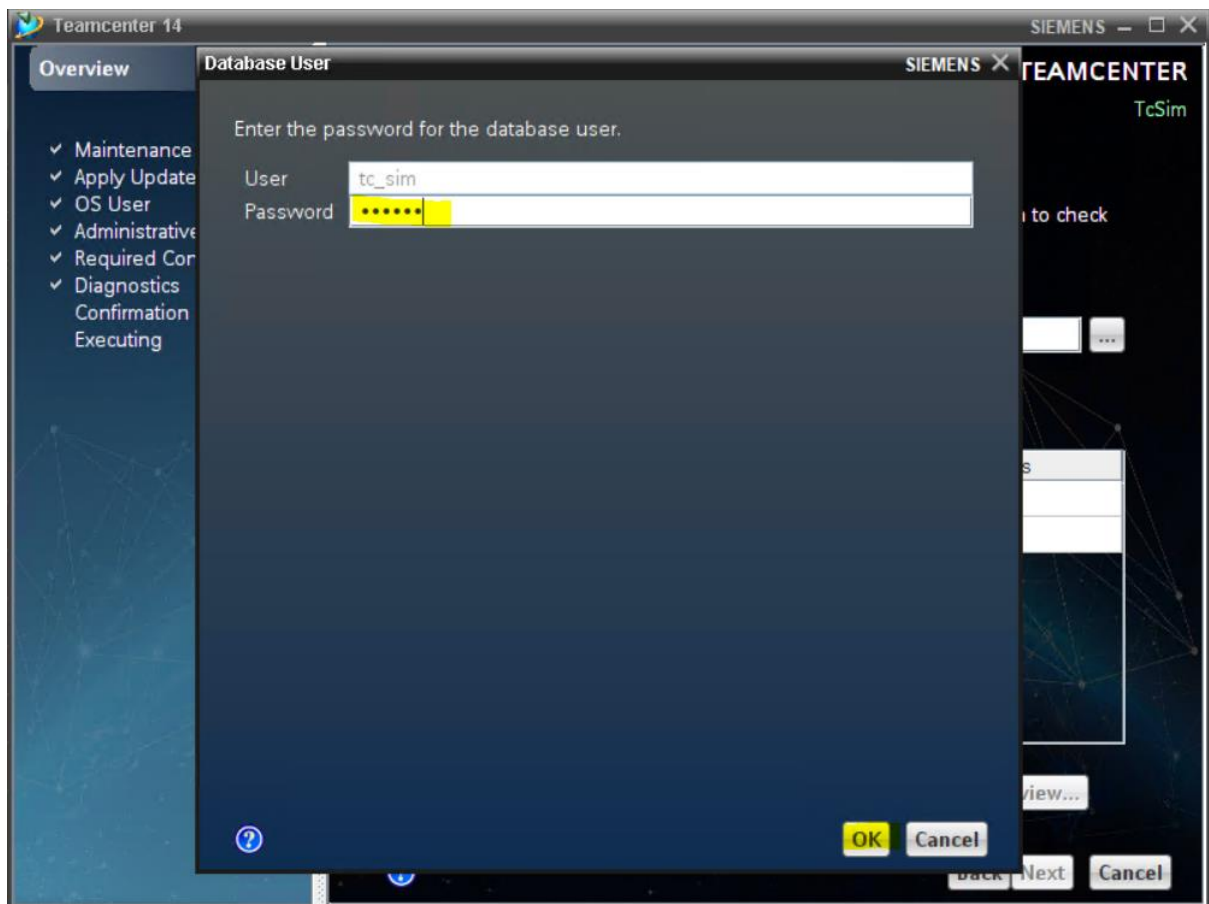


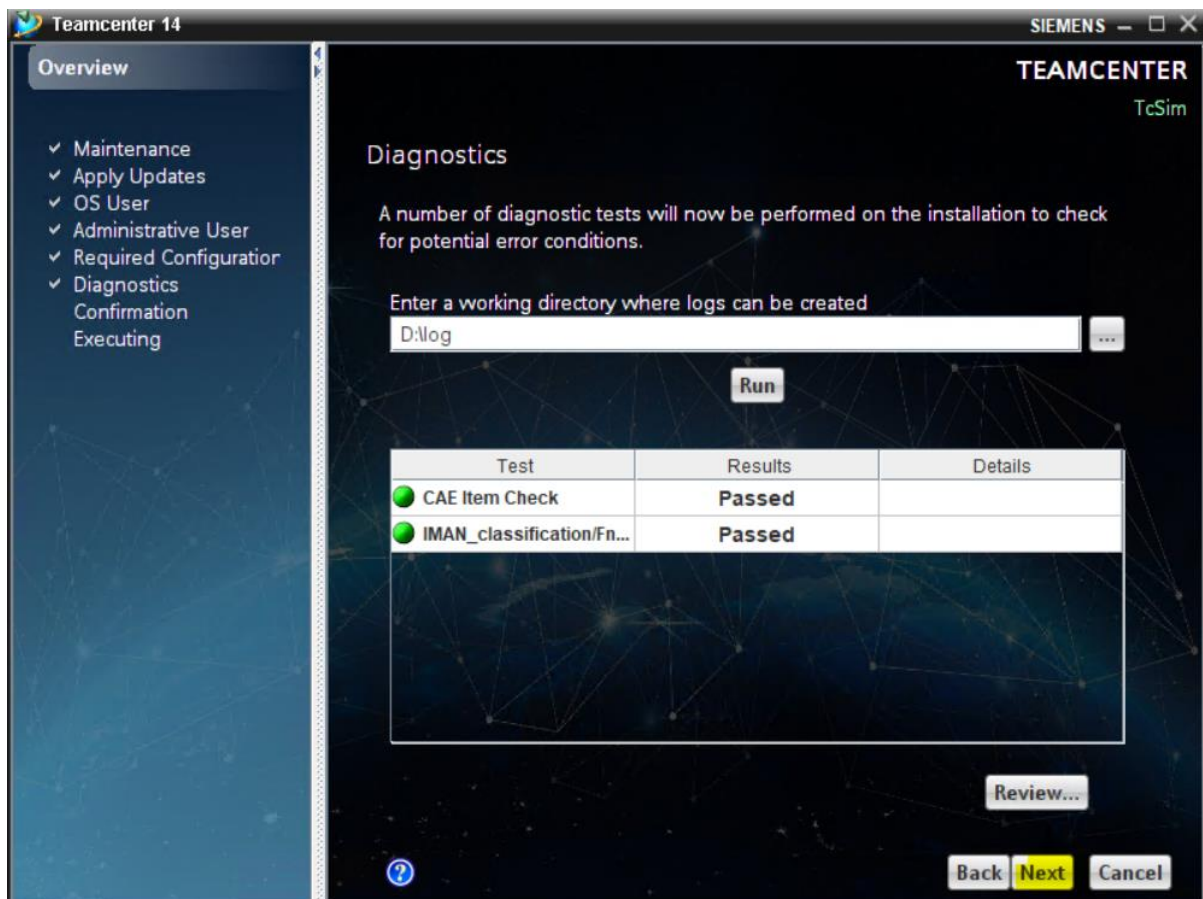


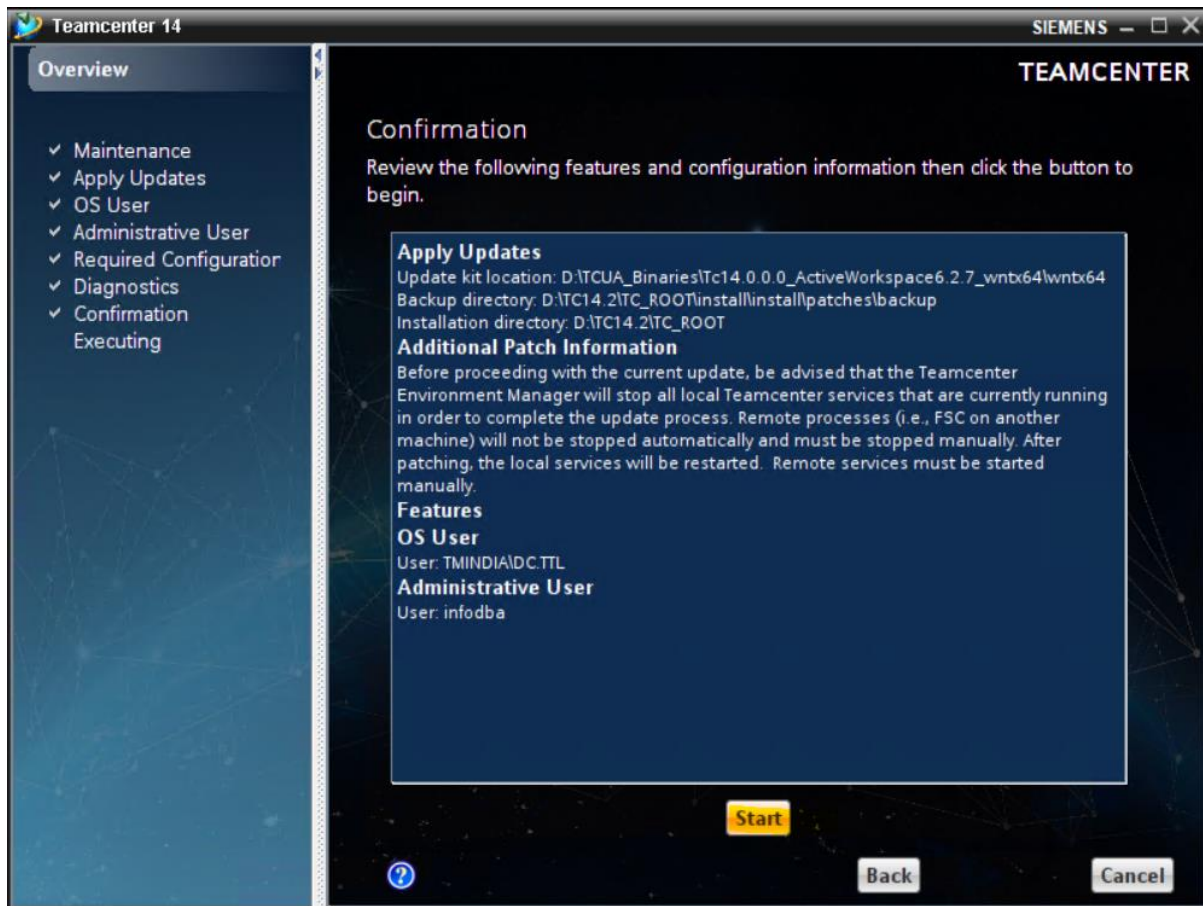


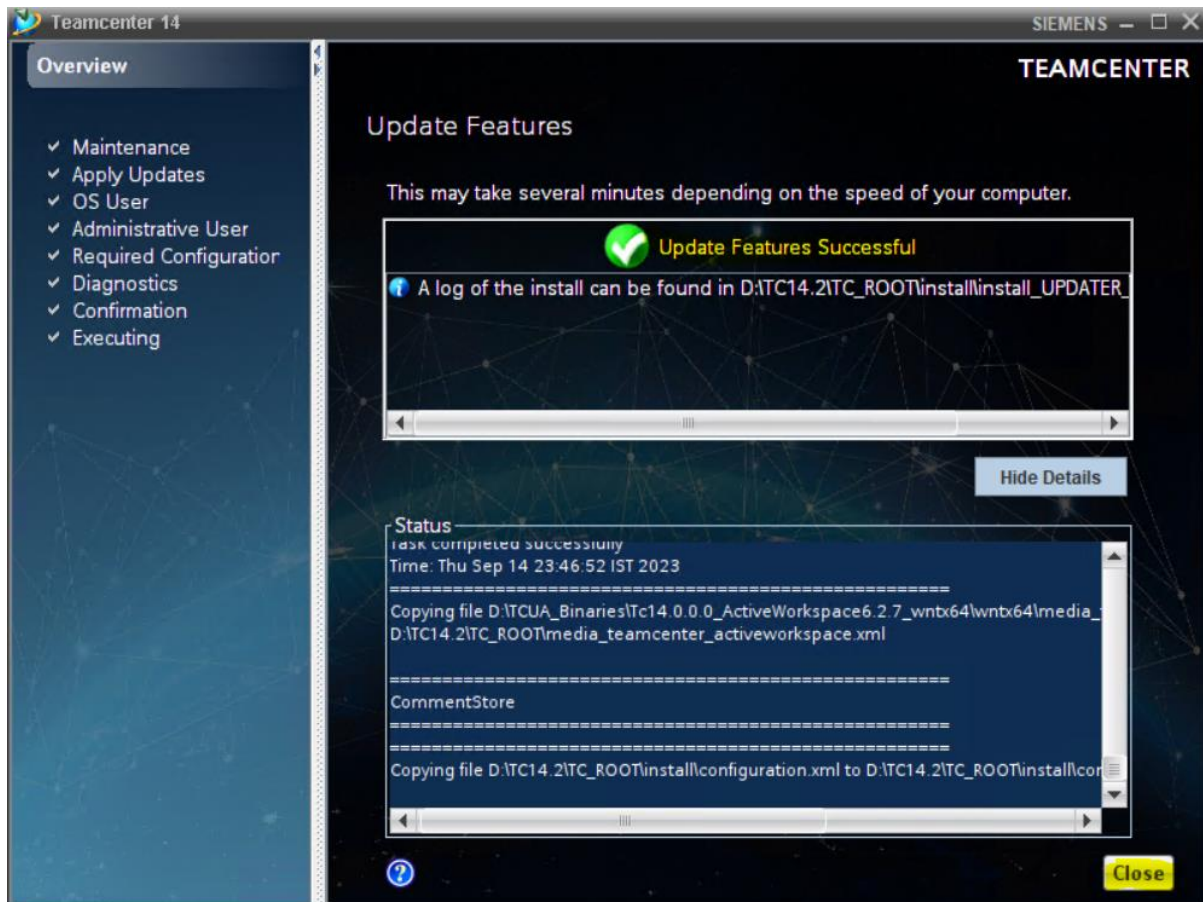


Install Active Workspace Basic Features

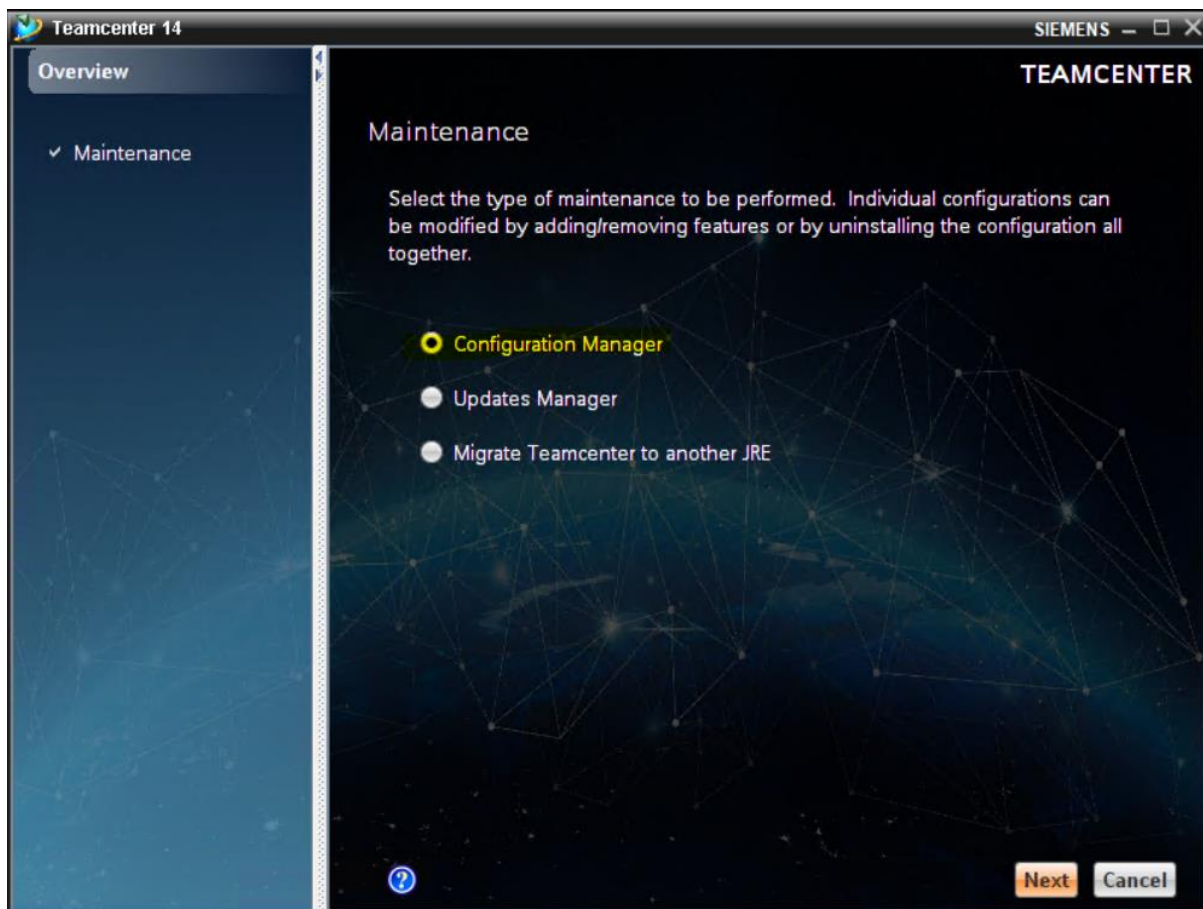


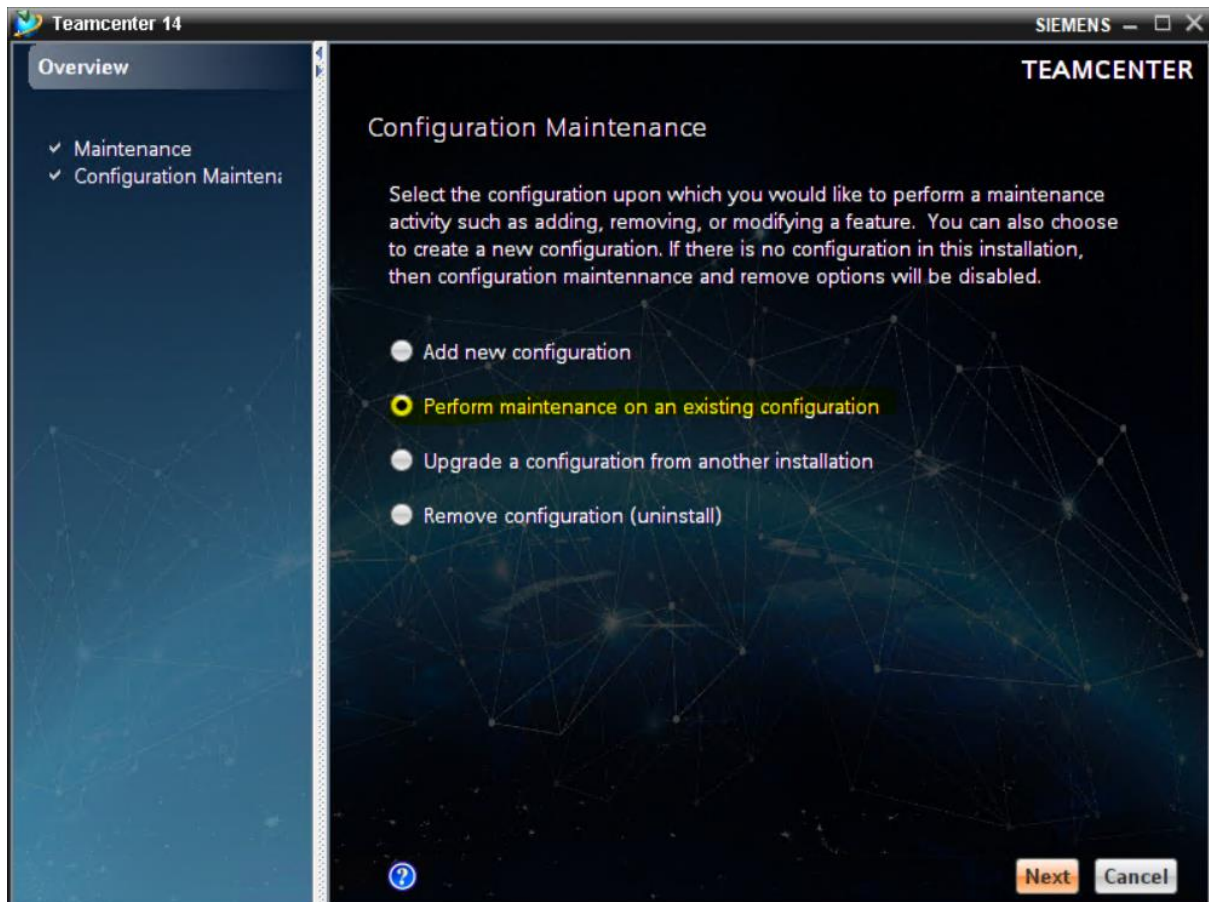


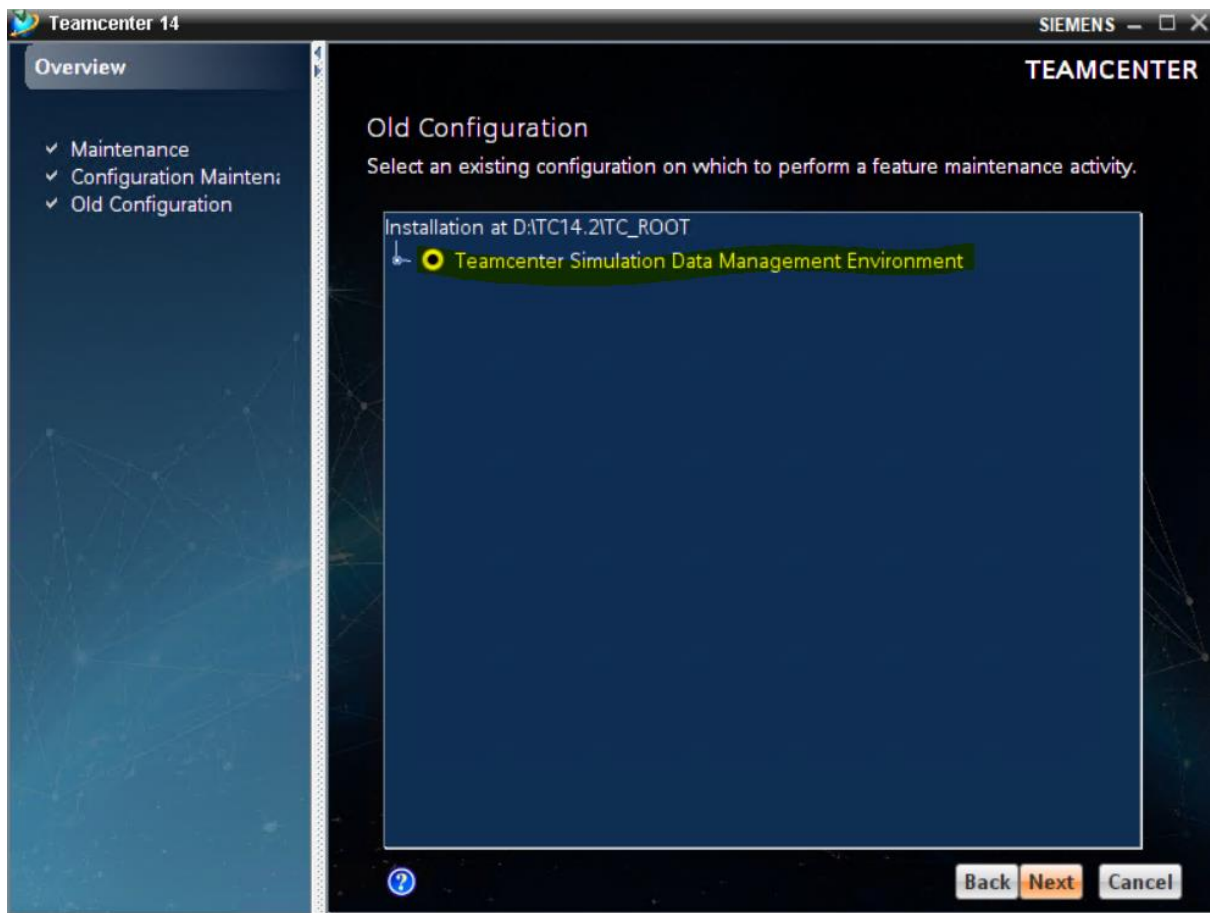





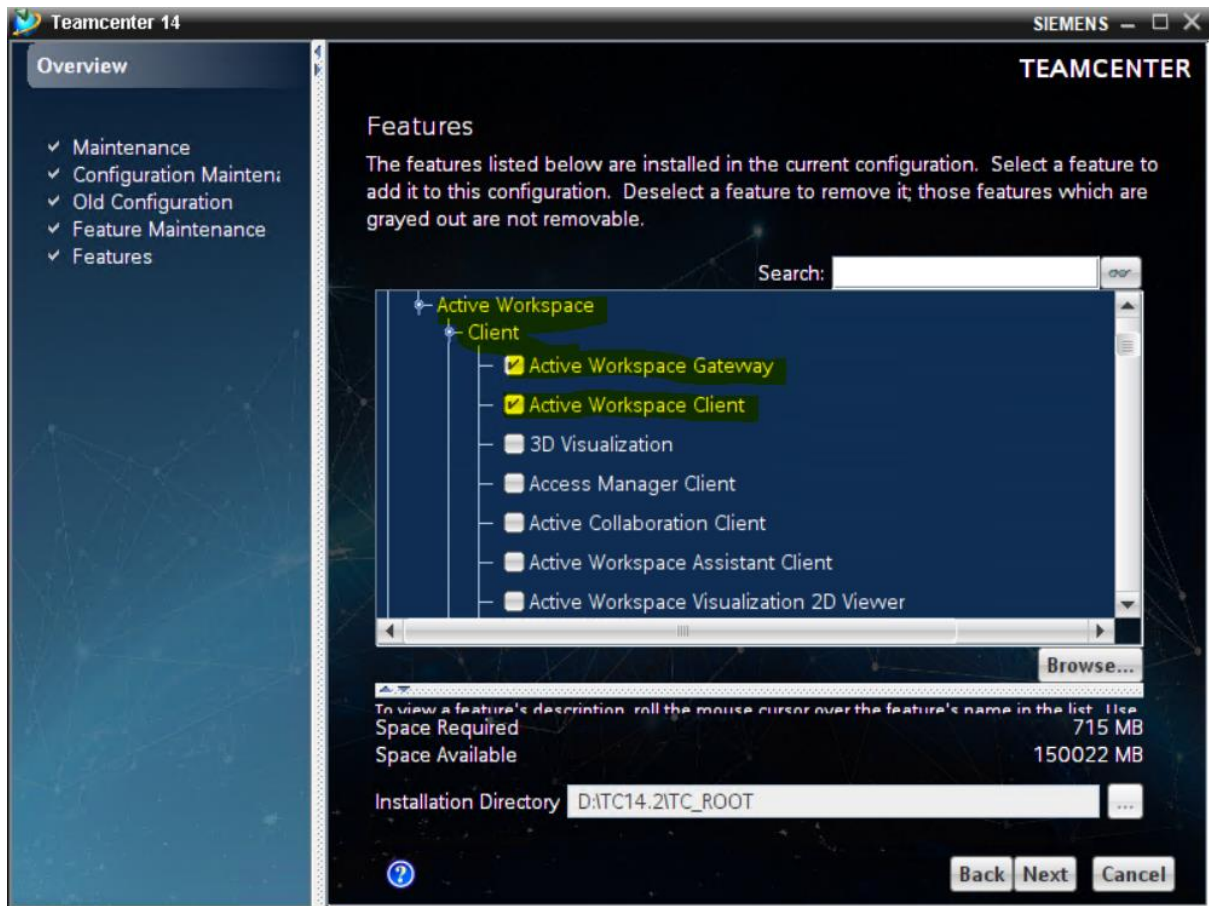

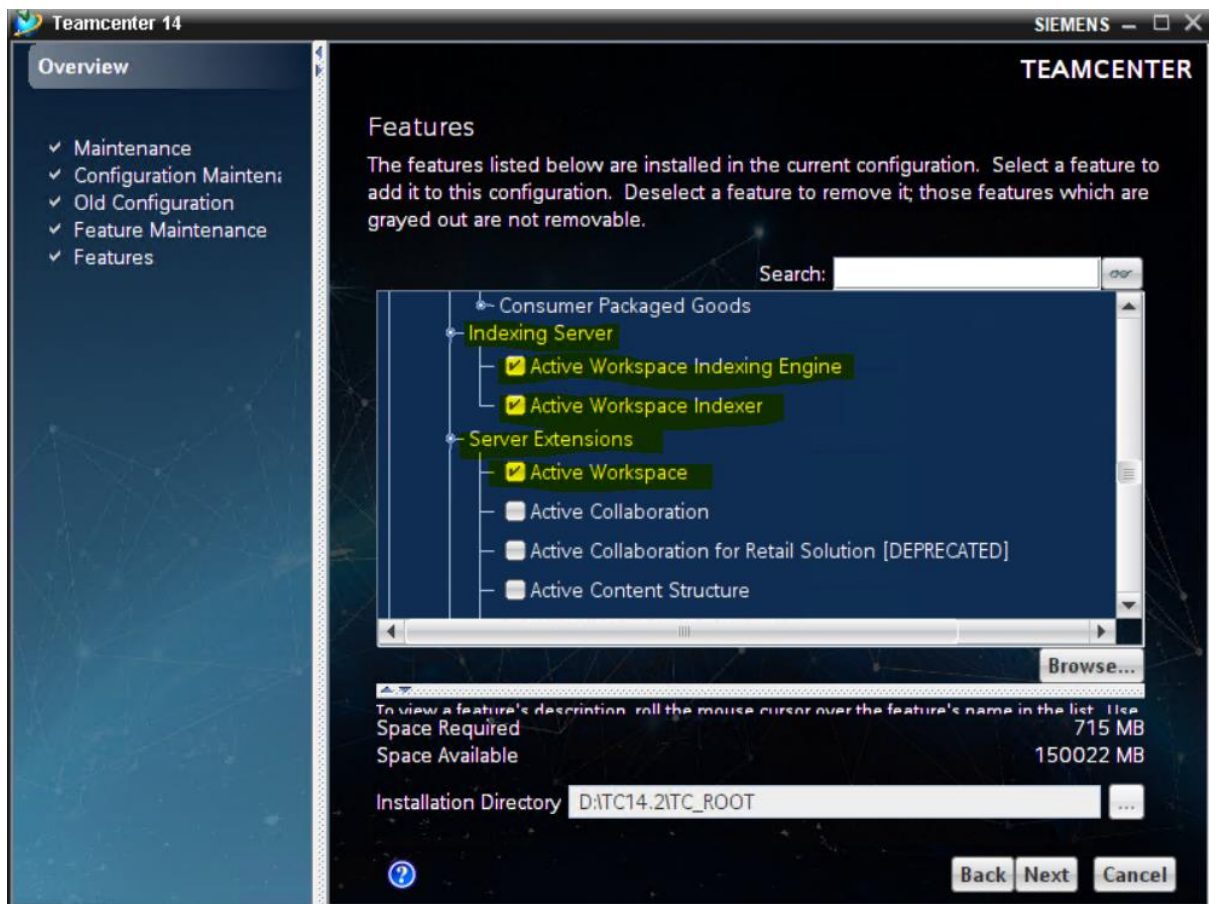

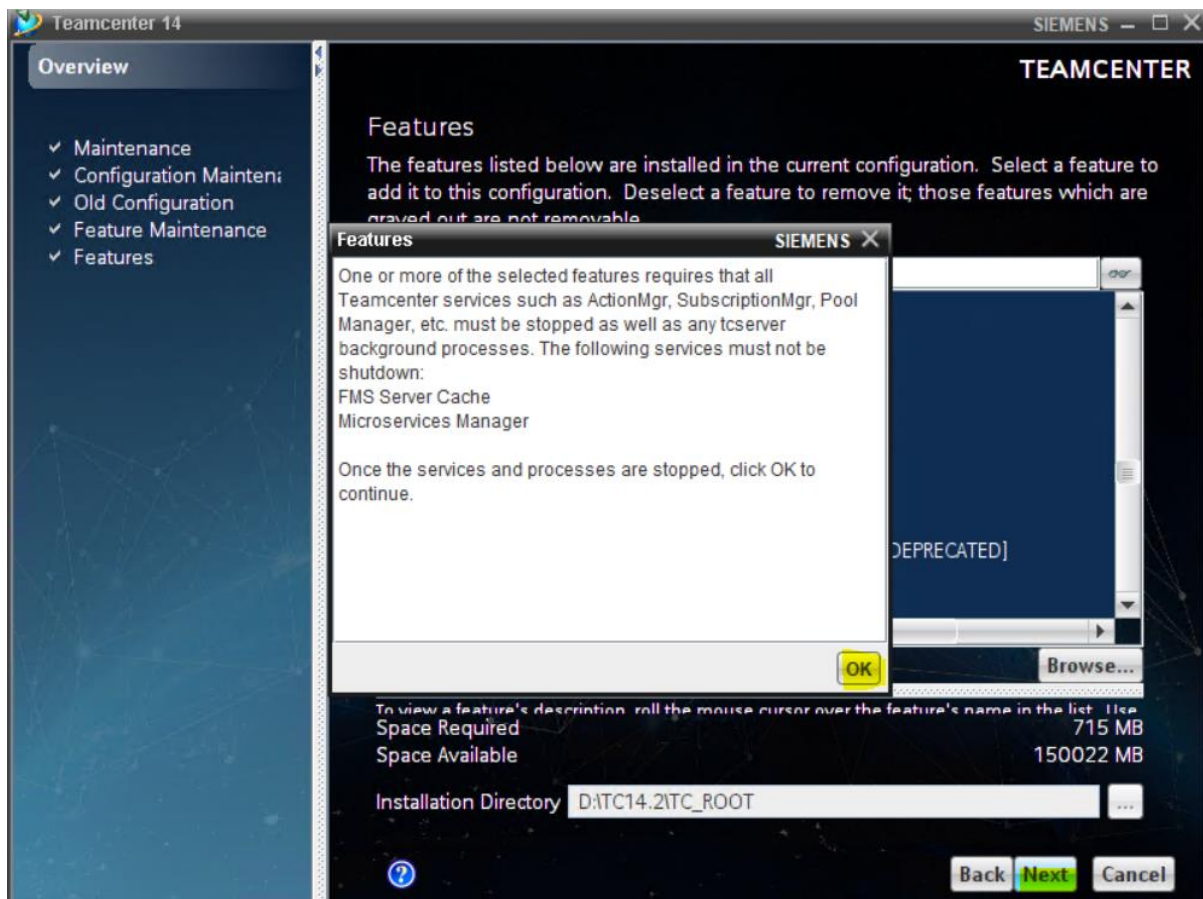


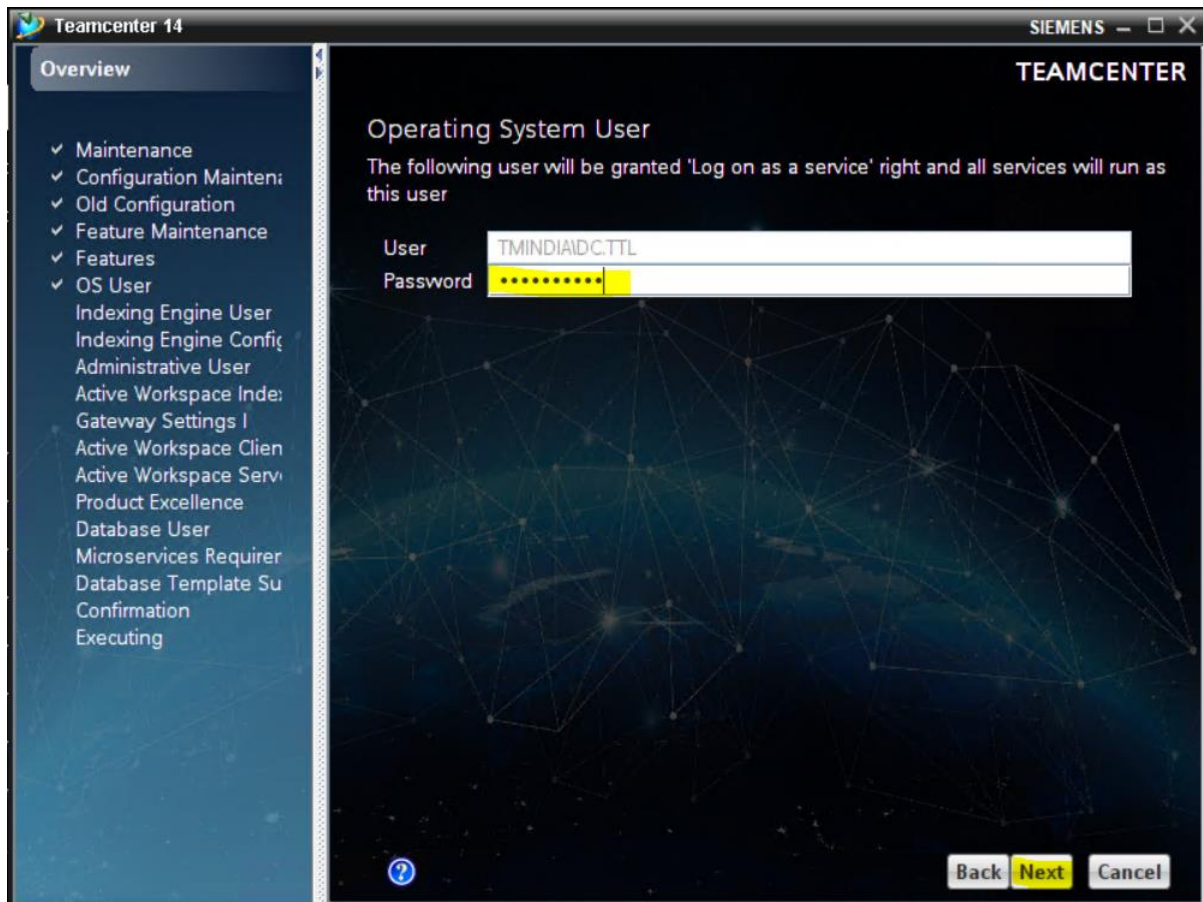


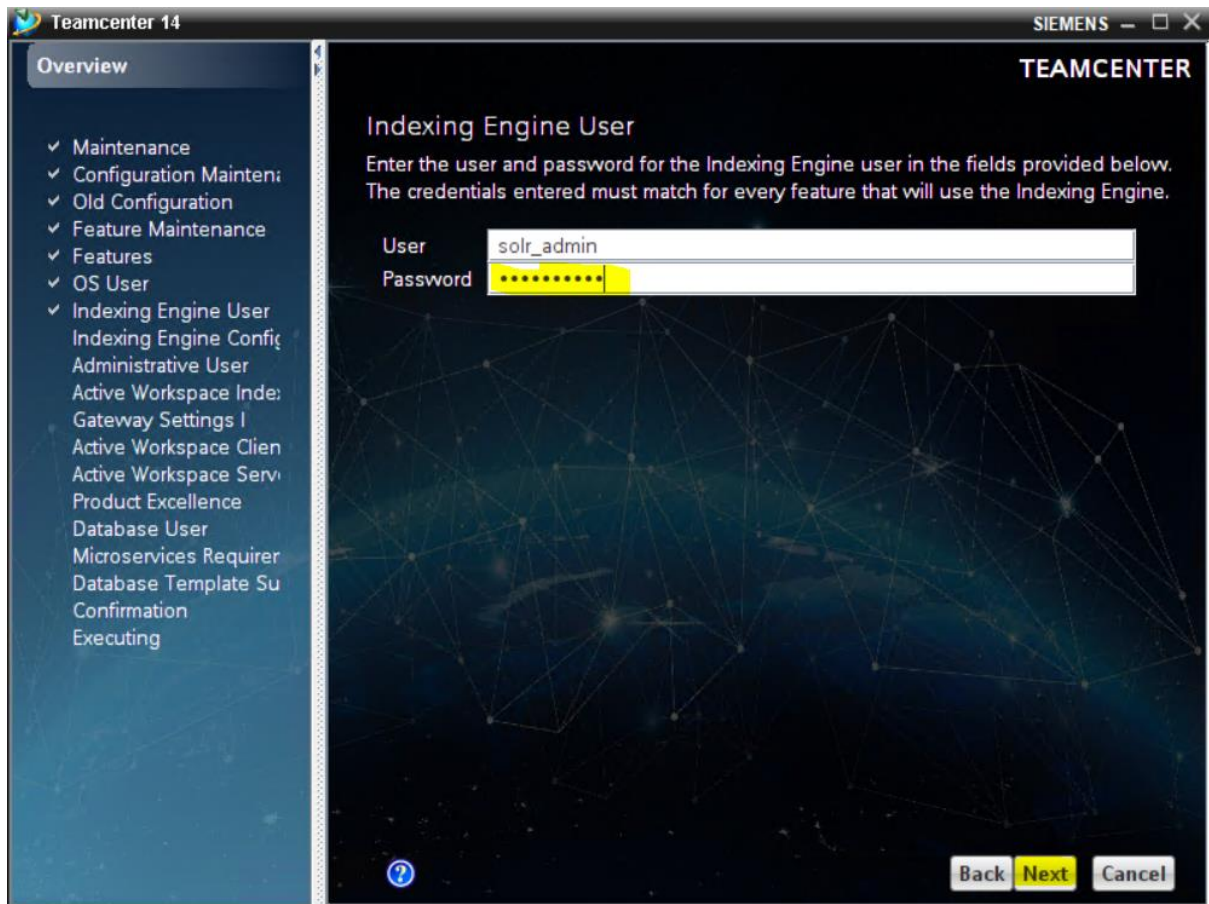

User: solr_admin

Password: solr_admin

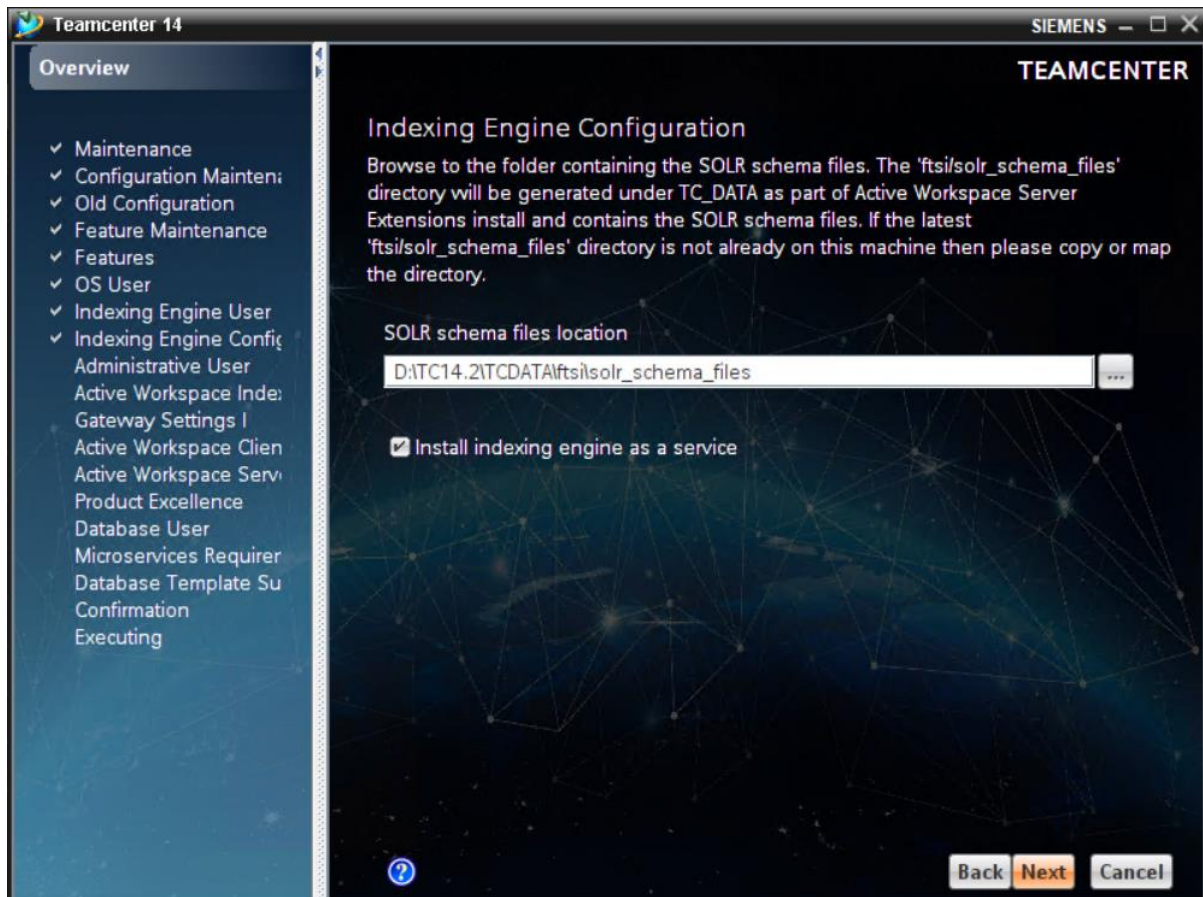

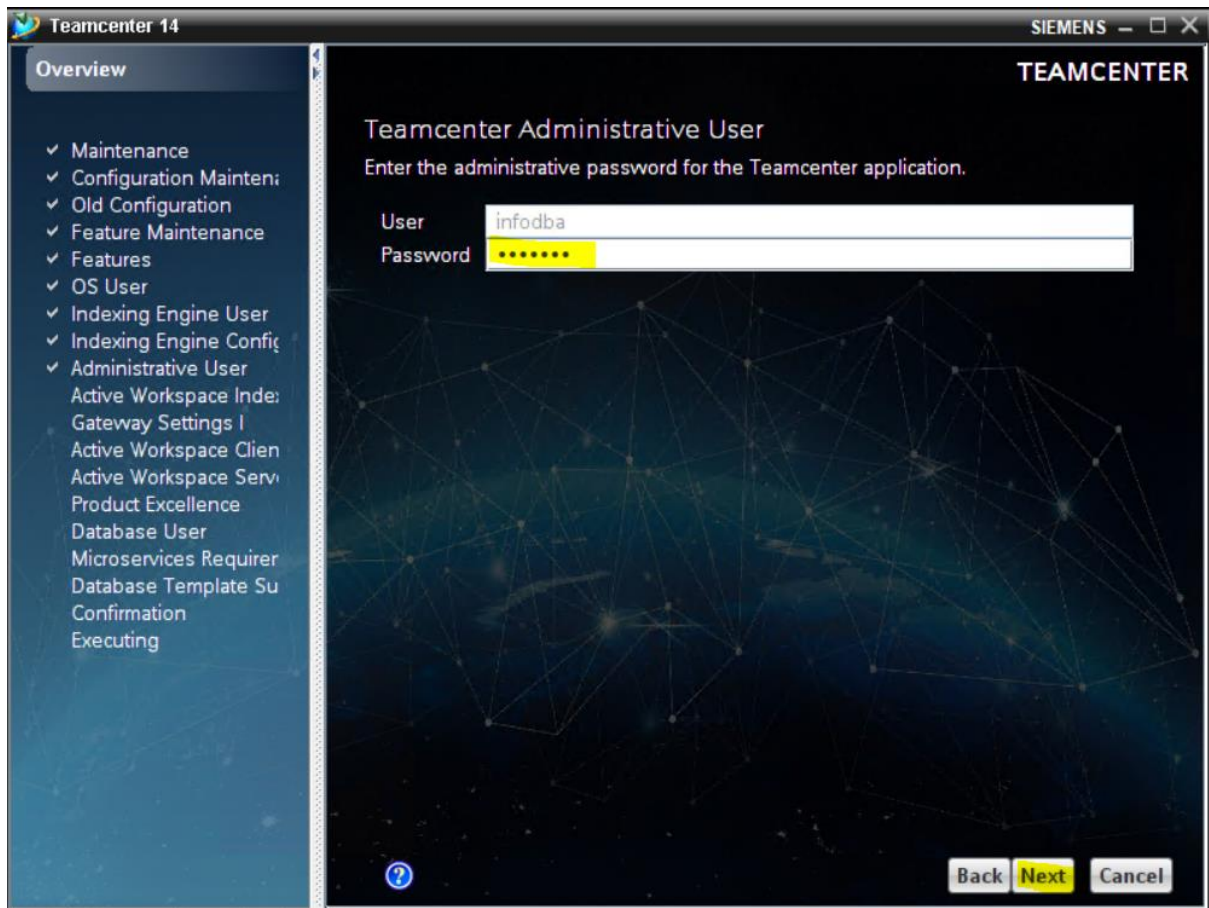

Teamcenter 14

SIEMENS

TEAMCENTER

Overview

- ✓ Maintenance
- ✓ Configuration Maintenance
- ✓ Old Configuration
- ✓ Feature Maintenance
- ✓ Features
- ✓ OS User
- ✓ Indexing Engine User
- ✓ Indexing Engine Configuration
- ✓ Administrative User
- ✓ Active Workspace Indexer
 - Gateway Settings
 - Active Workspace Client
 - Active Workspace Server
 - Product Excellence
 - Database User
 - Microservices Requirer
 - Database Template Setup
 - Confirmation
 - Executing

Active Workspace Indexer Settings

Specify Active Workspace Indexer installation settings below. Maximum Teamcenter Connections specifies the maximum number of open connections between the Teamcenter server and the indexer at a given time. It should be less than the number of warmed up Teamcenter servers available in the server manager.

. Teamcenter Retry Count specifies the number of tries to connect to the Teamcenter server.

☒ Standalone indexing environment

☐ Dispatcher-based indexing environment

Teamcenter Web Tier URL

http://simsoftsrvr1:7001/tc

Maximum Teamcenter Connections

4

Teamcenter Retry Count

5

Dispatcher Server URL


rmi://<HOSTNAME>:2001


Staging Directory

TC14.2\TC_ROOT\TcFTSIndexer\working

?

BackNextCancel

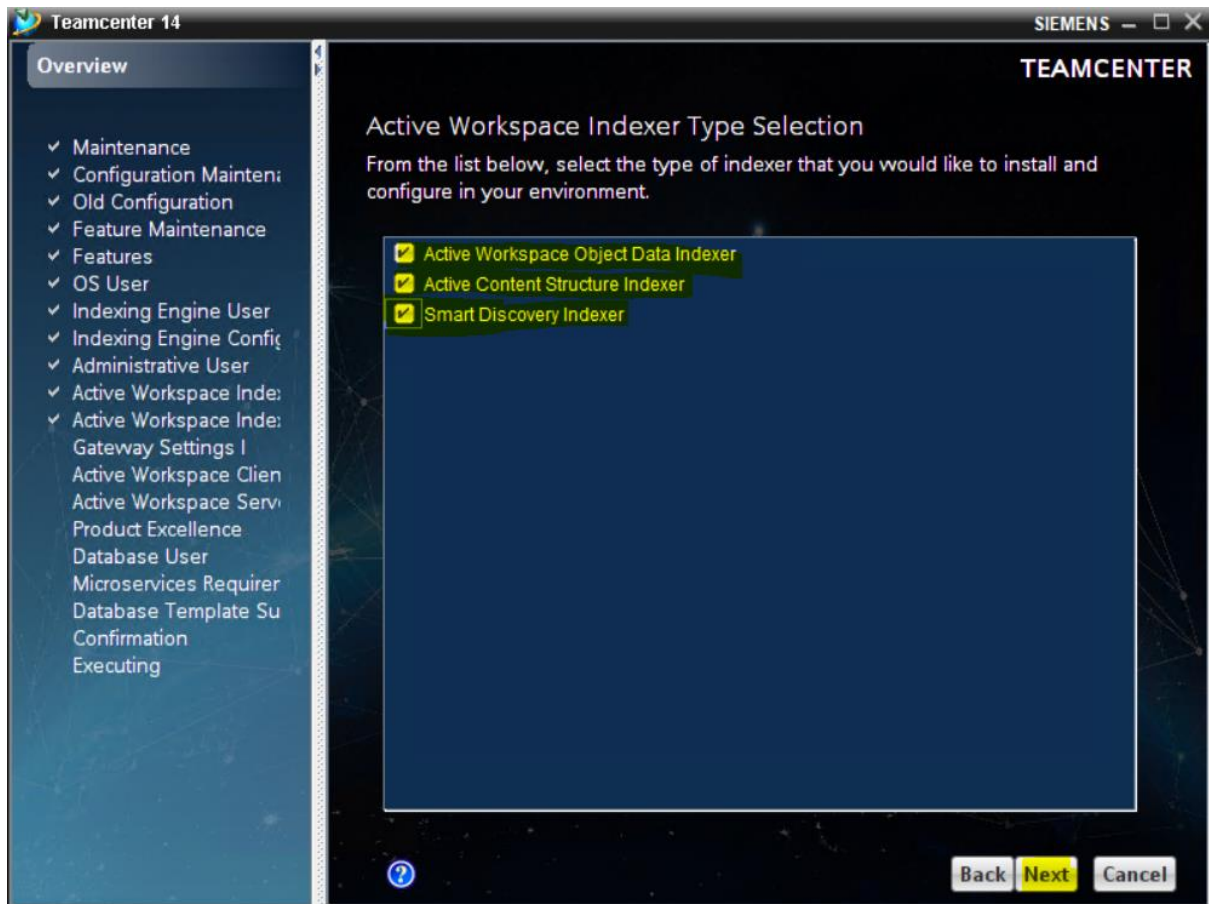

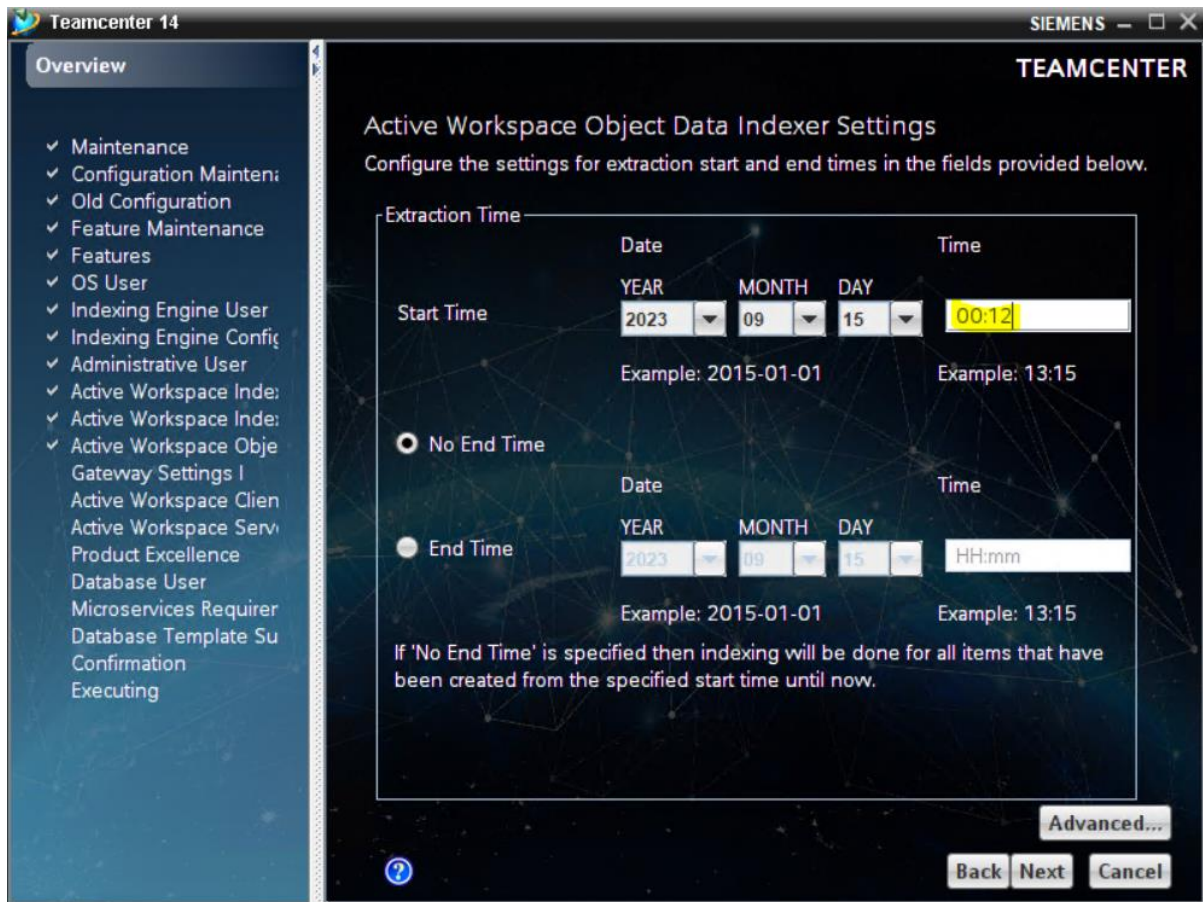

Teamcenter 14

SIEMENS

TEAMCENTER

Overview

- ✓ Maintenance
- ✓ Configuration Mainten:
- ✓ Old Configuration
- ✓ Feature Maintenance
- ✓ Features
- ✓ OS User
- ✓ Indexing Engine User
- ✓ Indexing Engine Config
- ✓ Administrative User
- ✓ Active Workspace Inde:
- ✓ Active Workspace Inde:
- ✓ Active Workspace Obje
- ✓ Gateway Settings I
 - Active Workspace Clie
 - Active Workspace Serv
 - Product Excellence
 - Database User
 - Microservices Requir
 - Database Template Su
 - Confirmation
 - Executing

Gateway Settings I

Specify Active Workspace client installation settings below.

Teamcenter Web Tier URL	http://simsoftsrvr1:7001/tc
Visualization Assigner URL	
Easy Plan URL	
NGP URL	
Service Dispatcher URLs	imssoftsrvr1.tnindia.tatamotors.com:9090/
Gateway Service Port	3000

FMS Settings

☐ Use as Bootstrap URLs

Bootstrap URLs

Bootstrap Client IP

☒ Use Assigned FSC URLs

Assigned FSC URLs


Advanced...


?


Back


Next


Cancel

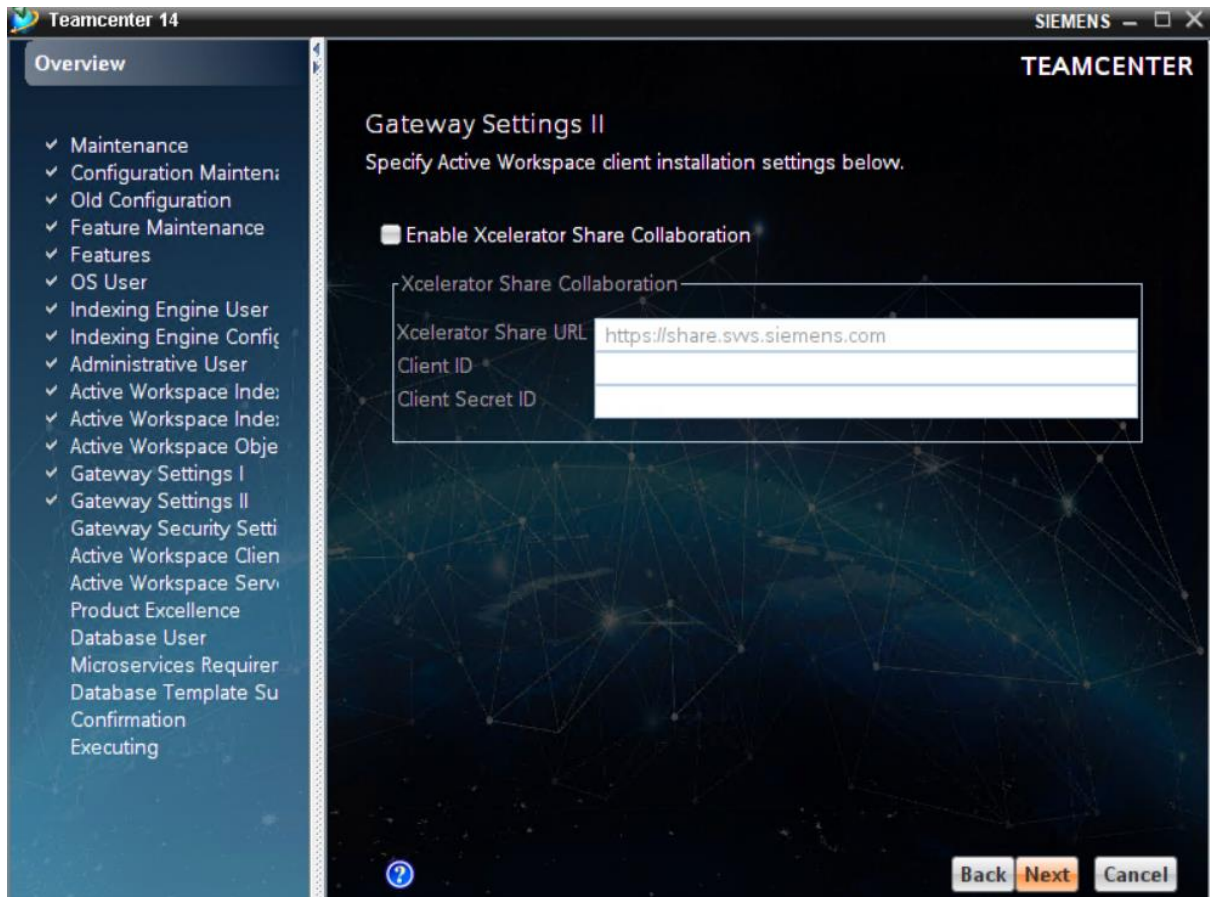


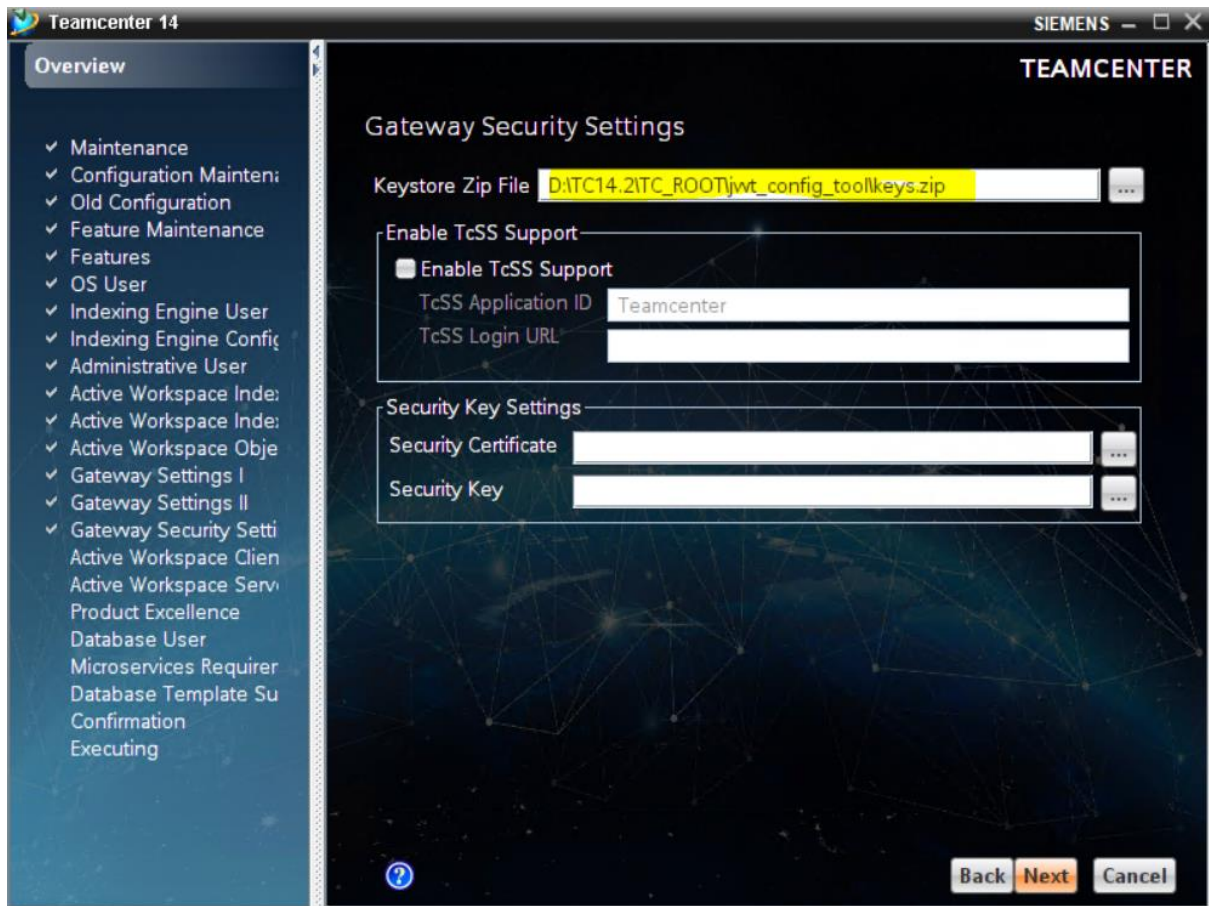



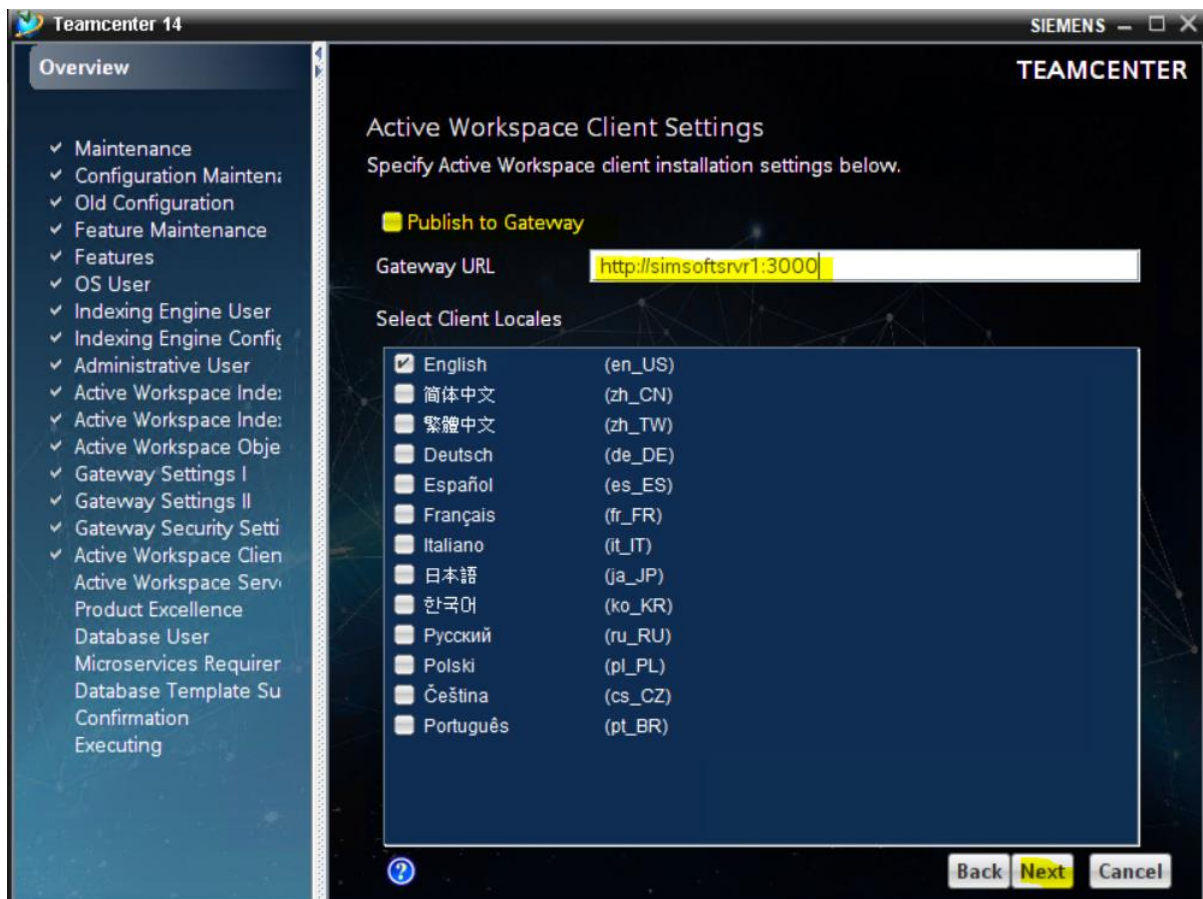



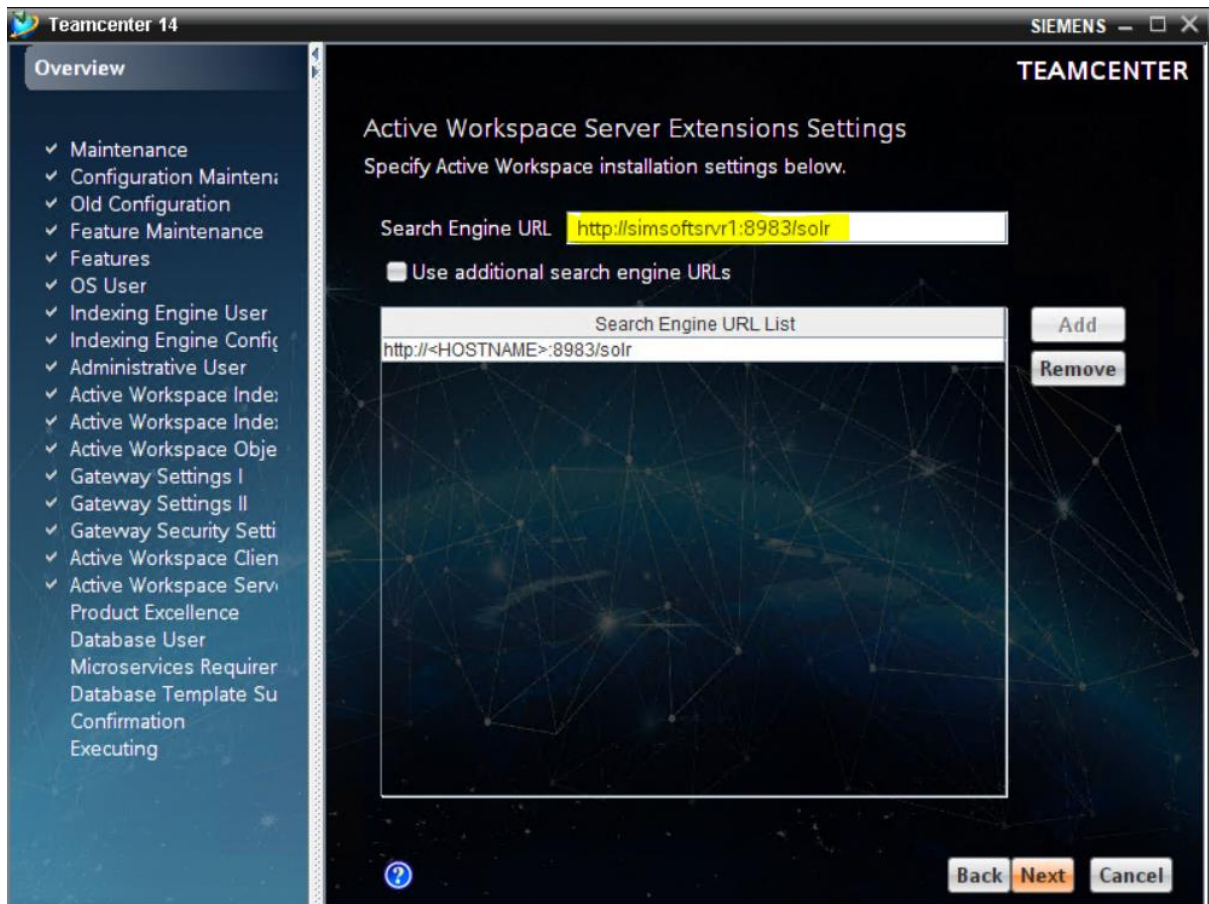


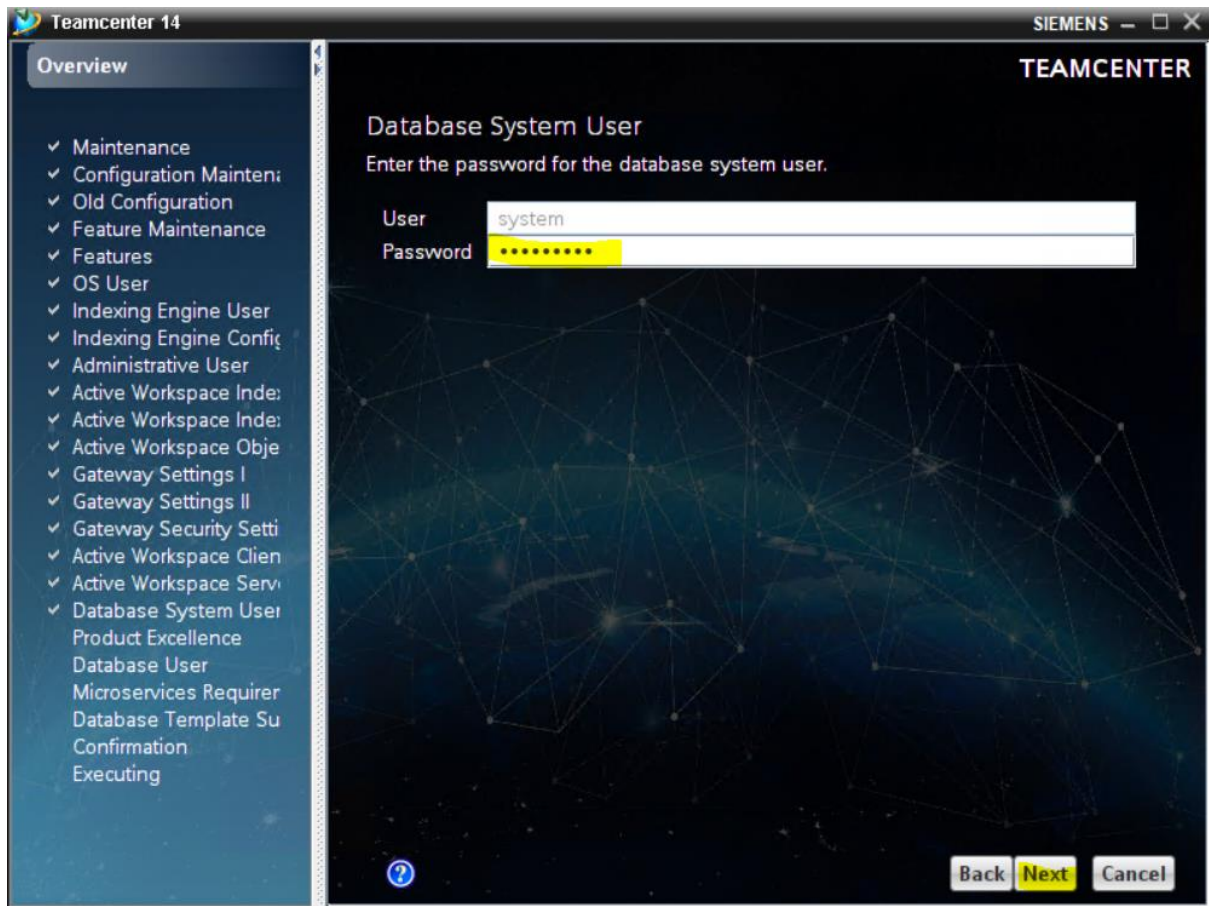



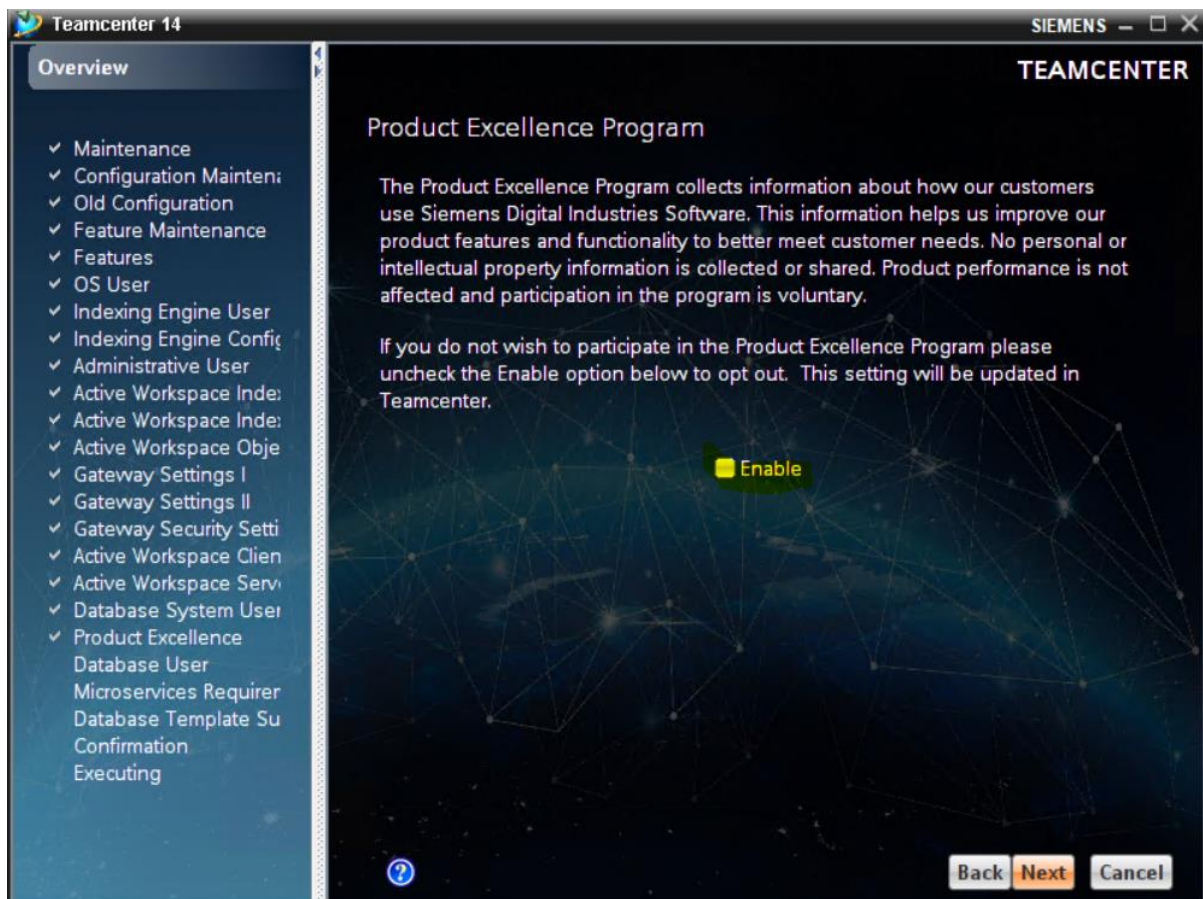


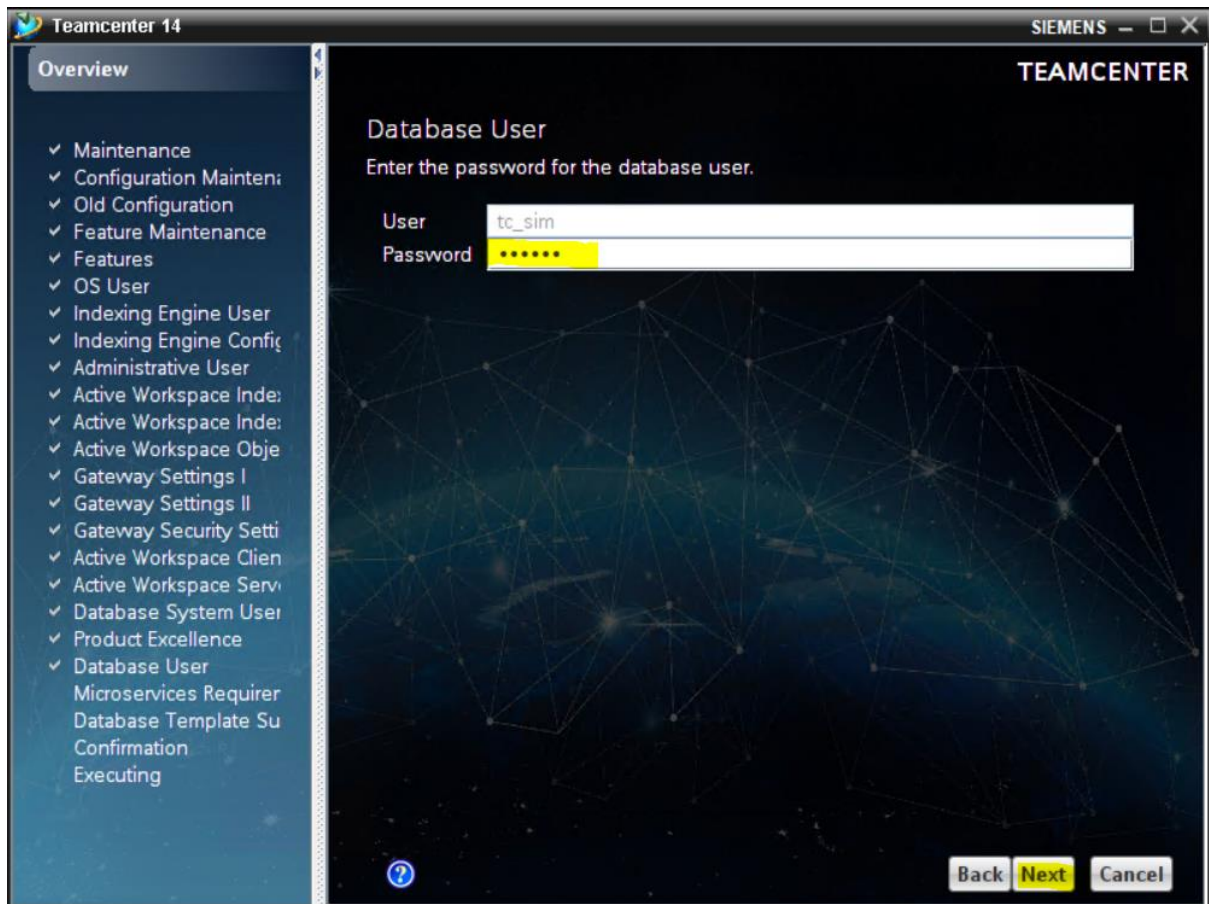

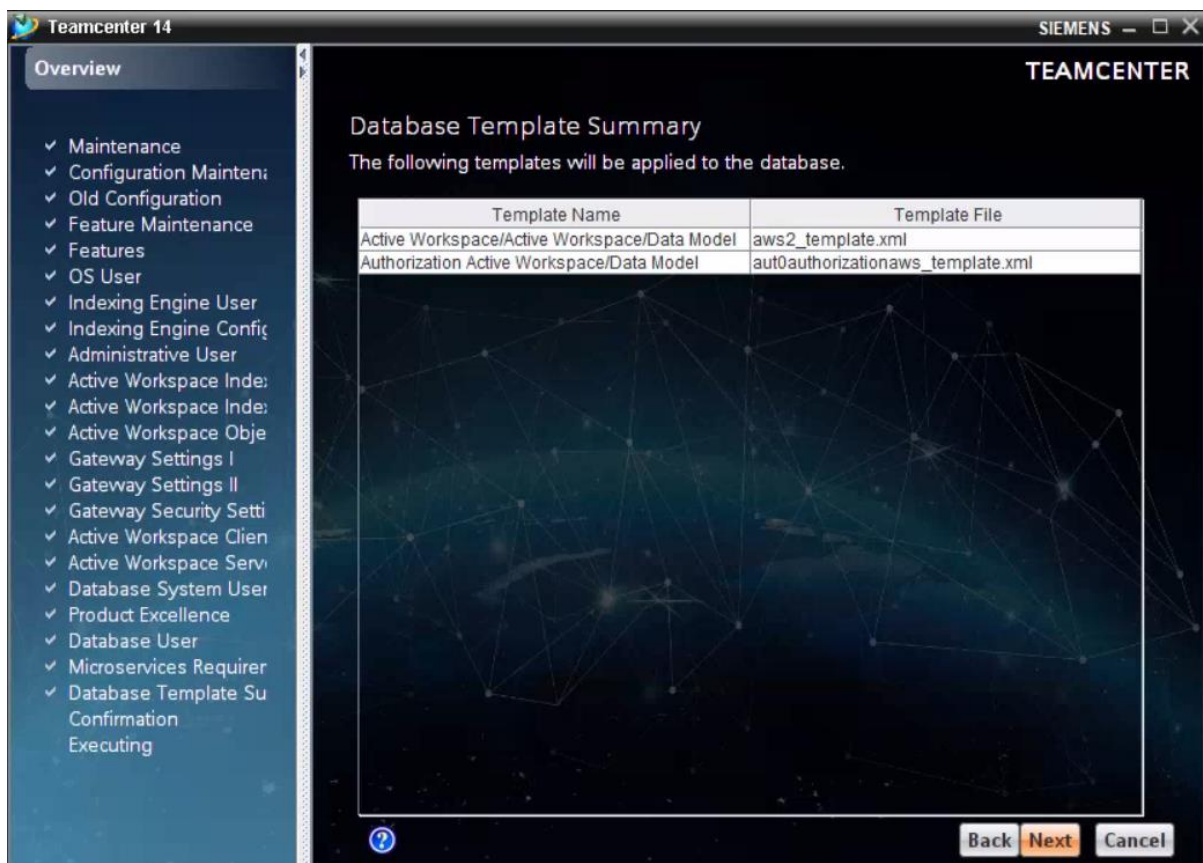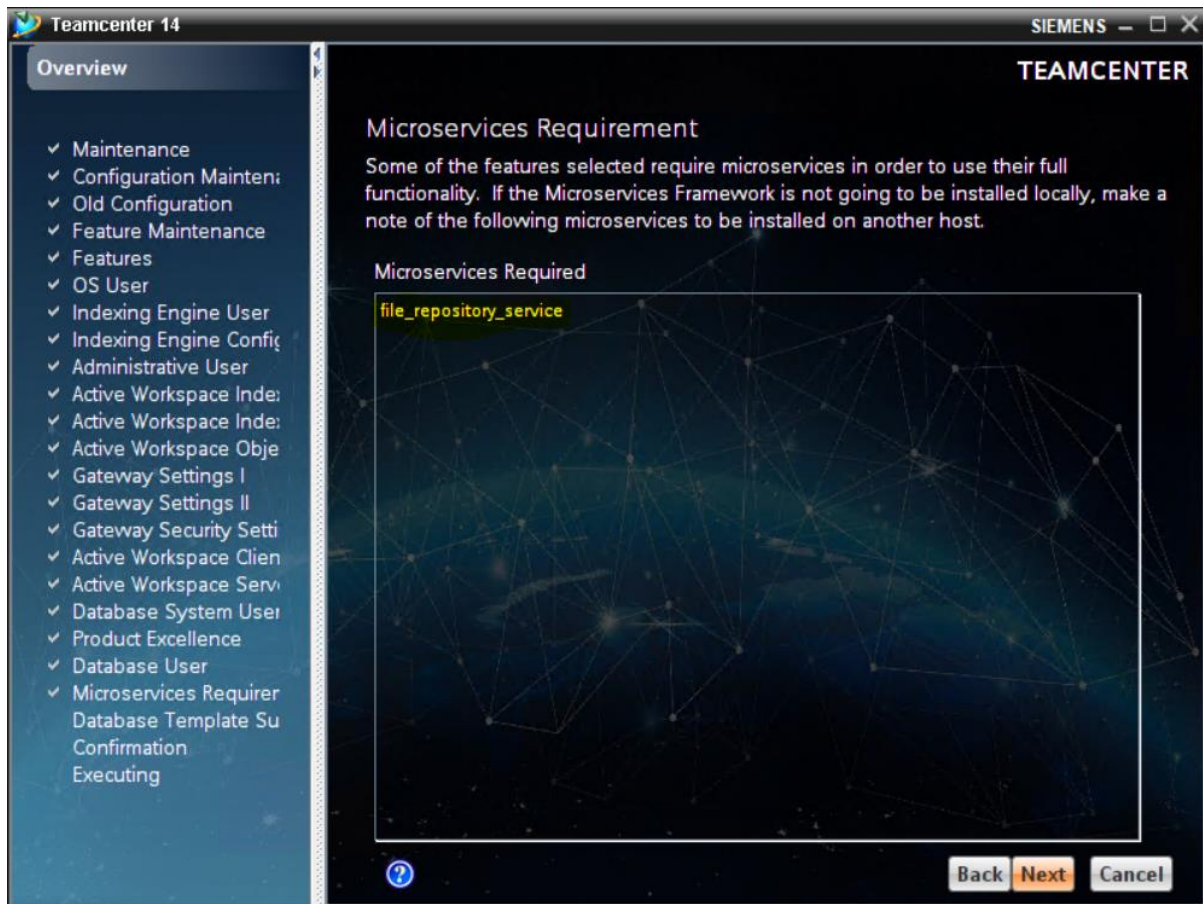

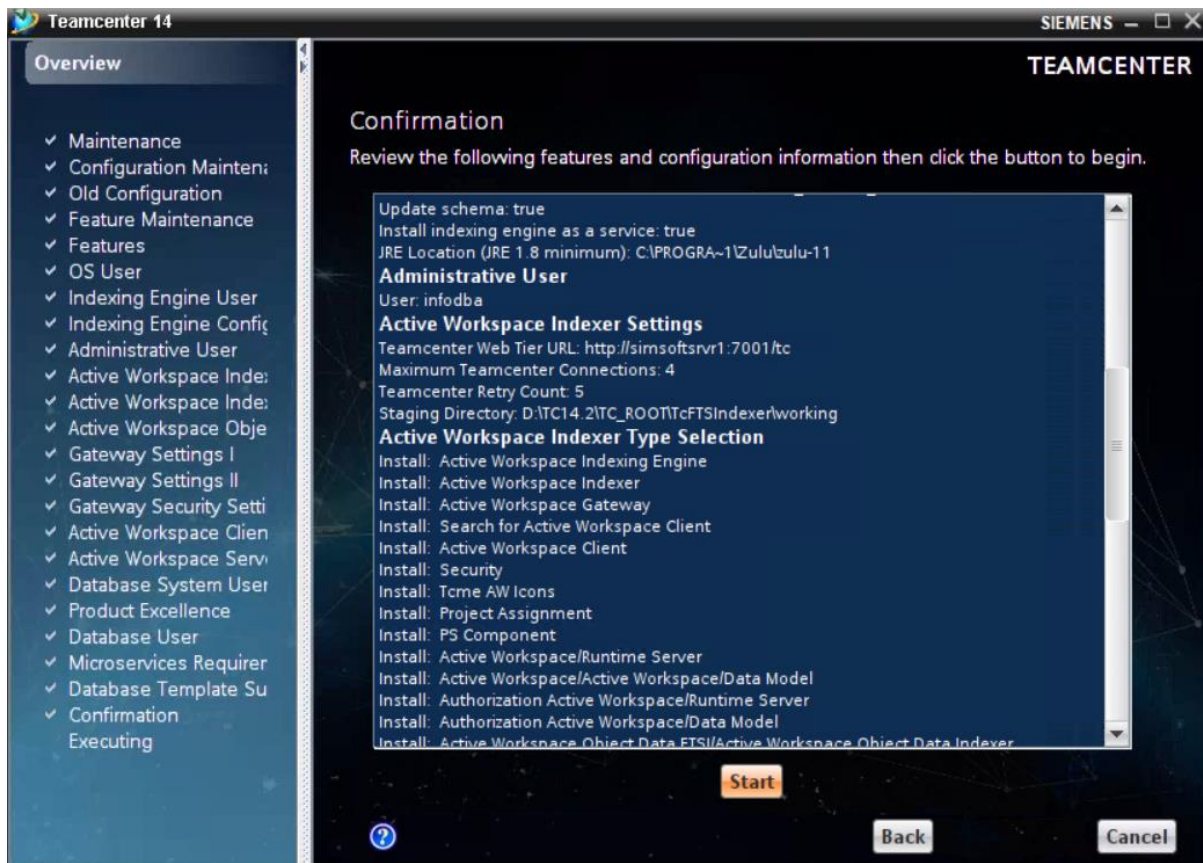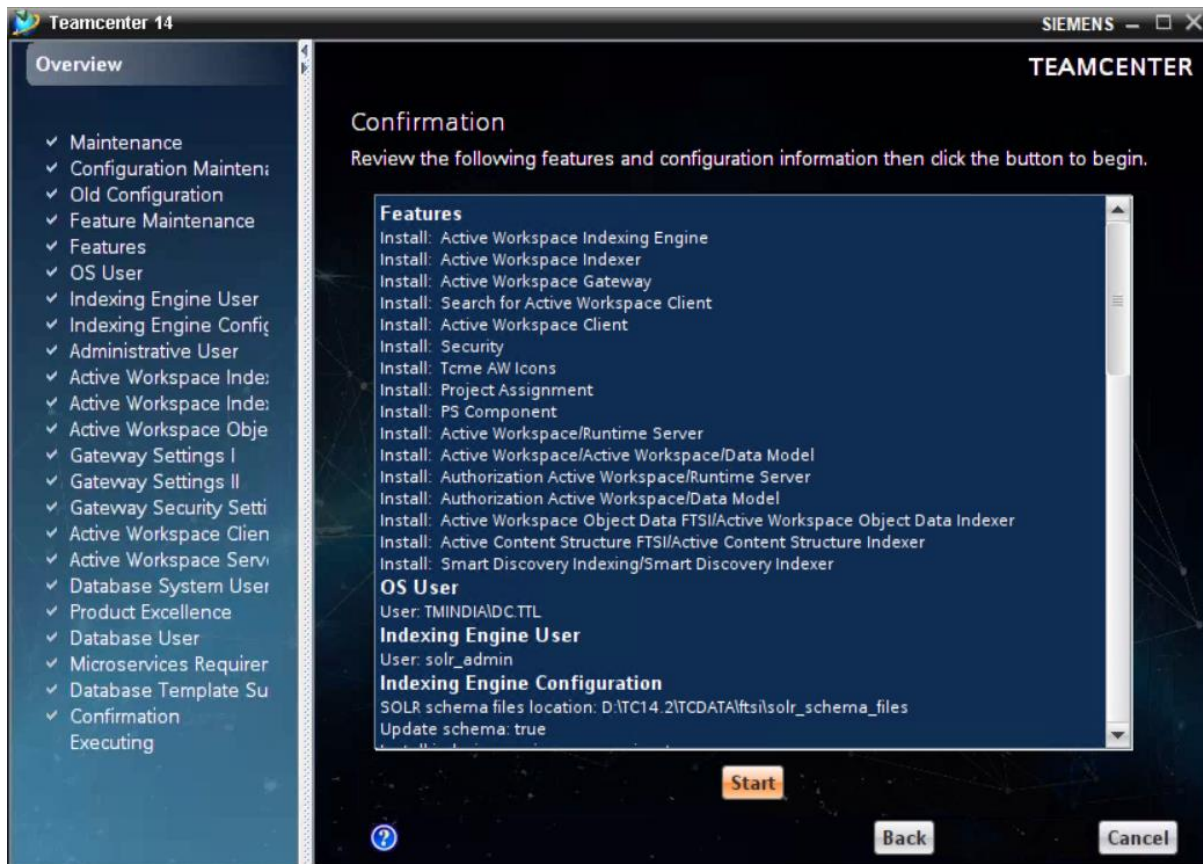

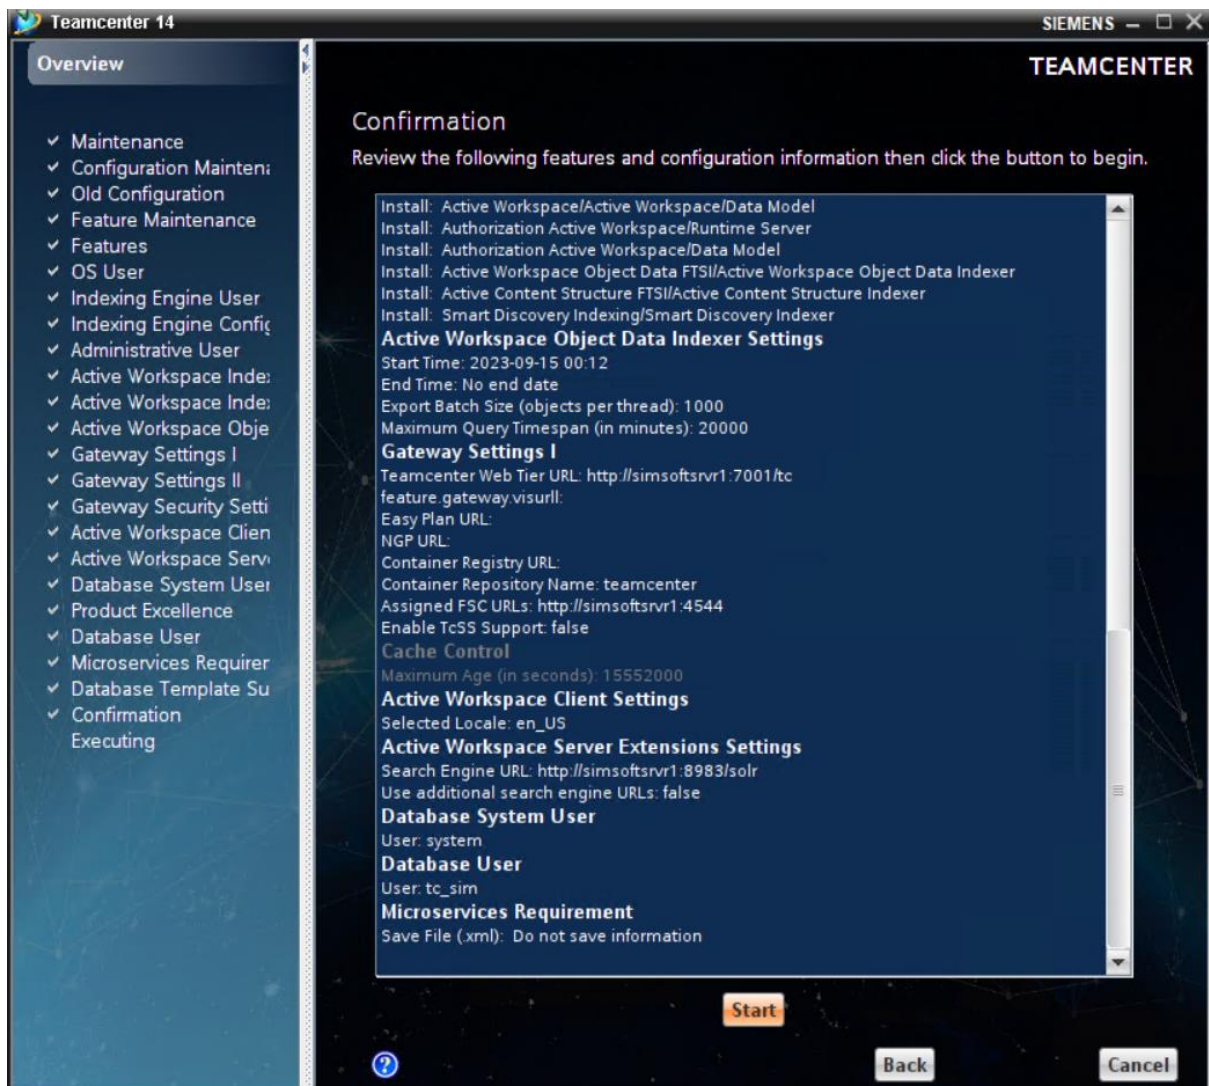


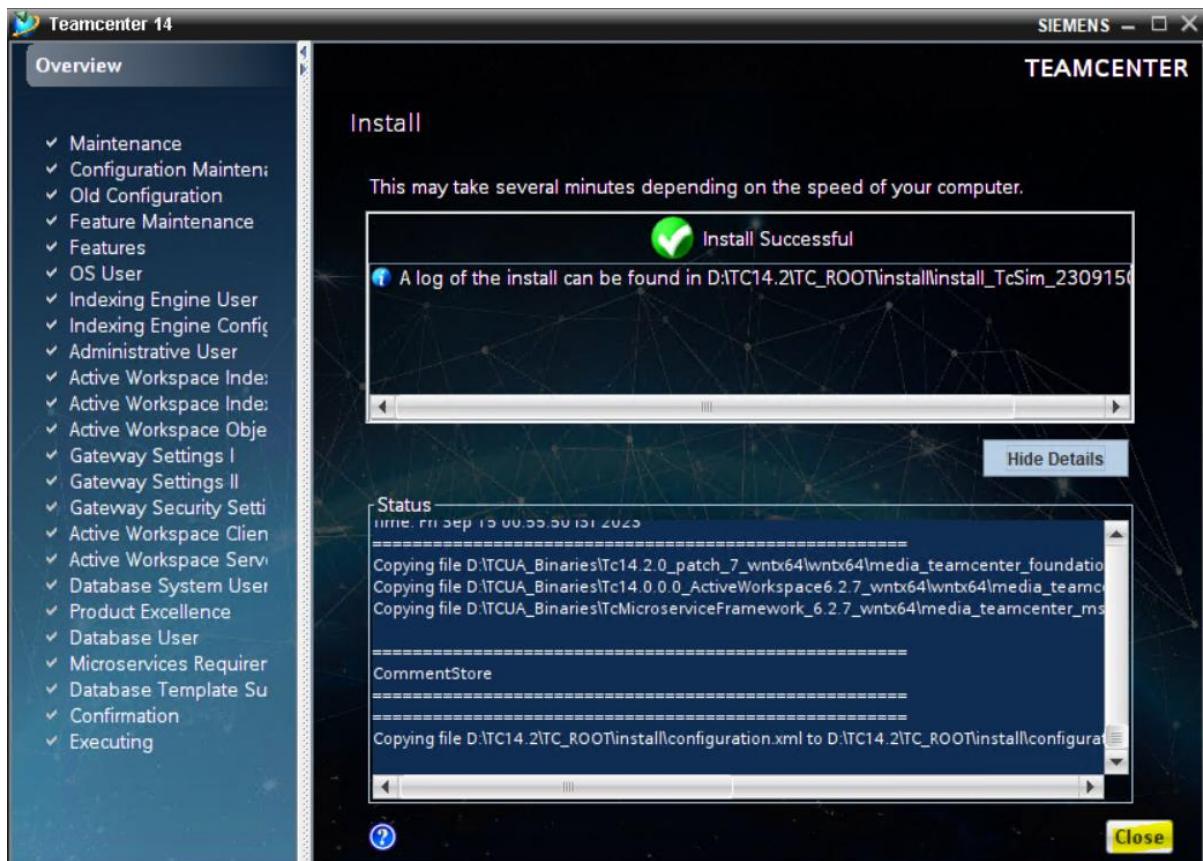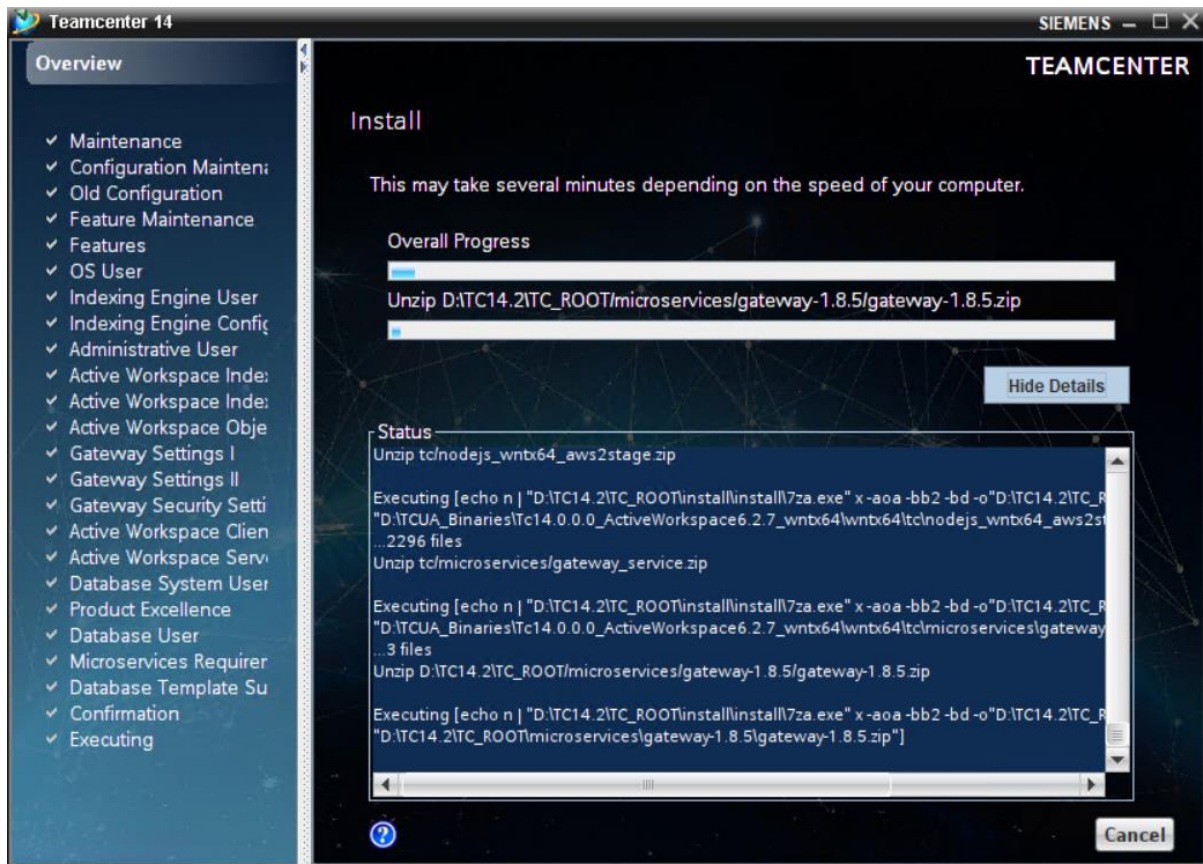


War file creation (Add microservice framework support to a Java EE web tier)


Create a WEB_ROOT folder in TC_ROOT

Go to 14.0 binary>>Web_tier location and run INSTALL_TCWEB.EXE as administrator.

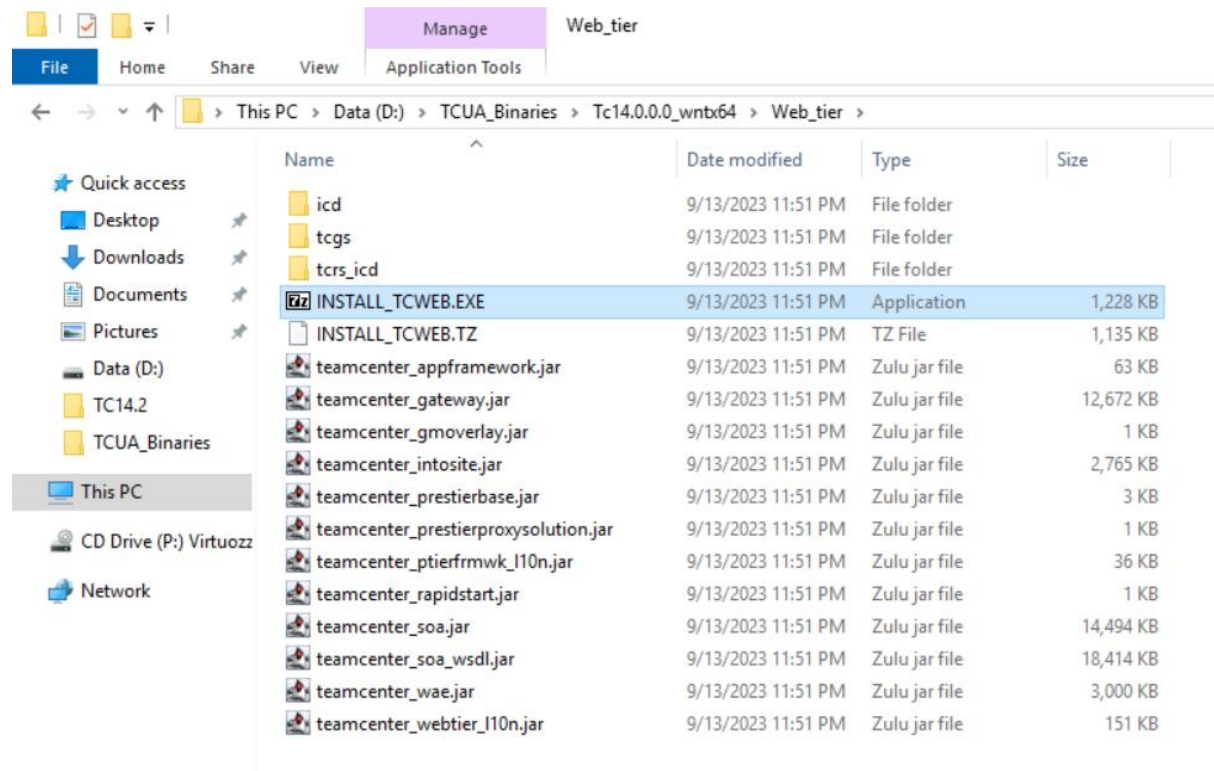


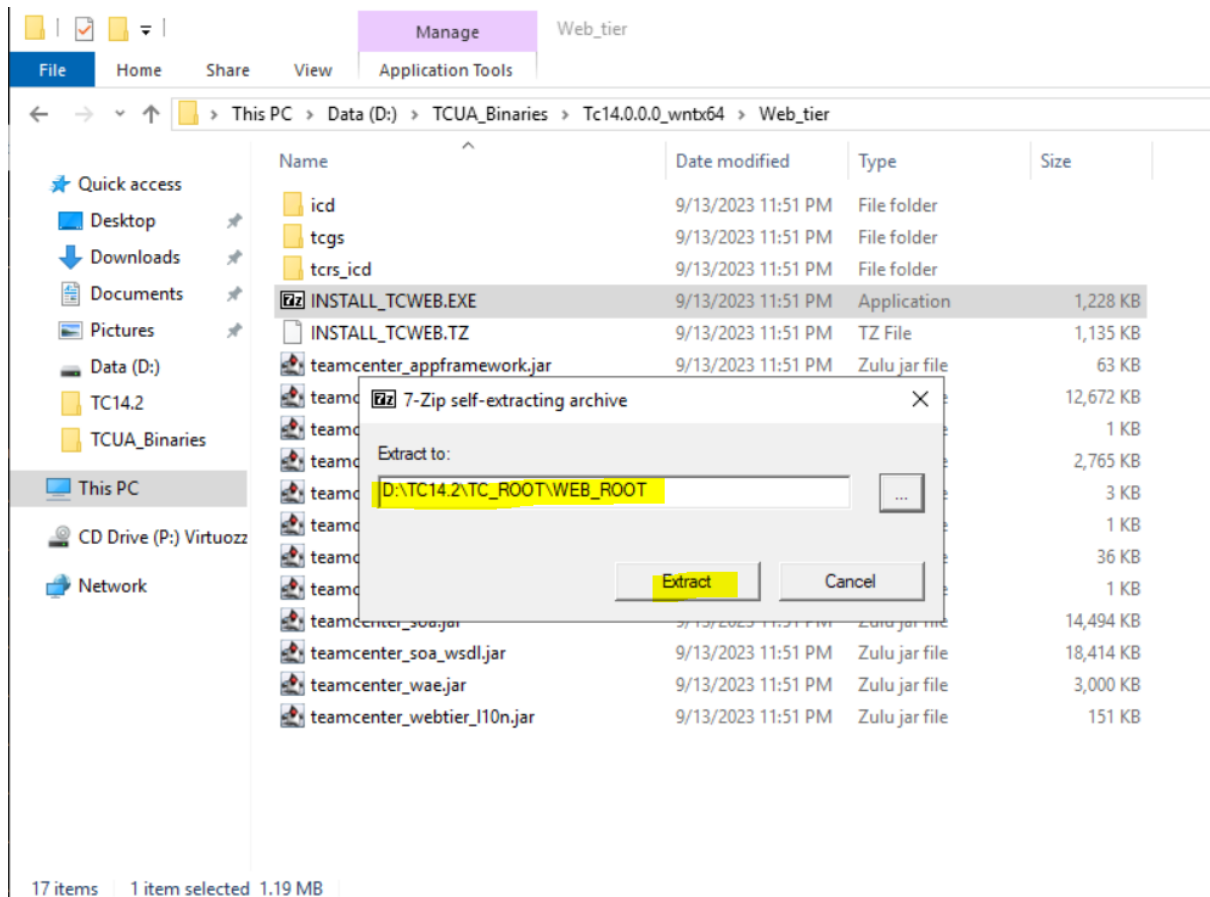



Go to WEB_ROOT folder and run insweb command


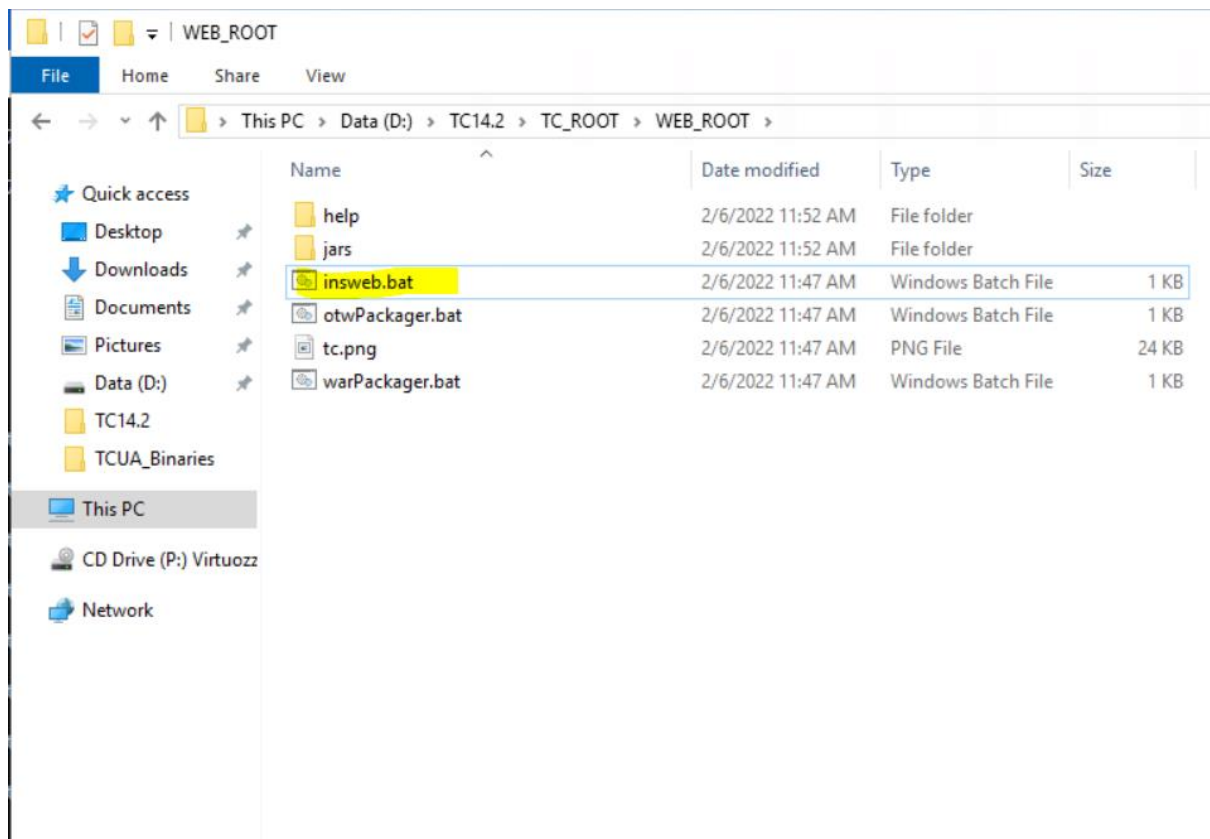




Click Copy ICDs...

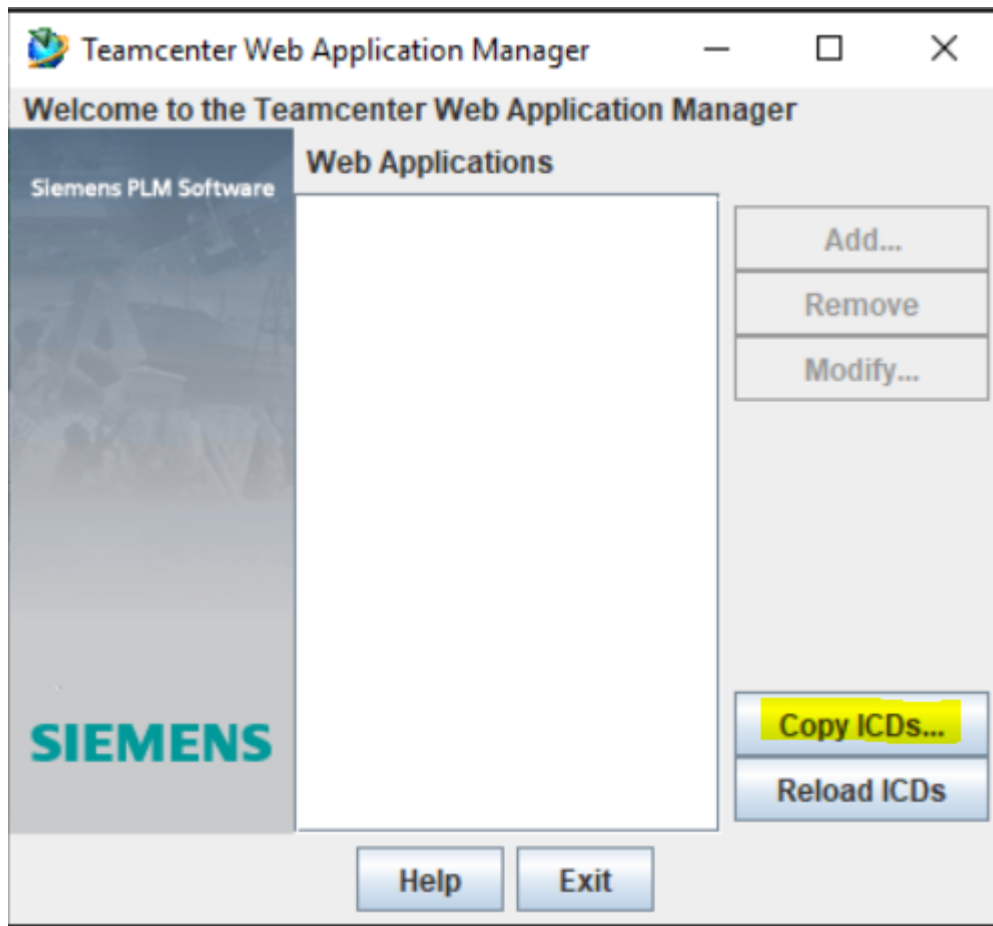


Copy ICDs from 14.0, then 14.2.0.7 patch, then Microservice binary and click OK.

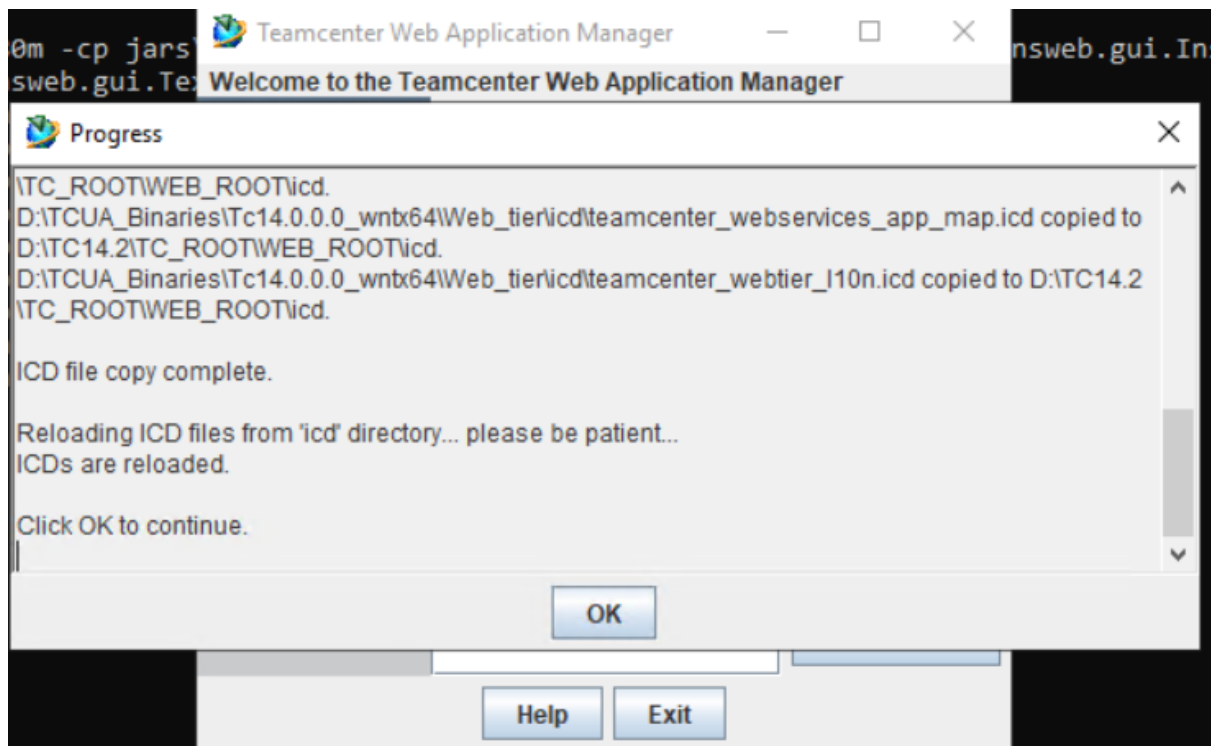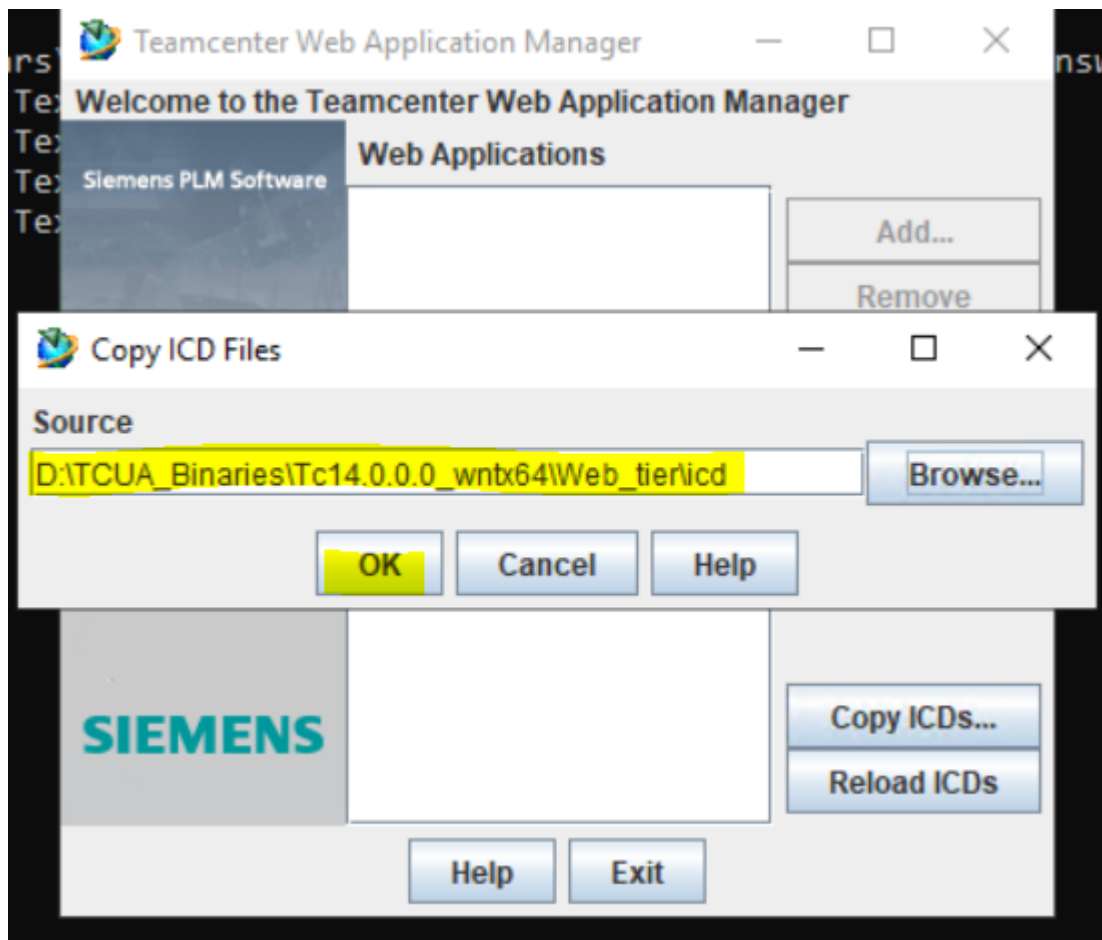

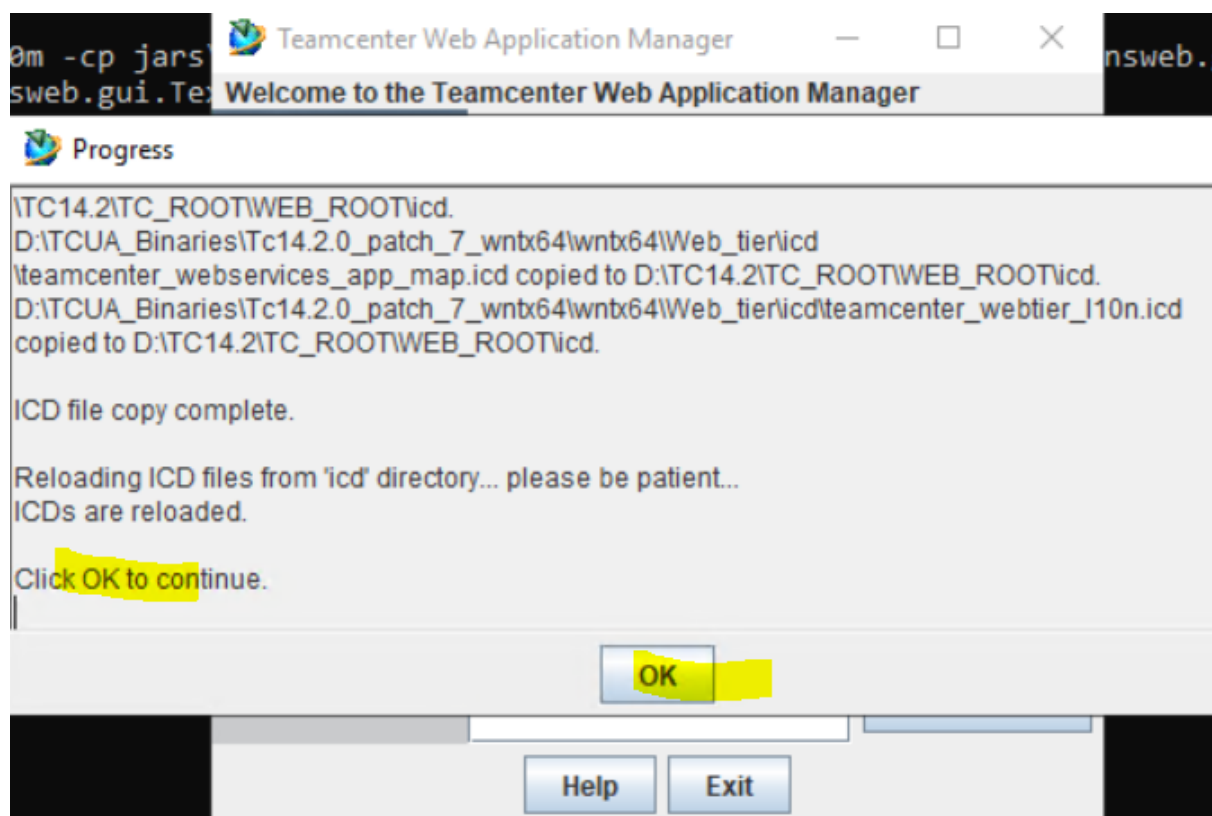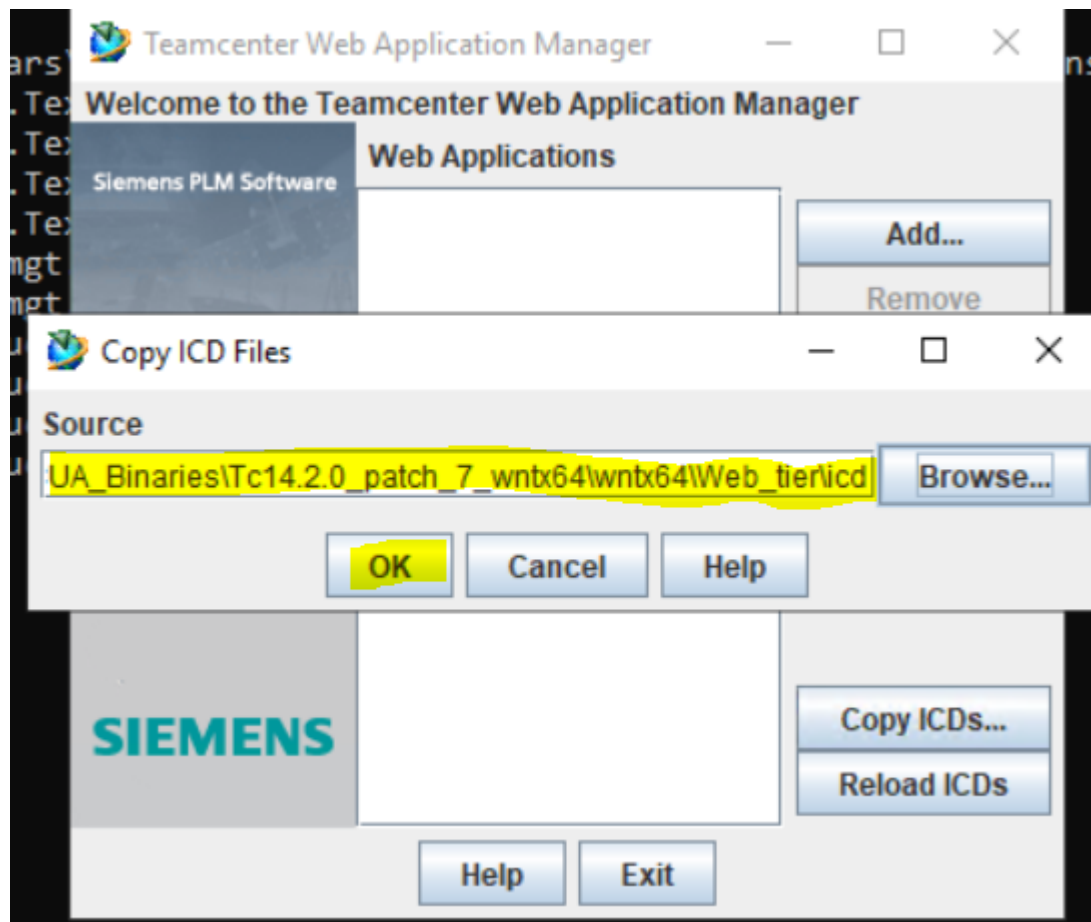


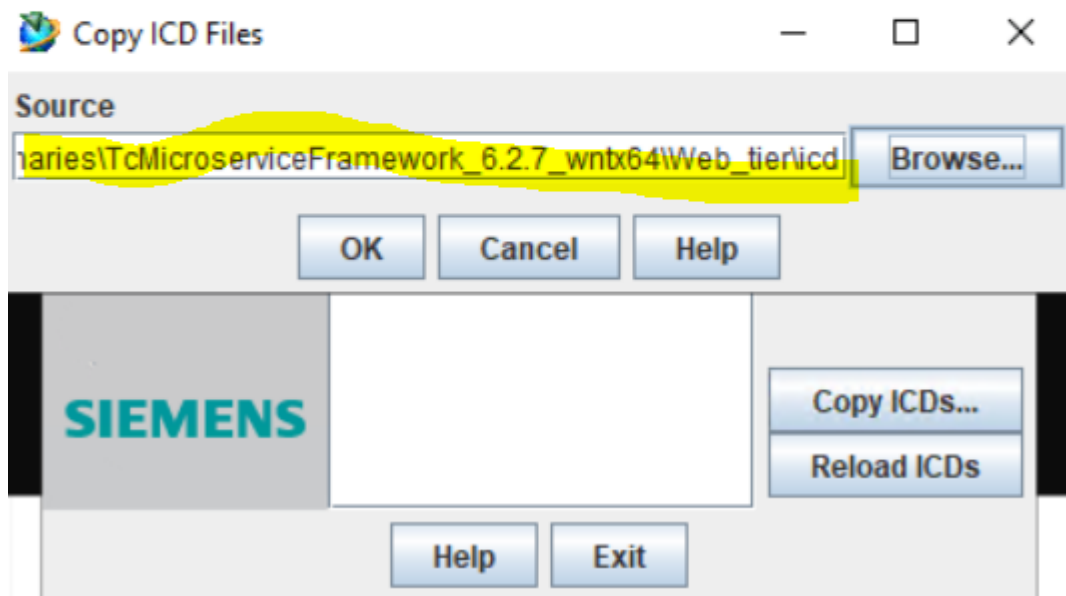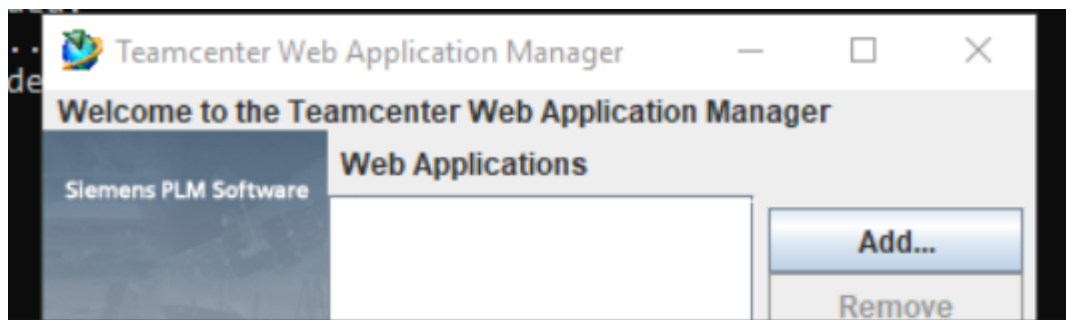

Click Add...

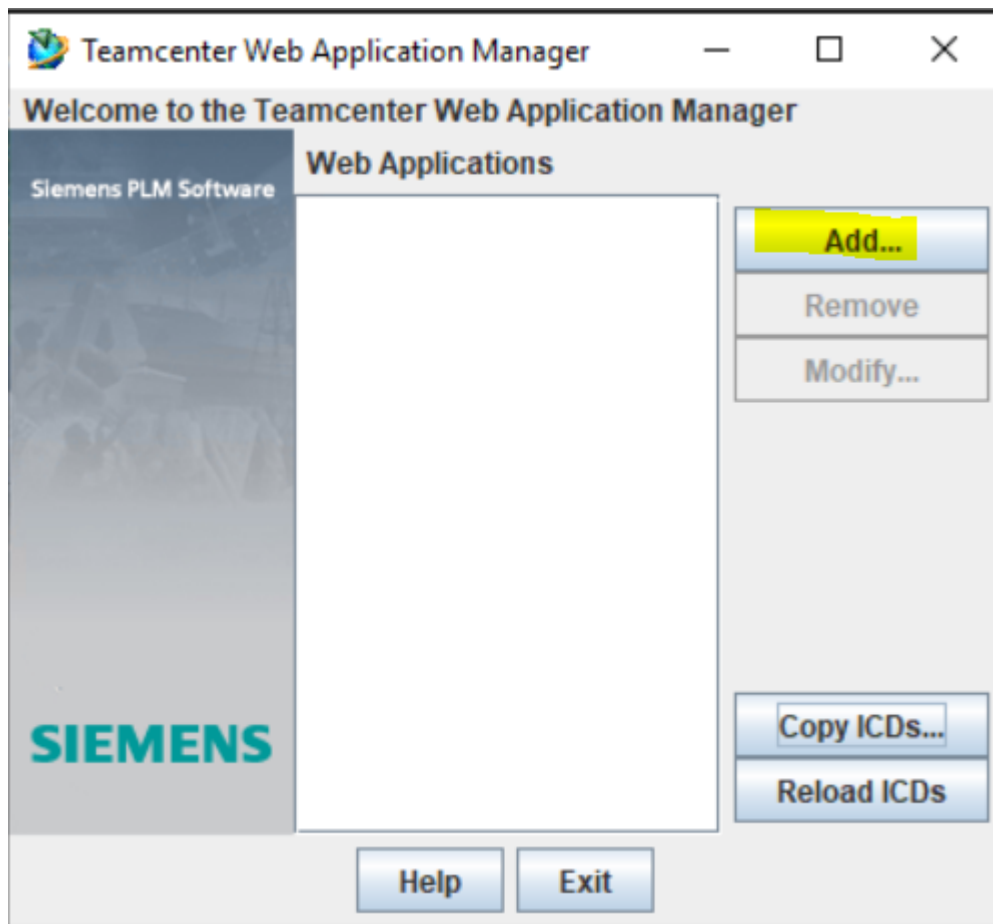

Remove E:\Windows

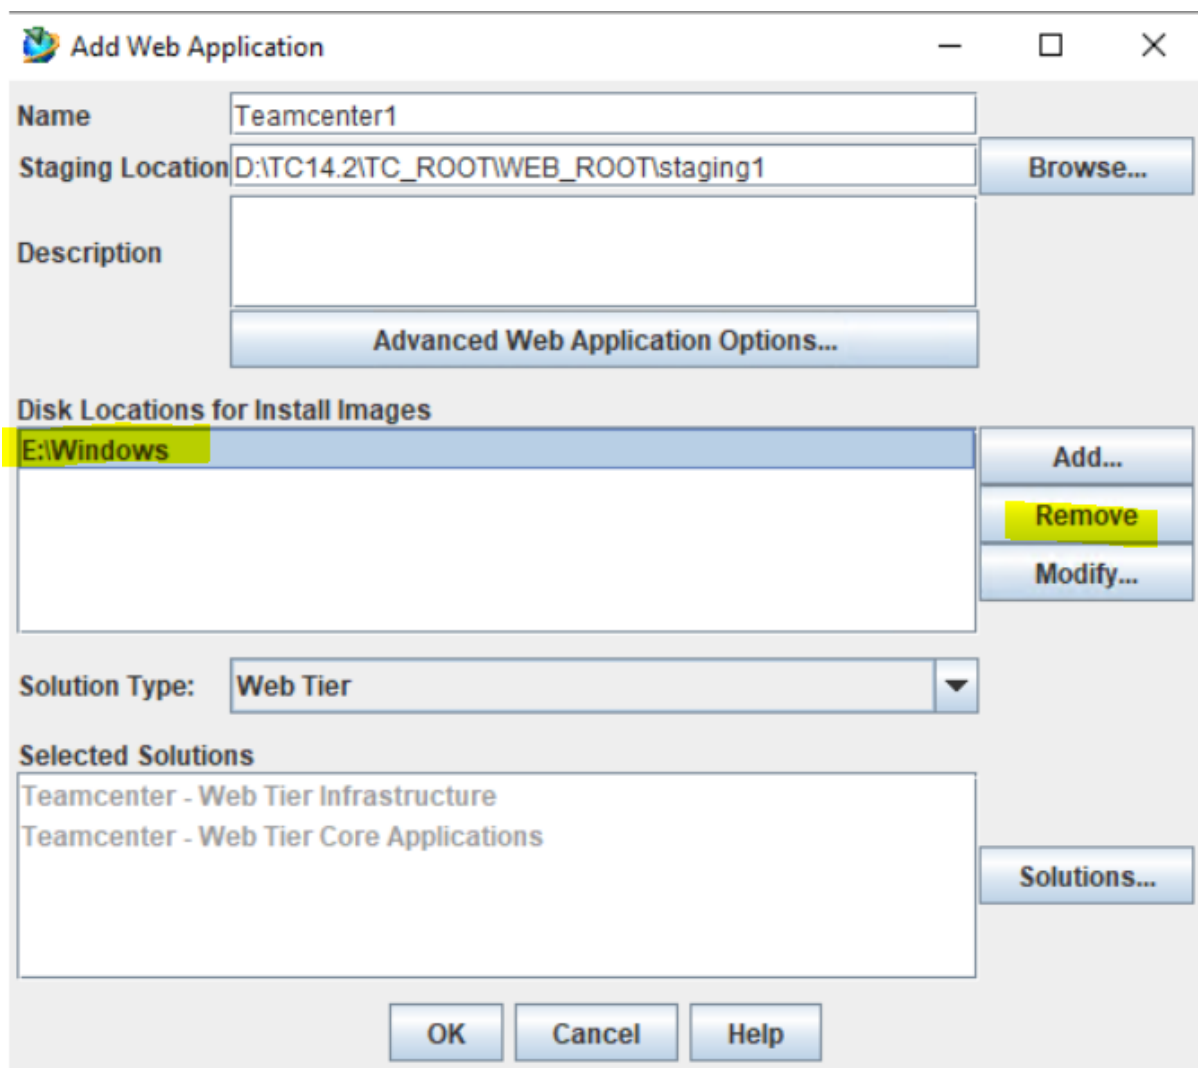

The image shows a Windows-style dialog box titled "Add Web Application". It contains several input fields and buttons. The "Name" field is set to "Teamcenter1". The "Staging Location" field is set to "D:\TC14.2\TC_ROOT\WEB_ROOT\staging1" and has a "Browse..." button next to it. The "Description" field is empty, with an "Advanced Web Application Options..." button below it. The "Disk Locations for Install Images" section has a list box containing "E:\Windows", which is highlighted. To the right of this list are "Add...", "Remove", and "Modify..." buttons. The "Remove" button is highlighted in yellow. Below this is a "Solution Type:" dropdown menu set to "Web Tier". The "Selected Solutions" list box contains "Teamcenter - Web Tier Infrastructure" and "Teamcenter - Web Tier Core Applications", with a "Solutions..." button to its right. At the bottom are "OK", "Cancel", and "Help" buttons.

Add Web Application

Name: Teamcenter1

Staging Location: D:\TC14.2\TC_ROOT\WEB_ROOT\staging1 **Browse...**

Description: **Advanced Web Application Options...**

Disk Locations for Install Images

E:\Windows **Add...** **Remove** **Modify...**


Solution Type: Web Tier


Selected Solutions

Teamcenter - Web Tier Infrastructure
Teamcenter - Web Tier Core Applications **Solutions...**


OK **Cancel** **Help**

Click Add and provide path upto web tier from 14.0, 14.2.0.7 and Microservice Framework kit.

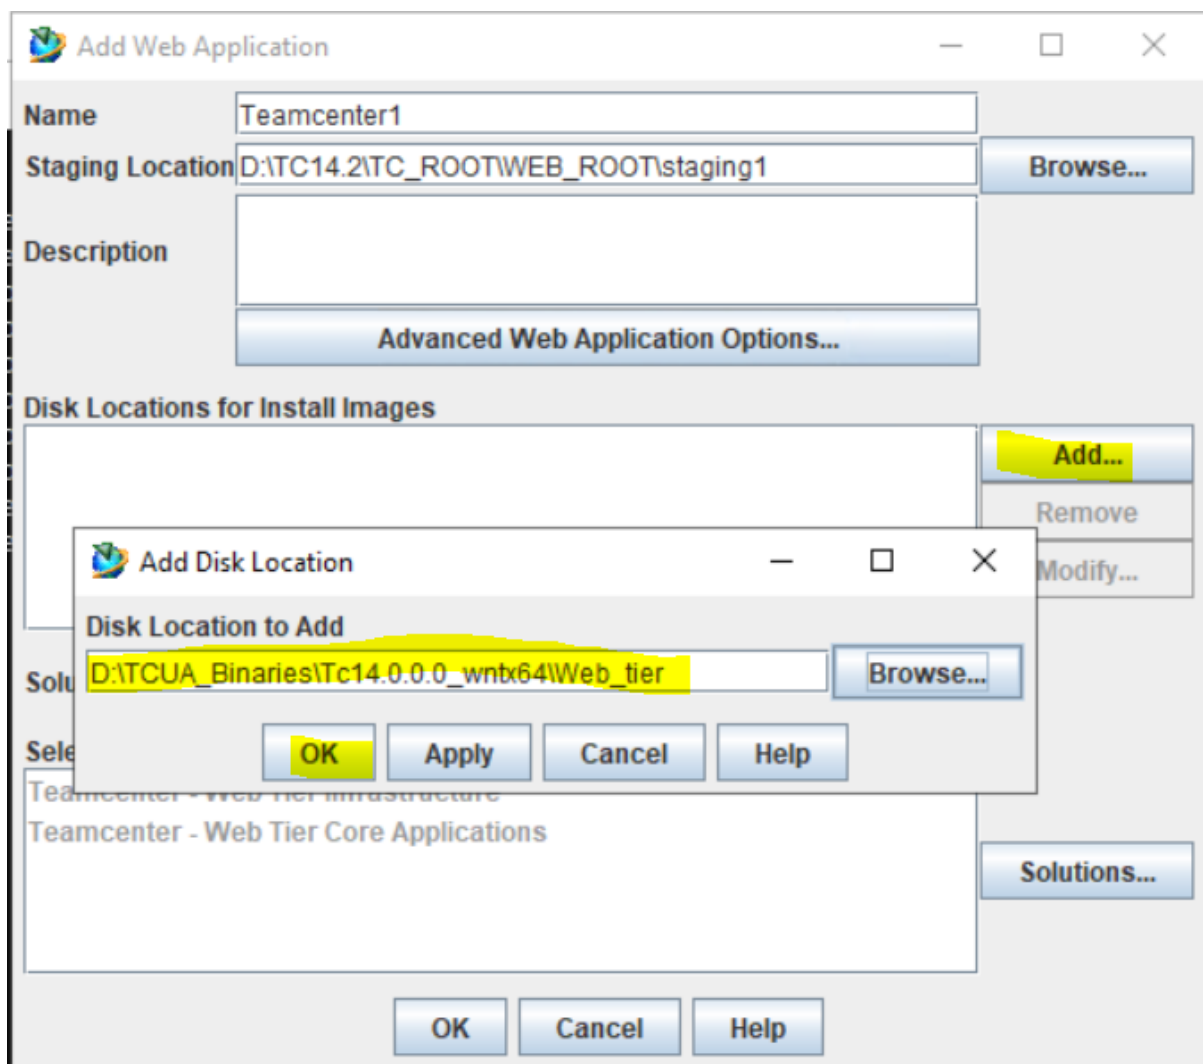


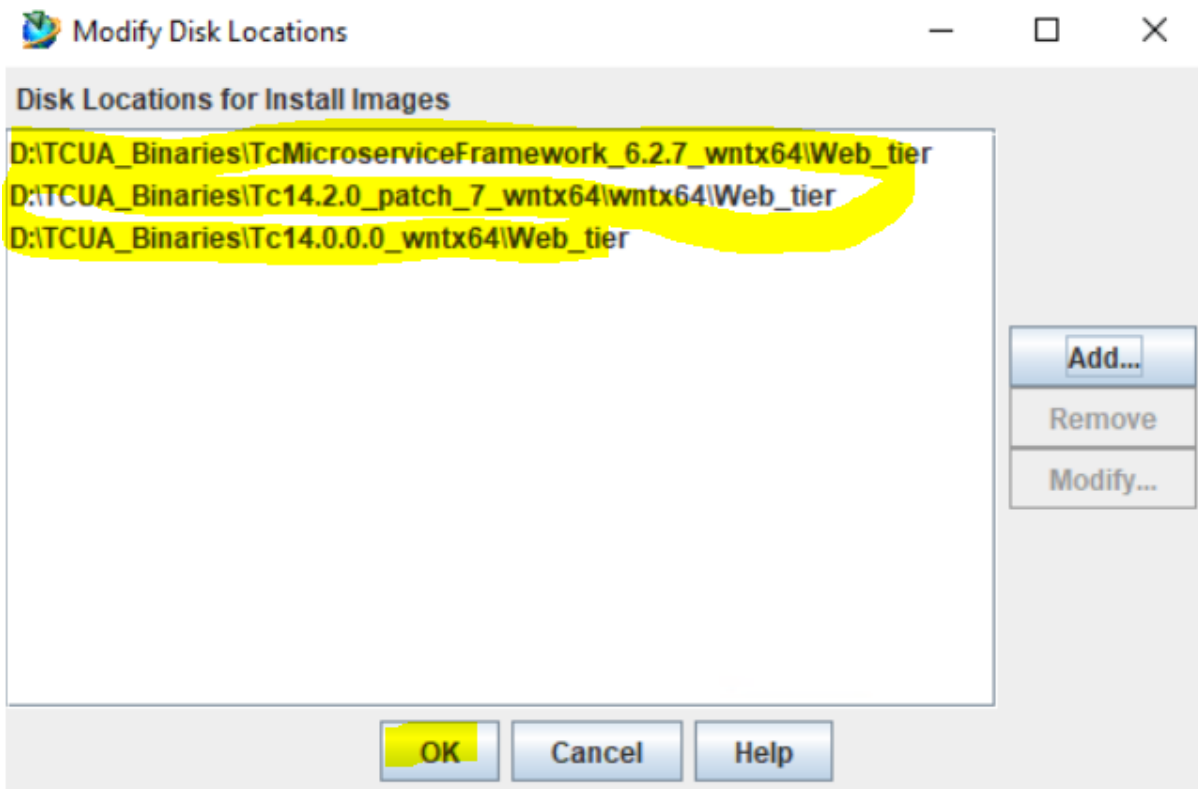

Copy keys.zip from %TC_ROOT%/jwt_config_tool directory to some other place and unzip it. After unzipping, delete zip file. Open keys folder and provide path upto signer_config in addition to above three path.

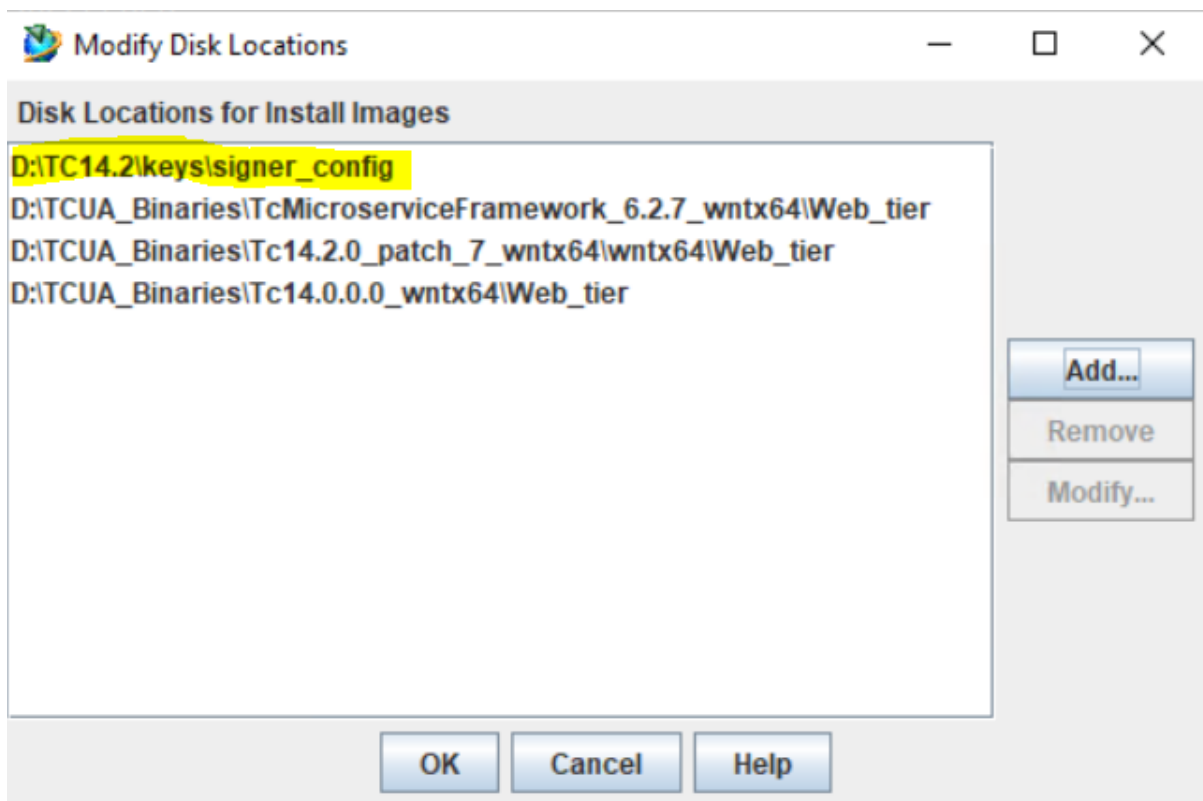

In Add Solutions panel, select 'Teamcenter Microservices'.

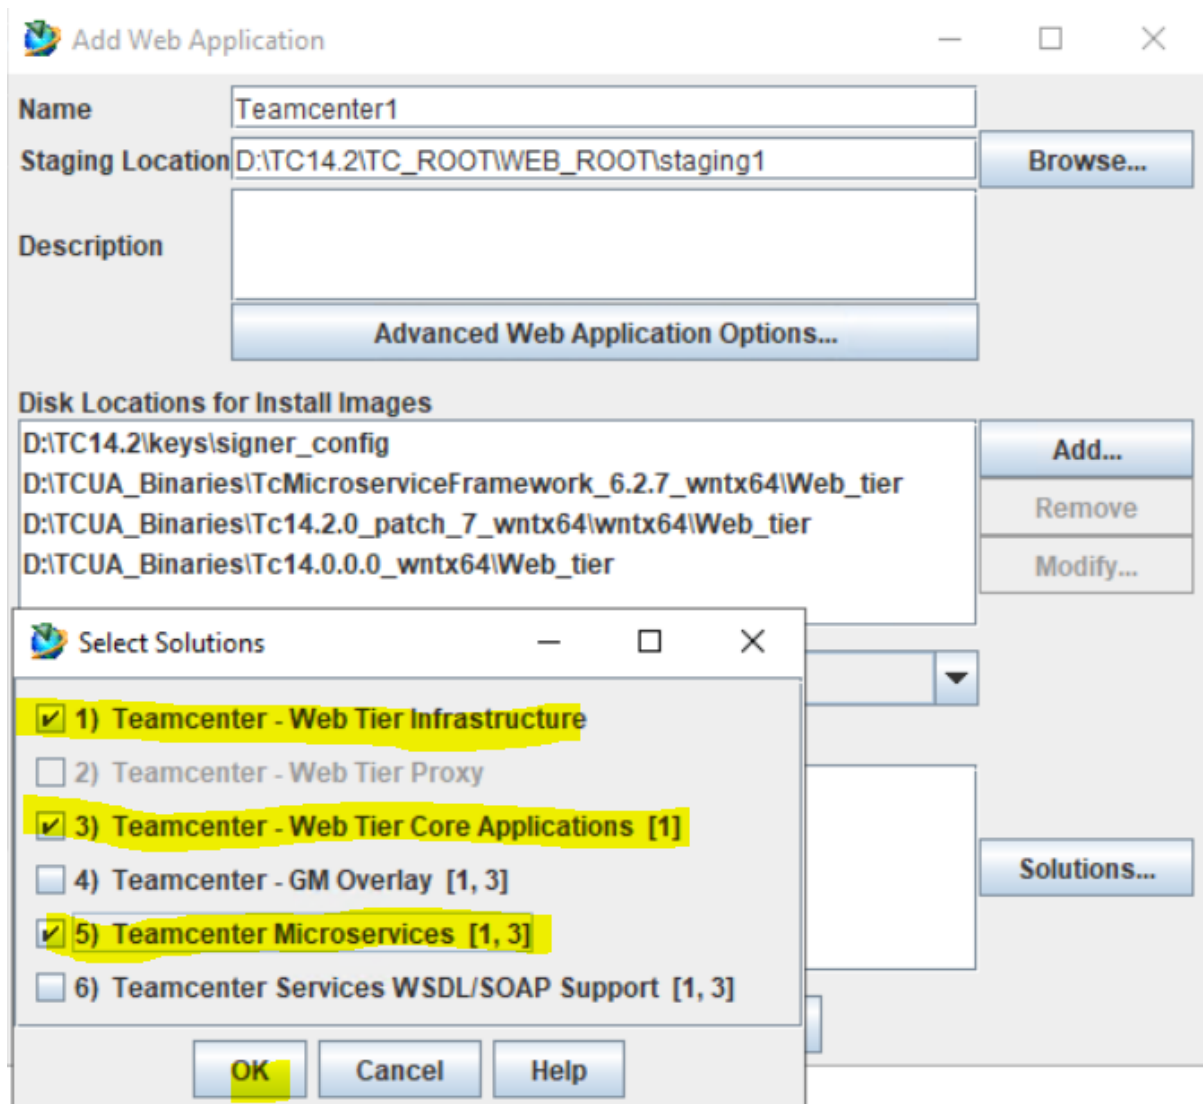

The screenshot displays two overlapping dialog boxes from the Teamcenter software interface.

The background dialog, titled "Add Web Application", contains the following fields and options:

- Name:** Teamcenter1
- Staging Location:** D:\TC14.2\TC_ROOT\WEB_ROOT\staging1 (with a "Browse..." button)
- Description:** (empty text box)
- Advanced Web Application Options...** (highlighted button)
- Disk Locations for Install Images:**
 - D:\TC14.2\keys\signer_config
 - D:\TCUA_Binaries\TcMicroserviceFramework_6.2.7_wntx64\Web
 - D:\TCUA_Binaries\Tc14.2.0_patch_7_wntx64\wntx64\Web_tier
 - D:\TCUA_Binaries\Tc14.0.0.0_wntx64\Web_tier
- Solution Type:** Web Tier
- Selected Solutions:**
 - Teamcenter - Web Tier Infrastructure
 - Teamcenter - Web Tier Core Applications
 - Teamcenter Microservices

The foreground dialog, titled "Advanced Web Application Options", contains the following settings:

- ☒ **Automatically Build Deployable File**
 - Deployable File Name:** tc
- ☐ **Copy Main ICD Files Locally**
- Session Timeout:** 1440
- ☐ **Secure Cookie**
- ☐ **Distributable**

Both dialogs feature "OK", "Cancel", and "Help" buttons at the bottom.

 **Modify Required Context Parameters**

Context Parameters

Name	Value
IS_SSO_ENABLED	false
SSO_APPLICATION_ID	Teamcenter
SSO_LOGIN_SERVICE_URL	http://host/tcssols
LogVolumeName	LogVol1
ManagerClusterID	TcCluster
Server_Manager_URIs	http://simsoftsrvr1:8086/PoolA
TcLocale	en_US
MICROSERVICE_ENABLED	true
MICROSERVICE_ADDRESS	http://simsoftsrvr1:9090

Description for Selected Parameter: Server_Manager_URIs

{http-protocol}://{server manager hostname}:{server manager assignment port}/{server manager pool id}

The server manager assignment port and pool id can be found in TEM Server Manager Communication Configuration Panel.

An example of this parameter is as follows:
http://<server1>:<port1>/PoolA;http://<server2>:<port2>/PoolB

The value must be of type 'STRING'.

OK **Cancel** **Help**

Click OK and war file generation will start. Exit insweb after war file generation is complete.

 **Progress**

Starting generation of web.xml file...

Done with generation of web.xml file...

Starting processing PARAM_FILES/TABLE_FILE tags...

Done with processing PARAM_FILES/TABLE_FILE tags...

Starting generation of mld_log4j.xml at D:\TC14.2\TC_ROOT\WEB_ROOT\staging1\webapp_root...

Done with generation of mld_log4j.xml at D:\TC14.2\TC_ROOT\WEB_ROOT\staging1\webapp_root...

Starting generation of WAR file...

Done with generation of WAR file...

Installation complete.

Click OK to continue.

OK


War file will be located at "D:\TC14.2\TC_ROOT\WEB_ROOT\staging1\deployment" with name tc.war


Deploy this file on Web Application Server (Weblogic 14c aka 14.1.1.0 in this case)

Installation of Weblogic 14C aka 14.1.1.0 and war file deployment in it.

For Weblogic 14c, we require Oracle JDK, hence we will install JDK 11.0.19

Run the JDK exe file as Administrator

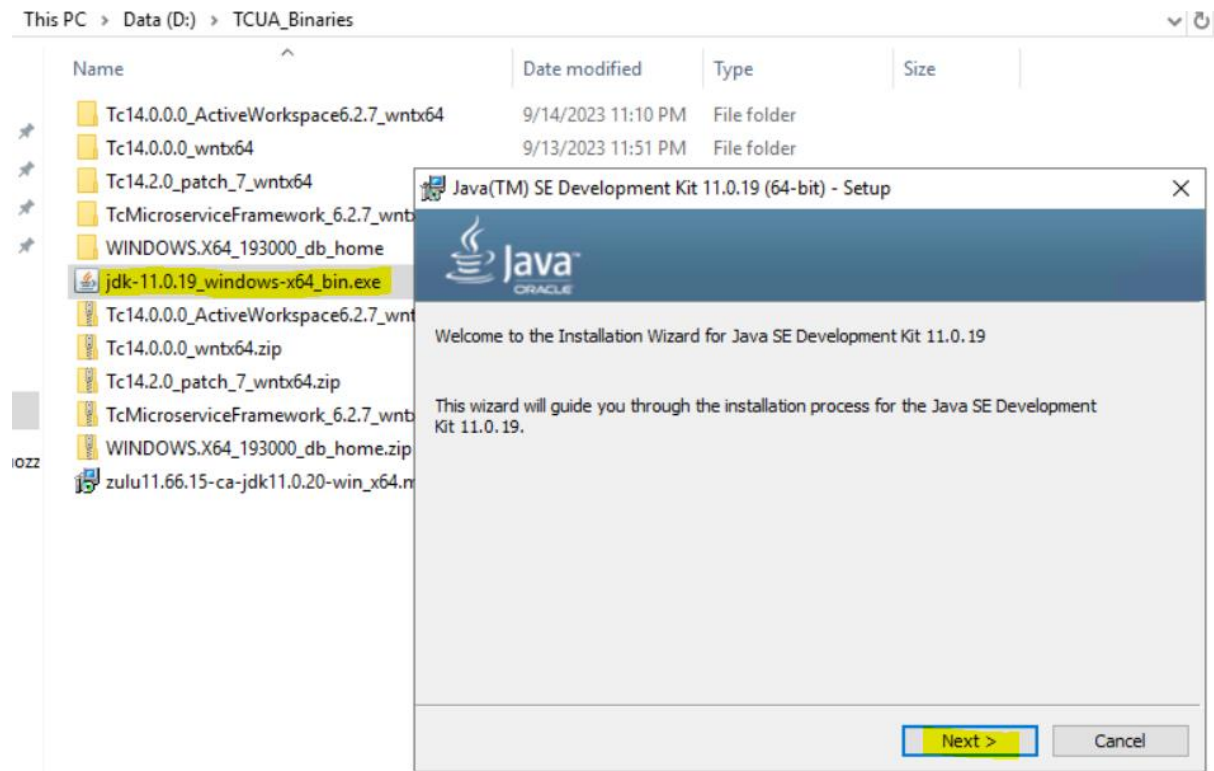

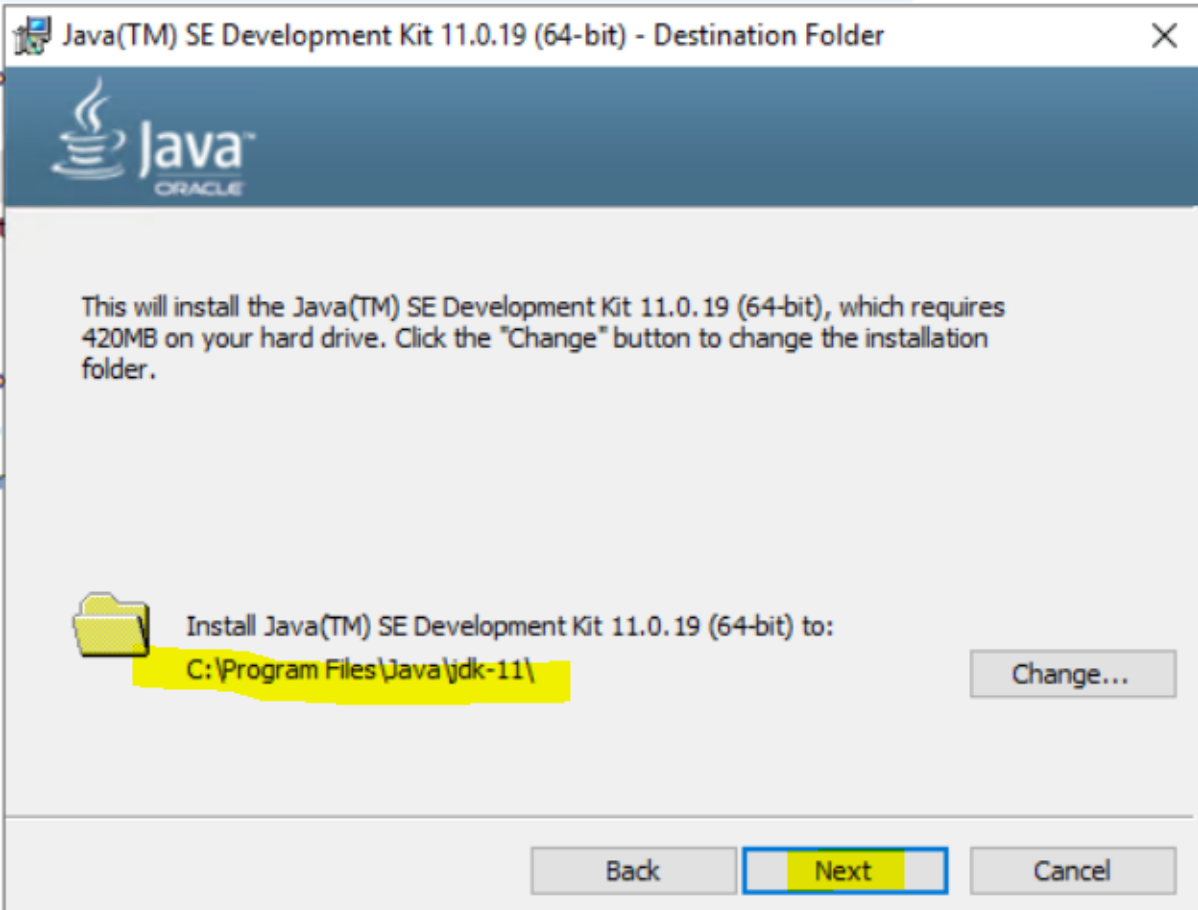



Open administrator command prompt and go to bin directory of JDK Installation "C:\Program Files\Java\jdk-11\bin"

Execute C:\Program Files\Java\jdk-11\bin>java -jar fmw_14.1.1.0.0_wls_lite_generic.jar

```
C:\Program Files\Java\jdk-11>cd bin
C:\Program Files\Java\jdk-11\bin>java -jar D:\TCUA_Binaries\fmw_14.1.1.0.0_wls_lite_generic.jar
```

Welcome

ORACLE
FUSION MIDDLEWARE



- Welcome
- [Auto Updates](#)
- [Installation Location](#)
- [Installation Type](#)
- [Prerequisite Checks](#)
- [Installation Summary](#)
- Installation Progress
- Installation Complete

Welcome to the Oracle Fusion Middleware 14.1.1 WebLogic Server and Coherence Installer.

Use this installer to create a new Oracle home that contains the Oracle WebLogic Server and Oracle Coherence software. You can use this software to configure a WebLogic Server domain for the deployment of Java applications.

For more information, see [Install, Patch, and Upgrade](#) in the Oracle Fusion Middleware documentation library.

Context-sensitive online help is available from the [Help](#) button.

Copyright © 1996, 2020, Oracle and/or its affiliates. All rights reserved.

Help

< Back

Next >

Finish

Cancel

Auto Updates

ORACLE
FUSION MIDDLEWARE



- Welcome
- Auto Updates**
- Installation Location
- Installation Type
- Prerequisite Checks
- Installation Summary
- Installation Progress
- Installation Complete

Skip Auto Updates

☐ Select patches from directory

Location:

☐ Search My Oracle Support for Updates

Username:

Password:

Installation Location

ORACLE[®]
FUSION MIDDLEWARE



- [Welcome](#)
- [Auto Updates](#)
- [Installation Location](#)**
- [Installation Type](#)
- [Prerequisite Checks](#)
- [Installation Summary](#)
- [Installation Progress](#)
- [Installation Complete](#)

Oracle Home:

D:\Weblogic14c

Browse

Feature Sets Installed At Selected Oracle Home: [View](#)

The Oracle Home D:\Weblogic14c will be used for all Oracle Feature Sets in this installation.

This page only shows Feature Sets installed at the selected Oracle Home.
It does not show Feature Sets installed anywhere else.

Help

< Back

Next >

Finish

Cancel

Installation Type

- [Welcome](#)
- [Auto Updates](#)
- [Installation Location](#)
- [Installation Type](#)**
- [Prerequisite Checks](#)
- [Installation Summary](#)
- [Installation Progress](#)
- [Installation Complete](#)

☒ WebLogic Server

- ☐ Coherence
- ☐ Complete with Examples

☒ Oracle Fusion Middleware 14.1.1 WebLogic Server and Coherence 14.1.1.0.0

☒ Core Server

- Core Application Server 14.1.1.0.0
- Coherence Product Files 14.1.1.0.0
- Web 2.0 HTTP Pub-Sub Server 14.1.1.0.0
- WebLogic SCA 14.1.1.0.0
- WebLogic Client Jars 14.1.1.0.0

☒ Administrative Tools

- Administration Console Additional Language Help Files 14.1.1.0.0
- CIE WLS Config 14.1.1.0.0

☒ Database Support

- Third party JDBC Drivers 14.1.1.0.0
- WebLogic Evaluation Database 14.1.1.0.0

☒ Open Source Components

- Fusion Middleware Maven Support 14.1.1.0.0

Help


< Back

Next >

Finish

Cancel

- [Welcome](#)
- [Auto Updates](#)
- [Installation Location](#)
- [Installation Type](#)
- [Prerequisite Checks](#)**
- [Installation Summary](#)
- Installation Progress
- Installation Complete

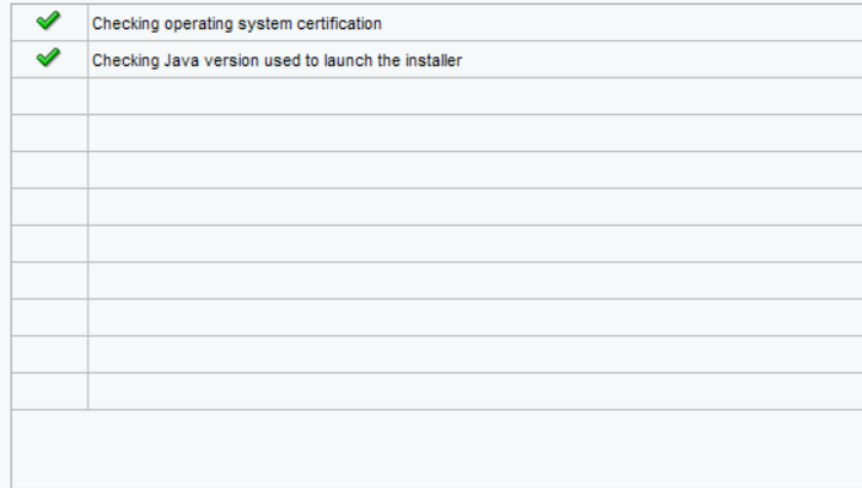[View Log](#)

- Cancel



Installation Summary

- [Welcome](#)
- [Auto Updates](#)
- [Installation Location](#)
- [Installation Type](#)
- [Prerequisite Checks](#)
- [Installation Summary](#)**
- [Installation Progress](#)
- [Installation Complete](#)

Install Oracle Fusion Middleware 14.1.1 WebLogic Server and Coherence

Installation Location

Oracle Home Location: D:\Weblogic14c

Log File Location: C:\Users\DC.TTL\AppData\Local\Temp\2\OraInstall2023-09-15_12-09-41PM\install2023-09-15_12-09-41PM.log

Disk Space

Required: 896 MB

Available: 147390 MB

Feature Sets to Install

Administration Console Additional Language Help Files 14.1.1.0.0

CIE WLS Config 14.1.1.0.0

Core Application Server 14.1.1.0.0

Coherence Product Files 14.1.1.0.0

Web 2.0 HTTP Pub-Sub Server 14.1.1.0.0

WebLogic SCA 14.1.1.0.0

WebLogic Client Jars 14.1.1.0.0

Third party JDBC Drivers 14.1.1.0.0

WebLogic Evaluation Database 14.1.1.0.0

OPatch 13.9.4.2.3

Fusion Middleware Maven Support 14.1.1.0.0

[Save Response File](#)

Select Install to accept the above options and start the installation.

To change the above options before starting the installation, select the option to change in the left pane or use the Back button.

[Help](#)

< [Back](#)

[Next](#) >

Install

[Cancel](#)



Installation Progress

- Welcome
- Auto Updates
- Installation Location
- Installation Type
- Prerequisite Checks
- Installation Summary
- Installation Progress**
- Installation Complete

100%

✓	Prepare
✓	Copy
✓	Generating Libraries
✓	Performing String Substitutions
✓	Linking
✓	Setup
✓	Saving the inventory
✓	Post install scripts

[View Messages](#)

☒ [View Successful Tasks](#)

[View Log](#)



Hardware and Software
Engineered to Work Together


[Help](#)

< Back

Next >

Finish

Cancel

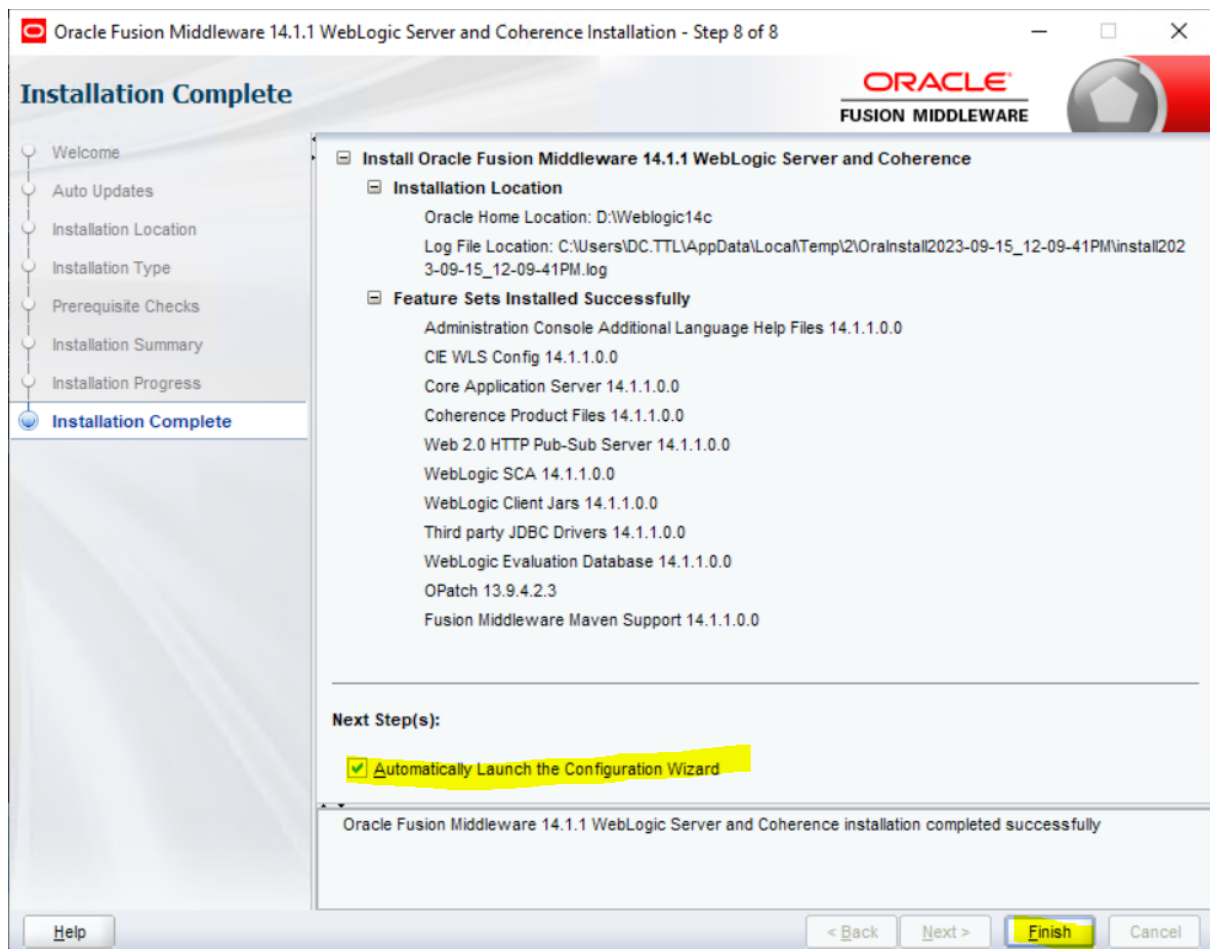

Click 'Finish' and it will launch Configuration Wizard.

C:\Windows\system32\cmd.exe - D:\Weblogic14c\oracle_common\common\bin\config.cmd

Fusion Middleware Configuration Wizard - Page 1 of 8

Configuration Type

ORACLE
FUSION MIDDLEWARE

- Create Domain**
- Templates
- Administrator Account
- Domain Mode and JDK
- Advanced Configuration
- Configuration Summary
- Configuration Progress
- End Of Configuration

What do you want to do?

☒ Create a new domain

☐ Update an existing domain

Domain Location:

Create a new domain.

Templates



[Create Domain](#)
Templates
[Administrator Account](#)
[Domain Mode and JDK](#)
[Advanced Configuration](#)
[Configuration Summary](#)
Configuration Progress
End Of Configuration

☒ **Create Domain Using Product Templates:**

Filter Templates:

☐ Include all selected templates ☐ Include all previously applied templates

Available Templates

- ☒ **Basic WebLogic Server Domain - 14.1.1.0.0 [wlserver] ***
- ☐ WebLogic Advanced Web Services for JAX-RPC Extension - 14.1.1.0.0 [oracle_common]
- ☐ WebLogic Advanced Web Services for JAX-WS Extension - 14.1.1.0.0 [oracle_common]
- ☐ WebLogic JAX-WS SOAP/JMS Extension - 14.1.1.0.0 [oracle_common]
- ☐ WebLogic Coherence Cluster Extension - 14.1.1.0.0 [wlserver]

☐ **Create Domain Using Custom Template:**

Template location:

Fusion Middleware Configuration Wizard - Page 3 of 8

Administrator Account

ORACLE
FUSION MIDDLEWARE

Create Domain
Templates
Administrator Account
Domain Mode and JDK
Advanced Configuration
Configuration Summary
Configuration Progress
End Of Configuration

Name: weblogic
Password:
Confirm Password:

Must be the same as the password. Password must contain at least 8 alphanumeric characters with at least one number or special character.

Help < Back Next > Finish Cancel

Username: weblogic

Password: weblogic123

ORACLE®
FUSION MIDDLEWARE

Domain Mode and JDK

Create Domain

Templates

Administrator Account

Domain Mode and JDK

Advanced Configuration

Configuration Summary

Configuration Progress

End Of Configuration

Domain Mode

☒ Development

Utilize boot.properties for username and password, and poll for applications to deploy.

☐ Production

Require the entry of a username and password, and do not poll for applications to deploy.

JDK

☒ Oracle HotSpot 11.0.19 C:\PROGRA~1\Java\jdk-11

☐ Other JDK Location:

Help

< Back

Next >

Finish

Cancel



Advanced Configuration

- [Create Domain](#)
- [Templates](#)
- [Administrator Account](#)
- [Domain Mode and JDK](#)
- [Advanced Configuration](#)**
- [Administration Server](#)
- [Configuration Summary](#)
- [Configuration Progress](#)
- [End Of Configuration](#)

☒ **Administration Server**

Modify Settings

☐ **Node Manager**

Configure Node Manager

☐ **Topology**

Add, Delete or Modify Settings for Managed Servers, Clusters and Coherence

[Help](#)

< Back

Next >

Finish

Cancel

Administration Server



- Create Domain
- Templates
- Administrator Account
- Domain Mode and JDK
- Advanced Configuration
- Administration Server**
- Configuration Summary
- Configuration Progress
- End Of Configuration

Server Name

Listen Address

Listen Port

Enable SSL ☐

SSL Listen Port

The name must not be null or empty and may not contain any : , = * ? % / _cloned.

Help

< Back

Next >

Finish

Cancel

Configuration Summary

- Create Domain
- Templates
- Administrator Account
- Domain Mode and JDK
- Advanced Configuration
- Administration Server
- Configuration Summary**
- Configuration Progress
- End Of Configuration



ORACLE
FUSION MIDDLEWARE

View: Deployment

- base_domain (D:\Weblogic14c\user_projects\domains\bas
 - AdminServer
 - AdminServer

Name	Basic WebLogic Server Domain
Description	Create a basic WebLogic Server domain
Author	Oracle Corporation
Location	D:\Weblogic14c\wlserver\common\temp

Select **Create** to accept the above options and start creating and configuring a new domain. To change the above configuration before starting Domain Creation, go back to the relevant page by selecting its name in the left pane, or by using the **Back** button.

Help

< Back Next > **Create** Cancel



Configuration Progress

- Create Domain
- Templates
- Administrator Account
- Domain Mode and JDK
- Advanced Configuration
- Administration Server
- Configuration Summary
- Configuration Progress**
- End Of Configuration

100%

- ✓ Copy Unprocessed Artifacts
- ✓ Security Processing
- ✓ Artifacts Generation
- ✓ String Substitution
- ✓ Post Processing


Help

< Back


Next >

Finish

Cancel

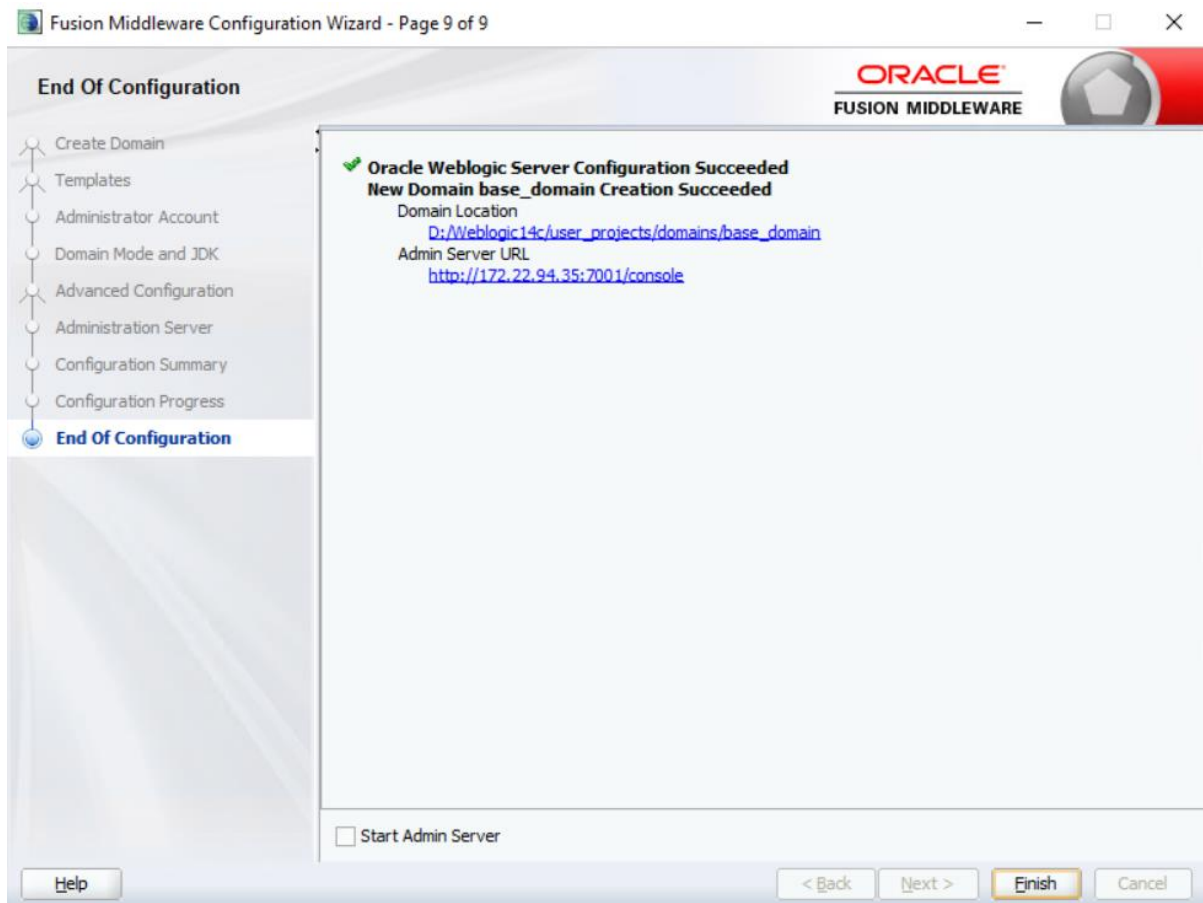

Deploy the file in Weblogic

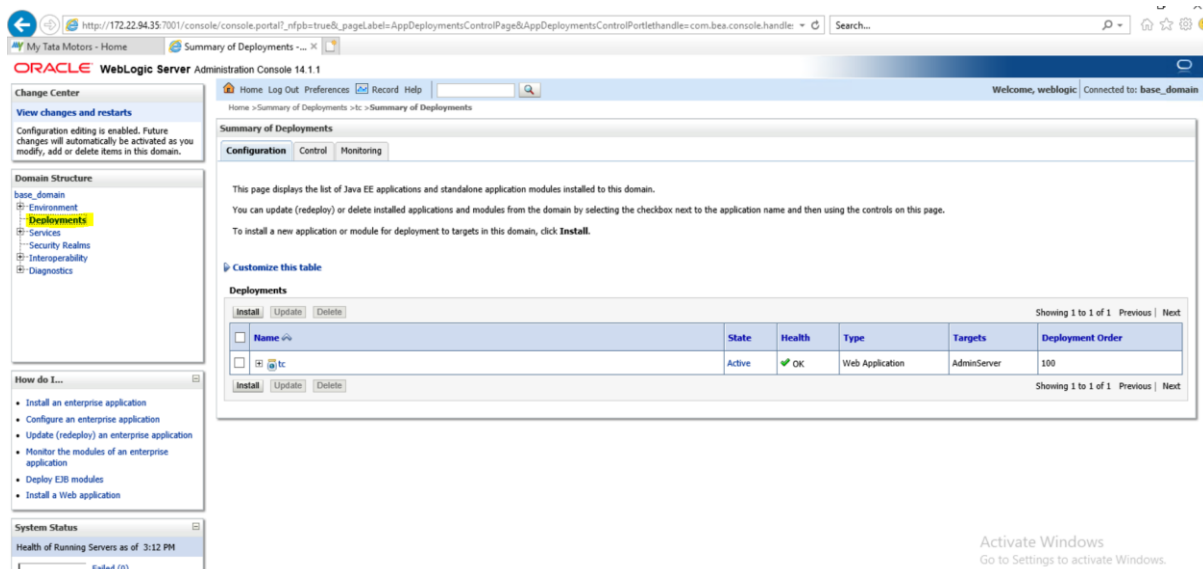

Publish to Gateway

Launch tem.bat and proceed till 'Feature Maintenance' panel.

