


SSD_High Precision Clock Description

The steps to turn on the high-precision clock are as follows:

1. Open highres in the config of the project

```
CHIP = i2m
BOARD = 011A
BOARD_NAME = SSC011A-S01A
PRODUCT = nvr
TOOLCHAIN = glibc
TOOLCHAIN_VERSION = 8.2.1
KERNEL_VERSION = 4.9.84
LIBC = glibc-2.28
BUSYBOX = busybox-1.20.2-arm-linux-gnueabi-hf-glibc-8.2.1-dynamic
KERNEL_CONFIG = glibc
IMAGE_CONFIG = spinand.ubifs.p2.partition.config
CUSTOMER_OPTIONS = 011a.201_options.mk
CUSTOMER_TAILOR = nvr_i2m_display_glibc_tailor.mk
MMAP = MMAP_I2M_128M.h
MHAI = i2m
MERGE_BOOT = TRUE
BOOTLOGO_FILE = sigmastar1024_600.jpg
#BOOTLOGO_ADDR = E_LX_FB
LOGO_ADDR = 0x7D00000
BOOTLOGO_BUFSIZE = 0x200000
PANEL_NAME = SAT070CP50
PANEL_WIDTH = 1024
PANEL_HEIGHT = 600
EXBOOTARGS =
KERNEL_BOOT_ENV = LX_MEM=$(KERNEL_MEMLN) mma_heap=mma_heap_name0,miu=0,sz=0x3800000 mma_memblock_remove=1 highres=on
TOOLCHAIN_REL = arm-linux-gnueabi-hf-
```

2. Open CONFIG_HIGH_RES_TIMERS in kernel config

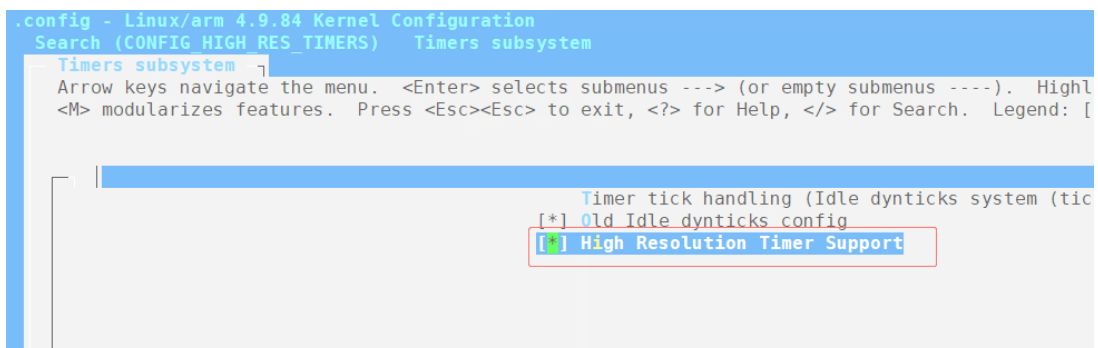

If you want to turn off the high-precision clock, you can change highres to off in the project's config.

```

MERGE_BOOT = TRUE
BOOTLOGO_FILE = sigmastar1024_600.jpg
#BOOTLOGO_ADDR = E_LX_FB
LOGO_ADDR = 0x7D00000
BOOTLOGO_BUFSIZE = 0x200000
PANEL_NAME = SAT070CP50
PANEL_WIDTH = 1024
PANEL_HEIGHT = 600
EXBOOTARGS =
KERNEL_BOOT_ENV = LX MEM=$(KERNEL_MEMLN) mma_heap=mma_heap_name0,miu=0,sz=0x3800000 mma_memblock_remove=1 highres=off
TOOLCHAIN_REL = arm-linux-gnueabi-hf-?

```

You can `cat /proc/timer_list` check whether the high-precision clock is turned on.

```

/mnt/strace # cat /proc/timer_list
Timer List Version: v0.8
HRTIMER_MAX_CLOCK_BASES: 4
now at 44156289416763 nsecs
CONFIG_HZ: 100

cpu: 0
clock 0:
  .base:      c374b540
  .index:     0
  .resolution: 10000000 nsecs
  .get_time:  ktime_get
active timers:
#0: <c140ff40>, hrtimer_wakeup, S:01
# expires at 44156290021929-44156290071929 nsecs [in 605166 to 655166 nsecs]
#1: <c374b878>, watchdog_timer_fn, S:01
# expires at 44156310000000-44156310000000 nsecs [in 20583237 to 20583237 nsecs]
#2: def_rt_bandwidth, sched_rt_period_timer, S:01
# expires at 44156320000000-44156320000000 nsecs [in 30583237 to 30583237 nsecs]
#3: <c15elac0>, hrtimer_wakeup, S:01
# expires at 44158740060762-44158750060758 nsecs [in 2450643999 to 2460643995 nsecs]
#4: sched_clock_timer, sched_clock_poll, S:01
# expires at 48378511621605-48378511621605 nsecs [in 4222222204842 to 4222222204842 nsecs]
clock 1:
  .base:      c374b560
  .index:     1
  .resolution: 10000000 nsecs
  .get_time:  ktime_get_real

```