

Quantum CORDIC — Arcsine on a Budget

Iain Burge

SAMOVAR, Institut Polytechnique
de Paris, Palaiseau, France
iain-james.burge@telecom-sudparis.eu

Michel Barbeau

Carleton University, School
of Computer Science, Ottawa, Canada
barbeau@scs.carleton.ca

Joaquin Garcia-Alfaro

SAMOVAR, Institut Polytechnique
de Paris, Palaiseau, France
joaquin.garcia_alfaro@telecom-sudparis.eu

Abstract—This work introduces a quantum algorithm for computing the function arcsine, with arbitrary accuracy. We leverage a technique from embedded computing and field-programmable gate arrays, called COordinate Rotation Digital Computer (CORDIC). CORDIC is a family of iterative algorithms that, in a classical context, can approximate various trigonometric, hyperbolic, and elementary functions using only bit shifts and additions. Adapting CORDIC to the quantum context is non-trivial, as the algorithm traditionally uses several non-reversible operations. We detail a method for CORDIC that avoids such non-reversible operations. We propose an approach to calculate the arcsine function reversibly with CORDIC. For n bits of precision, our method has space complexity of order n qubits, a layer count in the order of n times $\log n$, and a CNOT count in the order of n squared. This primitive function is a required step for the Harrow–Hassidim–Lloyd (HHL) algorithm, is necessary for quantum digital-to-analog conversion, can simplify a quantum speed-up for Monte-Carlo methods, and has direct applications in the quantum estimation of Shapley values.

I. INTRODUCTION

The problem of quantum digital-to-amplitude conversion [8] is an essential step in various quantum algorithms, including Harrow–Hassidim–Lloyd (HHL) — a quantum algorithm for solving linear equations [5], a quantum speed-up for Monte Carlo methods [9], and a quantum algorithm for Shapley value estimation [1]. However, to efficiently perform this conversion it is necessary to calculate inverse trigonometric functions, which is computationally expensive [8]. As quantum computation is in its early stages, it is valuable to consider techniques used in early classical computing intended for weak hardware. In particular, this work adapts the classical CORDIC algorithm for $\arcsin^1$ to the quantum setting.

Section II presents related work. Sections III and IV provide preliminaries to our problem, and introduces the approach of classical CORDIC to approximate $\arcsin$ on minimal hardware. Section V translates the approach to a quantum setting. Section VI demonstrates the use of quantum CORDIC to perform a quantum digital-to-analogue transformation. Section VII gives a sketch proof of the time and space complexity of quantum CORDIC and provides simulation results. Section VIII concludes the work.

II. RELATED WORK

There have been a few proposed algorithms for the calculation of arcsine on quantum computers. For instance, Häner et al. [4] leverages quantum parallelism to perform piecewise

polynomial approximations of a wide range of functions. It can be seen as a promising solution that scales well in precise situations, e.g., more than 32 bits. The approach is flexible, but may not be ideal in the short term, since it requires some memory access, a fair number of multiplications, and square rooting for the extreme portions of $\arcsin x$, i.e., $x \in [-1, -0.5] \cup [0.5, 1]$. There also exists the quantum function-value binary expansion method which performs a binary search to approximate $\arcsin x$, among other elementary functions [13]. The solution is broadly applicable and has some interesting parallels to the CORDIC algorithm. However, the arcsine implementation requires a squaring operation per bit of output, which is difficult to implement in the near term.

The above techniques are valuable for various applications when sufficient hardware is available. For instances where we do not have those resources available, we consider a technique from early computing. In the late 1950s, Volder [11] introduced the CORDIC algorithm to solve an important family of trigonometric equations using the underpowered hardware of the time. This was later generalized to a single algorithm that solves various elementary functions, including multiplication, division, the trigonometric functions, $\arctan$, the hyperbolic trigonometric functions, $\ln$, $\exp$, and square root [12]. A positive trait is that many of these operations can exist with the same architecture by leveraging simple parameters [6]. CORDIC has been further modified to approximate various other functions, including our target function, $\arcsin$ [7].

III. PRELIMINARIES

Suppose you have the following $(n + 1)$ -qubit quantum state:

$$|\phi\rangle = \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_{\text{in}} |0\rangle_{\text{out}},$$

where $N = 2^n$, the in register has size n , the out register is of size one, and h_k is the fixed point number $k2^{-n}$. A particularly useful transformation on this state is given by the following equation:

$$U|\phi\rangle = \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_{\text{in}} \left(\sqrt{1-h_k} |0\rangle + \sqrt{h_k} |1\rangle \right)_{\text{out}}, \quad (1)$$

which encodes the binary values h_k into the probability amplitudes of the output register. This transformation is an important instance of quantum digital-to-analog conversion [8].

A fast solution to this problem is valuable in multiple algorithms. For instance, a quantum algorithm for approximating Shapley values [1] could leverage this transformation to

¹Conventionally, the name of the function is *acsine*, while the function itself is written *arcsin*.

simplify the state preparation step. Another important example is the quantum speedup of Monte Carlo methods [9] which requires the transformation W , defined as:

$$|x\rangle_{\text{in}} |0\rangle_{\text{out}} \xrightarrow{W} |x\rangle_{\text{in}} \left(\sqrt{1 - \Phi(x)} |0\rangle + \sqrt{\Phi(x)} |1\rangle \right)_{\text{out}}.$$

where Φ is a function from binary strings to the interval from zero to one. This can be translated easily to our transformation.

We split the computation into two steps, where we first implement a reversible algorithm to compute Φ in the computational basis, and then apply our transformation. Take register in to have m qubits, the register aux to have n qubits, and the register out to have one qubit. We first apply the unitary V using the in register as input and outputting the n -bit approximate result $\tilde{\Phi}$ to aux , as follows:

$$|x\rangle_{\text{in}} |0\rangle_{\text{aux}} |0\rangle_{\text{out}} \xrightarrow{V} |x\rangle_{\text{in}} |\tilde{\Phi}(x)\rangle_{\text{aux}} |0\rangle_{\text{out}}.$$

where $|x\rangle_{\text{in}}$ is a computational basis vector, and $\tilde{\Phi}(x)$ is an n bit approximation of $\Phi(x)$. Next we perform U , Equation (1), on the resulting aux and out register giving,

$$|x\rangle_{\text{in}} |\tilde{\Phi}(x)\rangle_{\text{aux}} \left(\sqrt{1 - \tilde{\Phi}(x)} |0\rangle + \sqrt{\tilde{\Phi}(x)} |1\rangle \right)_{\text{out}}.$$

Finally, to restore the aux register to its initial state, we apply the V^{-1} transformation. In summary, we can solve the problem using a reversible classical algorithm implementation of Φ . We complete the process by encoding the result into the probability amplitude of our output bit.

Another practical use case is as a step of the HHL algorithm [5]. In this case, reciprocal eigenvalues are encoded as binary strings in a superposition. An essential step is to encode the reciprocals of the eigenvalues in the probability amplitudes of an output bit. In particular, we can apply a transformation closely related to U from Equation (1). Hence, an efficient algorithm to implement the transformation U , has immediate benefits to foundational problems.

There are a few naive approaches to implementing the transformation U , Equation (1). For example, one to use a lookup table, where each possible input $|h_k\rangle_{\text{in}}$ is separately implemented, but this would require exponential circuit depth. qRAM could be leveraged [3], however it would require exponential space. These approaches could be combined with linear interpolation to perform well at very low precision, but they do not scale well for our suggested applications.

With some naive methods out of the way, we examine a less trivial direction that illustrates the main challenge solved by this paper. Consider the following state,

$$|\psi_0\rangle = \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_{\text{in}} |0\rangle_{\text{aux}} |0\rangle_{\text{out}}.$$

where in and aux are n -qubit registers, each representing two's complement, fixed point integers in the range $[-2, 2)$ of the form $x_0 x_1 x_2 \dots x_{n-1}$ where x_0 is the sign bit, and out is a single qubit register. We require h_k to be in range $[0, 1)$, meaning if $k > N/4$ then $\alpha_k = 0$. Suppose we apply the function $\arcsin \sqrt{\cdot}$ where in is the input register, and aux

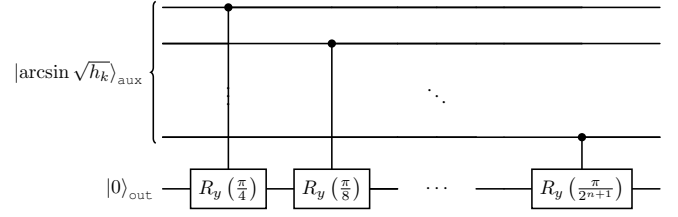


Fig. 1: Unitary transformation R which encodes the binary value of the aux register into the output register. Define $R_y(\omega) = (\cos \omega, -\sin \omega; \sin \omega, \cos \omega)$.

is the output register. Applying this unitary, which we call F , yields,

$$F|\psi_0\rangle = |\psi_1\rangle = \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_{\text{in}} |\arcsin \sqrt{h_k}\rangle_{\text{aux}} |0\rangle_{\text{out}}.$$

Suppose now that we apply the quantum circuit R from Figure 1. This would give us state,

$$R|\psi_1\rangle = |\psi_2\rangle = \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_{\text{in}} |\arcsin \sqrt{h_k}\rangle_{\text{aux}} \cdot \left(\cos(\arcsin \sqrt{h_k}) |0\rangle + \sin(\arcsin \sqrt{h_k}) |1\rangle \right)_{\text{out}}.$$

Using trigonometry identities, we have that,

$$|\psi_2\rangle = \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_{\text{in}} |\arcsin \sqrt{h_k}\rangle_{\text{aux}} \cdot \left(\sqrt{1 - h_k} |0\rangle + \sqrt{h_k} |1\rangle \right)_{\text{out}}.$$

Uncomputing $\arcsin \sqrt{\cdot}$ by performing F^{-1} , we get our desired state, Equation (1). This approach transforms our previous challenge into the problem of computing arcsin reversibly. This work describes a method to achieve this task efficiently.

IV. CLASSICAL CORDIC FOR ARCSINE

Algorithm 1 CORDIC Arcsine

```

1: procedure ARCSIN( $t$ , #iter)  $\triangleright t \in [-1, 1] \triangleright s(z) = 1$  if
    $z < 0$  else  $s(z) = 0$ 
2:    $\text{ang} \leftarrow 0, x \leftarrow 1, y \leftarrow 0, t \leftarrow t, d \leftarrow 0$ 
3:   for  $i = 1, i < \text{\#iter}, ++i$  do
4:      $d_i \leftarrow [s(x) \wedge s(t - y)] \oplus s(x) \oplus [s(x) \wedge s(y)] \oplus s(t - y)$ 
5:     if  $d_i$  then  $x, y \leftarrow y, x$ 
6:     for  $\_$  in range(2) do
7:        $x, y \leftarrow x - 2^{-i}y, y + 2^{-i}x$ 
8:     if  $d_i$  then  $x, y \leftarrow y, x$ 
9:      $t \leftarrow (1 + 2^{-2i})t$ 
10:     $\text{ang} \leftarrow \text{ang} + (-1)^{d_i} 2 \arctan 2^{-i}$ 
11:  return  $\text{ang}$ 

```

Let us give a brief insight into how CORDIC works. To begin, there is an implicit two-dimensional goal vector that encodes the problem. The exact vector is unknown, but we have a method to compare it to other vectors. A starting vector rotates towards the goal in increasingly small discrete steps, picking

the direction of rotation based on our comparison method, until it converges with satisfactory error. It is possible to avoid performing full multiplications during the rotations through the use of pseudo-rotations, rotations with a small stretch. See Figure 2 for an explicit example.

Our proposed method is based on Mazenc et al.'s algorithm [7]. In this work, Step 1 is slightly improved to better handle an edge case. The procedure is fully described in Algorithm 1. Each iteration follows the steps below:

With initial values: $\theta_0 = 0, x_0 = 1, y_0 = 0, t_0 = t$. The algorithm iteratively repeats the following steps, let i be the index of the current iteration,	
1)	Define $s(z) = 1$ if $z < 0$ and equal to 0 otherwise, $d_i = [s(x_i) \wedge s(t_i - y_i)] \oplus s(x_i) \oplus [s(x_i) \wedge s(y_i)] \oplus s(t_i - y_i).$
2)	If $d_i = 1$, then swap x_i and y_i .
3)	Perform pseudo-rotation: $\begin{pmatrix} x_{i+1} \\ y_{i+1} \end{pmatrix} = \begin{pmatrix} 1 & -2^{-i} \\ 2^{-i} & 1 \end{pmatrix} \begin{pmatrix} x_i \\ y_i \end{pmatrix}$
4)	If $d_i = 1$, then unswap x_i and y_i .
5)	Compensate for pseudo-rotation: $t_{i+1} = (1 + 2^{-2i})t_i$
6)	Update theta approximation: $\theta_{i+1} = \theta_i + (-1)^{d_i} 2 \arctan 2^{-i}.$

We first initialize the problem, given input $t \in [-1, 1]$. Our goal is to get the vector (x_i, y_i) to point in the same direction as the vector of length 1 with height t , i.e., vector $(\sqrt{1-t^2}, t)$. This goal vector has an angle of $\theta = \arcsin(t)$. By keeping track of each rotation we make, assuming (x_i, y_i) points in roughly the same direction as the goal vector, we can construct an approximation for θ . In particular, assuming infinite precision, as i tends to infinity, approximation θ_i tends to θ . According to Ref. [7], to achieve n bits of accuracy it takes $n + 2$ correct iterations.

Step 1 is a computationally convenient way to check if $\theta_i < \theta$, which we store in variable d_i . If $d_i = 0$, then we need to rotate counterclockwise to get closer to θ . Otherwise, if $d_i = 1$, we need to rotate clockwise. Steps 2 and 4 conjugate Step 3 to achieve the correct rotation direction. Step 3 performs a pseudo-rotation, slightly stretching our vector (x_i, y_i) by a factor of $1 + 2^{-2i}$. It is performed by making the following substitutions twice: $x' = x - 2^{-i}y$ and $y' = y + 2^{-i}x$. As a result of the operation, we point closer to the goal direction, but it is necessary to compensate for the stretch. Step 5 deals with the stretching of the vector (x_i, y_i) by stretching our goal vector by the same amount, $(1 + 2^{-2i})$. Note that multiplication by powers of 2 can be done efficiently through bit-shifting. Finally, Step 6 records the change to the current angle of vector (x_i, y_i) . Note that the expression $2 \arctan 2^{-i}$ can be precomputed and directly encoded into hardware.

V. QUANTUM CORDIC FOR ARCSINE

There are a few immediate challenges that appear when adapting CORDIC to a quantum setting, in this section we detail the solutions step-by-step. We first note a few important facts. We represent the values θ_i, x_i, y_i, t_i using fixed point two's complement in the range $[-2, 2]$ with one sign bit, one

Algorithm 2 Mult(in, aux, m): $\text{in} \leftarrow (1 + 2^{-m})\text{in}$

```

1: procedure MULT(in, aux, m) ▷ in is a register
   of size  $n$ , aux is a auxiliary register of size  $n$  with near
   0 value,  $m$  is the right shift
2:    $F \leftarrow [1, 1, 2, 3, 5, 8, 13, \dots]$  ▷ Fibonacci Sequence
3:    $\#iter \leftarrow 2 \lceil \log_\varphi(\sqrt{5}n/m)/2 \rceil$  ▷  $\varphi = (1 + \sqrt{5})/2$ 
4:    $\text{aux} \leftarrow \text{aux} + \text{in}$ 
5:   for  $i = \#iter, i \geq 0, --i$  do
6:     if  $i$  even then
7:        $\text{in} \leftarrow \text{in} - (-1)^{F[i]}(\text{aux} \gg (m \cdot F[i]))$ 
8:     else
9:        $\text{aux} \leftarrow \text{aux} - (-1)^{F[i]}(\text{in} \gg (m \cdot F[i]))$ 
10:   $\text{aux} \leftarrow \text{aux} - \text{in}$ 

```

integer bit, and $n - 2$ fractional bits. This avoids any issues with overflow, in the case of θ_i , θ is in the range $[-\pi/2, \pi/2]$, so $|\theta| \leq \pi/2 < 2$. In the case of $|x_i|, |y_i|, |t_i|$, each represents side-lengths of vectors with a magnitude that increases in size by $(1 + 4^{-i})$ each step, thus,

$$|x_i|, |y_i|, |t_i| \leq \prod_{i=1}^n (1 + 4^{-i}) < \sqrt[3]{e} < 2.$$

One can verify the inequality by taking $n \rightarrow \infty$, taking the $\ln$ of the infinite product, using the inequality $\ln(1+x) < x$ for positive x , and finally using the geometric series. The product represents the stretch caused by the pseudo-rotations over the iterations. The two's complement also allows us to check if a value is negative easily using the most significant bit, if it is 1 then the value is negative, otherwise, the value is positive. To approximate multiplication by 2^{-m} , we use the right bit-shift operation, $x_0 x_1 \dots x_{n-1} \gg m$, we move each bit to the right by m places, ignoring the m rightmost bits. Also note that, when right bit-shifting in two's complement, the previous leftmost bit is copied into the new leftmost bits, for example:

$$x_0 x_1 x_2 x_3 x_4 \gg 2 = x_0 x_0 x_0 x_1 x_2, \quad x_k \in \{0, 1\}.$$

This ensures right bitshifts work as a division by powers of two for negative numbers.

Now, let us go through the steps of the quantum implementation, assuming n bits each to represent θ_i, x_i, y_i, t_i as fixed point numbers in registers ang, x, y, t respectively. Allocate $n - 1$ bits to represent $d = d_1 d_2 \dots d_{n-1}$ as a bit array in register d where d_i represents the i th register qubit. Initialization is trivial, we use $t \leftarrow t$ as the input. Note that we do *not* need to use new registers for each iteration, one register per value is sufficient. Additionally, in this work we consider the leftmost bit is most significant.


We perform Step 1 with the following sequence of operations. We begin with the state:

$$|0\rangle_{d_i} |x_i\rangle_x |y_i\rangle_y |t_i\rangle_t$$

Where d_i is the i th bit of the d register. We perform a subtraction (implemented with an inverse addition gate) from y to t , yielding,

$$|0\rangle_{d_i} |x_i\rangle_x |y_i\rangle_y |t_i - y_i\rangle_t.$$

Looking directly at the sign bits of the x, y , and t registers gives $s(x_i), s(y_i)$, and $s(t_i - y_i)$ respectively, where $s(z) = 1$

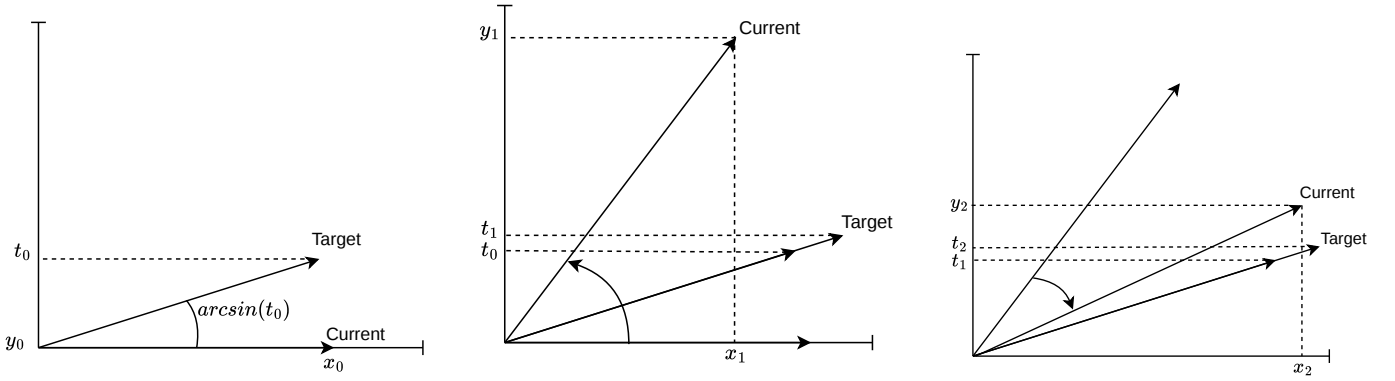

(a) Initial values, target vector is $((1 - t_0^2)^{1/2}, t_0) \approx (.96, .29)$, note that the first component is implicit, and we need not calculate it. The current vector is $(x_0, y_0) = (1, 0)$. Performing Line 4 shows that our next pseudo-rotation is counterclockwise.

(b) The `for` loop beginning at Line 6 performs the pseudo-rotation on our Current vector, yielding $(x_1, y_1) = (0.75, 1)$. The target vector is stretched by a factor of $5/4$ to compensate for the pseudo-rotation, giving us $t_1 \approx 0.36$. Line 4 determines that the next pseudo-rotation is clockwise.

(c) The `for` loop beginning at Line 6 performs the pseudo-rotation on our Current vector, yielding $(x_2, y_2) \approx (1.21, 0.56)$. The target vector is stretched further by a factor of $17/16$ to compensate for the pseudo-rotation, giving $t_2 \approx 0.39$. Line 4 determines that the next pseudo-rotation is clockwise.

Fig. 2: Example of first two iterations of Algorithm 1 Arcsine for $t \approx 0.29$. The target vector has an angle of $\arcsin(t)$, note that stretching the vector does not impact the angle of the vector. Each pseudo-rotation is recorded and the total change in angle is summed, yielding an approximation for $\arcsin(t)$. These results are generated when t is $300/1024$ represented with 12 bits as a fixed point integer in $[-2, 2)$ and can be viewed in the companion GitHub repository [2].

if $z < 0$ else $s(z) = 0$. We next perform the following operations,

- Perform a `Toffoli` gate using the sign bits of the x and t registers as controls and qubit d_i as the target.
- Perform a `Toffoli` gate using the sign bits of the x and y registers as controls and qubit d_i as the target.
- Perform a `CNOT` gate using the sign bits of the x register as control and qubit d_i as the target.
- Perform a `CNOT` gate using the sign bits of the t register as control and qubit d_i as the target.

Finally, we can undo the previous subtraction by adding the y register back to the t register. This gives us a correct d_i bit without side effects.

Steps 2 and 4 are trivial to implement using swap gates between each bit of the x and y register controlled by d_i , this can be done using $18n$ `CNOTs`. Step 3 is the most difficult. It leverages Algorithm 2 for multiplying by $(1 + 2^{-k})$. Note, that each step of Algorithm 2 is reversible. An explanation for `Mult` is the subject of Appendix A. For notational simplicity, we assume x and y have not been swapped. Our initial state for this step is,

$$|x_i\rangle_x |y_i\rangle_y.$$

We first subtract $y_i \gg i$ (y_i right shifted by i bits) from register x , giving us approximately,

$$|x_i - 2^{-i}y_i\rangle_x |y_i\rangle_y.$$

Next, we need to take an auxiliary register with value near 0. We apply `Mult`($y, \text{aux}, 2i$) to the y register,

$$|x_i - 2^{-i}y_i\rangle_x |y_i + 2^{-2i}y_i\rangle_y.$$

Finally, we add the x register shifted, $(x_i - 2^{-i}y_i) \gg i$, to the y register,

$$|x_i - 2^{-i}y_i\rangle_x |y_i + 2^{-2i}y_i + 2^{-i}(x_i - 2^{-i}y_i)\rangle_y.$$

Which equals $|x_i - 2^{-i}y_i\rangle_x |y_i + 2^{-i}x_i\rangle_y$. By repeating these operations once more, Step 4 is accomplished. Note that the bit shifting and the application of `MULT` apply a small but compounding error as a result of rounding. The analysis of this error will be the subject of future work.

With our new `Mult` tool, Step 5 is trivial. We simply apply `Mult`($t, \text{aux}, 2i$) to the t register. Finally, for Step 6 we apply controlled negation of the `ang` register using d_i as the control. Then add the precomputed $2\arctan 2^{-i}$ to the θ register; this operation can be encoded directly on quantum hardware. Then, once again, perform a controlled negation of the `ang` register using d_i as the control. This sequence gives,

$$\begin{aligned} |\theta_i\rangle_{\text{ang}} &\rightarrow |(-1)^{d_i}\theta_i\rangle_{\text{ang}} \rightarrow |(-1)^{d_i}\theta_i + 2\arctan 2^{-i}\rangle_{\text{ang}} \\ &\rightarrow |(-1)^{2d_i}\theta_i + (-1)^{d_i}2\arctan 2^{-i}\rangle_{\text{ang}} \\ &= |\theta_i + (-1)^{d_i}2\arctan 2^{-i}\rangle_{\text{ang}} = |\theta_{i+1}\rangle_{\text{ang}}. \end{aligned}$$

This step can be improved slightly by replacing the negations to the `ang` register with bitwise NOTs.

Thus, we have a quantum-compatible method for applying each step of the classical CORDIC algorithms. As we see in Section VII, these adapted techniques add minimal error in simulation.

VI. DIGITAL TO AMPLITUDE TRANSFORMATION

Suppose we are given a $5n$ -qubit quantum state of the form,

$$|\kappa_0\rangle = \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_t |0\rangle_d^{\otimes n-1} |0\rangle_x^{\otimes n} |0\rangle_y^{\otimes n} |0\rangle_{\text{mult}}^{\otimes n} |0\rangle_{\text{out}},$$

where $N = 2^n$, the t register has size n . Additionally, we have $h_k = k2^{-n}$, where if $k > N/4$ then $\alpha_k = 0$. In other words, register t stores a fixed point binary number between -2 and 2 in two's complement, but we restrict the initial value to be between 0 and 1 . The registers x , y , mult are of size n , register d is of size $n-1$, and each is initialized to $|0\rangle$. Finally, the out register is one qubit. It stores a value corresponding to h_k in its probability amplitudes.

Using a few modifications to Algorithm 1, we can leverage CORDIC Arcsine for Digital to Amplitude conversion. To make use of Remark VI.2, we first multiply register t by two and subtract one. Next, we set the x register equal to 1 . This gives us state,

$$|\kappa_1\rangle = \sum_{k=0}^{N-1} \alpha_k |h'_k\rangle_t |0\rangle_d^{\otimes n} |1\rangle_x |0\rangle_y^{\otimes n} |0\rangle_{\text{mult}}^{\otimes n} |0\rangle_{\text{out}},$$

where $h'_k = 2h_k - 1 \in [-1, 1]$.

We then apply Algorithm 3. Note that, for our current problem, we do not require an explicit representation of theta. As a result, we need not include the ang register. This yields the state,

$$|\kappa_2\rangle = \sum_{k=0}^{N-1} \alpha_k |h'_k\rangle_t |DA(h'_k)\rangle_d |x'\rangle_x |y'\rangle_y |g\rangle_{\text{mult}} |0\rangle_{\text{out}}. \quad (2)$$

The j th bit of $DA(h'_k)$ represents the rotation direction at iteration j of the algorithm. x' , y' , and g are the resulting garbage.

Remark VI.1. By Mazenc [7], we have the following relation,

$$\frac{\arcsin(h'_k)}{2} \approx \sum_{j=0}^n (-1)^{DA(h'_k)_j} \arctan(2^{-j}),$$

with error of order $\mathcal{O}(2^{-n})$.

Remark VI.2. $\arcsin(\sqrt{x})$ is an affine transformation of $\arcsin(x)$,

$$\arcsin(\sqrt{x}) = \frac{\arcsin(2x-1)}{2} + \frac{\pi}{4}.$$

Consider, the state $R' |DA(h'_k)\rangle_d |0\rangle_{\text{out}}$, which is equal to,

$$|DA(h'_k)\rangle_d \left[\cos\left(\frac{\pi}{4} + \sum_{j=0}^n (-1)^{DA(h'_k)_j} \arctan(2^{-j})\right) |0\rangle + \sin\left(\frac{\pi}{4} + \sum_{j=0}^n (-1)^{DA(h'_k)_j} \arctan(2^{-j})\right) |1\rangle \right]_{\text{out}}.$$

Where R' is implemented in Figure 3. Applying R' to the d and out registers of state $|\kappa_2\rangle$, by Remark VI.1, gives the approximate state,

$$|\kappa_3\rangle \approx \sum_{k=0}^{N-1} \alpha_k |h'_k\rangle_t |DA(h'_k)\rangle_d |0\rangle_x^{\otimes n} |0\rangle_y^{\otimes n} |0\rangle_{\text{mult}}^{\otimes n} \otimes \left[\cos\left(\frac{\pi}{4} + \frac{\arcsin(2h_k-1)}{2}\right) |0\rangle + \sin\left(\frac{\pi}{4} + \frac{\arcsin(2h_k-1)}{2}\right) |1\rangle \right]_{\text{out}}.$$

By Remark VI.2, this is equal to state,

$$\sum_{k=0}^{N-1} \alpha_k |h'_k\rangle_t |DA(h'_k)\rangle_d |x'\rangle_x^{\otimes n} |y'\rangle_y^{\otimes n} |g\rangle_{\text{mult}}^{\otimes n} \left[\sqrt{1-h_k} |0\rangle + \sqrt{h_k} |1\rangle \right]_{\text{out}}.$$

The registers d , x , y , mult can be cleaned by performing Algorithm 3 in reverse. We subtract one from register x to zero it. After adding one to and dividing register t by two and subtracting one from x , the binary to amplitude transformation is complete, yielding,

$$|\kappa_4\rangle \approx \sum_{k=0}^{N-1} \alpha_k |h_k\rangle_t |0\rangle_d^{\otimes n} |0\rangle_x^{\otimes n} |0\rangle_y^{\otimes n} |0\rangle_{\text{mult}}^{\otimes n} \left[\sqrt{1-h_k} |0\rangle + \sqrt{h_k} |1\rangle \right]_{\text{out}}.$$

Algorithm 3 Digital-to-Amplitude: Classical Step

```

1: procedure DA( $t$ , #iter)  $\triangleright t \in [-1, 1]$   $\triangleright s(z) = 1$  if  $z < 0$  else  $s(z) = 0$ 
2:    $x \leftarrow 1, y \leftarrow 0, t \leftarrow t, d \leftarrow 0$ 
3:   for  $i = 1, i < \text{\#iter}, ++i$  do
4:      $d_i \leftarrow [s(x) \wedge s(t-y)] \oplus s(x) \oplus [s(x) \wedge s(y)] \oplus s(t-y)$ 
5:     if  $d_i$  then  $x, y \leftarrow y, x$ 
6:     for  $\_$  in range(2) do
7:        $x, y \leftarrow x - 2^{-i}y, y + 2^{-i}x$ 
8:     if  $d_i$  then  $x, y \leftarrow y, x$ 
9:      $t \leftarrow (1 + 2^{-2i})t$ 
10:  return  $d$ 
```

VII. COMPLEXITY AND SIMULATIONS

In this section, we detail the complexity to construct $|\kappa_2\rangle$, Equation (2). The quantum implementation of Algorithm 3 applies Mult three times per iteration, and addition six times per iteration. Mult takes less than $\sqrt{5}\varphi^{-2i}n + 2$ additions on the i th step if $i < n$, where φ is the golden ratio, if $i \geq n$, then Mult can be skipped. Thus, assuming n iterations for $\mathcal{O}(n)$ bits of accuracy, we perform less than,

$$3 \sum_{i=1}^{n/2} \left(\frac{\sqrt{5}n}{\varphi^{2i}} + 2 \right) + \sum_{i=1}^n 6 = 9n + 3\sqrt{5}n \sum_{i=1}^{n/2} \frac{1}{\varphi^{2i}} < 14n,$$

additions. With $\mathcal{O}(n)$ auxiliary qubits, it is possible to compute addition in $\mathcal{O}(\log n)$ layers and $\mathcal{O}(n)$ CNOTs [10]. Thus, the total layer complexity is $\mathcal{O}(n \log(n))$ and the total CNOT complexity is $\mathcal{O}(n^2)$ where n corresponds to bits of precision. Note that, if n is not large, it is better to use a non-parallel version of addition to minimize overhead.

As for space complexity, we need $\mathcal{O}(n)$ bits of space. We require an auxiliary register of size n for Mult , and optionally another register to speed up addition. We need registers of n bits for x , y and t , and optionally ang . Finally, we need $n-1$ bits for register d . Thus, in total, we require a minimum of $5n-1$ qubits.

In simulations, it was found that the max error for any given input can be made arbitrarily small by making n larger (Figure 4). The full codebase can be found on our GitHub companion repository [2], containing a complete implementation using Qiskit as well as an identical classical implementation.

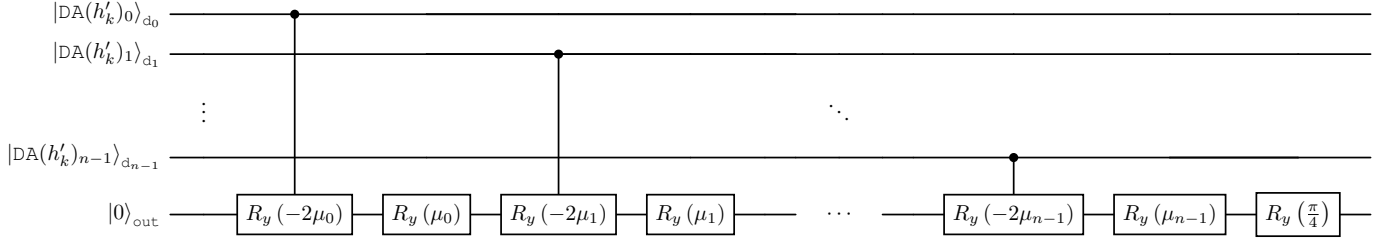


Fig. 3: Unitary transformation R' which transfers the binary encoding of CORDIC rotation direction stored in register into the amplitude of the $_{out}$ register. Where $DA(h'_k)_i$ represents the i th bit of $DA(h'_k)$. Define $R_y(\omega) = (\cos \omega, -\sin \omega; \sin \omega, \cos \omega)$, and $\mu_i = \tan^{-1} 2^{-i}$.

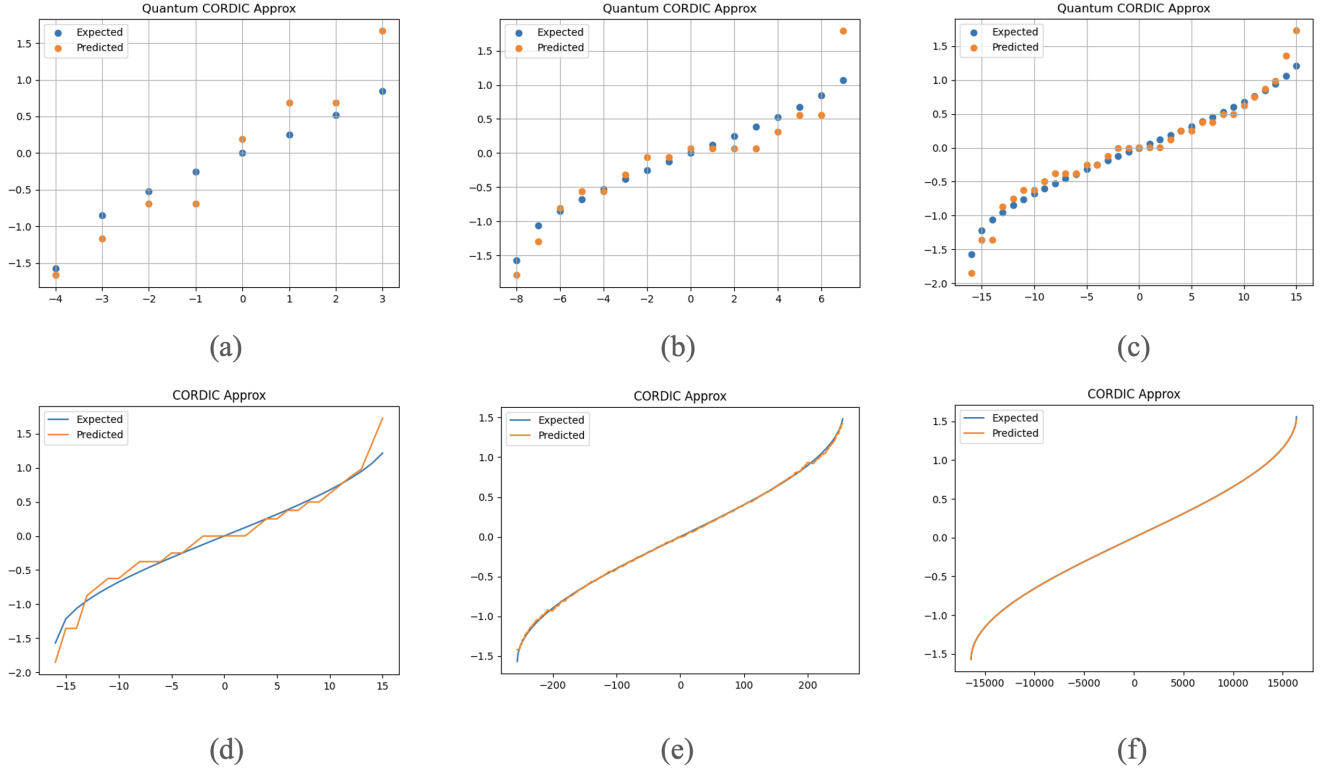


Fig. 4: Results of Classical and Quantum simulations of Quantum compatible Algorithm for CORDIC Arcsine (see our GitHub repository at <https://github.com/iain-burge/QuantumCORDIC> for further details). (a) Quantum simulation; $n = 4$; mean error = 3.27×10^{-1} ; max error = 8.18×10^{-1} . (b) Quantum simulation; $n = 5$; mean error = 1.83×10^{-1} ; max error = 7.25×10^{-1} . (c) Quantum simulation; $n = 6$; mean error = 9.91×10^{-2} ; max error = 5.13×10^{-1} . (d) Classical simulation; $n = 6$; mean error = 9.91×10^{-2} ; max error = 5.13×10^{-1} . (e) Classical simulation; $n = 10$; mean error = 1.04×10^{-2} ; max error = 1.51×10^{-1} . (f) Classical simulation; $n = 16$; mean error = 6.78×10^{-4} ; max error = 3.89×10^{-2} .

VIII. CONCLUSION

We have introduced a Quantum algorithm for calculating $\arcsin$ with low space and time complexity. It also has applications in HHL (Harrow–Hassidim–Lloyd), approximating Shapley values, and quantum Monte Carlo methods. As CORDIC is most appropriate for lower precision applications, future work could apply more budget conscious implementations of CORDIC $\arcsin$ at the expense of asymptotic behaviour. Beyond quantum digital-to-analog conversion, CORDIC has substantial value to bring to quantum algorithms. In particular, developing a CORDIC module could allow for

various elementary arithmetical operations to be built directly into the circuitry. As a result, quantum compatible CORDIC methods may find use for low to medium precision operations on early fault tolerant quantum hardware.

REFERENCES

- [1] Iain Burge, Michel Barbeau, and Joaquin Garcia-Alfaro. Quantum algorithms for shapley value calculation. In *2023 IEEE International Conference on Quantum Computing and Engineering (QCE)*, volume 1, pages 1–9. IEEE, 2023.

- [2] Iain Burge, Michel Barbeau, and Joaquin Garcia-Alfaro. Quantum cordic algorithm implementation, companion github repository, Oct 2024. <https://github.com/iain-burge/QuantumCORDIC>.
- [3] Vittorio Giovannetti, Seth Lloyd, and Lorenzo Maccone. Quantum random access memory. *Physical review letters*, 100(16):160501, 2008.
- [4] Thomas Häner, Martin Roetteler, and Krysta M Svore. Optimizing quantum circuits for arithmetic. *arXiv preprint arXiv:1805.12445*, 2018.
- [5] Aram W Harrow, Avinandan Hassidim, and Seth Lloyd. Quantum algorithm for linear systems of equations. *Physical review letters*, 103(15):150502, 2009.
- [6] Boppana Lakshmi and Anindya Sundar Dhar. Cordic architectures: A survey. *VLSI design*, 2010(1):794891, 2010.
- [7] Christophe Mazenc, Xavier Merrheim, and J-M Muller. Computing functions cos/sup-1 and sin/sup-1 using cordic. *IEEE Transactions on Computers*, 42(1):118–122, 1993.
- [8] Kosuke Mitarai, Masahiro Kitagawa, and Keisuke Fujii. Quantum analog-digital conversion. *Physical Review A*, 99(1):012301, 2019.
- [9] Ashley Montanaro. Quantum speedup of monte carlo methods. *Proceedings of the Royal Society A: Mathematical, Physical and Engineering Sciences*, 471(2181):20150301, 2015.
- [10] Yasuhiro Takahashi, Seiichiro Tani, and Noboru Kunihiro. Quantum addition circuits and unbounded fan-out. *arXiv preprint arXiv:0910.2530*, 2009.
- [11] Jack E Volder. The cordic trigonometric computing technique. *IRE Transactions on electronic computers*, (3):330–334, 1959.
- [12] John Stephen Walther. A unified algorithm for elementary functions. In *Proceedings of the May 18-20, 1971, spring joint computer conference*, pages 379–385, 1971.
- [13] Shengbin Wang, Zhimin Wang, Wendong Li, Lixin Fan, Guolong Cui, Zhiqiang Wei, and Yongjian Gu. Quantum circuits design for evaluating transcendental functions based on a function-value binary expansion method. *Quantum Information Processing*, 19:1–31, 2020.

APPENDIX

A. MULT FUNCTION

To understand the `Mult` algorithm, it is more instructive to considered its inverse, `Div` (Algorithm 4). To simplify the following proofs, we assume infinite bits of precision in our number representations.

Lemma A.1. *Suppose i is even, at the beginning of the i th iteration of Algorithm 4's for loop, the state is,*

$$\text{in} = z \sum_{k=0}^{F[i+1]-1} r^k, \quad \text{aux} = z \sum_{k=0}^{F[i]-1} r^k.$$

where z is the initial value of in , and $r = -2^{-m}$.

Proof: We proceed by induction. Base case: for $i = 0$, at the beginning of the loop $\text{in} = \text{aux} = zr^0$. Thus, the base case holds.

Inductive step: suppose that for an even $i < \lceil \sqrt{5}\varphi^{-m}n \rceil$, the registers hold the values,

$$\text{in} = z \sum_{k=0}^{F[i+1]-1} r^k, \quad \text{aux} = z \sum_{k=0}^{F[i]-1} r^k.$$

i is even so the logical statement in Line 6 is true. Hence, aux is updated to,

$$\text{aux} \leftarrow z \sum_{k=0}^{F[i]-1} r^k + (-1)^{F[i]} \cdot 2^{mF[i]} z \sum_{k=0}^{F[i+1]-1} r^k.$$

By definition $(-1)^{F[i]} \cdot 2^{mF[i]} = r^{F[i]}$, thus, the new value for aux is $z \sum_{k=0}^{F[i]-1} r^k + z \sum_{k=F[i]}^{F[i+1]+F[i]-1} r^k$. By definition of the Fibonacci sequence, $F[i+2] = F[i+1] + F[i]$, combining the summations yields,

$$\text{aux} = z \sum_{k=0}^{F[i+2]-1} r^k.$$

On the next loop, the index register holding i incremented by 1 and is now odd, so the if statement on Line 6 gets false. Hence, the next operation updates in ,

$$\text{in} \leftarrow z \sum_{k=0}^{F[i+1]-1} r^k + (-1)^{F[i+1]} \cdot 2^{mF[i+1]} z \sum_{k=0}^{F[i+2]-1} r^k$$

Similarly to the previous iteration, we find in is equal to $z \sum_{k=0}^{F[i+1]-1} r^k + z \sum_{k=F[i+1]}^{F[i+2]+F[i+1]-1} r^k$. Bringing the summations together shows,

$$\text{in} = z \sum_{k=0}^{F[i+3]-1} r^k.$$

The index register is incremented once again, such that it holds $i+2$. By induction, the result holds. $\blacksquare$

Remark A.1. *Recall, for $r \in (0, 1)$, and an integer J , the geometric sum formula gives,*

$$\sum_{k=0}^{J-1} r^k = \frac{1-r^J}{1-r} = \frac{1-2^{-Jm}}{1+2^{-m}}.$$

Algorithm 4 `Div(in, aux, m): in` $\leftarrow (1+2^{-m})^{-1}\text{in}$

```

1: procedure Div(in, aux, m)  $\triangleright$  in is a register
   of size  $n$ , aux is a auxiliary register of size  $n$  with near
   0 value,  $m$  is the right shift
2:   F  $\leftarrow [1, 1, 2, 3, 5, 8, 13, \dots]$   $\triangleright$  Fibonacci Sequence
3:   #iter  $\leftarrow 2 \lceil \log_{\varphi}(\sqrt{5}n/m)/2 \rceil$   $\triangleright \varphi = (1 + \sqrt{5})/2$ 
4:   aux  $\leftarrow \text{aux} + \text{in}$ 
5:   for  $i = 0, i < \text{\#iter}, ++i$  do
6:     if  $i$  even then
7:       aux  $\leftarrow \text{aux} + (-1)^{F[i]}(\text{in} \gg (m \cdot F[i]))$ 
8:     else
9:       in  $\leftarrow \text{in} + (-1)^{F[i]}(\text{aux} \gg (m \cdot F[i]))$ 
10:    aux  $\leftarrow \text{aux} - \text{in}$ 

```

Theorem A.2. *Assuming J iterations, the final state is,*

$$\text{in} \approx \frac{z}{1-2^{-m}}, \quad \text{aux} \approx 0,$$

with an accuracy of $\mathcal{O}(m\varphi^J)$ bits.

Proof: First note the state prior to Line 10 is,

$$\text{in} = z \sum_{k=0}^{F[J+1]-1} r^k, \quad \text{aux} = z \sum_{k=0}^{F[J]-1} r^k.$$

For simplicity, we assume J is even and greater than or equal to two. Then, Line 10 results in state,

$$\text{aux} \leftarrow z \sum_{k=0}^{F[J]-1} r^k - z \sum_{k=0}^{F[J+1]-1} r^k.$$

As a result, `aux` is equal to $-z \sum_{k=\mathbb{F}[J]}^{\mathbb{F}[J+1]-\mathbb{F}[J]-1} r^k$. This can be simplified to, $-z r^{\mathbb{F}[J]} \sum_{k=0}^{\mathbb{F}[J-1]-1} r^k$. Then, the geometric sum formula gives,

$$\text{aux} = -z r^{\mathbb{F}[J]} \frac{1 - r^{\mathbb{F}[J-1]}}{1 - r}.$$

Note that $\varphi^{k-1} < \mathbb{F}[k]$ for positive k . Thus,

$$\text{aux} < -z 2^{-\varphi^{J-1}m} \frac{1 - 2^{-\varphi^{J-2}m}}{1 - 2^{-m}}.$$

Note that z is always less than 2 as argued at the beginning of

Section V. Since $m \geq 1$, $J \geq 2$, we have $|\text{aux}| \leq 2^{-\varphi^{J-1}m+2}$. Thus, the error introduced to `aux` in terms of bit precision is exponentially small.

On the other hand, the `in` register state is,

$$\text{in} = z \frac{1 - 2^{-m\mathbb{F}[J]}}{1 + 2^{-m}}.$$

Thus, we have an absolute error of less than, $2 \cdot 2^{-m\mathbb{F}[J]} \leq 2^{-m\varphi^{J-1}}$. Therefore, the absolute error is exponentially small with respect to number of iterations. ■