

Introduction to SQL for BigQuery and Cloud SQL

1 hour 15 minutes 1 Credit

[Rate Lab](#)

GSP281



Google Cloud Self-Paced Labs

Overview

SQL (Structured Query Language) is a standard language for data operations that allows you to ask questions and get insights from structured datasets. It's commonly used in database management and allows you to perform tasks like transaction record writing into relational databases and petabyte-scale data analysis.

This lab serves as an introduction to SQL and is intended to prepare you for the many labs and quests in Qwiklabs on data science topics. This lab is divided into two parts: in the first half, you will learn fundamental SQL querying keywords, which you will run in the BigQuery console on a public dataset that contains information on London bikeshares.

In the second half, you will learn how to export subsets of the London bikeshare dataset into CSV files, which you will then upload to Cloud SQL. From there you will learn how to use Cloud SQL to create and manage databases and tables. Towards the end, you will get hands-on practice with additional SQL keywords that manipulate and edit data.

Objectives

In this lab, you will learn how to:

- Distinguish databases from tables and projects.
- Use the SELECT, FROM, and WHERE keywords to construct simple queries.

- Identify the different components and hierarchies within the BigQuery console.
- Load databases and tables into BigQuery.
- Execute simple queries on tables.
- Learn about the `COUNT`, `GROUP BY`, `AS`, and `ORDER BY` keywords.
- Execute and chain the above commands to pull meaningful data from datasets.
- Export a subset of data into a CSV file and store that file into a new Cloud Storage bucket.
- Create a new Cloud SQL instance and load your exported CSV file as a new table.
- Run `CREATE DATABASE`, `CREATE TABLE`, `DELETE`, `INSERT INTO`, and `UNION` queries in Cloud SQL.

Prerequisites

Very Important: Before starting this lab, log out of your personal or corporate gmail account.

This is a **introductory level** lab. This assumes little to no prior experience with SQL. Familiarity with Cloud Storage and Cloud Shell is recommended, but not required. This lab will teach you the basics of reading and writing queries in SQL, which you will apply by using BigQuery and Cloud SQL.

Before taking this lab, consider your proficiency in SQL. Below are more challenging labs that will let you apply your knowledge to more advanced use cases:

- [Weather Data in BigQuery](#)
- [Analyzing Natality Data Using Datalab and BigQuery](#)

Once you're ready, scroll down and follow the steps below to get your lab environment set up.

Setup and Requirements

Before you click the Start Lab button

Read these instructions. Labs are timed and you cannot pause them. The timer, which starts when you click **Start Lab**, shows how long Google Cloud resources will be made available to you.

This Qwiklabs hands-on lab lets you do the lab activities yourself in a real cloud environment, not in a simulation or demo environment. It does so by giving you new, temporary credentials that you use to sign in and access Google Cloud for the duration of the lab.

What you need

To complete this lab, you need:


- Access to a standard internet browser (Chrome browser recommended).
- Time to complete the lab.

Note: If you already have your own personal Google Cloud account or project, do not use it for this lab.

Note: If you are using a Pixelbook, open an Incognito window to run this lab.

How to start your lab and sign in to the Google Cloud Console


1. Click the **Start Lab** button. If you need to pay for the lab, a pop-up opens for you to select your payment method. On the left is a panel populated with the temporary credentials that you must use for this lab.

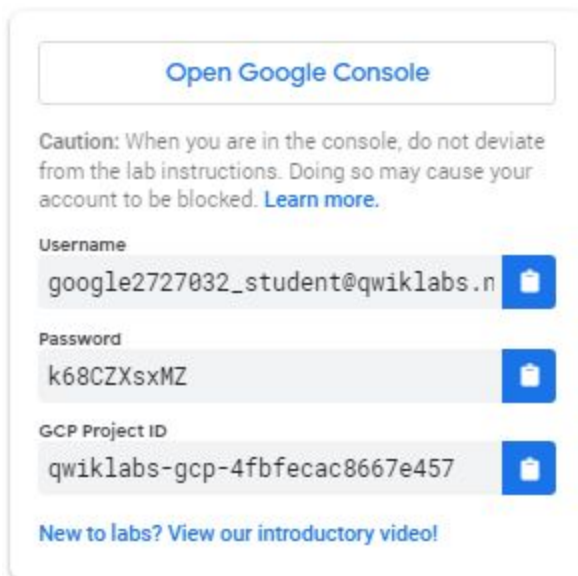

The screenshot shows a panel with the following content:


- A button at the top labeled "Open Google Console".
- A caution message: "Caution: When you are in the console, do not deviate from the lab instructions. Doing so may cause your account to be blocked. [Learn more.](#)"
- A "Username" field containing "google2727032_student@qwiklabs.n" with a copy icon.
- A "Password" field containing "k68CZXsxMZ" with a copy icon.
- A "GCP Project ID" field containing "qwiklabs-gcp-4fbfecac8667e457" with a copy icon.
- A link at the bottom: "New to labs? View our introductory video!"

2. Copy the username, and then click **Open Google Console**. The lab spins up resources, and then opens another tab that shows the **Sign in** page.

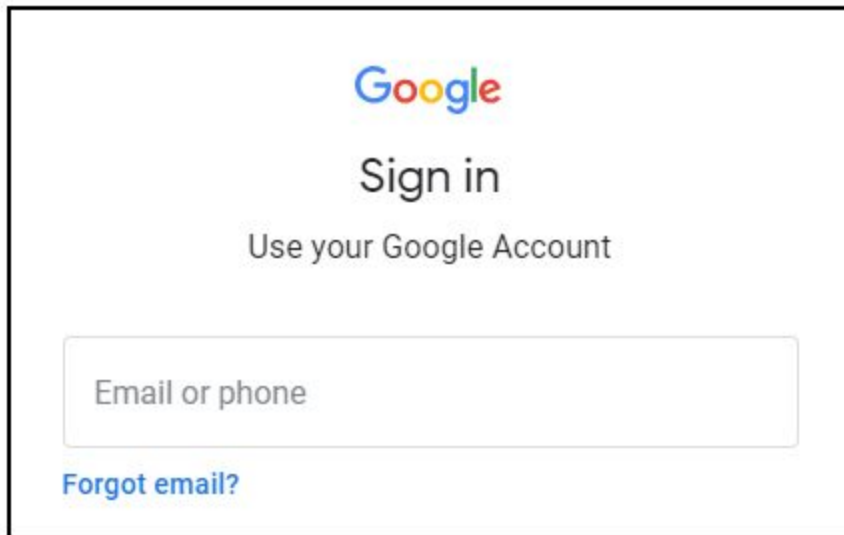

Tip: Open the tabs in separate windows, side-by-side.

If you see the **Choose an account** page, click **Use Another Account**.

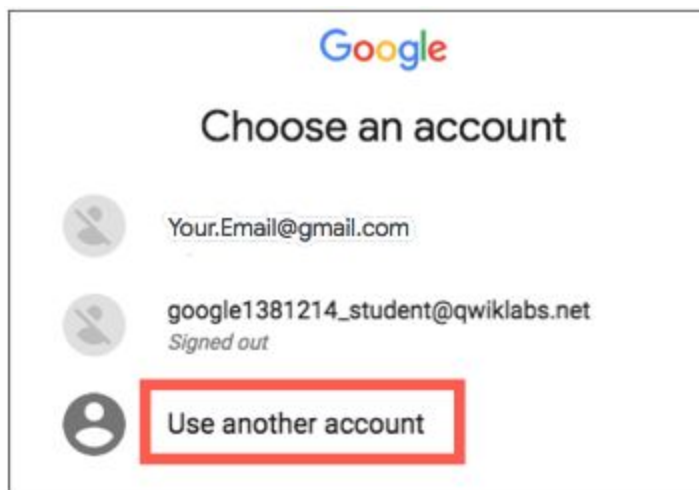


3. In the **Sign in** page, paste the username that you copied from the Connection Details panel. Then copy and paste the password.
Important: You must use the credentials from the Connection Details panel. Do not use your Qwiklabs credentials. If you have your own Google Cloud account, do not use it for this lab (avoids incurring charges).
4. Click through the subsequent pages:
 - Accept the terms and conditions.

- Do not add recovery options or two-factor authentication (because this is a temporary account).
- Do not sign up for free trials.

After a few moments, the Cloud Console opens in this tab.

Note: You can view the menu with a list of Google Cloud Products and Services by clicking the **Navigation menu** at the top-left.

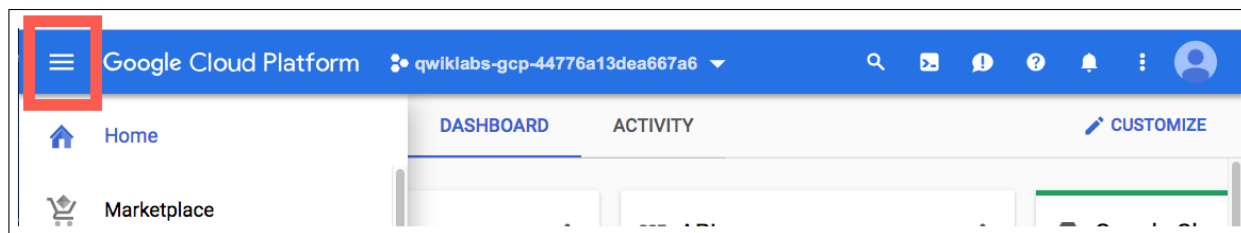

The Basics of SQL

Databases and Tables

As mentioned earlier, SQL allows you to get information from "structured datasets". Structured datasets have clear rules and formatting and often times are organized into tables, or data that's formatted in rows and columns.

An example of *unstructured data* would be an image file. Unstructured data is inoperable with SQL and cannot be stored in BigQuery datasets or tables (at least natively.) To work with image data (for instance), you would use a service like [Cloud Vision](#), perhaps through its [API](#) directly.

The following is an example of a structured dataset—a simple table:

User	Price	Shipped
Sean	\$35	Yes
Rocky	\$50	No

If you've had experience with Google Sheets, then the above should look quite similar. As we see, the table has columns for User, Price, and Shipped and two rows that are composed of filled in column values.

A Database is essentially a *collection of one or more tables*. SQL is a structured database management tool, but quite often (and in this lab) you will be running queries on one or a few tables joined together—not on whole databases.

SELECT and FROM

SQL is phonetic by nature and before running a query, it's always helpful to first figure out what question you want to ask your data (unless you're just exploring for fun.)

SQL has predefined *keywords* which you use to translate your question into the pseudo-english SQL syntax so you can get the database engine to return the answer you want.

The most essential keywords are SELECT and FROM:

- Use SELECT to specify what fields you want to pull from your dataset.
- Use FROM to specify what table or tables we want to pull our data from.

An example may help understanding. Assume that we have the following table `example_table`, which has columns USER, PRICE, and SHIPPED:

	A	B	C
1	USER	PRICE	SHIPPED
2	SEAN	\$35	YES
3	ROCKY	\$50	NO
4	AMANDA	\$20	YES
5	EMMA	\$65	YES
6	ANDRES	\$10	NO
7	CASEY	\$55	YES
8	HANNAH	\$15	NO
9	JOCELYN	\$30	NO

And let's say that we want to just pull the data that's found in the USER column.

We can do this by running the following query that uses SELECT and FROM:

```
SELECT USER FROM example_table
```

If we executed the above command, we would select all the names from the USER column that are found in `example_table`.

You can also select multiple columns with the SQL SELECT keyword. Say that you want to pull the data that's found in the USER and SHIPPED columns. To do this, modify the previous query by adding another column value to our SELECT query (making sure it's separated by a comma!):

```
SELECT USER, SHIPPED FROM example_table
```

Running the above retrieves the USER and the SHIPPED data from memory:

	A	B	C
1	USER	PRICE	SHIPPED
2	SEAN	\$35	YES
3	ROCKY	\$50	NO
4	AMANDA	\$20	YES
5	EMMA	\$65	YES
6	ANDRES	\$10	NO
7	CASEY	\$55	YES
8	HANNAH	\$15	NO
9	JOCELYN	\$30	NO

And just like that you've covered two fundamental SQL keywords! Now to make things a bit more interesting.

WHERE

The WHERE keyword is another SQL command that filters tables for specific column values. Say that you want to pull the names from example_table whose packages were shipped. You can supplement the query with a WHERE, like the following:

```
SELECT USER FROM example_table WHERE SHIPPED='YES'
```

Running the above returns all USERS whose packages have been SHIPPED to from memory:

	A	B	C
1	USER	PRICE	SHIPPED
2	SEAN	\$35	YES
3	ROCKY	\$50	NO
4	AMANDA	\$20	YES
5	EMMA	\$65	YES
6	ANDRES	\$10	NO
7	CASEY	\$55	YES
8	HANNAH	\$15	NO
9	JOCELYN	\$30	NO

Now that you have a baseline understanding of SQL's core keywords, apply what you've learned by running these types of queries in the BigQuery console.

Test your understanding

The following are some multiple choice questions to reinforce your understanding of the concepts covered so far. Answer them to the best of your abilities.

A keyword that specifies the fields (e.g. column values) that you want to pull from your dataset.

WHERE

checkSELECT

FROM

Submit

Specifies what table or tables we want to pull our data from.

WHERE

SELECT

checkFROM

Submit

Allows us to filter tables for specific column values.

closeSELECT

FROM

checkWHERE

Submit

Exploring the BigQuery Console

The BigQuery paradigm


[BigQuery](#) is a fully-managed petabyte-scale data warehouse that runs on the Google Cloud. Data analysts and data scientists can quickly query and filter large datasets, aggregate results, and perform complex operations without having to

worry about setting up and managing servers. It comes in the form of a command line tool (preinstalled in cloudshell) or a web console—both ready for managing and querying data housed in Google Cloud projects.

In this lab, you use the web console to run SQL queries.

Open BigQuery Console


In the Google Cloud Console, select **Navigation menu** > **BigQuery**:

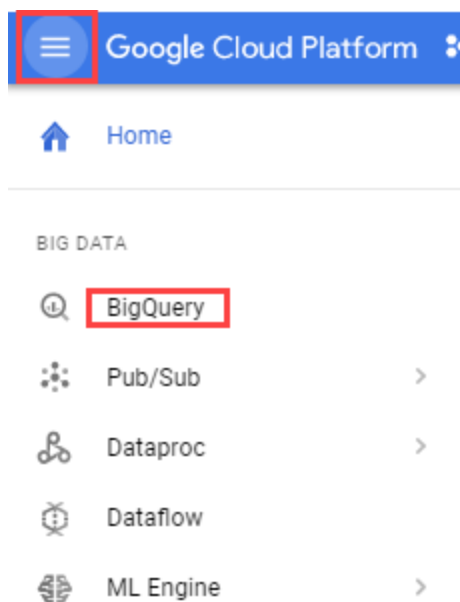

The **Welcome to BigQuery in the Cloud Console** message box opens. This message box provides a link to the quickstart guide and the release notes.

Click **Done**.

The BigQuery console opens.

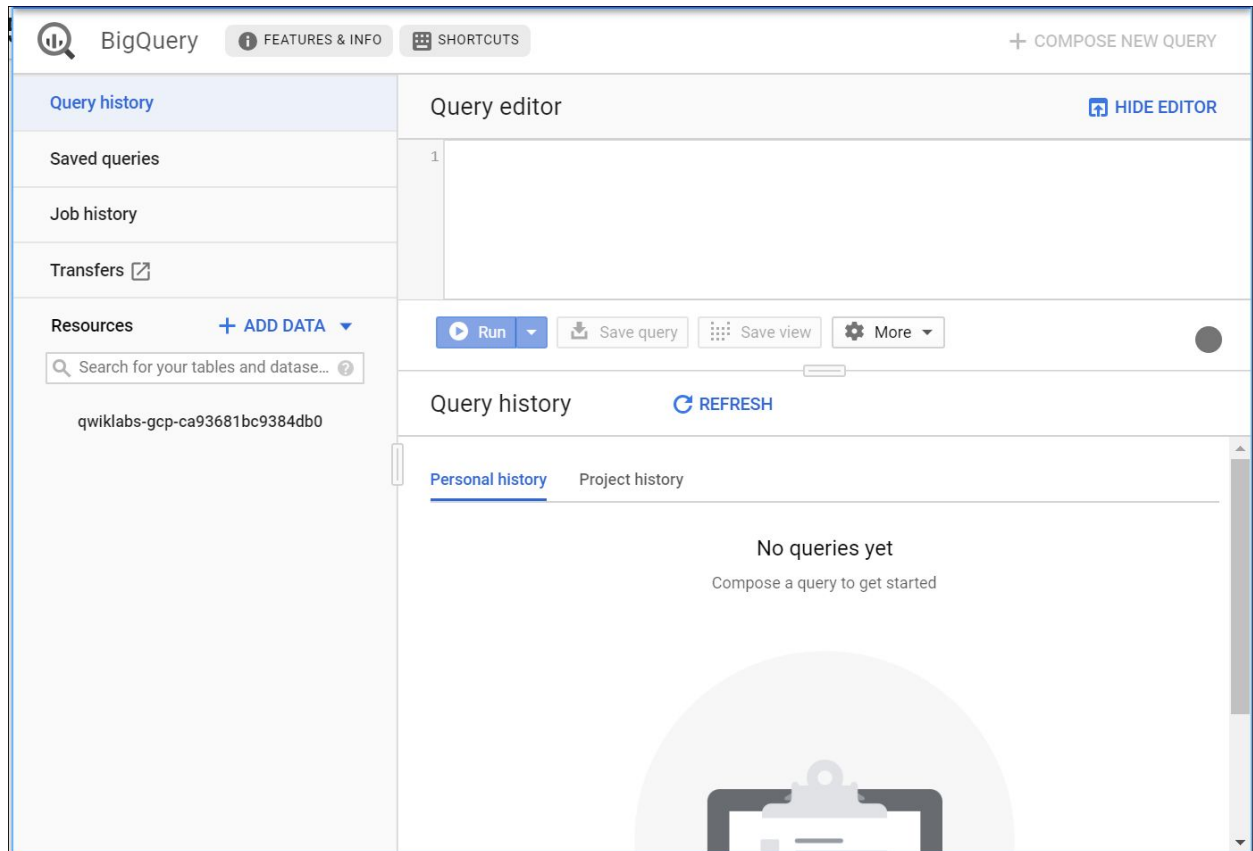

Take a moment to note some important features of the UI. The right-hand side of the console houses the "Query editor". This is where you write and run SQL commands like the examples we covered earlier. Below that is "Query history", which is a list of queries you ran previously.

The left pane of the console is the "Navigation panel". Apart from the self-explanatory query history, saved queries, and job history, there is the *Resources* tab.

The highest level of resources contain Google Cloud projects, which are just like the temporary Google Cloud projects you sign in to and use with each Qwiklab. As you can see in your console and in the last screenshot, we only have our


Qwiklabs project housed in the Resources tab. If you try clicking on the arrow next the project name, nothing will show up.

This is because your project doesn't contain any datasets or tables, you have nothing that can be queried. Earlier you learned datasets contain tables. When you add data to your project, note that in BigQuery, *projects contain datasets, and datasets contain tables*. Now that you better understand the project → dataset → table paradigm and the intricacies of the console, you can load up some queryable data.

Uploading queryable data


In this section you pull in some public data into your project so you can practice running SQL commands in BigQuery.

Click on the **+ ADD DATA** link then select **Explore public datasets**:

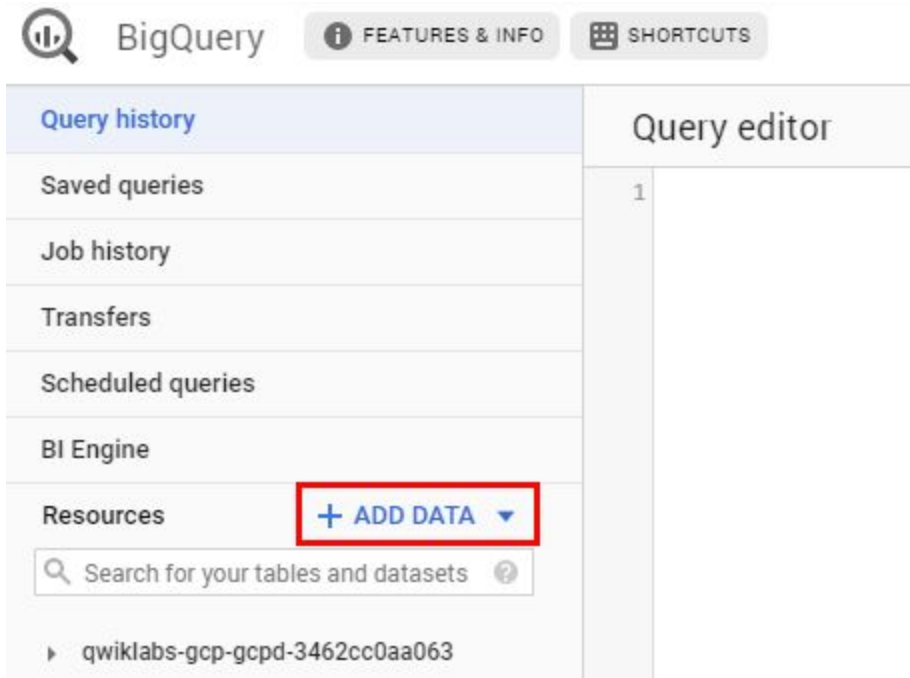


In the search bar, enter "london", then select the **London Bicycle Hires** tile, then **View Dataset**.

A new tab will open, and you will now have a new project called `bigquery-public-data` added to the Resources panel:

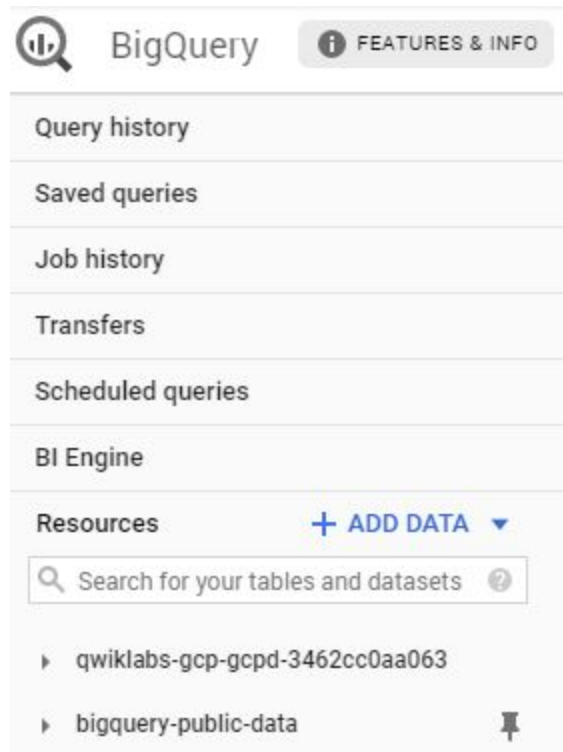

It's important to note that you are still working out of your lab project in this new tab. All you did was pull a publicly accessible project that contains datasets and tables into BigQuery for analysis — you didn't *switch over* to that project. All of your jobs and services are still tied to your Qwiklabs account. You can see this for yourself by inspecting the project field near the top of the console:

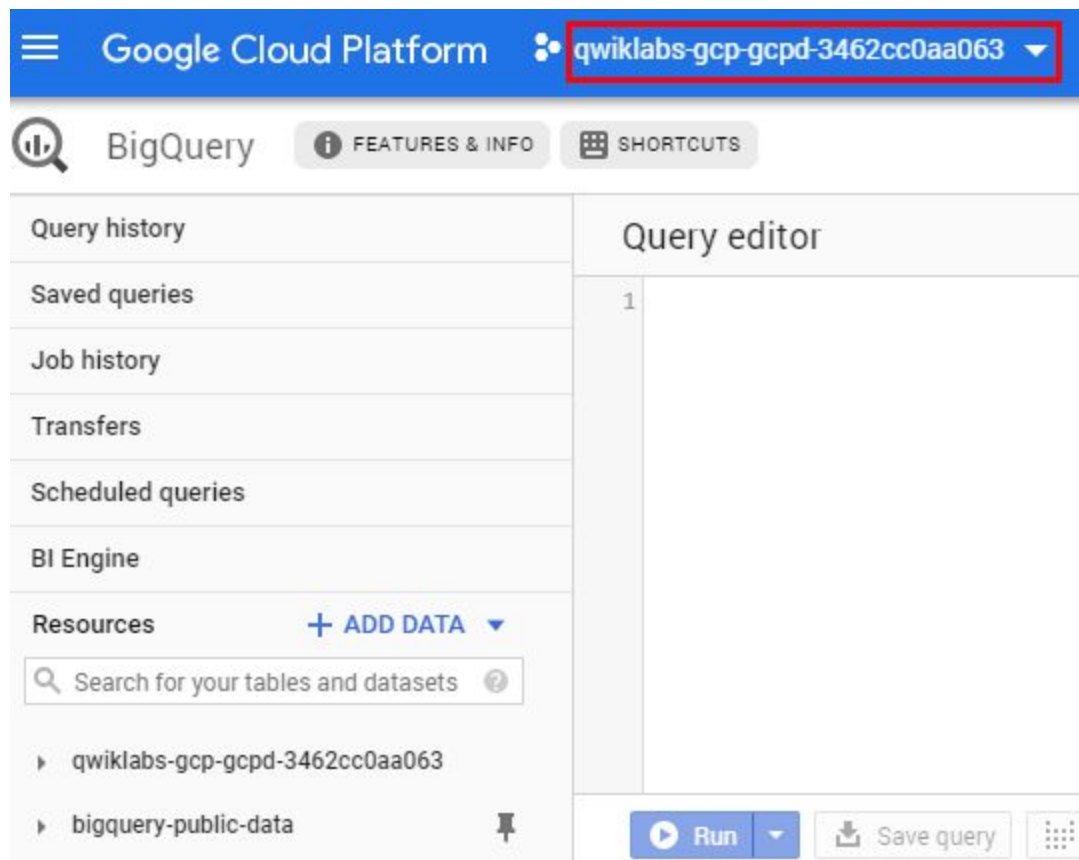

Click on **bigquery-public-data** > **london_bicycles** > **cycle_hire**. You now have data that follows the BigQuery paradigm:

- Google Cloud Project → bigquery-public-data
- Dataset → london_bicycles
- Table → cycle_hire

Now that you are in the `cycle_hire` table, in the center of the console click the **Preview** tab. Your page should resemble the following:

cycle_hire						
Schema		Details		Preview		
Row	rental_id	duration	bike_id	end_date	end_station_id	end_station_name
1	42406939	4500	8519	2015-04-08 17:03:00 UTC	719	Victoria Park R
2	54456949	8880	701	2016-06-02 19:01:00 UTC	732	Duke Street Hill
3	46543472	2520	10776	2015-08-06 13:42:00 UTC	101	Queen Street 1
4	46599130	2280	8968	2015-08-07 12:56:00 UTC	680	Westbridge Ro
5	42954682	2460	19	2015-04-25 17:24:00 UTC	622	Lansdowne Ro
6	61271627	6180	3666	2016-12-24 12:21:00 UTC	187	Queen's Gate (S
7	65050023	2700	1590	2017-05-16 18:27:00 UTC	358	High Holborn ,
8	64735614	3540	11982	2017-05-07 13:07:00 UTC	151	Chepstow Villa
9	52908739	2940	11295	2016-04-14 16:13:00 UTC	120	The Guildhall, C
10	42152586	3180	12438	2015-03-27 19:08:00 UTC	568	Bishop's Bridge
11	53601486	8940	8543	2016-05-07 23:40:00 UTC	463	Thurtle Road, H
12	43633514	2940	11699	2015-05-18 18:59:00 UTC	768	Clapham Comr

Inspect the columns and values populated in the rows. You are now ready to run some SQL queries on the `cycle_hire` table.

Running SELECT, FROM, and WHERE in BigQuery

You now have a basic understanding of SQL querying keywords and the BigQuery data paradigm and some data to work with. Run some SQL commands using this service.

If you look at the bottom right corner of the console, you will notice that there are **24,369,201** rows of data, or individual bikeshare trips taken in London between 2015 and 2017 (not a small amount by any means!)

Now take note of the seventh column key: `end_station_name`, which specifies the end destination of bikeshare rides. Before we get too deep, let's first run a simple query to isolate the `end_station_name` column. Copy and paste the following command in to the Query editor:

```
SELECT end_station_name FROM  
`bigquery-public-data.london_bicycles.cycle_hire`;
```

Then click **Run**.

After ~20 seconds, you should be returned with 24369201 rows that contain the single column you queried for: `end_station_name`.

Why don't you find out how many bike trips were 20 minutes or longer?

Click **COMPOSE NEW QUERY** to clear the Query editor, then run the following query that utilizes the `WHERE` keyword:

```
SELECT * FROM `bigquery-public-data.london_bicycles.cycle_hire` WHERE  
duration>=1200;
```

This query may take a minute or so to run.

`SELECT *` returns all column values from the table. Duration is measured in seconds, which is why you used the value 1200 ($60 * 20$).

If you look in the bottom right corner you see that **7,334,890** rows were returned. As a fraction of the total ($7334890/24369201$), this means that ~30% of London bikeshare rides lasted 20 minutes or longer (they're in it for the long haul!)

Test your understanding

The following are some multiple choice questions to reinforce your understanding of the concepts we've covered so far. Answer them to the best of your abilities.

A fully-managed petabyte-scale data warehouse that runs on the Google Cloud.

Cloud SQL

Google Cloud

checkBigQuery

Cloud Storage bucket

Submit

Projects contain datasets, and datasets contain tables.

False

checkTrue

Submit

With BigQuery, you can access datasets shared publicly from other Google Cloud projects.

False

checkTrue

Submit

More SQL Keywords: GROUP BY, COUNT, AS, and ORDER BY

GROUP BY



The `GROUP BY` keyword will aggregate result-set rows that share common criteria (e.g. a column value) and will return all of the unique entries found for such criteria.

This is a useful keyword for figuring out categorical information on tables. To get a better picture of what this keyword does, click **COMPOSE NEW QUERY**, then copy and paste the following command in the Query editor:

```
SELECT start_station_name FROM  
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY start_station_name;
```

Click **Run**.

You should receive a similar output (row values may not match the following):

Query results		 SAVE AS ▼	 EXPLORE IN DATA STUDIO
Query complete (0.020 sec elapsed, cached)			
Job information		Results	JSON Execution details
Row	start_station_name		
1	Victoria Park Road, Hackney Central		
2	Duke Street Hill, London Bridge		
3	Queen Street 1, Bank		
4	Killick Street, King's Cross		
5	Fulham Park Road, Fulham		
6	Queen's Gate (South), South Kensington		
7	Great Russell Street, Bloomsbury		
8	Falcon Road, Clapham Junction		
9	Winsland Street, Paddington		

Without the `GROUP BY`, the query would have returned the full **24,369,201** rows. `GROUP BY` will output the unique (non-duplicate) column values found in the table. You can see this for yourself by looking in the bottom right corner. You will see **880** rows, meaning there are 880 distinct London bikeshare starting points.



COUNT

The `COUNT()` function will return the number of rows that share the same criteria (e.g. column value). This can be very useful in tandem with a `GROUP BY`.

Add the COUNT function to our previous query to figure out how many rides begin in each starting point. Click **COMPOSE NEW QUERY**, copy and paste the following command in to the Query editor and then click **Run query**:

```
SELECT start_station_name, COUNT(*) FROM  
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY start_station_name;
```

You should receive a similar output (row values may not match the following):

Query results			 SAVE AS ▼	 EXPLORE IN DATA STUDIO
Query complete (2.700 sec elapsed, 676.19 MB processed)				
Job information Results JSON Execution details				
Row	start_station_name	f0_		
1	Bradmead, Nine Elms	1792		
2	Langdon Park, Poplar	6400		
3	Fisherman's Walk West, Canary Wharf	30208		
4	Gower Place , Euston	34560		
5	Tavistock Place, Bloomsbury	34560		
6	Binfield Road, Stockwell	41984		
7	PENTON STREET COMMS TEST TERMINAL _ CONTACT MATT McNULTY	1		
8	LSP1	1		
9	Royal Avenue 1, Chelsea	21761		
10	Northington Street , Holborn	39681		

This shows how many bikeshare rides begin at each starting location.

AS

SQL also has an AS keyword, which creates an *alias* of a table or column. An alias is a new name that's given to the returned column or table—whatever AS specifies.

Add an AS keyword to the last query we ran to see this in action. Click **COMPOSE NEW QUERY**, then copy and paste the following command in to the Query editor:

```
SELECT start_station_name, COUNT(*) AS num_starts FROM  
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY start_station_name;
```

Click **Run**.

You should receive a similar output (be aware that the row values might not be identical):

Query results			SAVE AS	EXPLORE IN DATA STUDIO
Query complete (2.450 sec elapsed, 676.19 MB processed)				
Job information Results JSON Execution details				
Row	start_station_name	num_starts		
1	Bradmead, Nine Elms	1792		
2	Langdon Park, Poplar	6400		
3	Fisherman's Walk West, Canary Wharf	30208		
4	Gower Place , Euston	34560		
5	Tavistock Place, Bloomsbury	34560		
6	Binfield Road, Stockwell	41984		
7	LSP1	1		
8	PENTON STREET COMMS TEST TERMINAL _ CONTACT MATT McNULTY	1		
9	Royal Avenue 1, Chelsea	21761		
10	Northington Street , Holborn	39681		

As you see, the `COUNT(*)` column in the returned table is now set to the alias name `num_starts`. This is a handy keyword to use especially if you are dealing with large sets of data – forgetting that an ambiguous table or column name happens more often than you think!

ORDER BY

The `ORDER BY` keyword sorts the returned data from a query in ascending or descending order based on a specified criteria or column value. We will add this keyword to our previous query to do the following:

- Return a table that contains the number of bikeshare rides that begin in each starting station, organized alphabetically by the starting station.
- Return a table that contains the number of bikeshare rides that begin in each starting station, organized numerically from lowest to highest.
- Return a table that contains the number of bikeshare rides that begin in each starting station, organized numerically from highest to lowest.



Each of the commands below is a separate query. For each command, clear the Query editor, copy and paste the command in to the Query editor, and then click **Run**. Examine the results.

```
SELECT start_station_name, COUNT(*) AS num FROM  
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY start_station_name  
ORDER BY start_station_name;
```

```
SELECT start_station_name, COUNT(*) AS num FROM  
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY start_station_name  
ORDER BY num;
```

```
SELECT start_station_name, COUNT(*) AS num FROM  
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY start_station_name  
ORDER BY num DESC;
```

The last query should have returned the following:

Query results			 SAVE AS ▼	 EXPLORE IN DATA STUDIO
Query complete (2.554 sec elapsed, 676.19 MB processed)				
Job information Results JSON Execution details				
Row	start_station_name	num		
1	Belgrove Street , King's Cross	234458		
2	Hyde Park Corner, Hyde Park	215629		
3	Waterloo Station 3, Waterloo	201630		
4	Black Lion Gate, Kensington Gardens	161952		
5	Albert Gate, Hyde Park	155647		
6	Waterloo Station 1, Waterloo	145910		
7	Wormwood Street, Liverpool Street	119447		
8	Hop Exchange, The Borough	115135		
9	Wellington Arch, Hyde Park	110260		
10	Triangle Car Park, Hyde Park	108347		

We see that "Belgrove Street, King's Cross" has the highest number of starts. However, as a fraction of the total ($234458/24369201$), we see that $< 1\%$ of rides start from this station.

Test your understanding

The following are some multiple choice questions to reinforce your understanding of the concepts we've covered so far. Answer them to the best of your abilities.

Aggregates rows that share common criteria (e.g. a column value) and will return all of the unique entries found for such criteria.

checkGROUP BY

ORDER BY

AS

COUNT

Submit

A SQL function will count and return the number of rows that share common criteria.

AS

closeORDER BY

closeGROUP BY

checkCOUNT

Submit

Creates an alias of a table or column.

ORDER BY

COUNT

checkAS

GROUP BY

Submit

Sorts the returned data from a query in ascending or descending order based on a specified criteria or column value.

AS

checkORDER BY

COUNT

GROUP BY

Submit

Working with Cloud SQL

Exporting queries as CSV files

[Cloud SQL](#) is a fully-managed database service that makes it easy to set up, maintain, manage, and administer your relational PostgreSQL and MySQL databases in the cloud. There are two formats of data accepted by Cloud SQL: dump files (.sql) or CSV files (.csv). You will learn how to export subsets of the `cycle_hire` table into CSV files and upload them to Cloud Storage as an intermediate location.

Back in the BigQuery Console, this should have been the last command that you ran:



```
SELECT start_station_name, COUNT(*) AS num FROM
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY start_station_name
ORDER BY num DESC;
```

In the Query Results section click **SAVE RESULTS > CSV(local file) > SAVE**. This initiates a download, which saves this query as a CSV file. Note the location and the name of this downloaded file—you will need it soon.

Click **COMPOSE NEW QUERY**, then copy and run the following in the query editor:

```
SELECT end_station_name, COUNT(*) AS num FROM  
`bigquery-public-data.london_bicycles.cycle_hire` GROUP BY end_station_name  
ORDER BY num DESC;
```

This will return a table that contains the number of bikeshare rides that finish in each ending station and is organized numerically from highest to lowest number of rides. You should receive the following output:

Query results			 SAVE AS ▼	 EXPLORE IN DATA STUDIO
Query complete (3.134 sec elapsed, 676.01 MB processed)				
Job information Results JSON Execution details				
Row	end_station_name	num		
1	Belgrove Street , King's Cross	231802		
2	Hyde Park Corner, Hyde Park	215038		
3	Waterloo Station 3, Waterloo	193200		
4	Albert Gate, Hyde Park	157943		
5	Hop Exchange, The Borough	156964		
6	Black Lion Gate, Kensington Gardens	156020		
7	Waterloo Station 1, Waterloo	141733		
8	Wormwood Street, Liverpool Street	129376		
9	Brushfield Street, Liverpool Street	120659		
10	Finsbury Circus, Liverpool Street	116011		

In the Query Results section click **SAVE RESULTS > CSV(local file) > SAVE**. This initiates a download, which saves this query as a CSV file. Note the location and the name of this downloaded file—you will need it in the following section.

Upload CSV files to Cloud Storage

Go to the Cloud Console where you'll create a storage bucket where you can upload the files you just created.

Select **Navigation menu > Storage > Browser**, and then click **Create bucket**.

Enter a unique name for your bucket, keep all other settings, and hit **Create**:



Create a bucket



Name your bucket

Pick a **globally unique, permanent name**. [Naming guidelines](#)

qwiklabs-gcp-00-d82878564de7

Tip: Don't include any sensitive information

CONTINUE

Choose where to store your data

This permanent choice defines the geographic placement of your data and affects cost, performance, and availability. [Learn more](#)



Cost-saving tip: You can keep your initial storage free by choosing **Location type > Region** and selecting **Location > us-east1, us-central1, or us-west1**.

Location type

- ☐ Region
Lowest latency within a single region
- ☐ Dual-region
High availability and low latency across 2 regions
- ☒ Multi-region
Highest availability across largest area

Location

us (multiple regions in United States) ▼

CONTINUE

- Choose a default storage class for your data
- Choose how to control access to objects
- Advanced settings (optional)

Test Completed Task

Click **Check my progress** below to check your lab progress. If you successfully created your bucket, you'll see an assessment score.

Create a cloud storage bucket.

Check my progress


You should now be in the Cloud Console looking at your newly created Cloud Storage Bucket.

Click **Upload files** and select the CSV that contains `start_station_name` data. Then click **Open**. Repeat this for the `end_station_name` data.

Rename your `start_station_name` file by clicking on the three dots next to on the far side of the file and click **rename**. Rename the file `start_station_data.csv`.

Rename your `end_station_name` file by clicking on the three dots next to on the far side of the file and click **rename**. Rename the file `end_station_data.csv`.

Your bucket should now resemble the following:

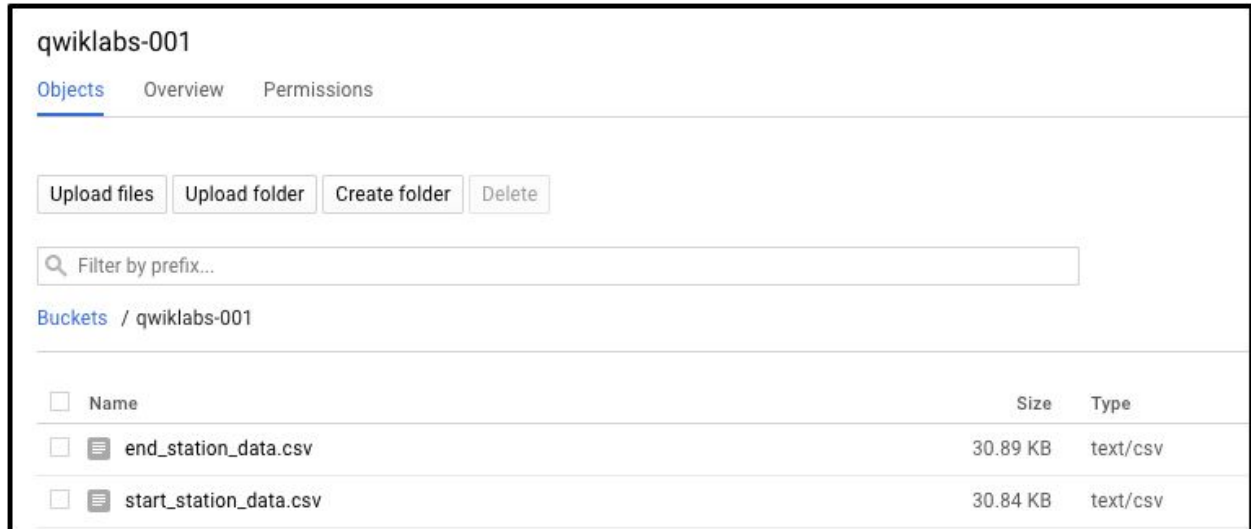

Test Completed Task

Click **Check my progress** to verify your performed task. If you have successfully upload CSV objects to your bucket, you will see an assessment score.

Upload CSV files to Cloud Storage.

Check my progress


Create a Cloud SQL instance

In the console, select **Navigation menu > SQL**.

Click **Create Instance**.


From here, you will be prompted to choose a database engine. Select **MySQL**.

Now enter in a name for your instance (like "qwiklabs-demo") and enter in a secure password in the **Root password** field (remember it!), then click **Create**:

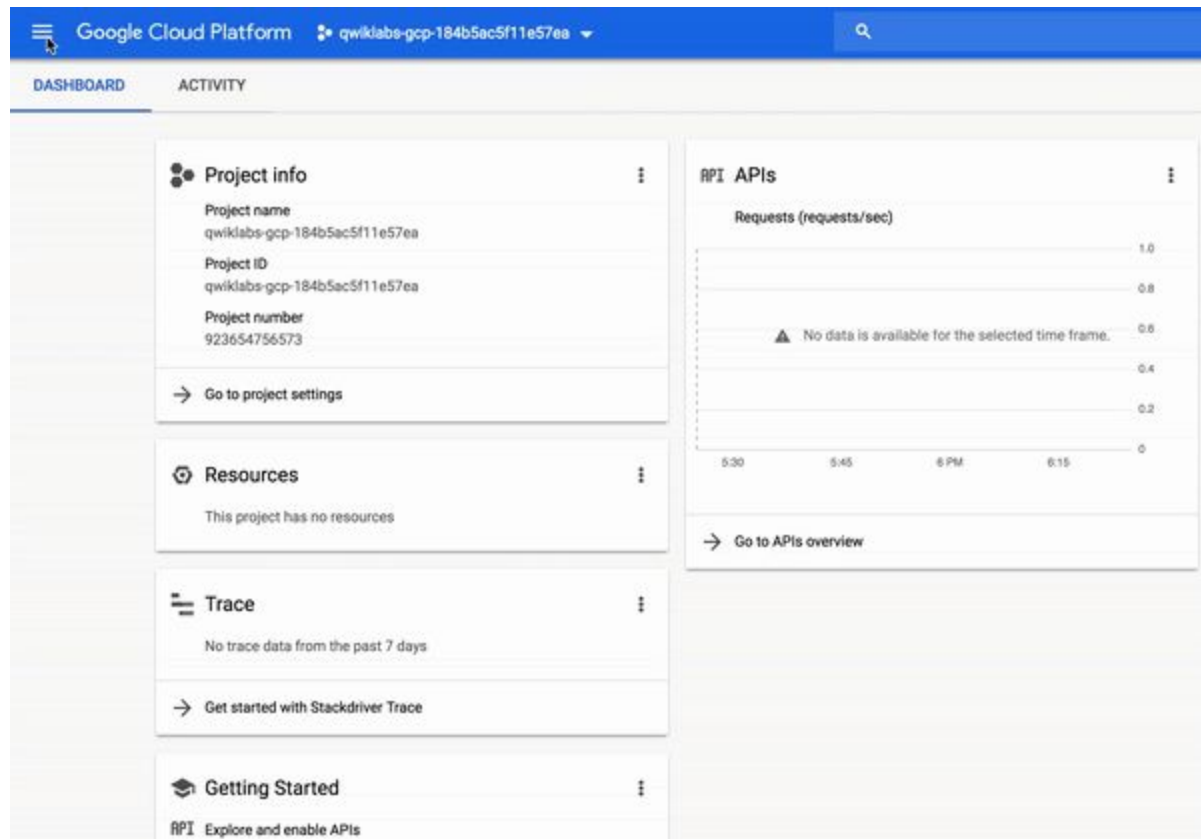

It might take a few minutes for the instance to be created. Once it is, you will see a green checkmark next to the instance name.

Click on the Cloud SQL instance. You should now be on a page that resembles the following:

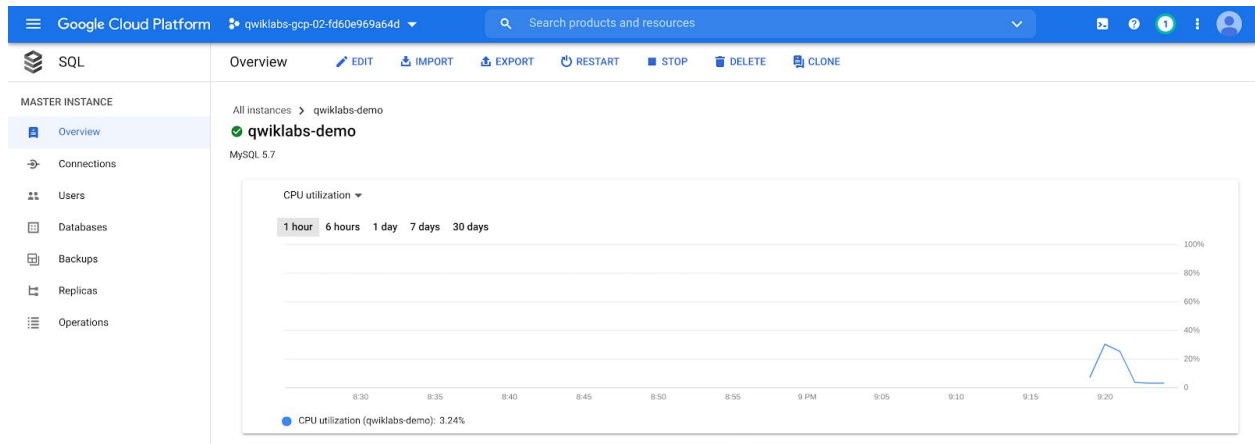

Test Completed Task

To check out your lab progress, click **Check my progress** below. If you have successfully set up your Cloud SQL instance, you will see an assessment score.

Create a CloudSQL Instance.

Check my progress

New Queries in Cloud SQL


CREATE keyword (databases and tables)

Now that you have a Cloud SQL instance up and running, create a database inside of it using the Cloud Shell Command Line.


Activate Cloud Shell

Cloud Shell is a virtual machine that is loaded with development tools. It offers a persistent 5GB home directory and runs on the Google Cloud. Cloud Shell provides command-line access to your Google Cloud resources.


In the Cloud Console, in the top right toolbar, click the **Activate Cloud Shell** button.

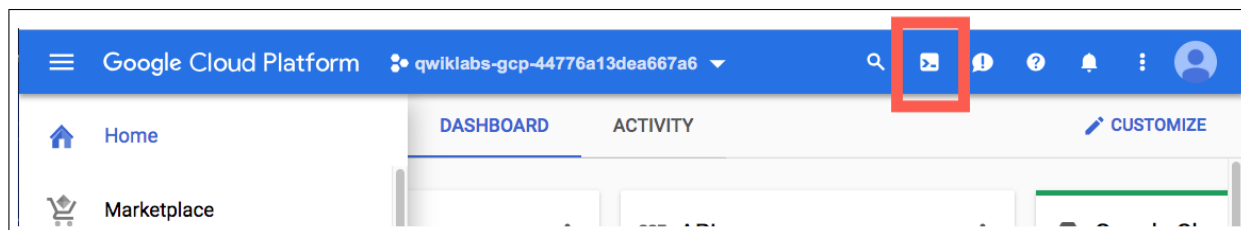

Click **Continue**.

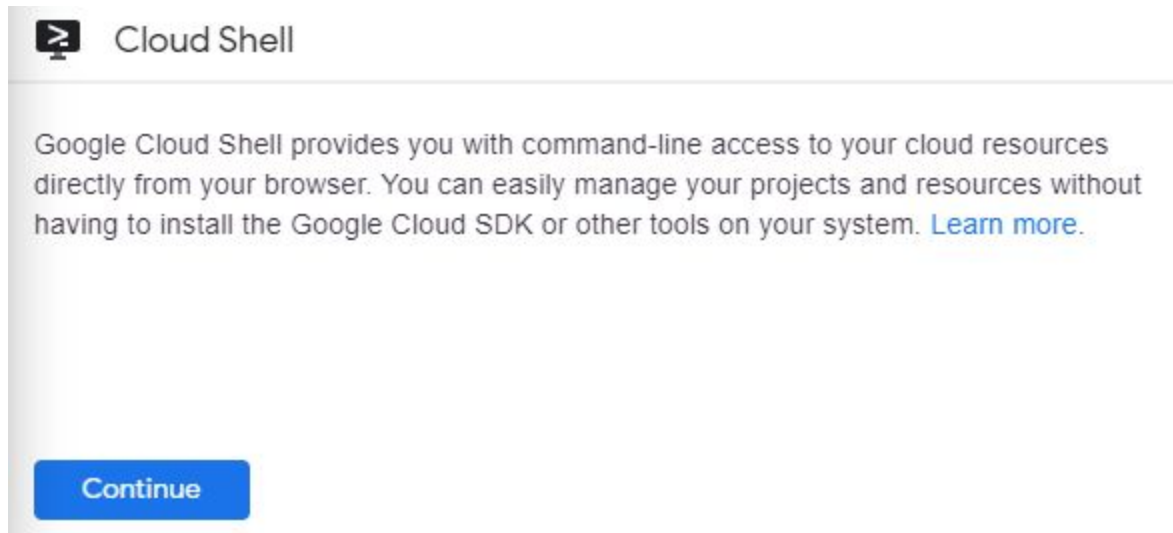

It takes a few moments to provision and connect to the environment. When you are connected, you are already authenticated, and the project is set to your *PROJECT_ID*. For example:

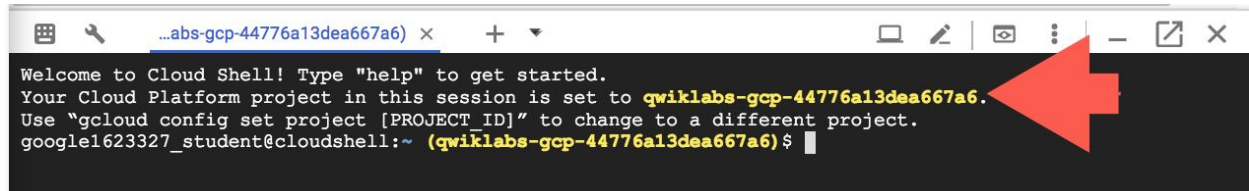The image shows a terminal window with a dark background. The title bar at the top reads "...abs-gcp-44776a13dea667a6) x". The terminal text says: "Welcome to Cloud Shell! Type 'help' to get started. Your Cloud Platform project in this session is set to **qwiklabs-gcp-44776a13dea667a6**. Use 'gcloud config set project [PROJECT_ID]' to change to a different project. google1623327_student@cloudshell:~ (**qwiklabs-gcp-44776a13dea667a6**)\$". A large red arrow points from the right towards the project ID in the second line of text.

```
...abs-gcp-44776a13dea667a6) x
Welcome to Cloud Shell! Type "help" to get started.
Your Cloud Platform project in this session is set to qwiklabs-gcp-44776a13dea667a6.
Use "gcloud config set project [PROJECT_ID]" to change to a different project.
google1623327_student@cloudshell:~ (qwiklabs-gcp-44776a13dea667a6)$
```

gcloud is the command-line tool for Google Cloud. It comes pre-installed on Cloud Shell and supports tab-completion.

You can list the active account name with this command:

```
gcloud auth list
```

(Output)

```
Credentialed accounts:
- <myaccount>@<mydomain>.com (active)
```

(Example output)

```
Credentialed accounts:
```

```
- google1623327_student@qwiklabs.net
```

You can list the project ID with this command:

```
gcloud config list project
```

(Output)

```
[core]
```

```
project = <project_ID>
```

(Example output)

```
[core]
```

```
project = qwiklabs-gcp-44776a13dea667a6
```

For full documentation of gcloud see the [gcloud command-line tool overview](#).

Run the following command in Cloud Shell to connect to your SQL instance, replacing qwiklabs-demo if you used a different name for your instance:

```
gcloud sql connect qwiklabs-demo --user=root
```

It may take a minute to connect to your instance.

When prompted, enter the root password you set for the instance.

You should now be on a similar output:

```
Welcome to the MariaDB monitor.  Commands end with ; or \g.
```

```
Your MySQL connection id is 494
```

```
Server version: 5.7.14-google-log (Google)
```

```
Copyright (c) 2000, 2017, Oracle, MariaDB Corporation Ab and others.
```



```
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.
```

```
MySQL [(none)]>
```

A Cloud SQL instance comes with pre-configured databases, but you will create your own to store the London bikeshare data.

Run the following command at the MySQL server prompt to create a database called bike:

```
CREATE DATABASE bike;
```

You should receive the following output:

```
Query OK, 1 row affected (0.05 sec)
```

```
MySQL [(none)]>
```

Test Completed Task

Check your progress by clicking **Check my progress** to verify your performed task. If you have successfully created database in Cloud SQL instance, you will see an assessment score.

Create a database.

Check my progress

Make a table inside of the bike database by running the following command:

```
USE bike;  
CREATE TABLE london1 (start_station_name VARCHAR(255), num INT);
```

This statement uses the CREATE keyword, but this time it uses the TABLE clause to specify that it wants to build a table instead of a database. The USE keyword specifies a database that you want to connect to. You now have a table named "london1" that contains two columns, "start_station_name" and "num".

VARCHAR(255) specifies variable length string column that can hold up to 255 characters and INT is a column of type integer.

Create another table named "london2" by running the following command:

```
USE bike;  
CREATE TABLE london2 (end_station_name VARCHAR(255), num INT);
```

Now confirm that your empty tables were created. Run the following commands at the MySQL server prompt:

```
SELECT * FROM london1;  
SELECT * FROM london2;
```

You should receive the following output for both commands:


```
Empty set (0.04 sec)
```

It says "empty set" because you haven't loaded in any data yet.

Upload CSV files to tables

Return to the Cloud SQL console. You will now upload the `start_station_name` and `end_station_name` CSV files into your newly created `london1` and `london2` tables.

1. In your Cloud SQL instance page, click **IMPORT**.
2. In the Cloud Storage file field, click **Browse**, and then click the arrow opposite your bucket name, and then click `start_station_data.csv`. Click **Select**.
3. Select the `bike` database and type in "london1" as your table.
4. Click **Import**:

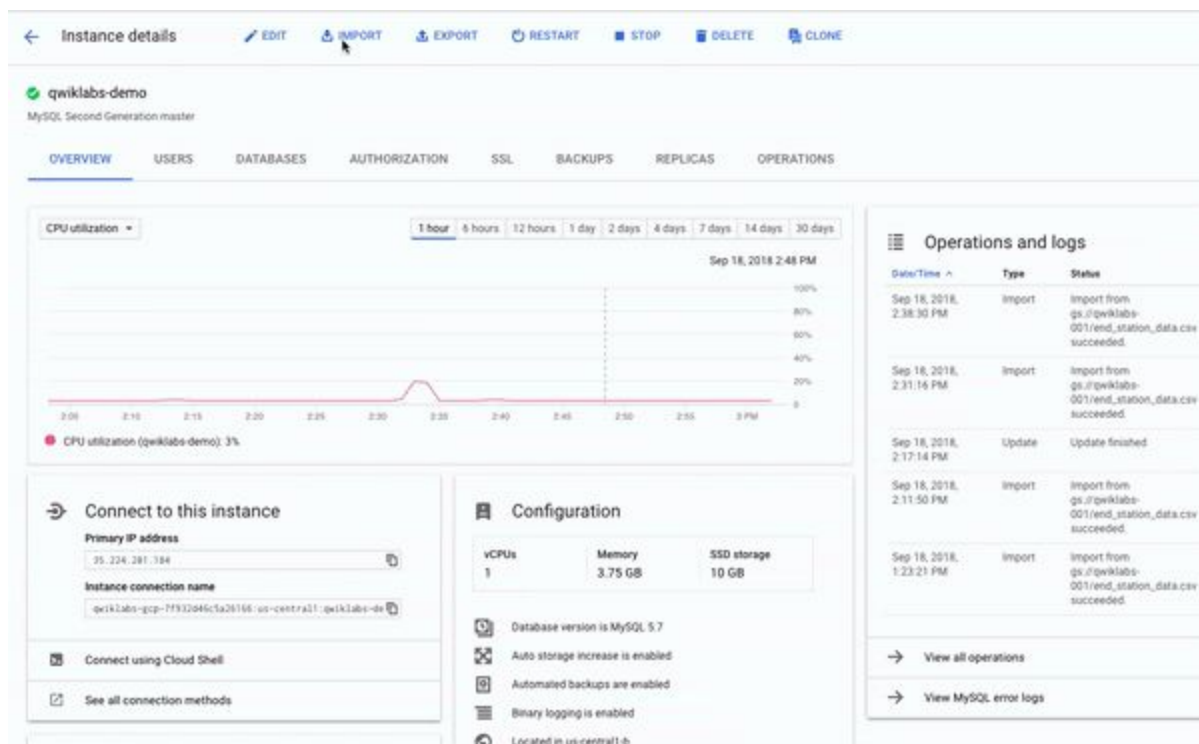

Do the same for the other CSV file.

1. In your Cloud SQL instance page, click **IMPORT**.

2. In the Cloud Storage file field, click **Browse**, and then click the arrow opposite your bucket name, and then click `end_station_data.csv`. Click **Select**.
3. Select the bike database and type in "london2" as your table.
4. Click **Import**:

You should now have both CSV files uploaded to tables in the bike database.

Return to your Cloud Shell session and run the following command at the MySQL server prompt to inspect the contents of `london1`:

```
SELECT * FROM london1;
```

You should receive 881 lines of output, one more each unique station name. Your output be formatted like this:

```
MySQL [bike]> SELECT * FROM london1;
```

start_station_name	num
start_station_name	0
Belgrove Street , King's Cross	234458
Hyde Park Corner, Hyde Park	215629
Waterloo Station 3, Waterloo	201630
Black Lion Gate, Kensington Gardens	161952
Albert Gate, Hyde Park	155647
Waterloo Station 1, Waterloo	145910
Wormwood Street, Liverpool Street	119447
Hop Exchange, The Borough	115135
Wellington Arch, Hyde Park	110260

Run the following command to make sure that `london2` has been populated:

```
SELECT * FROM london2;
```

You should receive 883 lines of output, one more each unique station name. Your output be formatted like this:

```
MySQL [bike]> SELECT * FROM london2;
```

end_station_name	num
end_station_name	0
Belgrove Street , King's Cross	231802
Hyde Park Corner, Hyde Park	215038
Waterloo Station 3, Waterloo	193200
Albert Gate, Hyde Park	157943
Hop Exchange, The Borough	156964
Black Lion Gate, Kensington Gardens	156020
Waterloo Station 1, Waterloo	141733
Wormwood Street, Liverpool Street	129376
Brushfield Street, Liverpool Street	120659

DELETE keyword

Here are a couple more SQL keywords that help us with data management. The first is the DELETE keyword.

Run the following commands in your MySQL session to delete the first row of the london1 and london2:

```
DELETE FROM london1 WHERE num=0;  
DELETE FROM london2 WHERE num=0;
```

You should receive the following output after running both commands:

```
Query OK, 1 row affected (0.04 sec)
```

The rows deleted were the column headers from the CSV files. The DELETE keyword will not remove the first row of the file per se, but all rows of the table where the column name (in this case "num") contains a specified value (in this case "0"). If you run the `SELECT * FROM london1;` and `SELECT * FROM london2;` queries and scroll to the top of the table, you will see that those rows no longer exist.

INSERT INTO keyword

You can also insert values into tables with the INSERT INTO keyword. Run the following command to insert a new row into london1, which sets start_station_name to "test destination" and num to "1":

```
INSERT INTO london1 (start_station_name, num) VALUES ("test destination", 1);
```

The INSERT INTO keyword requires a table (london1) and will create a new row with columns specified by the terms in the first parenthesis (in this case "start_station_name" and "num"). Whatever comes after the "VALUES" clause will be inserted as values in the new row.

You should receive the following output:

```
Query OK, 1 row affected (0.05 sec)
```

If you run the query `SELECT * FROM london1;` you will see an additional row added at the bottom of the "london1" table:

```
| Blackfriars road, Southwark | 5 |
| LSP2 | 4 |
| PENTON STREET COMMS TEST TERMINAL _ CONTACT MATT McNULTY | 1 |
| LSP1 | 1 |
| test destination | 1 |
+-----+-----+
881 rows in set (0.05 sec)
```

UNION keyword

The last SQL keyword that you'll learn about is UNION. This keyword combines the output of two or more SELECT queries into a result-set. You use UNION to combine subsets of the "london1" and "london2" tables.

The following chained query pulls specific data from both tables and combine them with the UNION operator.

Run the following command at the MySQL server prompt:

```
SELECT start_station_name AS top_stations, num FROM london1 WHERE num>100000
UNION
SELECT end_station_name, num FROM london2 WHERE num>100000
ORDER BY top_stations DESC;
```

The first SELECT query selects the two columns from the "london1" table and creates an alias for "start_station_name", which gets set to "top_stations". It uses the WHERE keyword to only pull rideshare station names where over 100,000 bikes start their journey.

The second SELECT query selects the two columns from the "london2" table and uses the WHERE keyword to only pull rideshare station names where over 100,000 bikes end their journey.

The UNION keyword in between combines the output of these queries by assimilating the "london2" data with "london1". Since "london1" is being unioned with "london2", the column values that take precedent are "top_stations" and "num".

ORDER BY will order the final, unioned table by the "top_stations" column value alphabetically and in descending order.

You should receive the following output:

top_stations	num_ends
Wormwood Street, Liverpool Street	119447
Wormwood Street, Liverpool Street	129376
Wellington Arch, Hyde Park	110260
Wellington Arch, Hyde Park	105729
Waterloo Station 3, Waterloo	201630
Waterloo Station 3, Waterloo	193200
Waterloo Station 1, Waterloo	145910
Waterloo Station 1, Waterloo	141733
Triangle Car Park, Hyde Park	108347
Triangle Car Park, Hyde Park	107372
Newgate Street , St. Paul's	108223
Hyde Park Corner, Hyde Park	215629
Hyde Park Corner, Hyde Park	215038
Hop Exchange, The Borough	115135
Hop Exchange, The Borough	156964
Finsbury Circus, Liverpool Street	105810
Finsbury Circus, Liverpool Street	116011
Craven Street, Strand	104457
Brushfield Street, Liverpool Street	103114
Brushfield Street, Liverpool Street	120659
Black Lion Gate, Kensington Gardens	161952
Black Lion Gate, Kensington Gardens	156020
Bethnal Green Road, Shoreditch	100005
Bethnal Green Road, Shoreditch	100590
Belgrove Street , King's Cross	234458
Belgrove Street , King's Cross	231802
Albert Gate, Hyde Park	155647
Albert Gate, Hyde Park	157943
28 rows in set (0.03 sec)	

As you see, 13/14 stations share the top spots for rideshare starting and ending points. With some basic SQL keywords you were able to query a sizable dataset, which returned data points and answers to specific questions.