

Chapter 1: Introduction





Chapter 1: Introduction

- What Operating Systems Do
- Operating-System Structure
- Operating-System Operations
- Process Management
- Memory Management
- Storage Management





Objectives

- To describe the basic organization of computer systems
- To provide a grand tour of the major components of operating systems
- To give an overview of the many types of computing environments





What is an Operating System?

- An operating system is a program that manages a computer's hardware.
- A program that acts as an intermediary between a user of a computer and the computer hardware
- some operating systems are designed to be convenient, others to be efficient, and others to be some combination of the two.
- Operating system goals:
 - Execute user programs and make solving user problems easier
 - Make the computer system convenient to use
 - Use the computer hardware in an efficient manner






Computer System Structure

- Computer system can be divided into four components:
 - Hardware – provides basic computing resources
 - ▶ CPU, memory, I/O devices
 - Operating system
 - ▶ Controls and coordinates use of hardware among various applications and users
 - Application programs – define the ways in which the system resources are used to solve the computing problems of the users
 - ▶ Word processors, compilers, web browsers, database systems, video games
 - Users
 - ▶ People, machines, other computers





Four Components of a Computer System

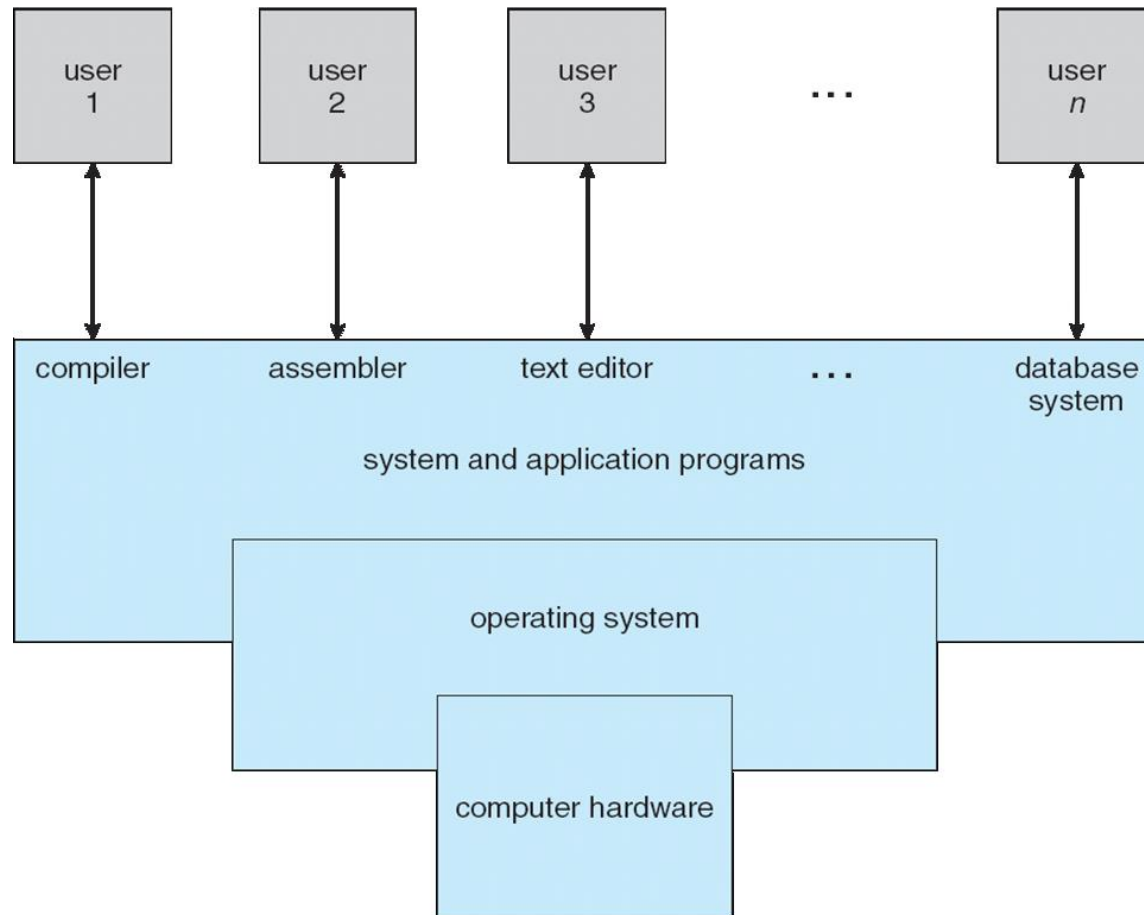

Abstract view of the components of a computer system





What Operating Systems Do

- Depends on the **point of view** –**User view & System view**

User View:

- **PC** users want convenience, **ease of use** and **good performance**
 - Don't care about **resource utilization**, **dedicated to single user experience**
- But shared computer such as **mainframe** or **minicomputer** must keep all users happy
- Users of dedicated systems such as **workstations** have dedicated resources but frequently use shared resources from **servers**
- Handheld computers are resource poor, optimized for usability and battery life
- Some computers have little or no user interface, such as embedded computers in devices and automobiles.





Operating System Definition

System View: OS is the program involved with **hardware**.

Thus, we can view OS as

- OS is a **resource allocator**
 - Manages all resources (CPU, memory, disk etc)
 - Decides between conflicting requests for efficient and fair resource use
- OS is a **control program**
 - Controls execution of programs to prevent errors and improper use of the computer





Operating System Definition (Cont.)

- No universally accepted definition
- Simple viewpoint : “Everything a vendor ships when you order is an operating system” is a good approximation
- More common definition:
“The one program running at all times on the computer” is the **kernel**.
- Everything else is either
 - a system program (ships with the operating system) , or
 - an application program.







Operating System Structure

- **Multiprogramming (Batch system)** needed for efficiency
 - Single user cannot keep CPU and I/O devices busy at all times
 - Multiprogramming organizes jobs (code and data) so CPU always has one to execute
 - A subset of total jobs in system is kept in memory
 - One job selected and run via **job scheduling**
 - When it has to wait (for I/O for example), OS switches to another job
- **Timesharing (multitasking)** is logical extension in which CPU switches jobs so frequently that users can interact with each job while it is running, creating **interactive** computing
 - **Response time** should be < 1 second
 - Each user has at least one program executing in memory \Rightarrow **process**
 - If several jobs ready to run at the same time \Rightarrow **CPU scheduling**
 - If processes don't fit in memory, **swapping** moves them in and out to run
 - **Virtual memory** allows execution of processes not completely in memory





Memory Layout for Multiprogrammed System

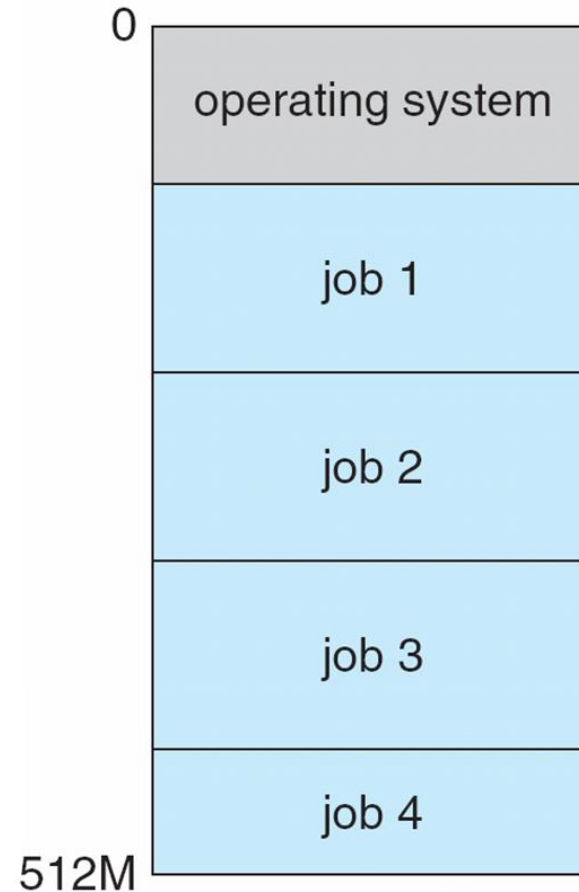



Operating-System Operations

- **Interrupt driven** (hardware and software)
 - Hardware interrupt by one of the devices
 - Software interrupt (**exception** or **trap**):
 - ▶ Software error (e.g., division by zero)
 - ▶ Request for operating system service
 - ▶ Other process problems include infinite loop, processes modifying each other or the operating system





Operating-System Operations (cont.)


- **Dual-mode** operation allows OS to protect itself and other system components
 - **User mode** and **kernel mode**
 - **Mode bit** provided by hardware
 - ▶ Provides ability to distinguish when system is running user code or kernel code
 - ▶ Some instructions designated as **privileged**, only executable in kernel mode
 - ▶ System call changes mode to kernel, return from call resets it to user
- Increasingly CPUs support multi-mode operations
 - i.e. **virtual machine manager (VMM)** mode for guest **VMs**





Transition from User to Kernel Mode

- Timer to prevent infinite loop / process hogging resources
 - Timer is set to interrupt the computer after some time period
 - Keep a counter that is decremented by the physical clock.
 - Operating system set the counter (privileged instruction)
 - When counter zero generate an interrupt
 - Set up before scheduling process to regain control or terminate program that exceeds allotted time

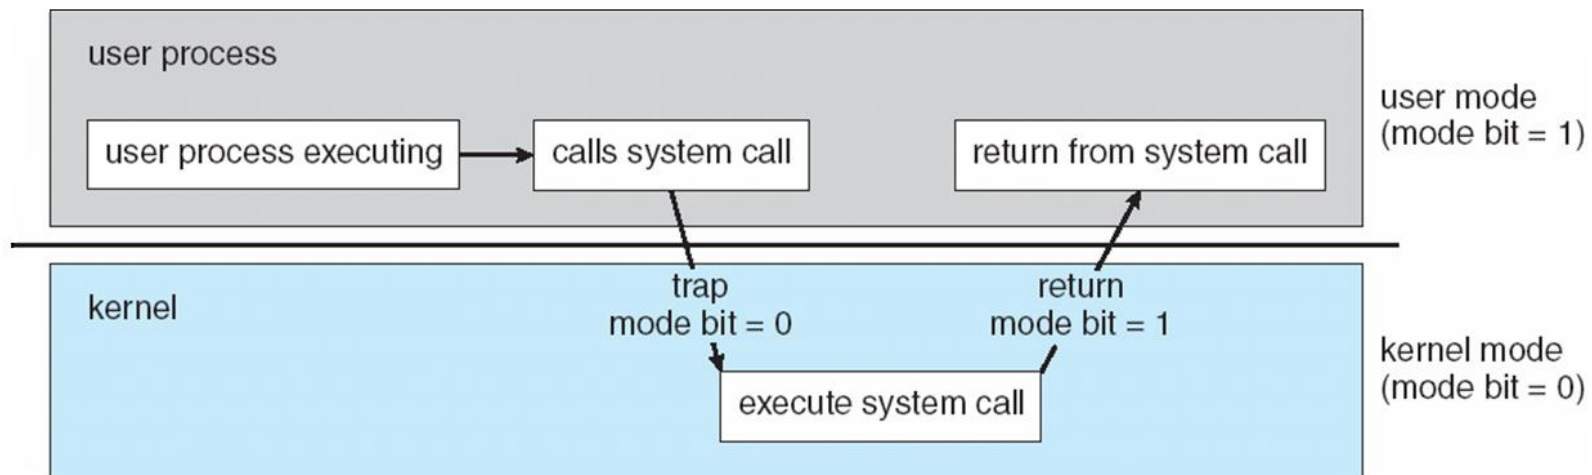



Process Management

- A process is a program in execution. It is a unit of work within the system. Program is a ***passive entity***, process is an ***active entity***.
- Process needs resources to accomplish its task
 - CPU, memory, I/O, files
 - Initialization data
- Process termination requires reclaim of any reusable resources
- Single-threaded process has one **program counter** specifying location of next instruction to execute
 - Process executes instructions sequentially, one at a time, until completion
- Multi-threaded process has one program counter per thread
- Typically system has many processes, some user, some operating system running concurrently on one or more CPUs
 - Concurrency by multiplexing the CPUs among the processes / threads






Process Management Activities

The operating system is responsible for the following activities in connection with process management:

- Creating and deleting both user and system processes
- Suspending and resuming processes
- Providing mechanisms for process synchronization
- Providing mechanisms for process communication
- Providing mechanisms for deadlock handling

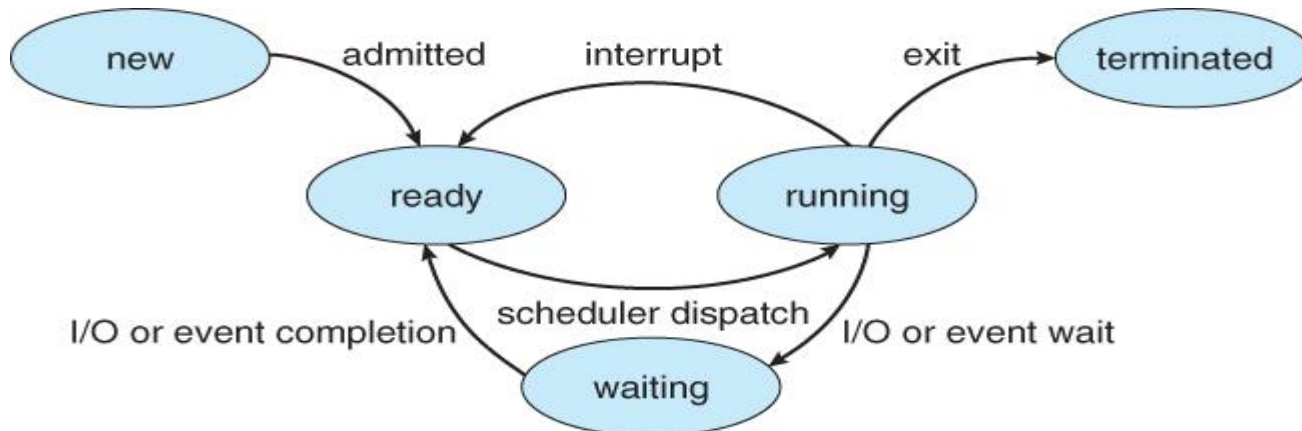



Memory Management

- To execute a program all (or part) of the instructions must be in memory
- All (or part) of the data that is needed by the program must be in memory.
- Memory management determines what is in memory and when
 - Optimizing CPU utilization and computer response to users
- Memory management activities
 - Keeping track of which parts of memory are currently being used and by whom
 - Deciding which processes (or parts thereof) and data to move into and out of memory
 - Allocating and deallocating memory space as needed





Storage Management

- OS provides uniform, logical view of information storage
 - Abstracts physical properties to logical storage unit - **file**
 - Each medium is controlled by device (i.e., disk drive, tape drive)
 - ▶ Varying properties include access speed, capacity, data-transfer rate, access method (sequential or random)
- File-System management
 - Files usually organized into directories
 - Access control on most systems to determine who can access what
 - OS activities include
 - ▶ Creating and deleting files and directories
 - ▶ Primitives to manipulate files and directories
 - ▶ Mapping files onto secondary storage
 - ▶ Backup files onto stable (non-volatile) storage media





Mass-Storage Management

- Usually disks used to store data that does not fit in main memory or data that must be kept for a “long” period of time
- Proper management is of central importance
- Entire speed of computer operation hinges on disk subsystem and its algorithms
- OS activities
 - Free-space management
 - Storage allocation
 - Disk scheduling
- Some storage need not be fast
 - Tertiary storage includes optical storage, magnetic tape
 - Still must be managed – by OS or applications





Performance of Various Levels of Storage

Level	1	2	3	4	5
Name	registers	cache	main memory	solid state disk	magnetic disk
Typical size	< 1 KB	< 16MB	< 64GB	< 1 TB	< 10 TB
Implementation technology	custom memory with multiple ports CMOS	on-chip or off-chip CMOS SRAM	CMOS SRAM	flash memory	magnetic disk
Access time (ns)	0.25 - 0.5	0.5 - 25	80 - 250	25,000 - 50,000	5,000,000
Bandwidth (MB/sec)	20,000 - 100,000	5,000 - 10,000	1,000 - 5,000	500	20 - 150
Managed by	compiler	hardware	operating system	operating system	operating system
Backed by	cache	main memory	disk	disk	disk or tape


Movement between levels of storage hierarchy can be explicit or implicit





Migration of data “A” from Disk to Register

- Multitasking environments must be careful to use most recent value, no matter where it is stored in the storage hierarchy

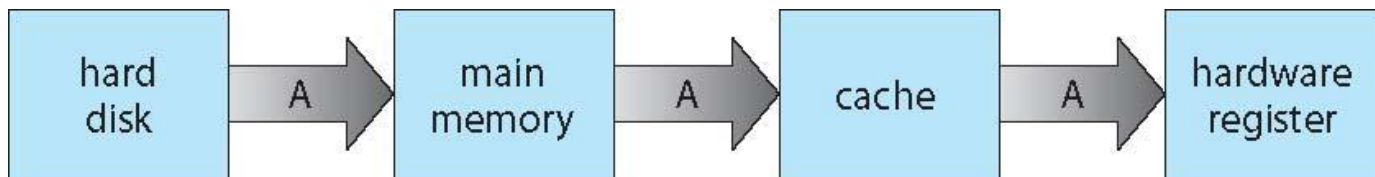

- Multiprocessor environment must provide **cache coherency** in hardware such that all CPUs have the most recent value in their cache





I/O Subsystem

- One purpose of OS is to hide peculiarities of hardware devices from the user
- I/O subsystem responsible for
 - Memory management of I/O including buffering (storing data temporarily while it is being transferred), caching (storing parts of data in faster storage for performance), spooling (the overlapping of output of one job with input of other jobs)
 - General device-driver interface
 - Drivers for specific hardware devices



End of Chapter 1

