

Configuration Smartphone

[illegible]

Téléphonie : Configuration Smartphone

Table des matières

Tableau des versions	2
1. Configuration Téléphone et enrôlement INTUNE	4
Enrôlement.....	4
2. Configuration WIFI CHG	6
Récupérer la Mac de la carte wifi du téléphone :	6
Ajout dans l'ISE.....	6
Ajout du Wifi CHG sur le smartphone.....	7
3. Installation des logiciels sur le Playstore	8
4. Configuration de Jabber.....	9
Remplacement d'un téléphone par un smartphone (numéro déjà existant)	9
Nouvelle ligne pour un smartphone (aucun numéro attribué).....	17
Nouvelle ligne compte générique	20
5. Administratif	26
Remplir et faire signer la feuille « Réception smartphone ».....	26
Remplir la feuille « GO_Infra_Liste GSM_SMARTPHONE_ ».....	26
6. Annexes.....	27
Le QR CODE d'enrôlement n'est pas reconnu	27
Profil Cadre / Profil Directeur	28

1. Configuration Téléphone et enrôlement INTUNE

Enrôlement

(Le smartphone doit être neuf ou réinitialiser d'usine afin de pouvoir être enrôler)



Tapoter 6 fois sur l'écran afin d'arriver à cet écran

Scanner le QR CODE correspondant au profil de l'utilisateur cadre ou directeur

[GO] SMARTPHONES PROFIL CADRES

Utilisez ce jeton ou code QR pour inscrire des appareils. [En savoir plus](#)

Date de création du jeton

06/03/2026 14:45

Jeton

CDNBIPDD

Jeton en tant que code QR



[GO] SMARTPHONES PROFIL DIRECTEURS

Utilisez ce jeton ou code QR pour inscrire des appareils. [En savoir plus](#)

Date de création du jeton

27/03/2026 10:12

Jeton

TYPHKRHP

Jeton en tant que code QR





Si le QR CODE n'est pas reconnu suivre [Le QR CODE d'enrôlement n'est pas reconnu](#)


Sélectionner la box wifi 4g/5g en attendant pour la configuration

[LIEN VERS LES TOKENS](#)

Téléphonie : Configuration Smartphone

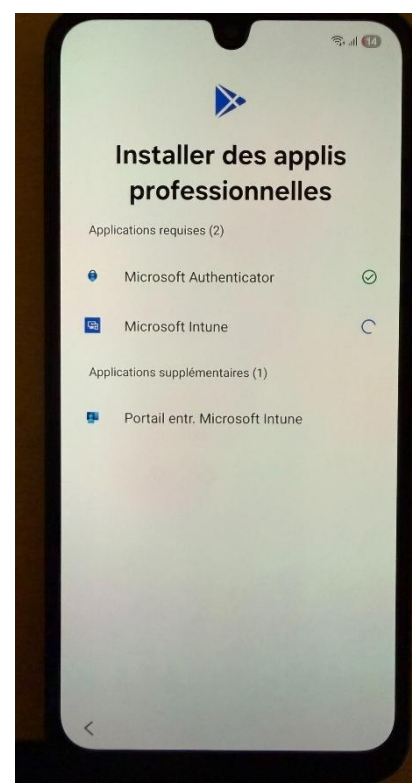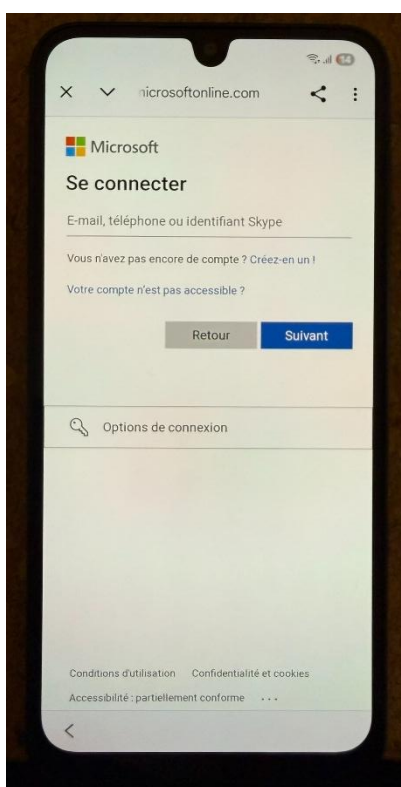

Se connecter avec le compte Microsoft de l'utilisateur et installer les applications obligatoires

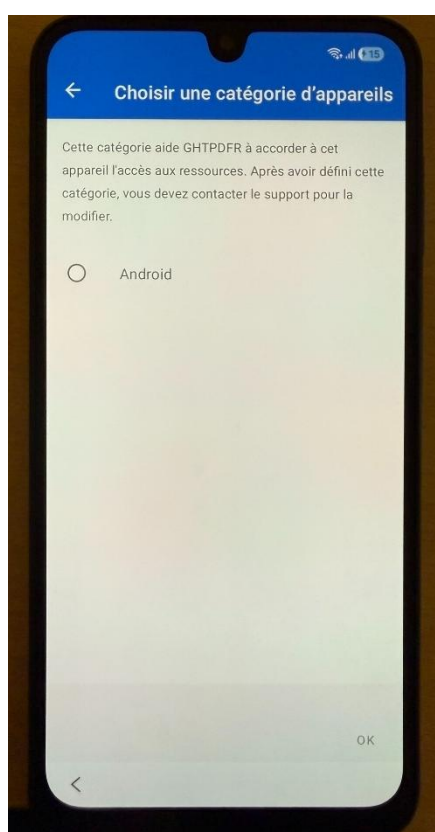

(Dans le cas d'un profil directeur ne pas configurer de compte personnel)

Continuer jusqu'à la fin de la configuration

2. Configuration WIFI CHG

Récupérer la Mac de la carte wifi du téléphone :

Paramètres → À propos du téléphone → Information sur le statut → Adresse MAC Wi-Fi du téléphone

Ajout dans l'ISE

Ajouter la Mac de la carte Wifi dans **CHG-MAB-JABBER** et mettre une description

Edit Endpoint

✕

▼ General Attributes

Mac Address *

24:A4:52:94:50:C6

Description

Smartphone de Me El ~~Rouibi~~ cadre de chirurgie

Static Assignment

☐

Policy Assignment

Unknown

Static Group Assignment

☒

Identity Group Assignment

CHG-MAB-JABBER

► Custom Attributes

► Other Attributes

Delete



Refresh Endpoint

Cancel

Save

Ajout du Wifi CHG-DATA sur le smartphone

Se connecter sous la forme **chg\nom+1^{ère}** du prénom et mot de passe AD

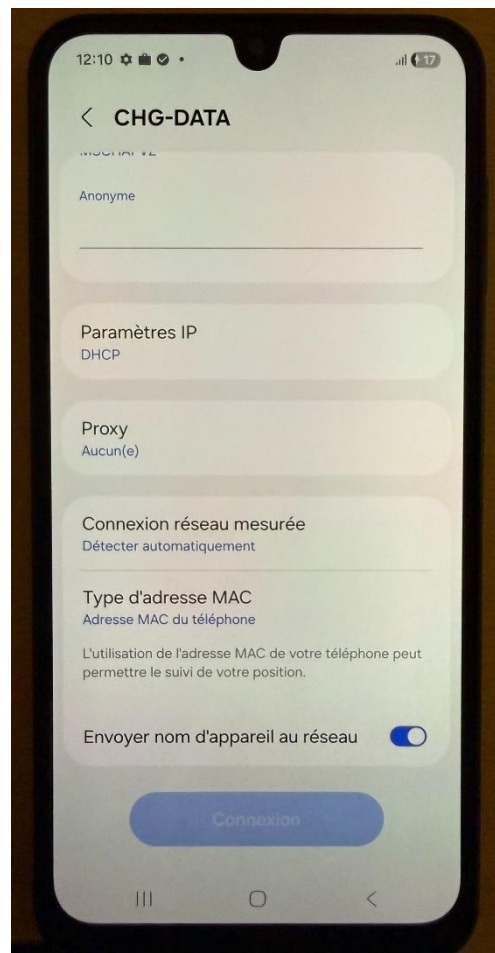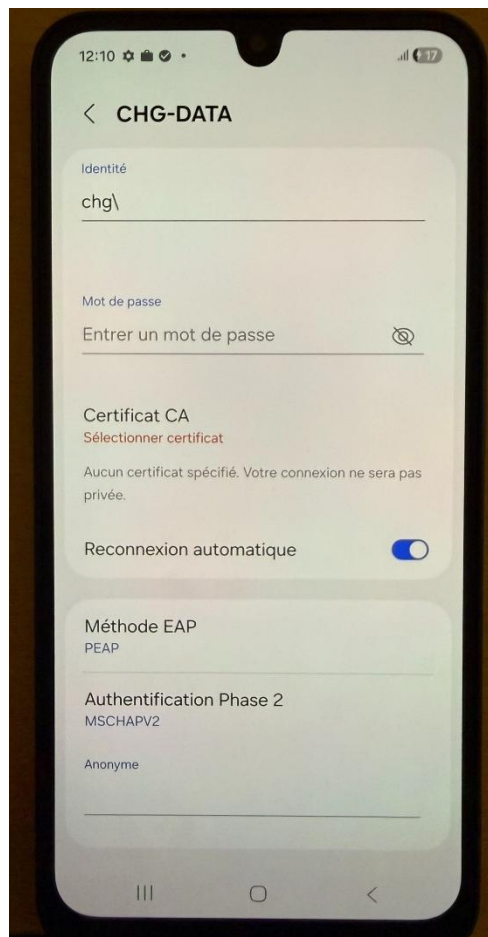

Certificat CA :

Ne pas valider

Type d'adresse MAC :


Adresse MAC du téléphone

Connexion

UNE FOIS LE WIFI CHG CONNECTE, SUPPRIMER LE WIFI DE LA BOX 4G/5G

3. Installation des logiciels sur le Playstore

Lancer le Play Store, les applications sont censées s'installer toutes seules.

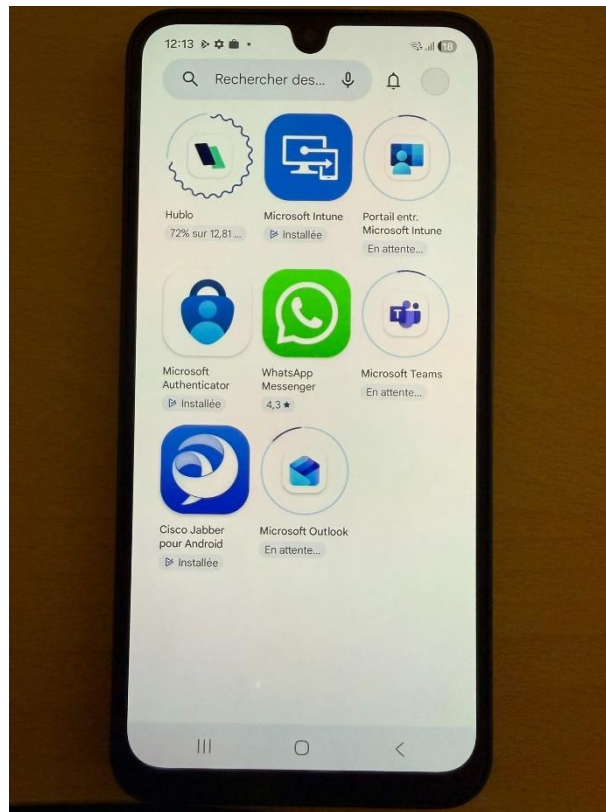

Une fois installé, créer des raccourcis sur l'écran d'accueil en restant appuyé sur l'application et ajouter à l'accueil

Se connecter au compte Teams et Outlook.


Ensuite passer à la [configuration de Cisco Jabber](#)

Et insérer la SIM (s'il y en a une)


4. Configuration de Jabber

Remplacement d'un téléphone par un smartphone (numéro déjà existant)


Ajout du BOT (Android) :

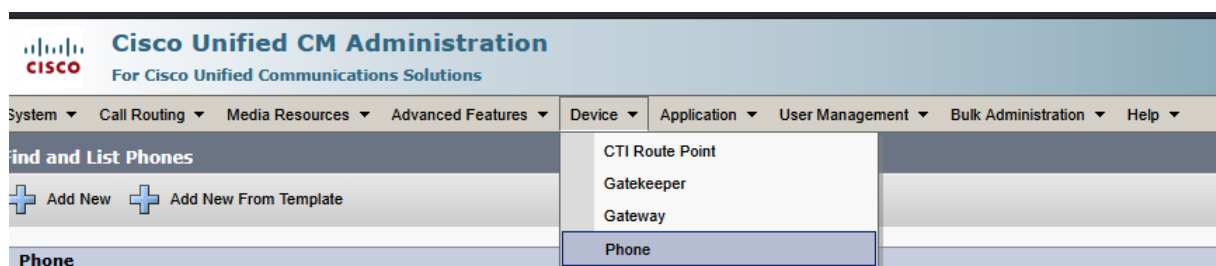

- Choisir un exemple :

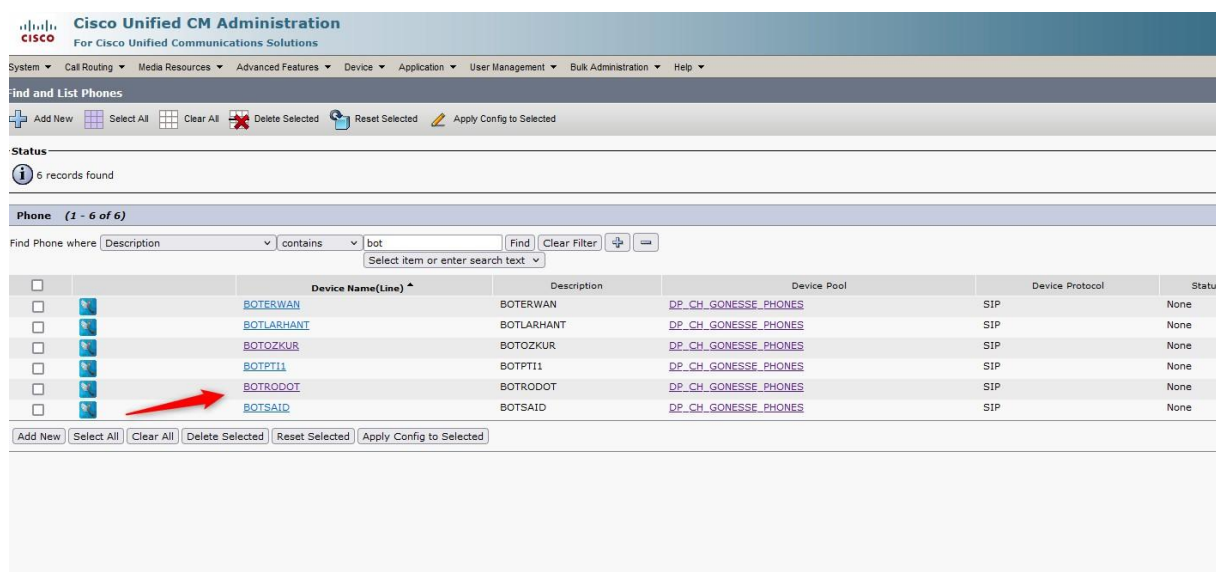

- Cliquez sur Copy :

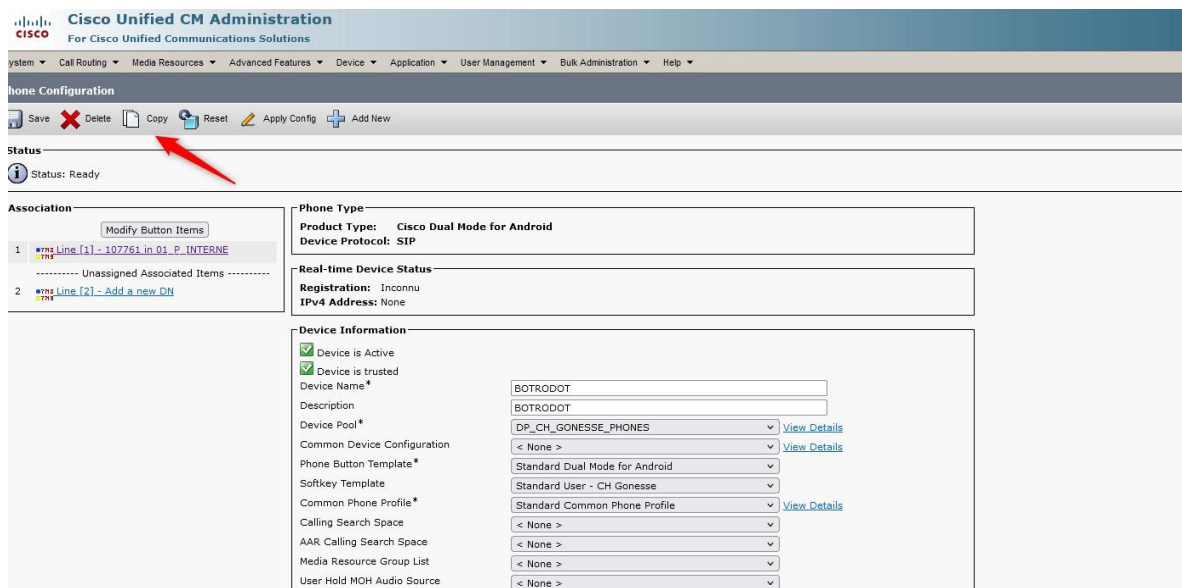

Cisco Unified CM Administration
For Cisco Unified Communications Solutions

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

Phone Configuration

Save ✖ Delete 📄 Copy 🔄 Reset 🗑️ Apply Config ➕ Add New

Status
Status: Ready

Association
Modify Button Items

1	7781 Line [1] - 107761 in 01_P_INTERNE
----- Unassigned Associated Items -----	
2	7781 Line [2] - Add a new DN

Phone Type
Product Type: Cisco Dual Mode for Android
Device Protocol: SIP

Real-time Device Status
Registration: Inconnu
IPv4 Address: None

Device Information

☒ Device is Active	
☒ Device is trusted	
Device Name*	BOTRODDOT
Description	BOTRODDOT
Device Pool*	DP_CH_GONESSE_PHONES View Details
Common Device Configuration	< None > View Details
Phone Button Template*	Standard Dual Mode for Android View Details
Softkey Template	Standard User - CH Gonesse
Common Phone Profile*	Standard Common Phone Profile View Details
Calling Search Space	< None >
AAR Calling Search Space	< None >
Media Resource Group List	< None >
User Hold MOH Audio Source	< None >

- Mettre le nouveau BOT (Device Name et Description) et l'identifiant (Owner User ID) :

Téléphonie : Configuration Smartphone

Phone Configuration

Save Delete Copy Reset Apply Config Add New

☒ Device is Active
☒ Device is trusted
 Device Name* BOTDELFORGE
 Description BOTDELFORGE
 Device Pool* DP_CH_GONESSE_PHONES [View Details](#)
 Common Device Configuration < None > [View Details](#)
 Phone Button Template* Standard Dual Mode for Android
 Softkey Template Standard User - CH Gonesse
 Common Phone Profile* Standard Common Phone Profile [View Details](#)
 Calling Search Space < None >
 AAR Calling Search Space < None >
 Media Resource Group List < None >
 User Hold MOH Audio Source < None >
 Network Hold MOH Audio Source < None >
 Location* Hub_None
 AAR Group < None >
 User Locale < None >
 Network Locale < None >
 Built In Bridge* Par défaut
 Privacy* Par défaut
 Device Mobility Mode* Par défaut [View Current Device Mobility Settings](#)
 Owner ☒ User ☐ Anonymous (Public/Shared Space)
 Owner User ID* delforgel [Find](#)
 Mobility User ID < None >
 Primary Phone < None > [Find](#)
 Use Trusted Relay Point* Par défaut
 Always Use Prime Line* Par défaut
 Always Use Prime Line for Voice Message* Par défaut
 Geolocation < None >
☒ Retry Video Call as Audio
☐ Ignore Presentation Indicators (internal calls only)
☒ Logged Into Hunt Group

- Ajoutez la ligne :

Phone Configuration

Save Delete Copy Reset Apply Config Add New

Status

[i](#) Add successful

Association

Modify Button Items

1 [Line \[1\] - Add a new DN](#)

Phone Type

Product Type: Cisco Dual Mode for Android
Device Protocol: SIP

Real-time Device Status

Registration: Unregistered
IPv4 Address: 172.20.44.201
Active Load ID: Jabber_for_Android-14.1.2.306885
Download Status: None

Device Information

- Entrez le numéro d'appel (court ou long) et les informations se remettront automatiquement : (Sinon prendre exemple d'une ligne existante et remplir en fonction du profil)

Directory Number Information

Directory Number* \+33182320558 ☒ Urgent Priority

Route Partition 01_P_INTERNE

Save Delete Reset Apply Config Add New

Status
Directory Number Configuration has refreshed due to a directory number change. Please click Save button to save the configuration.

Directory Number Information

Directory Number* 107593 ☒ Urgent Priority

Route Partition 01_P_INTERNE

Description 107593 - ABDUL SAMAD Valery

Alerting Name ABDUL SAMAD Valery

ASCII Alerting Name ABDUL SAMAD Valery

External Call Control Profile < None >

☒ Allow Control of Device from CTI

Line Group LG_SUPPORT_INFORMATIQUE_DSI [Edit Line Group](#)

Associated Devices CSFABDULSAMADV SEP682C7BCA9434 [Edit Device](#) [Edit Line Appearance](#)

Dissociate Devices

Directory Number Settings

Voice Mail Profile CHG-No-VoiceMail (Choose <None> to use system default)

Calling Search Space CSS_PROFIL_3

BLF Presence Group* Standard Presence group

User Hold MOH Audio Source 1-attente

Network Hold MOH Audio Source 1-attente

☐ Reject Anonymous Calls

Enterprise Alternate Number
[Add Enterprise Alternate Number](#)

- Vérifié que le bot est bien associé sinon puis rechercher le BOT

Allow Control of Device from CTI

Associated Devices BOTALTERNANTDSI [Edit Device](#) [Edit Line Appearance](#)

Dissociate Devices

Call Forward and Call Pickup Settings

	Voice Mail	Destination	Calling Search Space
Calling Search Space Activation Policy			Utiliser les valeurs par défaut du système
Forward All	☐ or		CSS_PROFIL_X_Renvois
Secondary Calling Search Space for Forward All			CSS_PROFIL_X_Renvois
Forward Busy Internal	☒ or		CSS_PROFIL_X_Renvois
Forward Busy External	☒ or		CSS_PROFIL_X_Renvois
Forward No Answer Internal	☒ or		CSS_PROFIL_X_Renvois
Forward No Answer External	☒ or		CSS_PROFIL_X_Renvois
Forward No Coverage Internal	☒ or		CSS_PROFIL_X_Renvois
Forward No Coverage External	☒ or		CSS_PROFIL_X_Renvois
Forward on CTI Failure	☒ or		CSS_PROFIL_X_Renvois
Forward Unregistered Internal	☒ or		CSS_PROFIL_X_Renvois
Forward Unregistered External	☒ or		CSS_PROFIL_X_Renvois
No Answer Ring Duration (seconds)			
Call Pickup Group	< None >		

- Remplir comme suit et cliquez sur Save :

Line 1 on Device BOTABDULSAMAD

Display (Caller ID)	ABDUL SAMAD Valery	Display text for a line appearance is intended
ASCII Display (Caller ID)	ABDUL SAMAD Valery	
External Phone Number Mask	+33134532121	
Recording Option*	Enregistrement d'appels désactivé	
Recording Profile	< None >	
Recording Media Source*	Passerelle préférée	
Monitoring Calling Search Space	< None >	

Multiple Call/Call Waiting Settings on Device BOTABDULSAMAD

Note: The range to select the Max Number of calls is: 1-3

Maximum Number of Calls*

Busy Trigger* (Less than or equal to)

Forwarded Call Information Display on Device BOTABDULSAMAD

☒ Caller Name
☐ Caller Number
☐ Redirected Number
☒ Dialed Number

Users Associated with Line

- Allez dans End User, cherchez le nom de l'utilisateur :

Cisco Unified CM Administration
For Cisco Unified Communications Solutions

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

Phone Configuration

Confidential Access Mode
 Confidential Access Level

Do Not Disturb

☐ Do Not Disturb
 DND Option*

Product Specific Configuration Layout

Cisco Usage and Error Tracking

User Management

- Application User
- End User
- User/Phone Add
- SIP Realm
- User Settings
- Self-Provisioning
- Assign Presence Users

- Cochez cette case et cliquez sur SAVE:

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

End User Configuration

Save  Delete  Add New

User Information

User Status: Active LDAP Synchronized User
 User ID*: delforge1
 Self-Service User ID: 33134532330
 PIN: [Edit Credential](#)
 Confirm PIN:
 Last name*: DELFORGE
 Middle name:
 First name: Laetitia
 Title: Encadrant d'unité de soins et d'activités paraméd. - 05U20
 Directory URI: laetitia.delforge@ch-gonesse.fr
 Telephone Number: +33134532330
 Home Number:
 Mobile Number:
 Pager Number: 19771208
 Mail ID: laetitia.delforge@ch-gonesse.fr
 Manager User ID:
 Department: 8551 - PLATEAU SSR GERIATR. CH E
 User Locale: < None > ▾
 Associated PC:
 Digest Credentials:
 Confirm Digest Credentials:
 User Profile: Standard (Factory Default) User Profile ▾ [View Details](#)
 Name Dialing: DELFORGElaetitia
 Number of Digits needed for the Unique AA Name 4

Convert User Account

☐ Convert LDAP Synchronized User to Local User

Service Settings

☒ Home Cluster 
☒ Enable User for Unified CM IM and Presence (Configure IM and Presence in the associated UC Service Profile)
☐ Include meeting information in presence (Requires Exchange Presence Gateway to be configured on CUCM IM and Presence server)
[Presence Viewer for User](#)
 UC Service Profile: Use System Default("CHG-ServiceProfile") ▾ [View Details](#)

Associer le BOT et désassocier le DECT (une fois récupérer)

 **Cisco Unified CM Administration**
For Cisco Unified Communications Solutions

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

End User Configuration

Save  Delete  Add New

Manager User ID:
 Department: 8414 - USLD soins
 User Locale: < None > ▾
 Associated PC/Site Code:
 Digest Credentials:
 Confirm Digest Credentials:
 User Profile: Standard (Factory Default) User Profile ▾ [View Details](#)
 User Rank*: 1-Default User Rank ▾
 Name Dialing: PLOSSandrine
 Number of Digits needed for the Unique AA Name 3

Convert User Account

☐ Convert LDAP Synchronized User to Local User

Service Settings

☒ Home Cluster
☒ Enable User for Unified CM IM and Presence (Configure IM and Presence in the associated UC Service Profile)
☐ Include meeting information in presence (Requires Exchange Presence Gateway to be configured on CUCM IM and Presence server)
[Presence Viewer for User](#)
 UC Service Profile: Use System Default("CHG-ServiceProfile") ▾ [View Details](#)

Device Information

Controlled Devices: BOTPLOS

Available Profiles:

CTI Controlled Device Profiles:

[Device Association](#) 
[Line Appearance Association for Presence](#)

Extension Mobility

Téléphonie : Configuration Smartphone

Il faudra aussi mettre désassocier le DECT de la ligne (une fois le DECT récupéré)

Status

 Status: Ready

Directory Number Information

Directory Number* ☒ Urgent Priority

Route Partition

Description

Alerting Name

ASCII Alerting Name

External Call Control Profile

☒ Allow Control of Device from CTI

Associated Devices



Dissociate Devices

[Edit Device](#)

[Edit Line Appearance](#)

Et mettre la description du smartphone « En stock » sur CUCM

Phone Type

Product Type: Cisco 7925
Device Protocol: SCCP

Real-time Device Status

Registration: Registered with Cisco Unified Communications Manager toip-cucm-12
IPv4 Address: [172.20.204.180](#)
Active Load ID: None
Download Status: None

Device Information

☒ Device is Active
☒ Device is trusted

MAC Address* (SEP58AC788D9696)

Description

Device Pool* [View Details](#)




Common Device Configuration [View Details](#)

Phone Button Template*

Et aussi sur « [GO DSI PTI Telephonie V2 20250409](#) »

	A	B	C	D	E	F	G	H
1	ID	Tel_DEVICE NAM	TYPE	PÔLE	LIB_POLE	UF	LIB_UF	BAT CIBLE
1738	1737	SEPEC01D50B1C12			En stock			

Rentrez identifiant suivi de @chg.fr puis CONTINUER (Nom + 1^{ère} prénom@chg.fr)

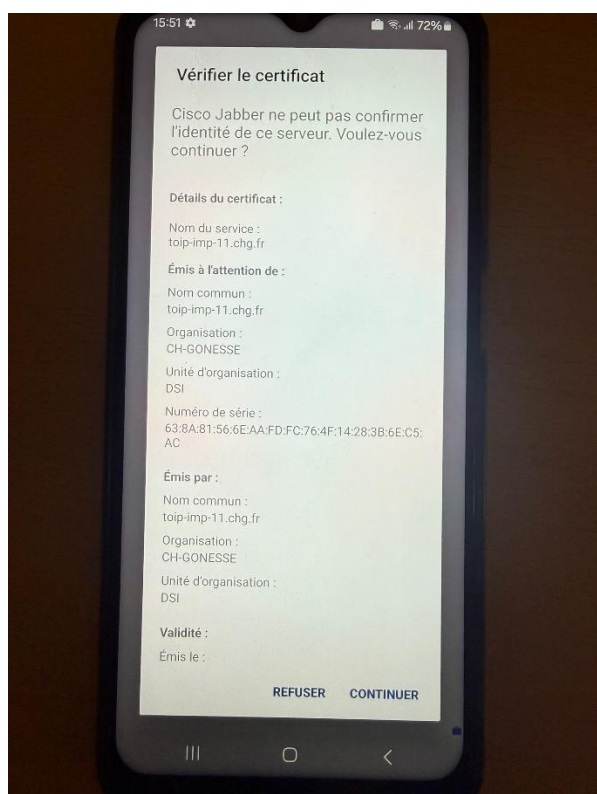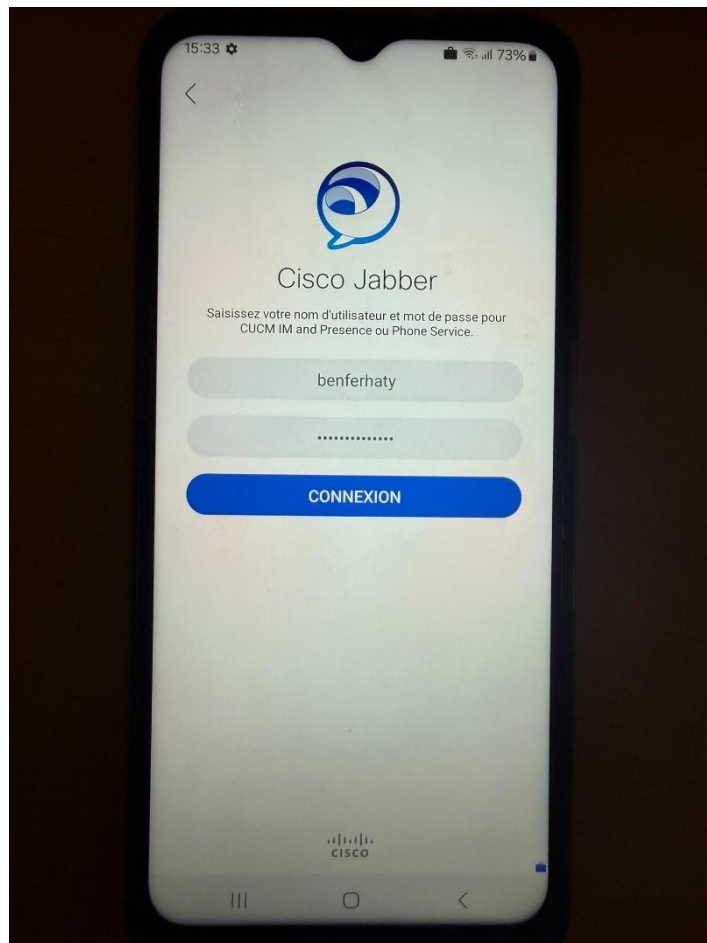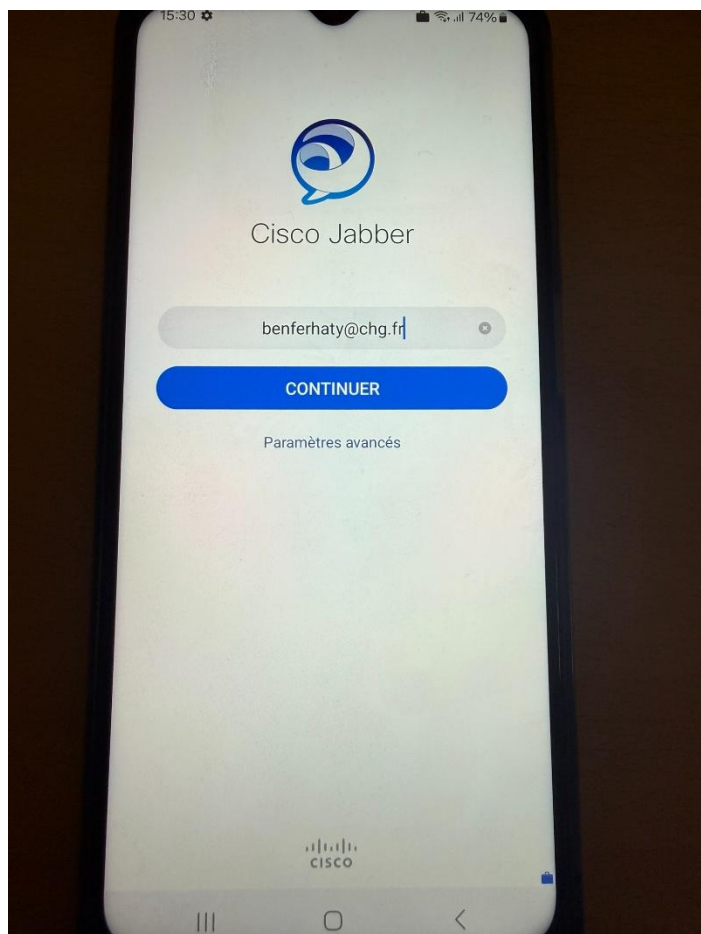

Continuer plusieurs fois

Autoriser ce qui est requis pour que Jabber fonctionne

Pour désactiver l'appel Visio automatique : [Procédure](#)

Nouvelle ligne pour un smartphone (aucun numéro attribué)

Récupérer un numéro disponible dans « [Nouveaux num SDA dispo](#) »

Ajout End User

Si l'utilisateur n'a jamais eu de numéro de téléphone attribué, faire les manipulations suivantes pour créer le « End user » :

- Renseignez le numéro de téléphone dans l'Active Directory puis Appliquer

Propriétés de : ANGELI Nathalie

Membre de	Réplication de mot de passe	Objet	Sécurité	Environnement
Sessions	Contrôle à distance	Profil des services	Bureau à distance	COM+
Général	Adresse	Compte	Profil	Téléphones
			Organisation	Certificats publiés

 ANGELI Nathalie

Prénom : Initiales :

Nom :

Nom complet :

Description :

Bureau :


Numéro de téléphone :

Adresse de messagerie :


Page Web :

Téléphonie : Configuration Smartphone

- Dans le CUCM, allez dans « LDAP Directory »

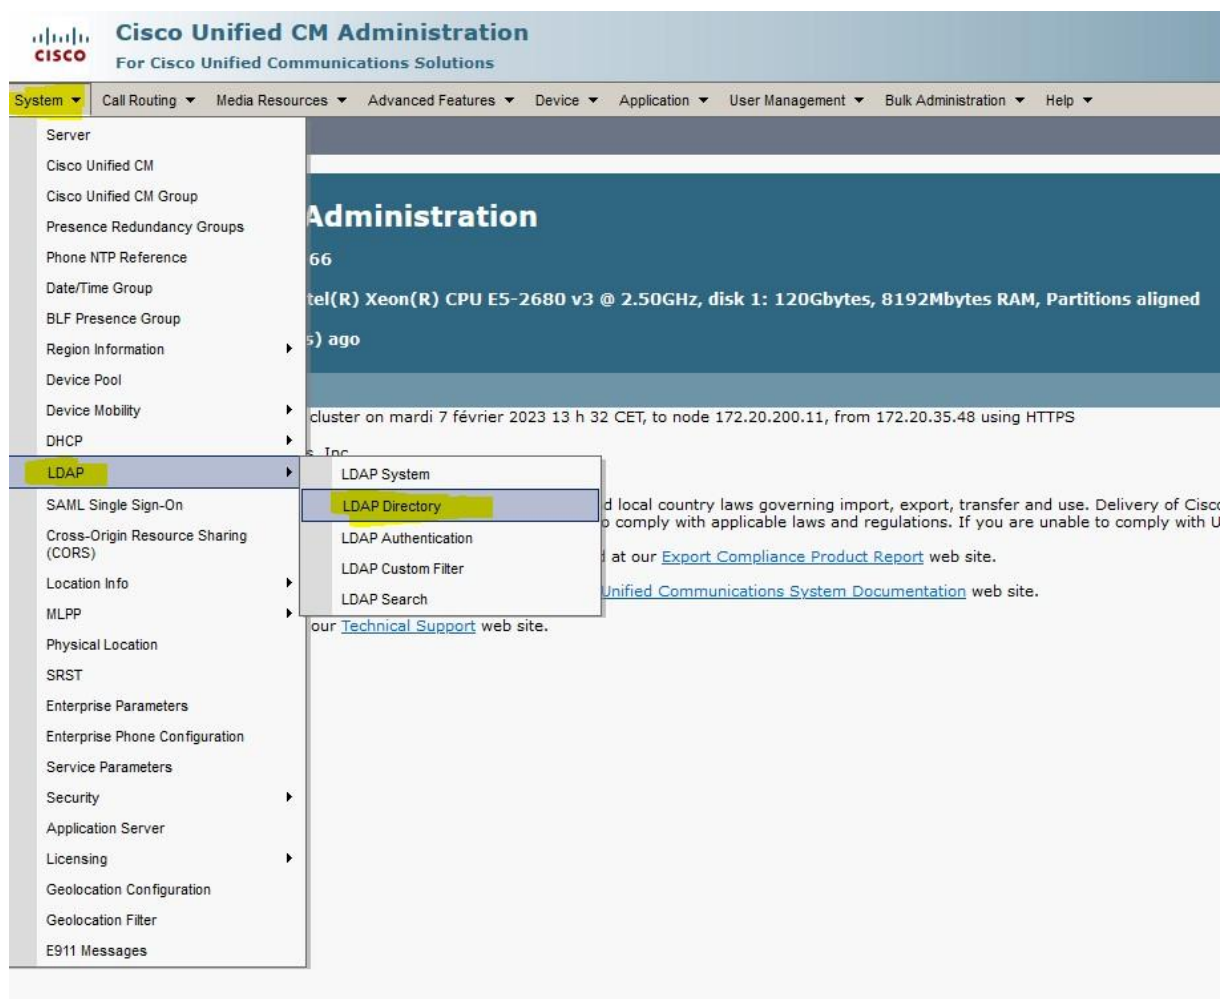

The screenshot shows the Cisco Unified CM Administration web interface. The left-hand navigation menu is expanded, showing the 'System' category. Under 'System', the 'LDAP' option is selected, which has opened a sub-menu. In this sub-menu, the 'LDAP Directory' option is highlighted. The main content area on the right shows the 'Administration' page with system information, including the server model (Intel(R) Xeon(R) CPU E5-2680 v3) and a recent update log entry.

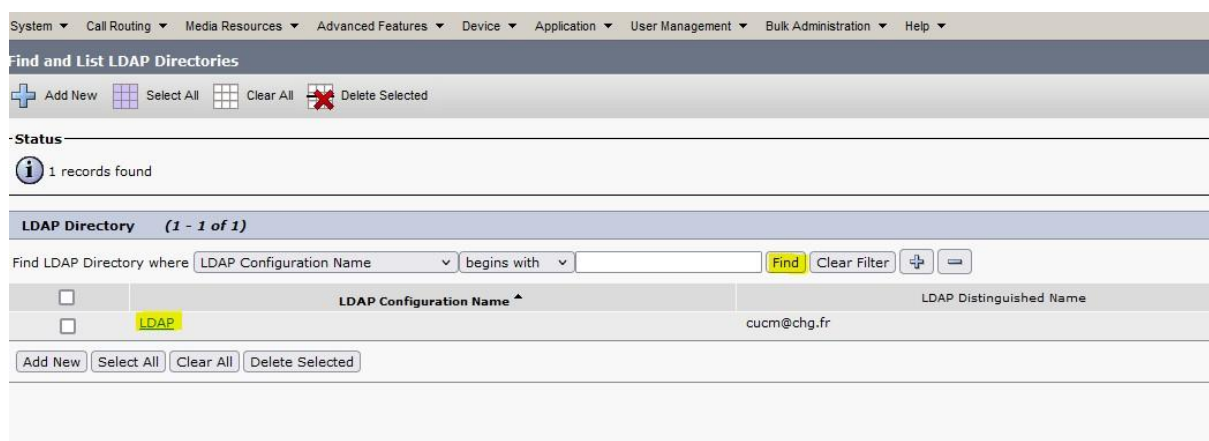


This screenshot displays the 'Find and List LDAP Directories' page. At the top, there are navigation tabs and a search bar. Below the search bar, there are buttons for 'Add New', 'Select All', 'Clear All', and 'Delete Selected'. A status bar indicates '1 records found'. The main table lists the LDAP directories. The first entry is 'LDAP' with a configuration name 'cucm@chg.fr'. The table has columns for 'LDAP Configuration Name' and 'LDAP Distinguished Name'. At the bottom, there are buttons for 'Add New', 'Select All', 'Clear All', and 'Delete Selected'.

LDAP Configuration Name	LDAP Distinguished Name
LDAP	cucm@chg.fr

Téléphonie : Configuration Smartphone

- Cliquez sur « Perform Full Sync Now » pour faire une synchronisation immédiate avec l'Active Directory

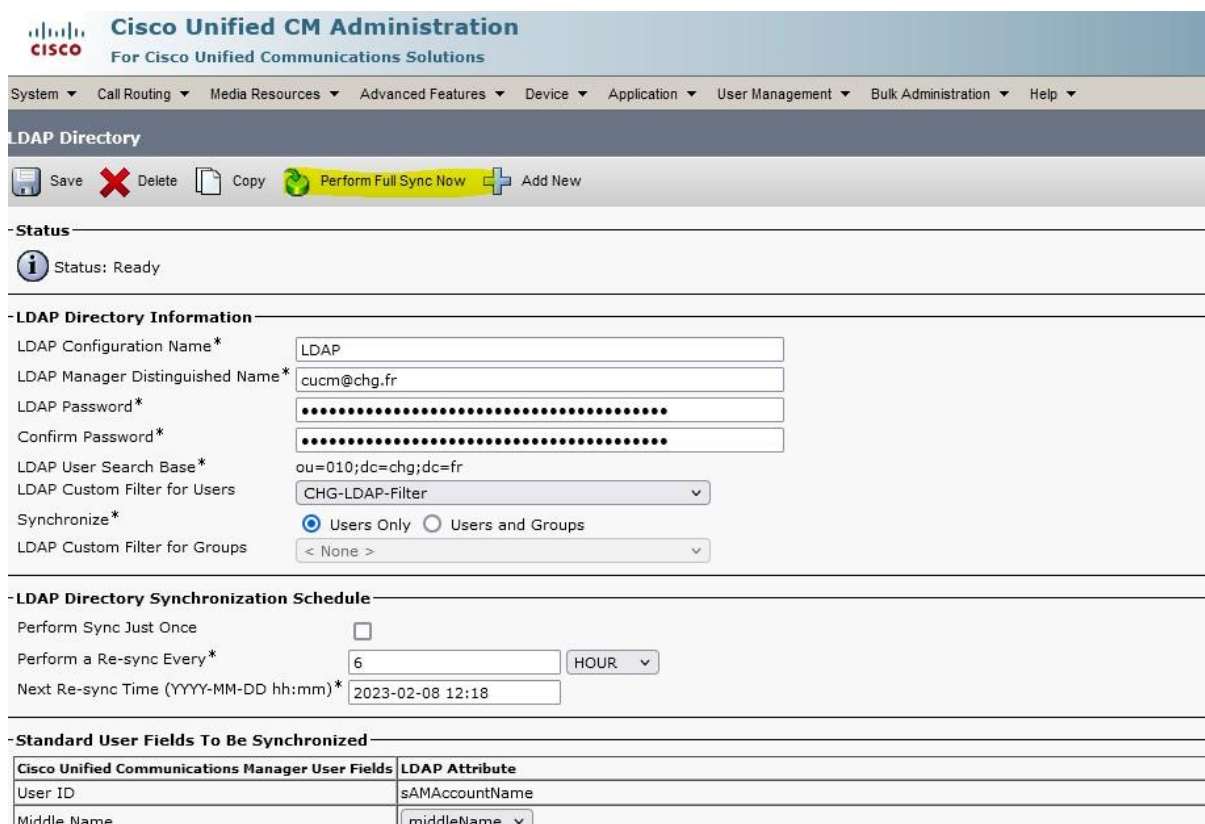

Cisco Unified CM Administration
For Cisco Unified Communications Solutions

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

LDAP Directory

Save Delete Copy Perform Full Sync Now Add New

Status
Status: Ready

LDAP Directory Information

LDAP Configuration Name* LDAP

LDAP Manager Distinguished Name* cucm@chg.fr

LDAP Password*

Confirm Password*

LDAP User Search Base* ou=010;dc=chg;dc=fr

LDAP Custom Filter for Users CHG-LDAP-Filter ▾

Synchronize* ☒ Users Only ☐ Users and Groups

LDAP Custom Filter for Groups < None > ▾

LDAP Directory Synchronization Schedule

Perform Sync Just Once ☐

Perform a Re-sync Every* 6 HOUR ▾

Next Re-sync Time (YYYY-MM-DD hh:mm)* 2023-02-08 12:18

Standard User Fields To Be Synchronized

Cisco Unified Communications Manager User Fields	LDAP Attribute
User ID	sAMAccountName
Middle Name	middleName ▾


- End user ok

	User ID *	Meeting Number	First Name	Last Name	Department	Directory URI	User Status	User Rank
	angelin	33182320558	Nathalie	ANGELI	0058 - Mise à disposition extern	nathalie.angeli@ghtpdf.fr	Active Enabled LDAP Synchronized User	1

On peut maintenant suivre : [Remplacement d'un téléphone par un smartphone \(numéro déjà existant\)](#)

Nouvelle ligne compte générique

- Créer le compte générique dans l'AD en renseignant Prénom Nom et Numéro de téléphone :

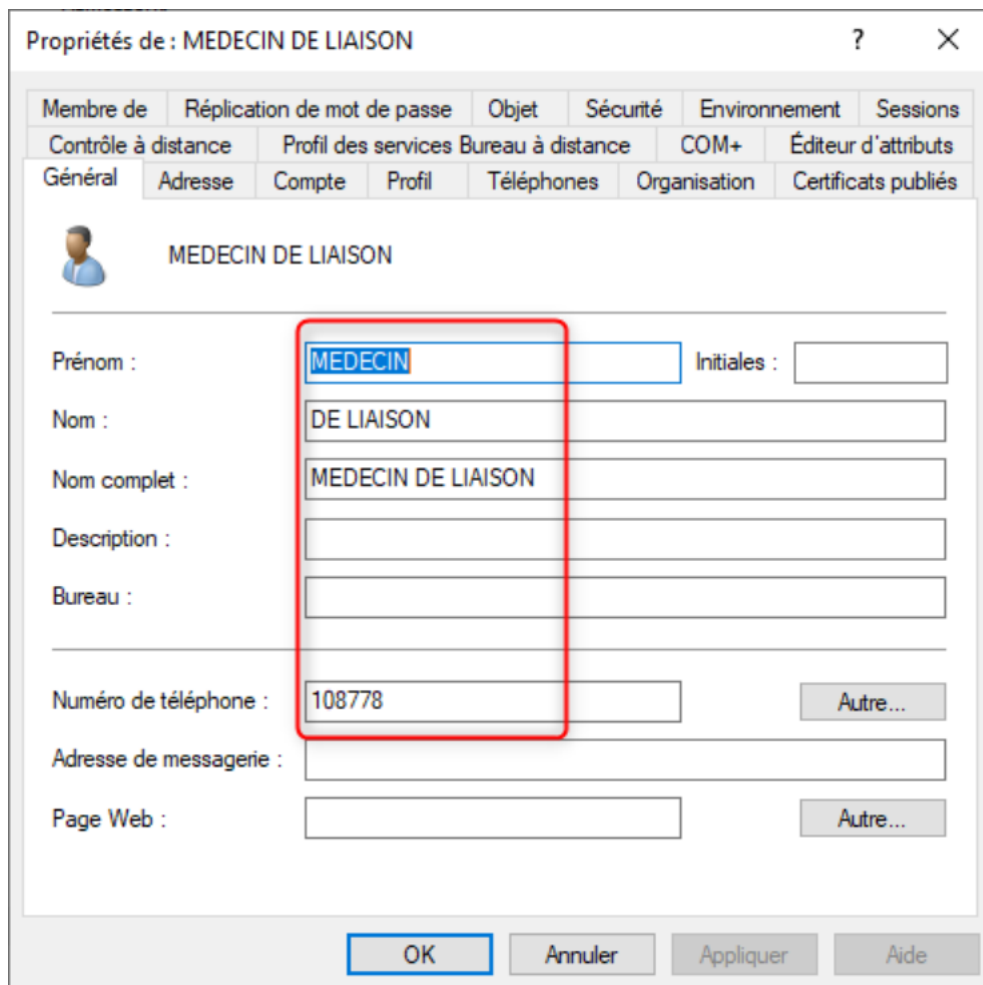

Propriétés de : MEDECIN DE LIAISON

Membre de Réplication de mot de passe Objet Sécurité Environnement Sessions
Contrôle à distance Profil des services Bureau à distance COM+ Éditeur d'attributs
Général Adresse Compte Profil Téléphones Organisation Certificats publiés

MEDECIN DE LIAISON

Prénom : MEDECIN Initiales :
Nom : DE LIAISON
Nom complet : MEDECIN DE LIAISON
Description :
Bureau :
Numéro de téléphone : 108778 Autre...
Adresse de messagerie :
Page Web : Autre...

OK Annuler Appliquer Aide

Téléphonie : Configuration Smartphone

Propriétés de : MEDECIN DE LIAISON ? X

Membre de	Réplication de mot de passe	Objet	Sécurité	Environnement	Sessions
Contrôle à distance	Profil des services	Bureau à distance	COM+	Éditeur d'attributs	
Général	Adresse	Compte	Profil	Téléphones	Organisation
		Certificats publiés			

Nom d'ouverture de session de l'utilisateur :

@CHG.fr

Nom d'ouverture de session de l'utilisateur (antérieur à Windows 2000) :

CHG\

☐ Déverrouiller le compte

Options de compte :

☐ L'utilisateur devra changer le mot de passe
☒ L'utilisateur ne peut pas changer de mot de passe
☒ Le mot de passe n'expire jamais
☐ Enregistrer le mot de passe en utilisant un chiffrement réversible

Date d'expiration du compte

☒ Jamais

☐ Fin de : vendredi 9 juin 2023

Téléphonie : Configuration Smartphone

- Renseigner l'« employeeNumber » dans « Editeur d'attributs » (un nombre à 3 chiffres différent à chaque fois) : **Suivre le fichier [GO_DSI_EmployeeNumber](#) et le remplir**

Propriétés de : MEDECIN DE LIAISON

Membre de	Réplication de mot de passe	Objet	Sécurité	Environnement	Sessions
Général	Adresse	Compte	Profil	Téléphones	Organisation
Contrôle à distance	Profil des services	Bureau à distance	COM+	Éditeur d'attributs	

Attributs :


Attribut	Valeur
badPwdCount	0
codePage	0
countryCode	0
displayName	MEDECIN DE LIAISON
employeeNumber	100
givenName	MEDECIN
lastLogoff	(jamais)
lastLogon	(jamais)
lastLogonTimestamp	09/05/2023 12:32:47 Paris, Madrid
logonCount	0
primaryGroupID	513 = (GROUP_RID_USERS)
pwdLastSet	09/05/2023 12:25:52 Paris, Madrid
sAMAccountType	805306368 = (NORMAL_USER_ACCOUNT
sn	DE LIAISON

Modifier Filtrer

OK Annuler Appliquer Aide

Téléphonie : Configuration Smartphone

- Faire une synchro LDAP dans CUCM:

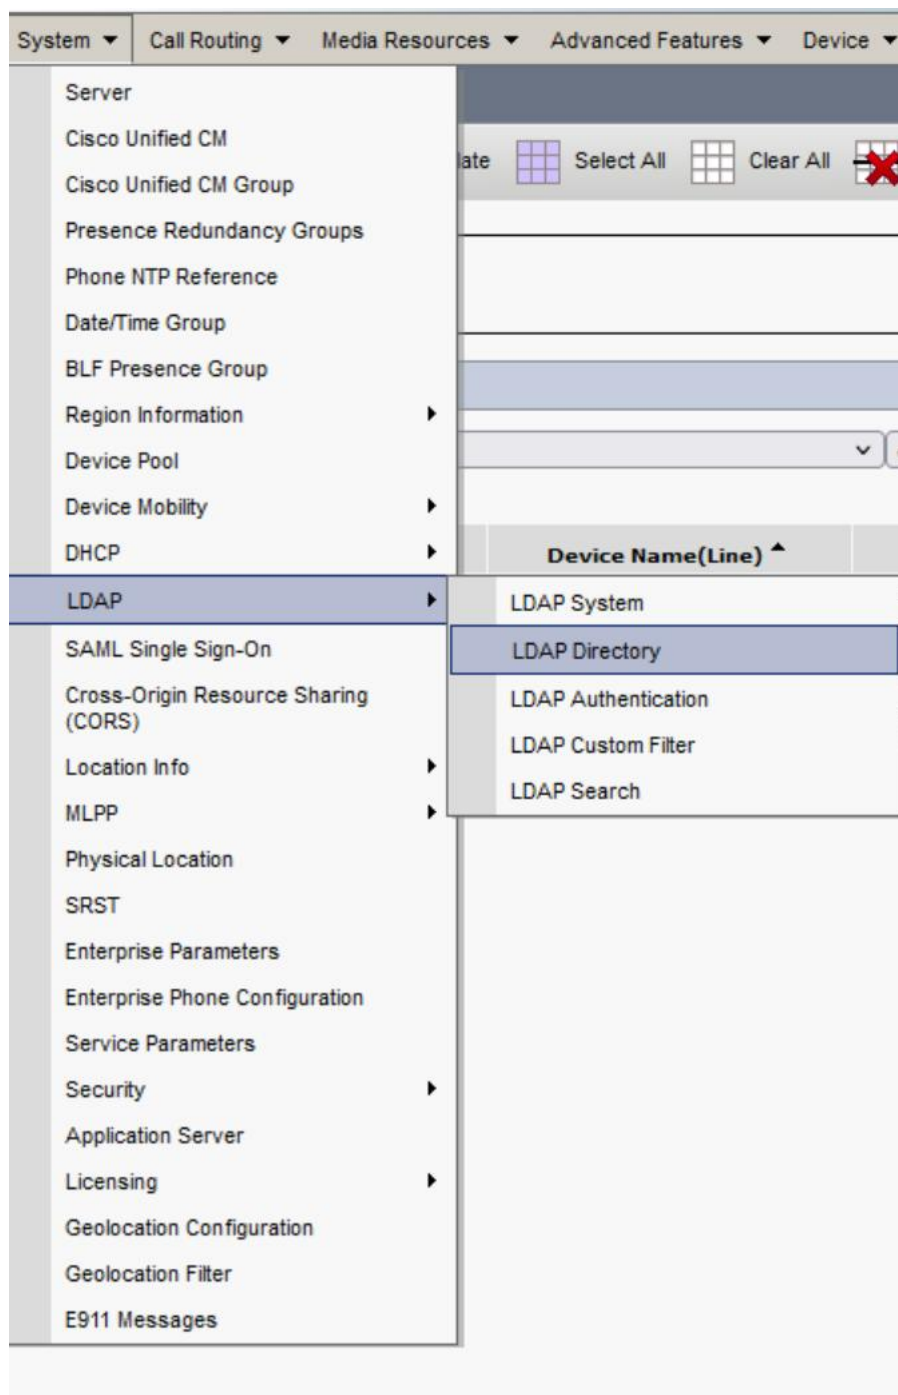

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

Find and List LDAP Directories

 Add New  Select All  Clear All  Delete Selected

Status

 1 records found

LDAP Directory (1 - 1 of 1)

Find LDAP Directory where LDAP Configuration Name ▾ begins with ▾ Find Clear Filter  

☐	LDAP Configuration Name ^	LDAP D
☐	LDAP	cucm@chg.fr

 Add New  Select All  Clear All  Delete Selected

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

LDAP Directory

 Save  Delete  Copy  Perform Full Sync Now  Add New

Status

 Status: Ready

LDAP Directory Information

LDAP Configuration Name*

LDAP Manager Distinguished Name*

LDAP Password*

Confirm Password*

LDAP User Search Base*

LDAP Custom Filter for Users

Synchronize* ☒ Users Only ☐ Users and Groups

LDAP Custom Filter for Groups


LDAP Directory Synchronization Schedule

Perform Sync Just Once ☐

Perform a Re-sync Every* HOUR ▾

Next Re-sync Time (YYYY-MM-DD hh:mm)*

- Dans CUCM et « End User » le compte devrait apparaître comme ceci :

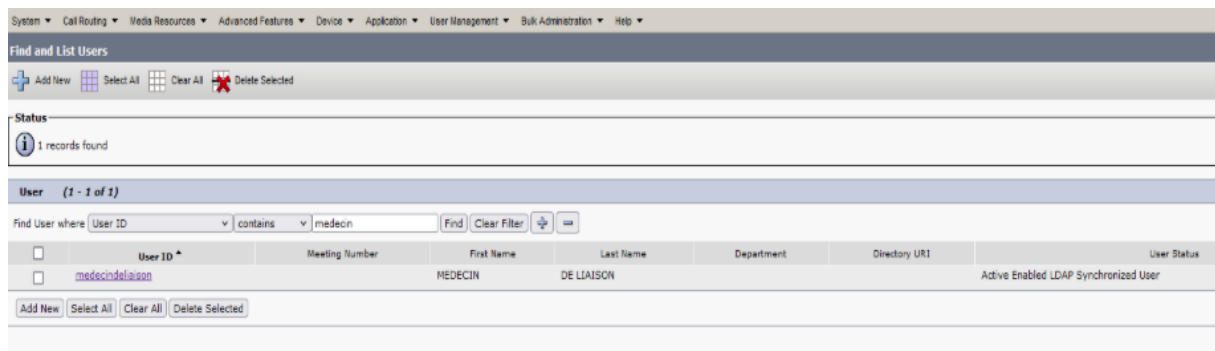

The screenshot shows the 'Find and List Users' interface in CUCM. At the top, there's a navigation bar with various menu items. Below it, the 'Find and List Users' section has buttons for 'Add New', 'Select All', 'Clear All', and 'Delete Selected'. A status bar indicates '1 records found'. The main table lists user details:

User ID	Meeting Number	First Name	Last Name	Department	Directory URI	User Status
medecin@liaison		MEDECIN	DE LIAISON			Active Enabled LDAP Synchronized User

Below the table are buttons for 'Add New', 'Select All', 'Clear All', and 'Delete Selected'.

On peut reprendre la configuration [Remplacement d'un téléphone par un smartphone \(numéro déjà existant\)](#)

Ajout du numéro dans ENOVACOM sur le profil



The screenshot shows the 'Coordonnées' section of a profile in ENOVACOM. It includes fields for 'Téléphone principal' (numéro long), 'Téléphone portable' (numéro court), and 'Email principal'. A checkbox for 'Boîte aux Lettres VIP' is also present.

Coordonnées ^

Téléphone principal (numéro long)

Téléphone portable (numéro court)

Boîte aux Lettres VIP

Email principal
yann.benferhat@ch-gonesse.fr

Numéro long = +331...

Numéro court = 10...

Effectuer des test d'appels afin de vérifier la configuration

5. Administratif

Remplir et faire signer la feuille « [Réception smartphone](#) »

Ensuite faire une copie et la remettre à l'utilisateur, puis déposer l'original sur le bureau du Responsable PTI.

Remplir la feuille « [GO Infra Liste GSM SMARTPHONE](#) »




Ne pas oubliez de transmettre par mail [les procédures](#) ci-dessous au destinataire du smartphone

✓		Configuration du WIFI en cas de changement de mot de ...	...		ABDUL SAMAD Valery	14 février 2023	650 Ko	0
✓		Procédure d'appels application Cisco Jabber.pdf	...		ABDUL SAMAD Valery	14 février 2023	982 Ko	0
✓		Procédure pour la désactivation de la visio Cisco Jabber.pdf	...		ABDUL SAMAD Valery	14 février 2023	647 Ko	0
✓		Procédure Renvoi d'appel Cisco Jabber.pdf	...		ABDUL SAMAD Valery	7 avril 2023	447 Ko	0

6. Annexes



Le QR CODE d' enrôlement n'est pas reconnu

Revenir en arrière et suivre la configuration jusqu'au compte google

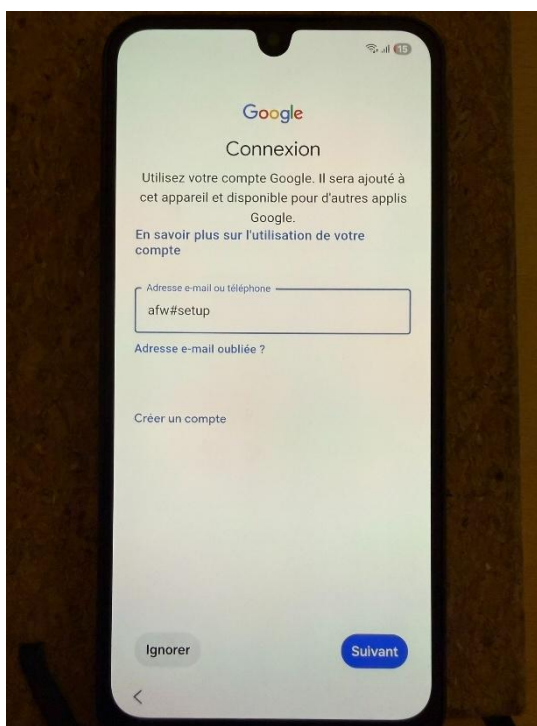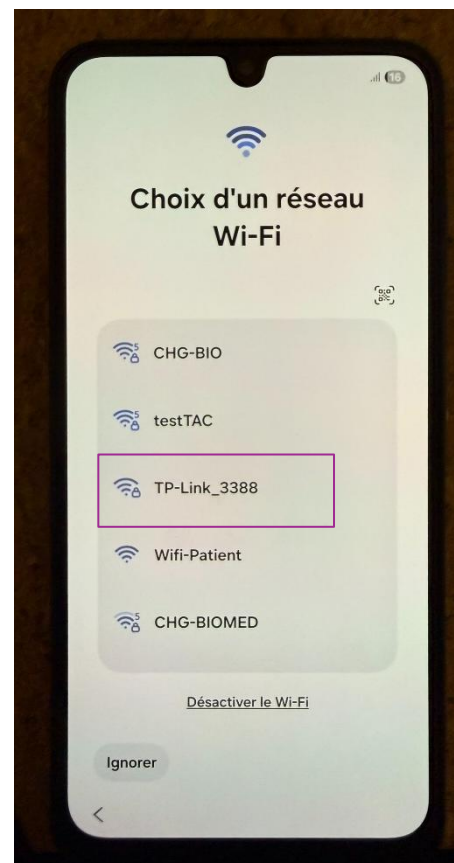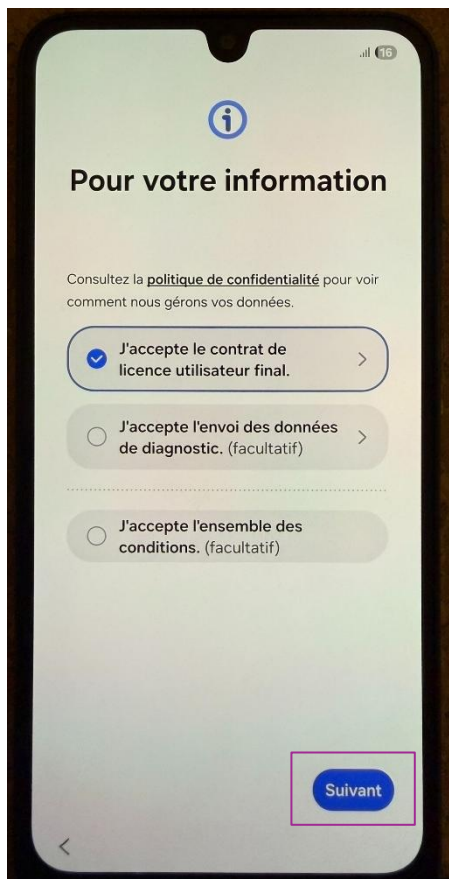

AFW#SETUP

Téléphonie : Configuration Smartphone

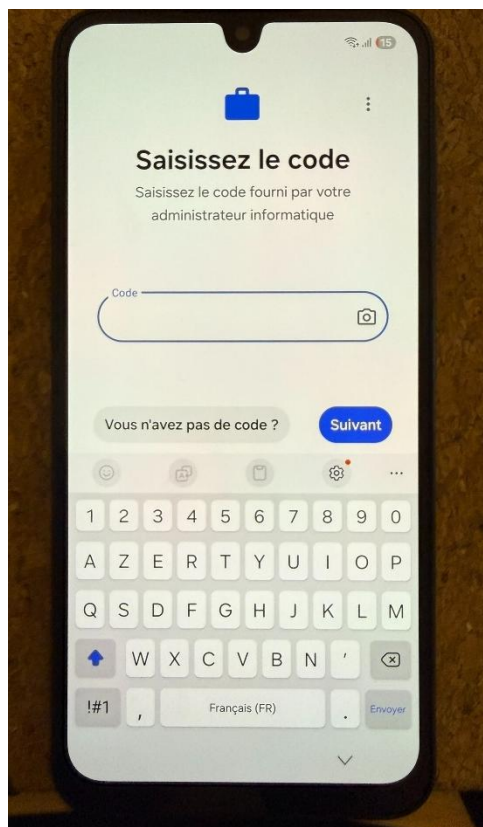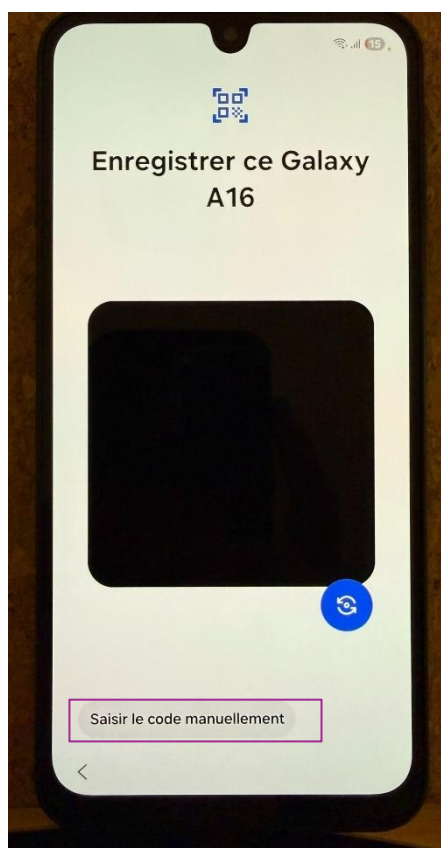

Saisir le jeton pour enrôler

On peut reprendre la configuration [Enrôlement](#)

Profil Cadre / Profil Directeur

Profil Cadre : Installation automatique des applications (Jabber, Outlook, Teams, Hublo), Play store limité, contrôle total.

Profil Directeur : Profil perso et Profil pro séparé, installation automatique dans le profil professionnel, possibilité à l'utilisateur d'en installer sur son profil perso