Contents

Introd-uction	2
Cttrrent lusmess activities	2
Business rWes	3
Entities & their relevant attributes	5
Entity list	5
Entity structures with relevant attributes	5
Prin1ary Keys & Foreign Keys	9
Data Definition Language implen1entations	
Relationship between all entities	
Cardinality	16
Final ER Diagrrun	18
References	10

Introduction

Founded in 1996, Buddha Air is the largest airlines con1pany of Nepal with greater than 100,000 hours of **flights**, 3 n1illion satisfied passengers from 9 different don1estic destinations. It has the highest capacity **aircraft**, all equipped with n1odern technology stuffs ensuring quality & safe flying.

Buddha Air has several <u>branches</u> in different <u>countries</u>. Most branches are in Nepal on n1any <u>states</u>. Its dedicated <u>employees</u> are keen to prove the quality service often reconm1ended by its custon1ers. Buddha Air is well known for low <u>airfare</u> for both way <u>routes</u> services across don1estic custon1ers.

Highly dedicated in customer services, Buddha Air offers several <u>discount</u> schemes for children and people with disabilities. Buddha Air has won n1ultiple awards for its safety & reliability records of flying fron1 national and international organizations.

Due to its high reliability, safety records and highly gained trusts fron1 custon1ers, Buddha Air is having more <u>transactions</u>, causing day to day expanding business activities hard to manage its operations. To ensure more flexible service for customers, it's highly recommended to in1plement and Airlines Reservation Systen1, a con1puterized system that will help n1anage all inforn1ation related to flight, <u>passengers</u>, their <u>contact details</u>, reservation, transactions, schedule publishing, air fare payments etc.

Current business activities

Buddha Air is operating on spot airline reservation, flight booking services with help of several travel agencies. It's not only causing inconvenience for custonlers but also raises the actual tariff that customer has to pay. Though having branches in n1ultiple cities targeting high range of custonlers, en1ployee something fails to satisfy customers in remote areas when they have to travel for reservation also when they need to travel for cancellation or flight day extension. Followings are the key operations of Buddha Air's dayto daybusiness:

1. Sales Transactions

All sales transactions are related to flight ticket sales; advance reservations, reservation cancellations etc.

a. Reservation

Buddha Air provides flight pre-reservation to its customers. All customers are open to reserve flights to travel in future. Reservations are taken before 11 hour of flight. Pre-reservation insuring future sales forecast.

b. Cancellation

No hard rules, as far as con1pany does not have to lose anything. A custon1er is always can cancel their flights. Cancelled seats are released for re-sell instantly.

Company denies canceling a sold ticket, if cancellation request is n1ade within 6 hour of flight.

2. Flight scheduling

Day to day flight scheduling, new flight arrangen1ents according to sales potentiality, flight departure delay decisions **all** takes roon1s in its daily flight scheduling activities etc.

3. Ticketing

On spot ticket sales, online reservation sales, urgent sales, VVIP ticketing is done in its several branches, authorized agents fron 1 different travel agencies.

Business rules

Quality services to customers aren't possible with defined business principles. Buddha Air has several business rules that apply from its own staffs to third party sales agents and potential custon1ers. For each, business rules are as per listed below:

1. Custon1ers

- They are welcome to those from different flight schedules those are available throughout a day depending upon their con1fort, willingness and flexibility and of course upon flight availability.
- All custon1ers are required to subn1it valid contact details.
- All custon1ers must reserve a flight to travel. No on the gate sales are available. Also customers can't buy tickets at airports, instead they need to visit online store or a sales counter to get a ticket or reserve for future plans.
- **Full** payn1ents are necessary in-order to confirn1 a booking. Yes, there can be several discounts schemes which can be claimed by customers & is given upon proper alignment with discount descriptions.
- Customers n1ust be penalized for cancellation. How n1uch <u>charges</u> they have to pay, depends when they are canceling the flights. If it's before **11** hour of flight they need to pay 10% of sales and if it's within **11** hour of flight 33.33% will be deducted from actual sales an1ount.
- Custon1ers can demand the cancellation & 100% refund of flight is cancelled due to technical reason, bad weather.

- All customers are allowed up to 5 KG cargo free with each ticket. Exceeding 5 KG causes the additional fees.
- Each customer is eligible for \$20,000 life insurance.
- Wheel chairs & oxygen is available for special passengers.

2. Employees (including sales agents)

- All enlployees must be dressed according to conlpany dress code with an ID card, easily visible to guests.
- Employees are expected to be presence on their seat within duty hours.
- All enlployees are assigned to serve client based on first come first services. Yes- there is a provision for special cure for urgent & national security nlatters.
- Employees are hereby responsible for serving customers first, second their own jobs.
- Employees are not allowed to take flight reservations within 11 hour of flight.

Database Design for Airline Reservation

Entities & their relevant attributes

Entity list

- 1. AirCrafts
- 2. Route
- 3. Airfare
- 4. Flight_Schedule
- 5. Discounts
- 6. Charges
- 7. Countries
- 8. State
- 9. Contact_Details
- 10. Passengers
- 11. Branches
- 12. Employee
- 13. Transactions

Entity structures with relevant attributes:

AirCrafts

Field	DataType	Description	Constraints
AcID	INT	Field will store unique row nun1ber.	Primary Key
AcNumber	Varchar(32)	Aircraft number that identifies the plane.	NOTULL
Capacity	INT	No. of seats available.	NOT NULL
MfdBy	Varchar(128)	Manufacturing company.	NOT NULL
MfdOn	DATETIME	Manufactured date of aircraft.	NOT NULL

Route

Field	Data Type	Description	Constraints
RtID	INT	Stores unique row id.	Prin1ary Key
Airport	Varchar(32)	Fron 1 where the flight will take off.	NOT NULL
Destination	Varchar (32)	Flight destinations.	NOT NULL
RouteCode	Varchar(16)	A unique Route code generated using Source & Destination of flight.	NOT NULL UNIQUE

Airfare

Field	Data Type	Description	Constraints
AfID	INT	Stores unique row id.	Prin1ary Key

Route	INT	Route id fron 1 Route table.	Foreign Key
Fare	Currency	Stores service charge an1ount.	NOT NULL
FSC	Currency	Stores fuel surcharge amount.	NOT NULL

Fli'!! ht_Schedu!e

Field	Data Type	Description	Constraints
FlID	INT	Unique nun1ber to identify the flight.	Prin1ary Key
FlightDate	DATETIME	Date of flight.	NOT NULL
Departure	DATETIME	Stores the departure tin1e of flight.	
Arrival	DATETIME	Stores the arrival tin1e of flight on destination.	
AirCraft	INT	Aircraft nun1ber that will fly, a number from Aircraft table.	Foreign Key
NetFare	INT	To determine total fare of flight, an ID fron 1 Air_Fare table.	Foreign Key

Discounts

Field	Data Type	Description	Constraints
DiID	INT	Unique row id.	Prin1ary Key
Title	Varchar(32)	Label to know discount.	NOT NULL
Amount	INT	Discount amount in %	NOT NULL
Description	Varchar(255)	Discount ren1arks & details.	

Charges

Field	Data Type	Description	Constraints
ChID	INT	Unique row id.	Prin1ary Key
Title	Varchar(32)	Label for charge.	NOT NULL
Anlount	INT	An1ount of charge in%.	NOT NULL
Description	Varchar(255)	Describe cause of charge.	

Countries

Field	Data Type	Description	Constraints
CtID	INT	Unique row id.	Primary Key
CountryName	Varchar(32)	Room to store country nan1e	NOTNULL

State

Field	Data Type	Description	Constraints
StID	INT	Unique row id.	Prin1ary Key
StateName	Varchar(32)	State name will take place here.	
Country	INT	PK from Country table.	Foreign Key

Contact_Details

Field	Data Type	Description	Constraints
CnID	INT	Unique row id.	Prin1ary Key
En1ail	Varchar(16)	Passenger's contact email tor transaction about flights.	NOT NULL
Cell	Varchar(16)	Passenger's contact cell no for transaction about flights.	NOT NULL
Tel	Varchar(16)	Passenger's contact telephone no. for transaction about flights.	
Street	Varchar(64)	Street address of the oassengers.	NOT NULL
State	INT	PK fron1 State table.	Foreign Key

passen!!ers

Field	Data Type	Description	Constraints
PsID	INT	Unique row id.	Primary Key
Nan1e	Varchar(32)	Passenger's name	NOT NULL
Address	Varchar (64)	Passenger's address	NOT NULL
Age	INT	Passenger's age	NOT NULL
Nationalities	Varchar (16)	Nationality of the passenger.	NOT NULL
Contacts	INT	ContactID fron1 Contact_Details table.	Foreign Key

Branches

Field	Data Type	Description	Constraints
BrID	INT	Unique id for each branches	Primary Key
Center	Varchar(16)	Branch Title	NOT NULL
Address	Varchar(32)	Address of the branch	NOT NULL
State	INT	State ID from state table	Foreign Key

En1pIoyees

Field Data Type Description Constraints	Field
---	--------------

En1pID	INT	Unique nun1ber to identity en1ployee, unique on ent.ire systen1.	Prin1ary Key
Nan1e	Varchar(32)	En1ployee nan1e	NOT NULL
Address	Varchar(32)	En1ployee address	NOT NULL
Branch	INT	Associated branch id from Branch Table	Foreign Key
Designat.ion	Varchar(32)	Working duty position.	NOT NULL
En1ail	Varchar(32)	Contact en1ail of the en1oloyee	NOT NULL
Tel	Varchar(16)	Contact telephone nun1ber.	
Ext	INT	Ext nun1ber of en1ployee cabinet, if applicable.	

Transactions

Field	Data Type	Description	Constraints
TsID	INT	Unique row id	Primary Key
BookingDate	Date/Tin1e	Keeps the booking date.	NOT NULL
DepartureDate	Date/Tin1e	Keeps the departure date.	NOT NULL
Passenger	INT	Transaction creator passengers row id to associate booking/cancellation, oavn1ents etc.	Foreign Key
Flight	INT	Flight no, a PK of Flight_Schedule to determine flyin{!details & costs.	Foreign Key
Type	BIT	Reservation/Cancellati on	NOT NULL
En1ployee	INT	Reservat.ion agent, a row id of enlployee who helps the oassen{!er to nlake transaction.	Foreign Key
Charges	INT	If transaction is cancellation, charges may apply as per business rules.	Foreign Key
Discount	INT	Discount offers n1ay apply based on scheme criteria.	Foreign Key
Total	INT	Calculated value of actual payable cost by customer to make a transaction.	NOT NULL

Primary Keys & Foreign Keys

SN		Primary Key	Foreign Keys	
	Table		Column	References
1	AirCraft	AcID	-	-
			AirCraft	AirCraft.AcID
2	Flight_Schedule	FIID	Route	Route.RtID
			Airfare	AirFare.AflD
3	Route	RtID	-	-
4	Airfare	AflD	Route	Route.RtID
5	Discounts	DiID	_	-
6	Charges	ChID	_	-
7	Passengers	PsID	Contacts	Contact_Details.CnID
8	Contact_Details	CnID	State	State.Still
9	State	StID	Country	Country.Ct.ID
10	Country	CtID	-	-
	Transaction	TsID	Passenger	Passengers.PsID
11			Flight	Flight_Schedule.FIID
			Employee	Employee.En1pID
			Charge	Charges.ChID
			Discount	Discounts.DiID
12	Employee	En1pID	Branch	Branch.BrID
13	Branch	BrID		

Data Definition Language implementations:

/* 3.1. Insert DATA into AirFare table*/

```
/* 0. Create Database & use it */
CREATE DATABASE BuddhAirBase;
USE BuddhaAirBase;
/* 1. Create AirCrafts table*/
CREATE TABLE AirCrafts(
      AcID INT Prin1ary Key,
      AcNumber Varchar(32) NOT NULL,
      Capacity INT NOT NULL,
      MfdBy Varchar(128) NOT NULL,
      MfdOn Datetime NOT NULL
);
/* 1.1 Insert data into Aircrafts table*/
INSERT INTO AirCrafts
(AcID, AcNumber, Capacity, MfdBy, MfdOn)
VALUES
(1, "ATR 72-500", 75, "Alenia Aeronotica", "23 April 1998");
/* 2. Create Route table*/
CREATE TABLE Route(
      RtID INT,
      Airport Varchar(32) NOT NULL,
      Destination Varcbar(32) NOT NULL,
      RouteCode Varchar(16) NOT NULL UNIQUE,
      PRIMARY KEY (RtID)
);
/* 2.1 Insert data into Route table*/
INSERT INTO Route
Values (1, "Kathmandu", "Pokhara", "KTM-PKR"):
/* 3. Create AirFare table*/
CREATE TABLE Airfare(
      AflD INT,
      Route INT,
      Fare Currency,
      FSC Currency,
      PRIMARY KEY (AflD),
      CONSTRAINT fk_Route FOREIGN KEY (Route) REFERENCES
Route(RtID)
);
```

VALUES

```
INSERT INTO Airfare
VALUES
(1, 1, 86, 12);
/* 4. Create Flight Schedule table*/
CREATE TABLE Flight_ScheduJe(
      FIID INT,
      FlightDate DATETIME,
      Departure DATETIME,
      Arrival DATETIME,
      AirCraft INT,
      NetFare INT,
      PRIMARY KEY (FIID),
      CONSTRAINT fk_AirCraft FOREIGN KEY (AirCraft) REFERENCES
AirCrafts(AclD),
      CONSTRAINT fk_NetFare FOREIGN KEY (NetFare) REFERENCES
AirFare(AfID)
);
/* 4.1 Insert DATA into Flight Schedule*/
INSERT INTO Flight; .. Schedule
VALUES
(1, 'January 23, 2012', '23:20', '1:20', 1, 1);
/* 5. Create Discounts table*/
CREATE TABLE Discounts(
      DiID INT PRIMARY KEY,
      Title Varchar(32),
      An1ount INT,
      Description Varchar (255)
/* 5.1 Insert data into Discounts table*/
INSERT INTO Discounts
VALUES
(l,'Childrens', 10, 'Discount is provide all childrens under age of 10.');
/* 6. Create Charges table */
CREATE TABLE Charges(
      ChID INT PRIMARY KEY,
      Title Varchar(32),
      An1ount INT,
      Description Varchar (255)
/* 6.1 Insert data into Charges table*/
INSERT INTO Charges
```

```
(2, 'Urgent Cancellation', 33.33, '33.3% will be charged for cancellation for booking
within 11 hrs fron1 flight tin1e');
/* 7. Crate Country table*/
CREATE TABLE Countries (
      CtID INT PRIMARY KEY,
      CountryName Varchar (32) NOT NULL
);
/* 7.1 Insert data into Country table*/
INSERT INTO Countries
VALUES
(1, 'Nepal');
/* 8. Create State table*/
CREATE TABLE State(
       StID INT,
      StateName Varchar (32),
      Country INT,
      PRIMARY KEY (StID),
      CONSTRAINT fk_Country FOREIGN KEY (Country) REFERENCES
Countries(CtID)
);
/* 8.1. Insert data into State table*/
INSERT INTO State
VALUES
(1, 'Bagn1ati', 1);
I* 9. Create Contact Details table*/
CREATE TABLE Contact_Details(
      CnID INT PRIMARY KEY,
      En1ail Varchar (16) NOT NULL,
      Cell Varchar (16) NOT NULL,
      Tel Varchar (16),
      Street Varchar (64),
      State INT NOT NULL,
      CONSTRAINT fk_State FOREIGN KEY (State) REFERENCES State(StID)
);
/* 9.1 Insert data into Contact Details */
INSERT INTO Contact_Details
VALUES
(l,'hello@shekhardesigner.con1', '9851121824', '01-4215384', 'Gandak:i Marga', l);
/* 10. Create Passengers table */
CREATE TABLE Passengers(
      PsID INT PRIMARY KEY,
      Name Varchar (32) NOT NULL,
```

```
Address Varchar (64) NOT NULL,
      Age INT NOT NULL,
      Nationality Varchar(16) NOT NULL,
      Contacts INT NOT NULL,
      CONSTRAINT fk_Contacts FOREIGN KEY (Contacts) REFERENCES
Contact_Details(CnID)
);
/* 10.1 Insert data into Passengers table*/
INSERT INTO Passengers
VALUES
(l,'Shekhar Kun1ar Sharn1a', 'Sinan1anga-39, KTM', 23, 'Nepalese', 1);
/* 11. Create Branch table*/
CREATE TABLE Branches(
      BrID INT PRIMARY KEY,
      Center Varcbar(16) NOT NULL,
      Address Varchar(32) NOT NULL,
      State INT,
      CONSTRAINT fk_StateOtEn1ployee FOREIGN KEY (State) REFERENCES
State(StID)
);
/* 11.1 Insert data into branches table*/
INSERT INTO Branches
VALUES
(1, 'Kathmandu', 'New Road, Katbn1andu', 1);
/* 12. Create Employee table */
CREATE TABLE Employee
      En1pID INT PRIMARY KEY,
      Name Varchar (32) NOT NULL,
      Address Varchar (32) NOT NULL,
      Branch INT NOT NULL,
      Designation Varchar(32) NOT NULL,
      Email Varchar (16) NOT NULL,
      Tel Varchar (16) NOT NULL,
      Ext INT,
      CONSTRAINT fk_Branch FOREIGN KEY (Branch) REFERENCES
Branches(BrID)
);
/* 12.1 Insert data into Employee table */
INSERT INTO En1ployee
VALUES
(1, 'Diwan Adhikari', 'Bagbazaar - 11, KTM', 1, 'Sales Executive',
'the.one@yahoo.con1', '01-4215254', 12);
```

/* 13. Create table Transactions */

CREATE TABLE Transactions(

TsID INT PRIMARY KEY,

BookingDate DATETIME,

DepartureDate DATETIME,

Passenger INT,

Flight INT,

Type BIT,

En1ployee INT,

Charges INT,

Discount INT,

 $CONSTRAINT \ fk_Passenger \ FOREIGN \ KEY \ (Passenger) \ REFERENCES \\ Passengers (PsID),$

CONSTRAINT fk_Flight FOREIGN KEY (Flight) REFERENCES Flight_Schedule(FlID),

CONSTRAINT fk_En1ployee FOREIGN KEY (En1ployee) REFERENCES En1ployee(EmpID),

CONSTRAINT fk_Charges FOREIGN KEY (Charges) REFERENCES Charges(ChID),

CONSTRAINT fk_Discount FOREIGN KEY (Discount) REFERENCES Discounts(DiID));


/* 13.1 Insert data into Transactions */

INSERT INTO Transactions

VALUES

(1,'12 Noven1ber 2011', '21 December 2011', 1, 1, 0, 1, NULL, NULL);

Relationship behveen all entities

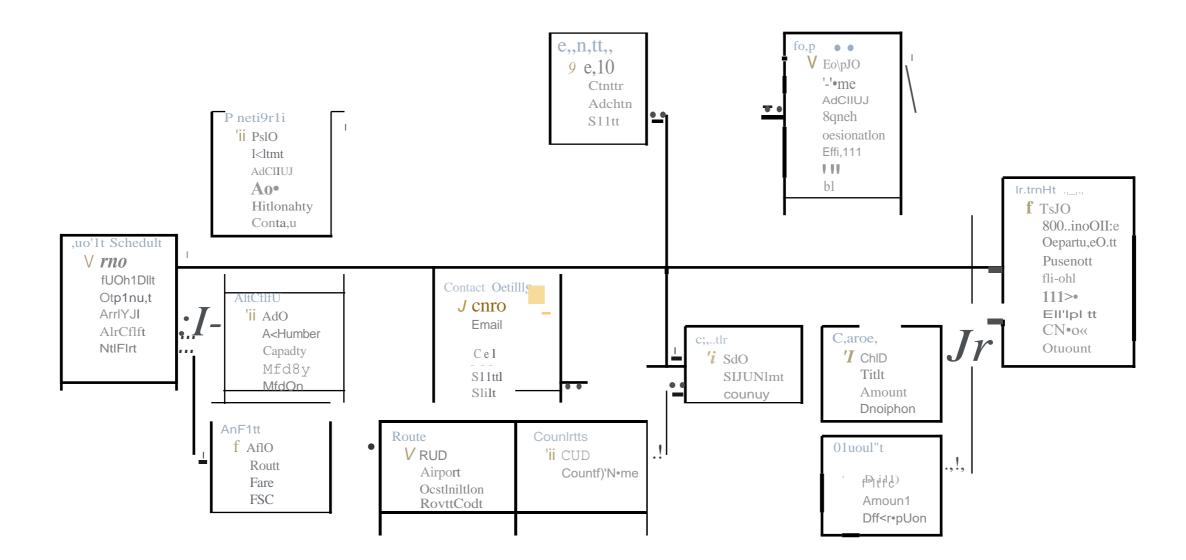


Cardinality


Cardinality notations, using *Chen style*. M = n1any, N = 0, 1, 2 ...

SN	Entities	Cardinality
1.	AirCrafts & Flight_Schedule	1 : M
2.	Route & AirFare	1:1
3.	AirFare & Flight_Schedule	1 · M
4.	Discounts & Transactions	N: 1
5.	Charges & Transactions	N: 1
6.	Countries & State	1 : M
7.	State & Branches	1 : M
8.	Contact_Details & State	M :1
9.	Passengers & Contact_Details	1:1
10	Passengers & Transactions	1:1
11.	Branches & En1ployee	1 : M
12.	En1ployees & Transactions	1 : M
13.	Transactions & Flight_Schedule	M :1

Cardinality diagran1 (Information engineering style notations)

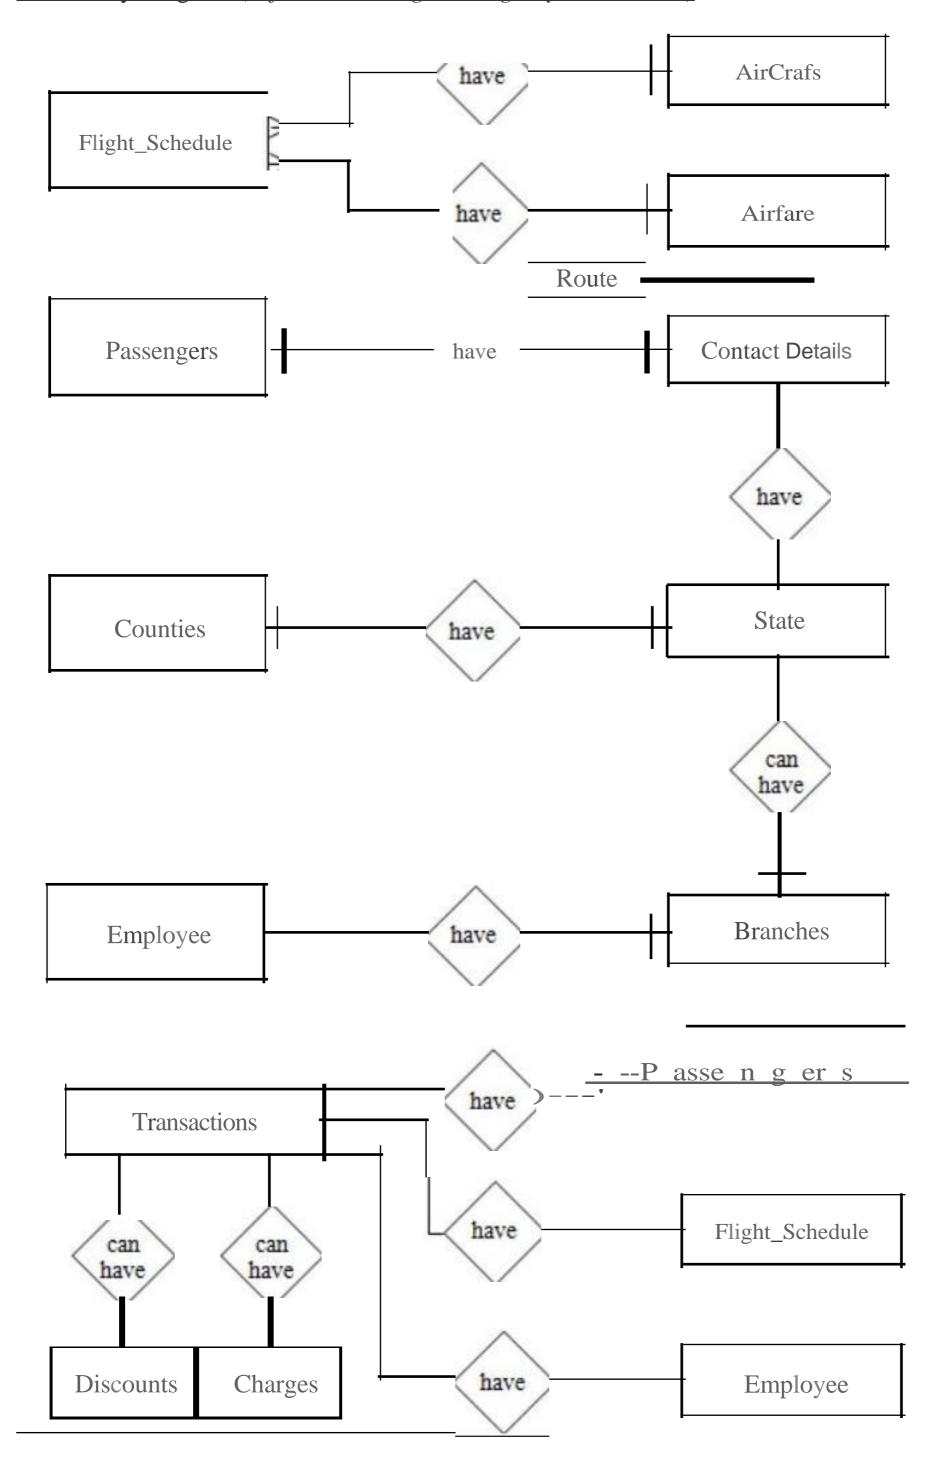

Final ER Diagram

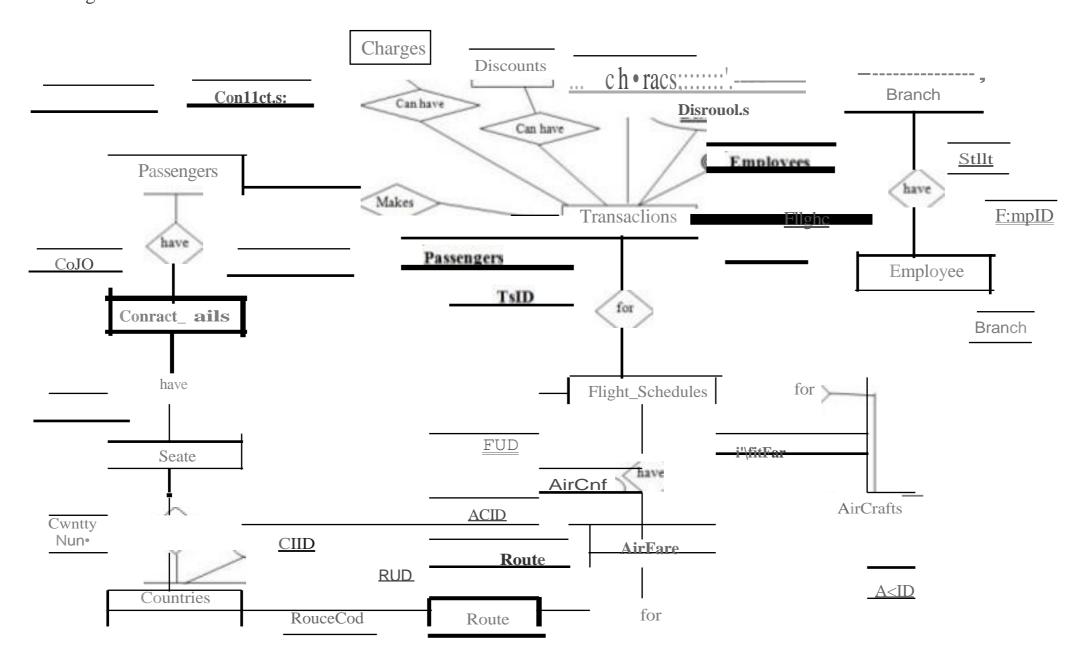

References

- 1. Ran1ez Elmasri and Shan1kant B. Navathe, 'Fundamentals of Database Systems' Addison Wesley Publishing Company
- 2. Allan Leake, (2000), *Definition of Database* http://searchsglserver.techtarget.conlidefinition/database
- 3. Sn1artDraw (2011), *Resources Tutorials* http://www.sn1artdraw.con1/resources/tutorials
- 4. BuddhaAir, Nepal (2011) *Company History* http://www.buddhaair.com/company/history.php