

BRIEF ARTICLE

THE AUTHOR

1. REPORT

In the previous chapter, we have seen that using a MFCC representation of utterances with regions of silence removed leads to a large improvement in accuracy, time and computational complexity in the performance of DTW algorithm augmented with a euclidean metric..The main contributing factor behind the large time and computational complexity of the base line DTW is the **size** of the time series sequences. The computational cost of a DTW algorithm is (mn) where m and n denote the length of the two time series sequences currently compared. Using longer sequences increases the size of the DTW cost matrix hence resulting into a greater number of computations.

The DTW algorithm on its own is a domain independent algorithm that uses a similarity metric to compare any two sequences through comparison of their global trends. The algorithm employses dynamic programming to search a space of mapping between the time axis of the two respective sequences to determine the optimum alignment between them. The only difference between MFCC-augmented DTW and baseline DTW is the feature extraction stage. In machine learning, feature extraction refers to the pre-processing stage that involves the extraction of new features from a set of raw attributes through a suitable functional mapping. The extraction phase of MFCC features involves a segmentation of the time series followed by a functional mapping on the segmented windows. The resultant sequence of extracted feature vectors has a much smaller length compared to the length of the original sequence. Evident from the experiments done in the previous chapters, the use mel-cepstrum features extracted on ‘cleaned’ signals not only increases the accuracy of DTW but also reduces the time and computational cost through reduction of dimensionality of the original sequence.

Any time series sequence contains both local and global trends. In some time series datasets[], it has been observed that incorporating the information about these local trends and global shapes in the clustering /classification process does improve the performance of the DTW. The feature extraction methodologies used for their works are domain and application independent. The MFCC feature extraction on the other hand, is a domain and application dependent. This feature extraction process can only be applied to time series

sequences corresponding to speech. From a scientific stand point, it will be interesting to compare and see how well/bad the domain independent methods are to domain dependent methods. In this chapter, I investigate an unsupervised methodology that:

- incorporates information about local and global trends in the feature extraction process
- employs an adaptive DTW that tackles the issue of the large time and computational complexity by moving from working on time series sequences to sequences of segmented time-slices. To counter the tradeoff in the decrease in accuracy, the algorithm is equipped with a kernel function(self-proposed) that is designed to measure the similarity of sub-sequences more accurately than standard euclidean metric by being invariant toward time-dilation and scale.

2. FEATURE EXTRACTION

The fundamental problem of baseline DTW is that the numerical value of a data point in a time series sequence is not a complete picture of the data point in relation to the rest of the sequence. The context such as the position of the points in relation to their neighbours is ignored. To fix this issue, an alternative form of DTW know as Derivative DTW is proposed but the fundamental problem with this DTW is that it fails to detect significant common sub-patterns between two sequences(mainly global trends). Ideally we need to use features that contains information about the overall shapes of the sequences plus the local trend around the points. This allows the DTW to built a complete picture of the data point in relation to the rest of the sequence and hence achieve a better optimal alignment between the two sequences.

For feature extraction, the methodology that I have used for this setup is based on Xie and Wiltgen's paper[1]. Each point in the time series sequence is replaced by a 4 dimensional vector where the first two features correspond to information regarding the local trends around a point and the last two features reflect the position of that point in the global shape of the sequence.

Definition of local feature given in [1] is as follows:

$$f_{\text{local}}(r_i) = (r_i - r_{i-1}, r_i - r_{i+1})$$

The extraction of global features is constrained by two factors: the features that reflect information about global trends and the features must be in the same scaling order as the local features. Being in the same scale allows them to be combined with local features. In [1] the authors used the following method to extract global features from the time series

sequence:

$$f_{\text{global}}(r_i) = (r_i - \sum_{k=1}^{i-1} r_k, r_i - \sum_{k=i+1}^M \frac{r_k}{M+1})$$

3. ADAPTION OF DTW

The feature extraction methodology discussed above results in a time series sequence of vectors where the length of the series is $\|X_n\| - 2$. ($\|X_n\|$ denotes the original length of the time series sequence). The DTW augmented with these features will still suffer from large time and computational complexity as before. In the MFCC feature extraction, the time series sequence is first segmented into series of frames of length 20ms. Through appropriate functional mapping, the frames are converted into vectors. Because the length of the resultant sequence of vectors is much smaller than the length of the original time series the size of the DTW cost matrix is smaller than before. This decreases the time and computational cost associated with each comparison.

Using this as motivation, the time series of 4d vectors extracted in the previous stage are segmented using windows of width 10ms. The number of segmented windows is much smaller than the length of sequences. Thus if we adapt the DTW to work on sequence of frames rather than the time series sequences, we can achieve a large improvement in the time and computational cost associated in the testing phase.

The problem now can be shifted to finding an appropriate kernel that can be used to compute the similarity between two subsequences of feature vectors while adjusting to the temporal skewness present within the subsequences. Intuitively speaking, we need a kernel that behaves like a DTW on pairs of subsequences.

- Proposed Kernel

The motivation behind the kernel proposed for this problem comes from the polynomial kernel. Lets consider the following example. Let x and z be two dimensional vectors. Consider the simple polynomial kernel of degree 2 : $k(x, z) = (x^T z)^2$. This kernel can be expressed as :

$$\begin{aligned} k(x, z) &= (x^T z)^2 \\ &= (x_1 z_1 + x_2 z_2)^2 \\ &= x_1^2 z_1^2 + 2x_1 z_1 x_2 z_2 + x_2^2 z_2^2 \\ &= (x_1^2, 2x_1 x_2, x_2^2)(z_1^2, 2z_1 z_2, z_2^2)^T \\ &= \phi(x)^T \phi(z) \end{aligned}$$

Hence the 2nd order polynomial kernel is equivalent to a corresponding feature mapping ϕ that contains terms of order 2. Now, if we generalise this notion then $k(x, x') = (x^T z)^M$ contains all monomials of order M. For instance, if x and z are two images, then the kernel represents a particular weighted sum of all possible products of M pixels in the first image with M pixels in the second image.

Now consider the following signals: The signal denoted by the ‘blue’ color is a translation

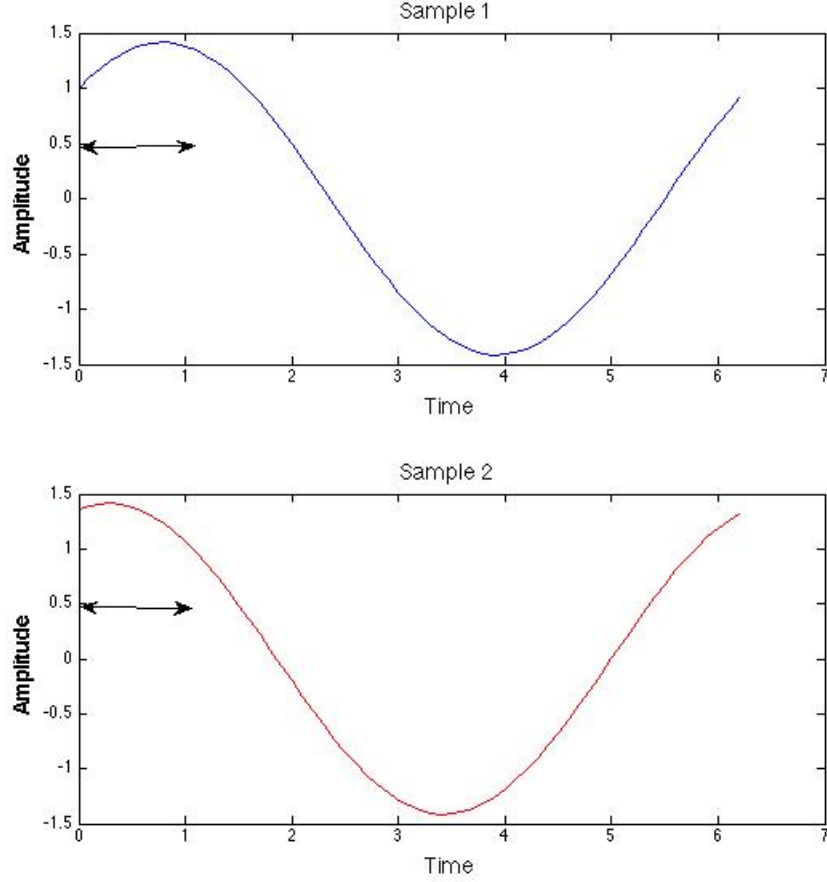


FIGURE 1. Two signals separated by translation

of the signal denoted by the ‘red’ color . From our methodology constructed so far, each time series point is replaced by a 4-dimensional vector and the resultant time series sequence of vectors is segmented using windows of size 10ms. In the example above, lets consider the window spanned by the arrows.

Using a euclidean metric in this scenario is inappropriate. The metric is analogous to using linear time warping where the two subsequences will be matched based on a linear match of the two temporal dimensions. In our context, we need a kernel that computes the similarity/distance between two sub-sequences by warping the time axis. In the polynomial kernel discussed above, in the generalised case $k(x, x') = (x^T z)^M$ represents a particular weighted sum of all possible products of M time series points in the first sub-sequence with M time series points in the second subsequence here x and z represent respective subsequences. Using this a s motivation I propose the following metric :

This corresponds to a sum of all possible products of each time series points in the first subsequence with each time series point in the second subsequence.

Kernel functions must be continuous, symmetric, and most preferably should have a positive (semi-) definite Gram matrix. Kernels which are said to satisfy the Mercer's theorem are positive semi-definite, meaning their kernel matrices have no non-negative Eigen values. The use of a positive definite kernel insures that the optimization problem will be convex and solution will be unique.