


Manage your Adobe Experience Manager Content fragments {#aem-fragments}

By integrating Adobe Experience Manager as a Cloud Service with Adobe Journey Optimizer, you can use AEM Content Fragments in your content and check Fragment statuses without leaving Journey Optimizer.


When you republish a Fragment already used in a Journey or Campaign, Journey Optimizer usually reflects the change within about **5 minutes**, see [Work with Adobe Experience Manager Content Fragments](#). If delays occur, you can now manually sync that Fragment from Journey Optimizer to pull the latest published version.

Access AEM Content Fragments {#access-aem-fragments}

1. From the **[!UICONTROL Content Management]** menu, select **[!UICONTROL Fragments]**.
2. Open the **[!UICONTROL AEM Fragments]** tab to view Content Fragments available from Adobe Experience Manager.
3. From the Fragment list, click ******* to **[!UICONTROL Explore references]** or **[!UICONTROL Edit Tags]**.

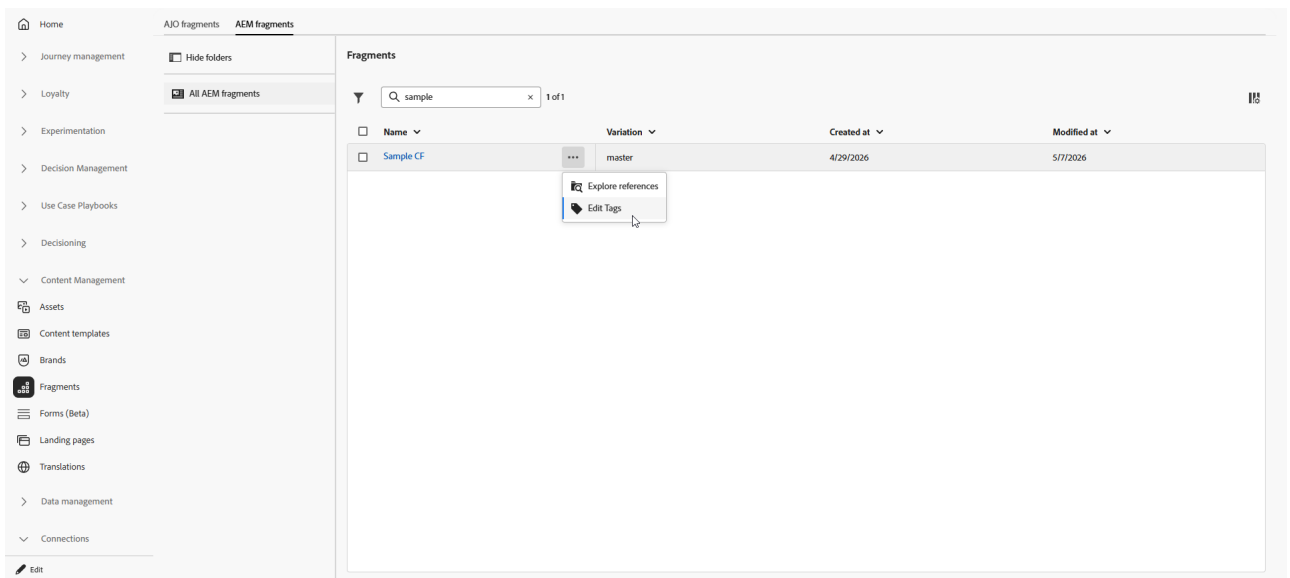

4. Select a Fragment to review its status and available actions:
 - **[!UICONTROL Explore references]**: see the Journeys and Campaigns that use the fragment.
 - **[!UICONTROL Open in AEM]**: open the Fragment in Adobe Experience Manager to edit or republish it.
 - **[!UICONTROL Sync]**: manually pull the latest published version when automatic sync has not completed.

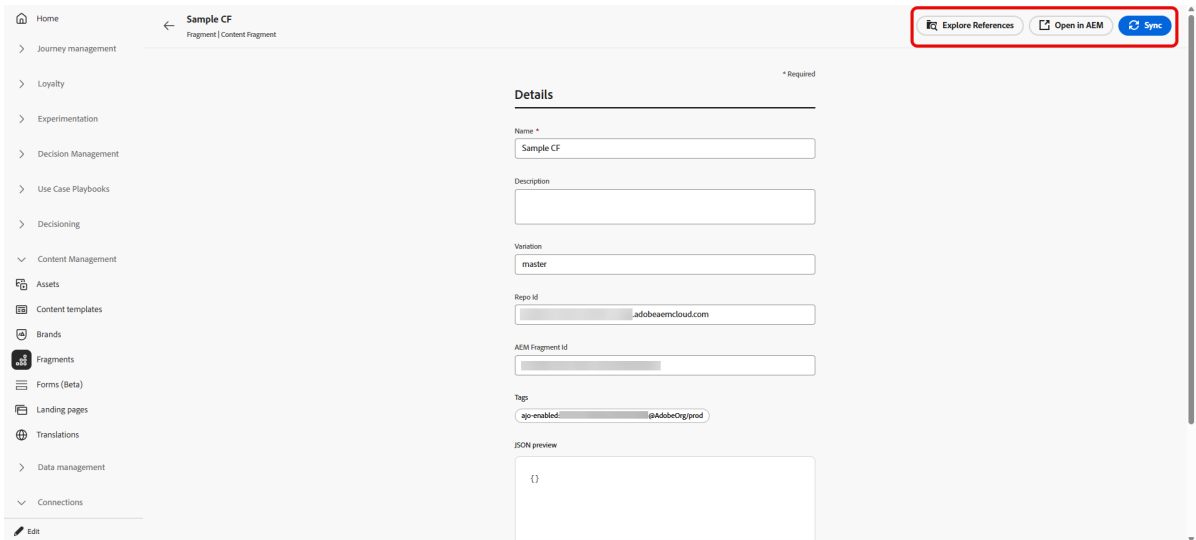

5. The **[!UICONTROL Details]** menu allows you to review metadata and preview the synced payload:

- **[!UICONTROL Name]**: title of the Content Fragment as shown in Journey Optimizer.
- **[!UICONTROL Description]**: description imported from Adobe Experience Manager.
- **[!UICONTROL Variation]**: published variation currently represented for this Fragment.
- **[!UICONTROL Repo Id]**: repository identifier for the Fragment in Adobe Experience Manager.
- **[!UICONTROL AEM Fragment Id]**: unique Content Fragment identifier in Adobe Experience Manager.
- **[!UICONTROL Tags]**: tags assigned in Adobe Experience Manager, including Journey Optimizer enablement tags that determine whether the Fragment appears in selectors for your organization and sandbox. [Learn how to create and assign tags](#)
- **[!UICONTROL JSON preview]**: read-only JSON structure of the Fragment content Journey Optimizer uses.

[Learn more about Content Fragment](#)