
# Understand basic text mode for groupings activities

#### Task - 4 parents grouping

The following text mode will group tasks based on up to four levels of parents, and leave parents that don't exist blank.

```
textmode=true
group.0.name=Parents
group.0.valueexpression=CONCAT({parent}.{parent}.{parent}.{parent}.{name},IF(ISBLANK({parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.{parent}.
```

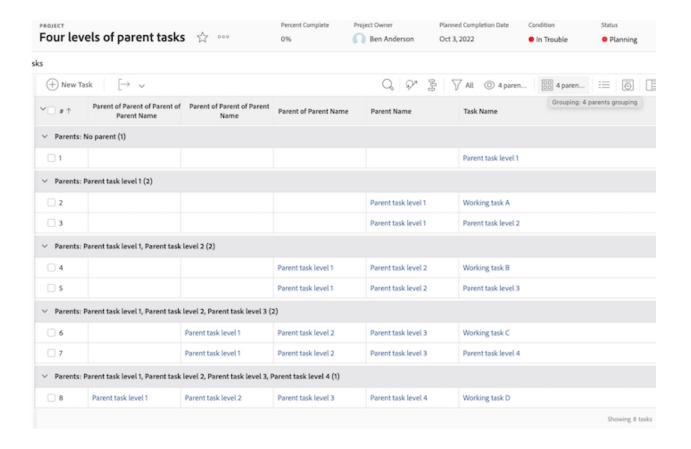

#### **Task - Percent complete grouping**

The following text mode will group tasks based on their percent complete. Tasks will fall into one of the following categories when grouped:


- 0%
- 1% to 25%
- 26% to 50%
- 51% to 75%
- 76% to 99%
- 100%

group.0.linkedname=direct

group.0.namekey=percentComplete

group.0.valueexpression=IF({percentComplete}<1,"0%",IF({percentComplete}<26,"1% to 25%",IF({percentComplete}<51,"26% to 50%",IF({percentComplete}<76,"51% to 75%",IF({percentComplete}<100,"76% to 99%",IF({percentComplete}=100,"100","\*\*\*"))))) group.0.valueformat=doubleAsString

textmode=true

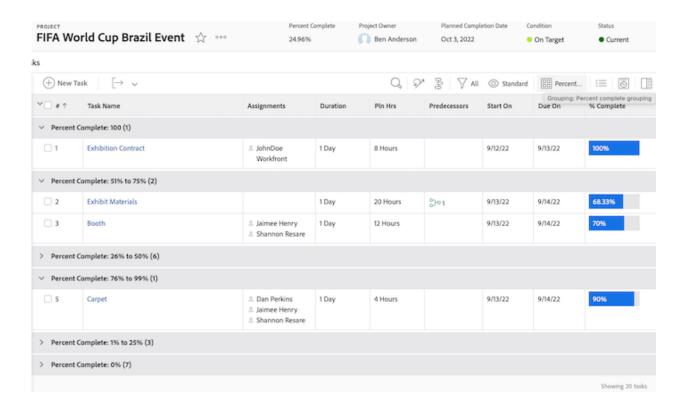


#### Task - statusEquatesWith, then status

textmode=true


The following text mode will group tasks by statusEquatesWith, then by status.

group.0.enumclass=com.attask.common.constants.TaskStatusEnum group.0.enumtype=TASK group.0.linkedname=direct group.0.name=State group.0.type=enum group.0.valuefield=statusEquatesWith group.0.valueformat=val group.1.enumclass=com.attask.common.constants.TaskStatusEnum group.1.enumtype=TASK group.1.linkedname=direct group.1.namekey=status group.1.type=enum group.1.valuefield=status group.1.valueformat=val

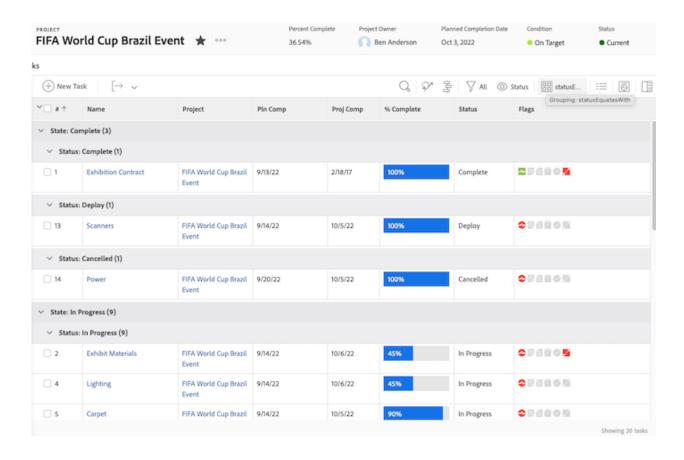

## **Proof Approval - Group by project name**

group.0.valueformat=HTML group.0.valuefield=documentVersion:document:project:name group.0.displayname=Project Name

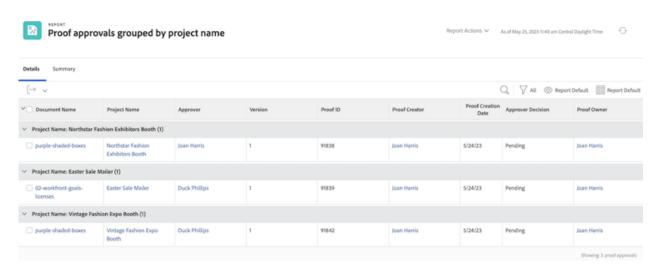

### **Proof Approval - Group by document name**

group.0.displayname=Document Name group.0.valuefield=documentVersion:document:name group.0.valueformat=HTML

