BrosTrend AX3000 WiFi 6 WiFi Extender Installation Guide

Contents

1 BrosTrend AX3000 WiFi 6 WiFi Extender
2 Quick Installation Guide
3 LED indicator
4 Working Mode 1: Set Up as a Wi-Fi Extender
5 Connect to Your Existing Wi-Fi Network
6 Method 2:Set UP WPS button
7 Relocate
8 Working Mode 2: Set Up as a Universal Wi-Fi to Ethernet Adapter
9 Working Mode 3: Set up as a Wireless Access Point
10 Create Your Wireless Access Point Network
11 FAQ
12 FCC Statement
13 GNU GENERAL PUBLIC LICENSE
14 TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION
15 END OF TERMS AND CONDITIONS
16 FCC Statement
17 CE Mark Warr1ing
18 Declaration of Conformity
19 GNU General Public License Notice



BrosTrend®

BrosTrend AX3000 WiFi 6 WiFi Extender




Quick Installation Guide

AX3000 WiFi 6 Range Extender
AX3000 WiFi to Gigabit Ethernet Adapter
Video Installation Guide is available via this link:
https://www.brostrend.com/pages/video-guide
support@brostrend.com

LED indicator

- **Solid Blue**
  The extender/adapter is in a proper position and receiving strong signal from your router.


- **Solid Yellow**
  The extender/adapter is receiving good signal from your router.
- **Solid Red**
  The extender/adapter is receiving weak signal from your router. Please relocate it closer to your router for better performance.
- **Blinking Red Slowly**
  The extender/adapter is powered on, while setup is not completed or fails to receive any signal from your router. Please relocate it closer to your router or set it up again.
- **Blinking Blue Fast**
  The extender/adapter is pairing with your existing router via WPS method. Please wait until the pairing completes.

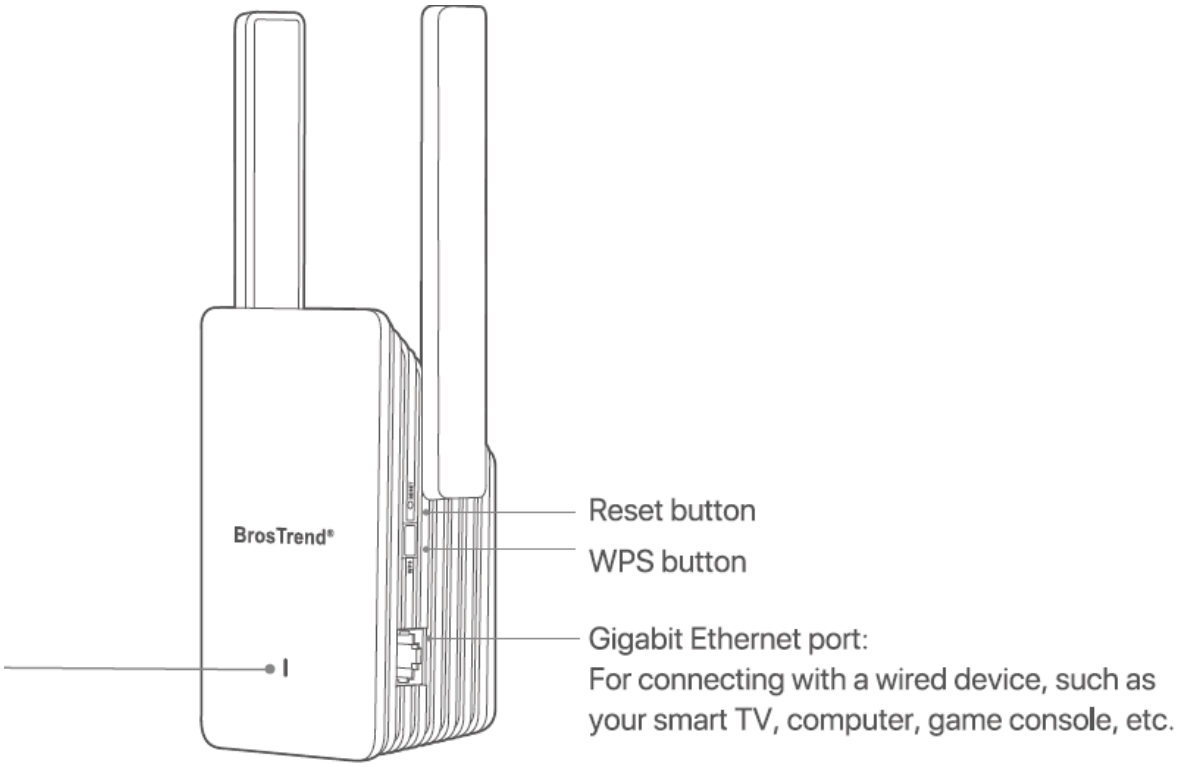

Working Mode 1: Set Up as a Wi-Fi Extender

Power on

Plug the extender into a power outlet in the same room as your existing Wi-Fi router. Wait until the LED indicator blinks red slowly.

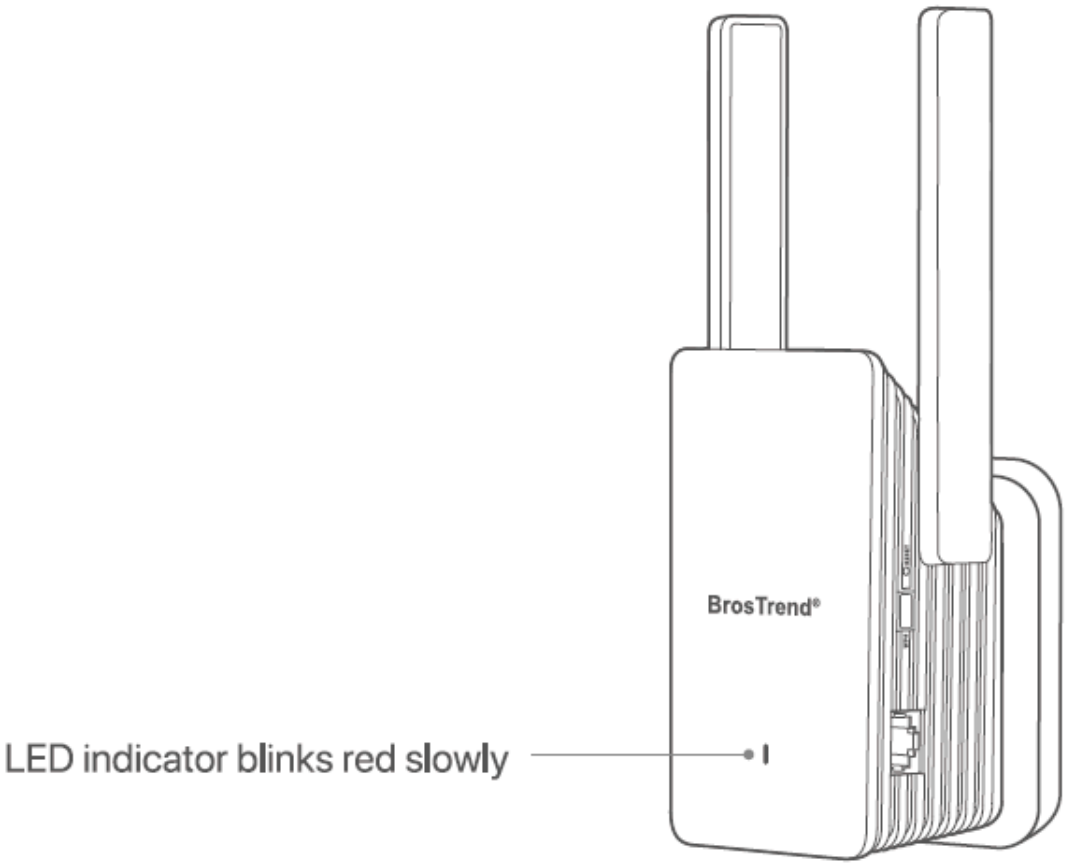

Connect to Your Existing Wi-Fi Network

Set up via Web Management Interface

1. Connect your Wi-Fi device to the default Wi-Fi network of the extender: Bros Trend _EXT, or connect your computer to the Ethernet port of the extender with an Ethernet cable.




2. Start a Web browser and visit **brostrendwifi.com** or 192.168.0.254 in the address bar.




* If the Web UI is inaccessible, referto Q1 in FAQ.


3. Create a login password for future logins. . (Recommended)

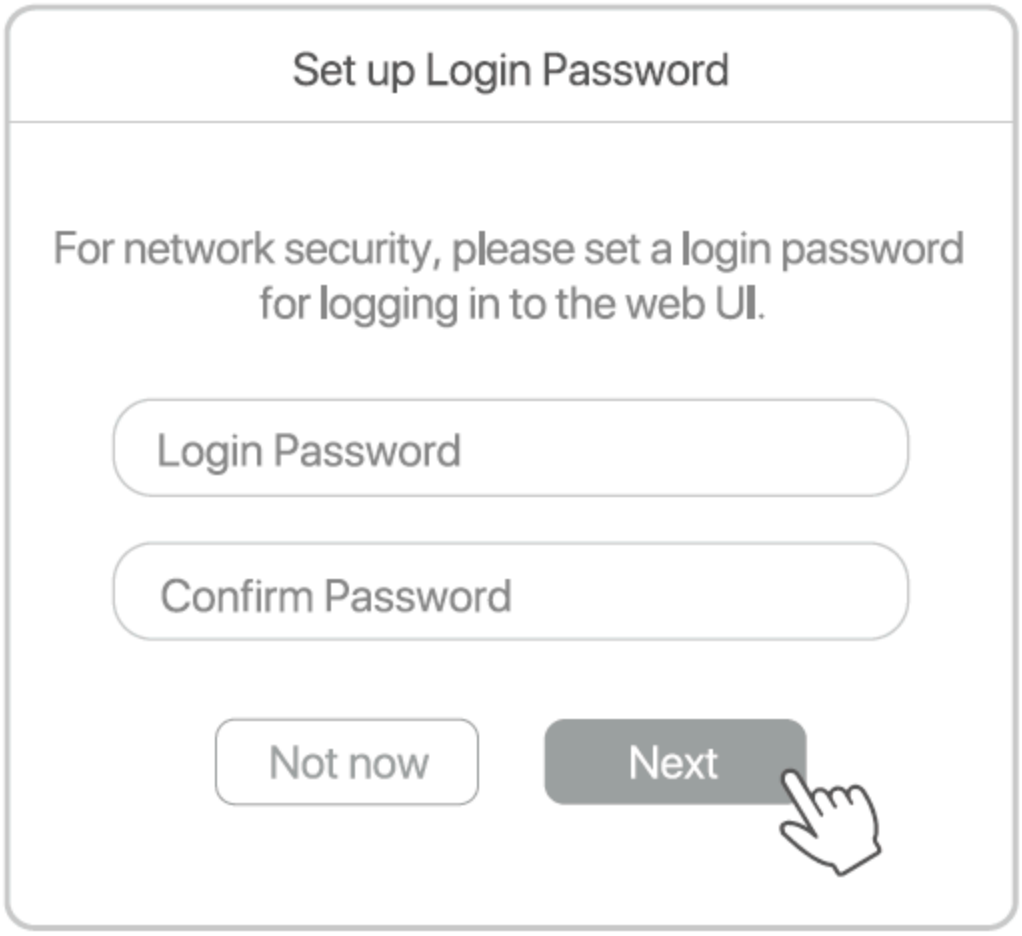


4. Select Extender Mode, click Next.

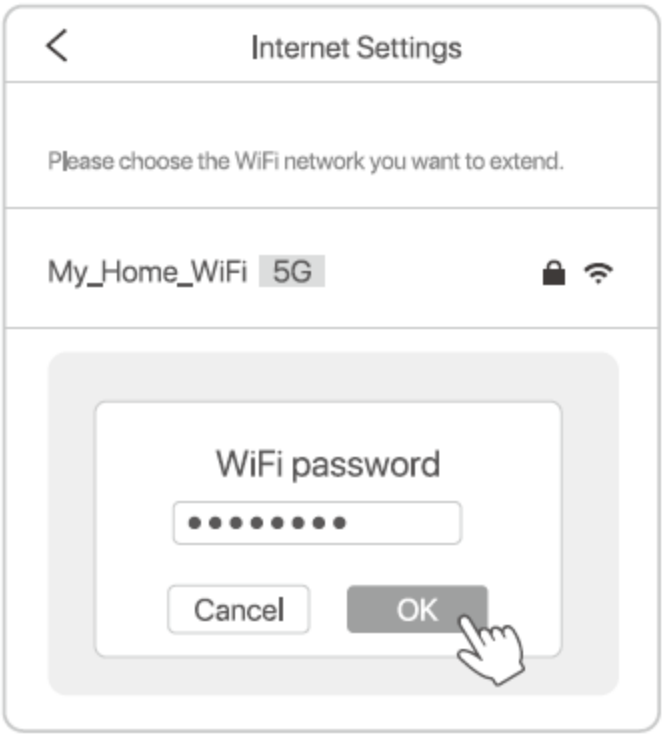


5. Choose the Wi-Fi network you want to extend and enter the Wii password.

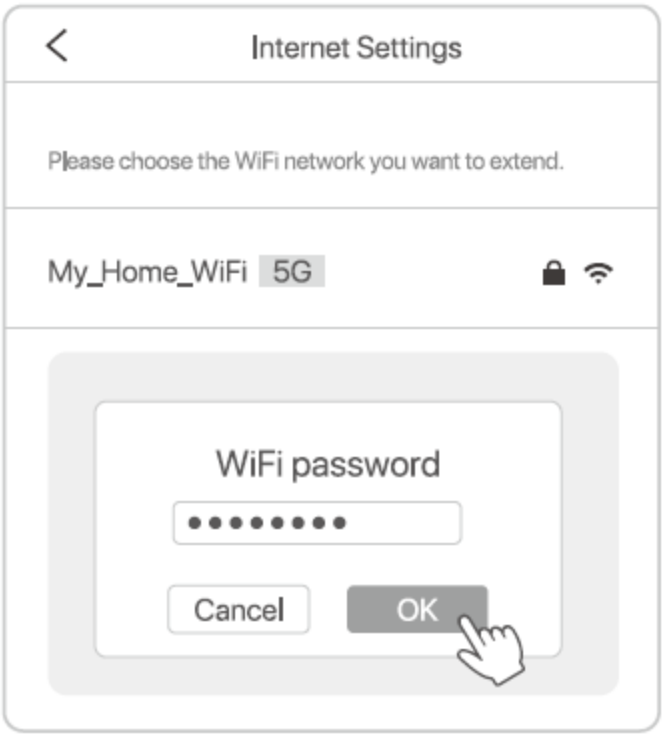

6. Customize the extended WiFi name(SSID) and password. Click Extend.

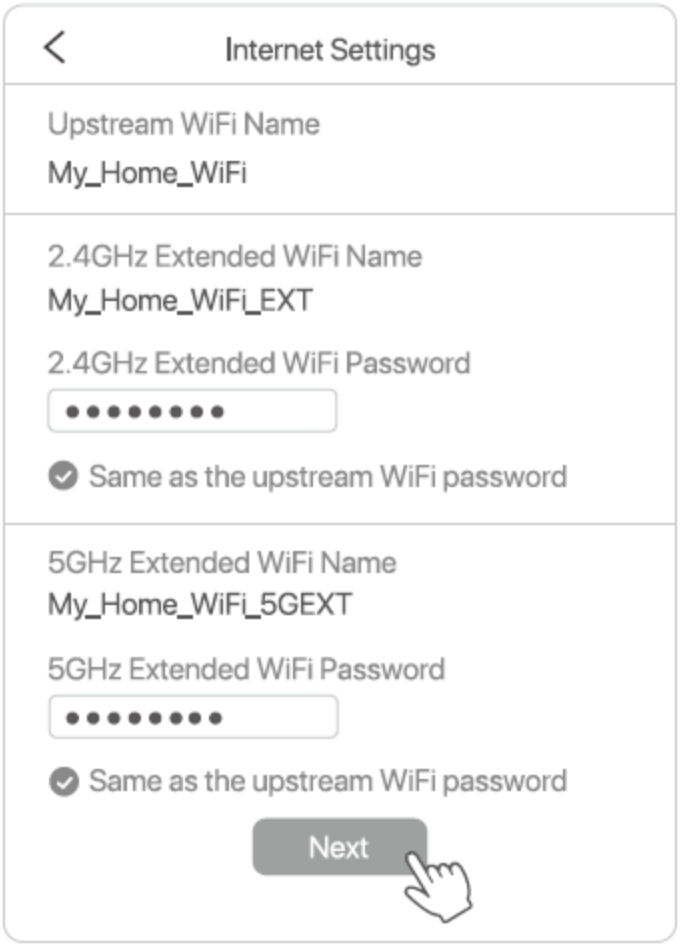

7. Check if the extender connects to your WiFi network successfully according to the status of the LED indicator.

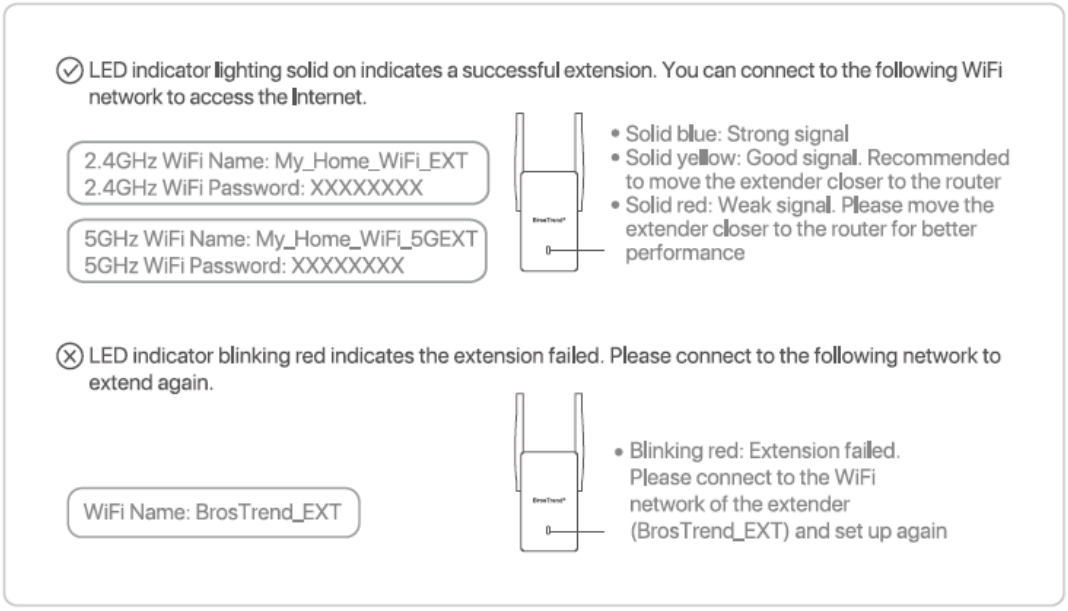


Method 2:Set UP WPS button

This method is applicable if your router has a WPS button. Otherwise, use Method 1.

1. Power on: Plug the extender into a power outlet in the same room as your existing router. Wait until the LED indicator blinks red.
2. Press the WPS button on your router.
3. Within 2 minutes, press the WPS button on the extender, the LED indicator on extender will start to blink blue fast.
4. Wait until the LED indicator turns solid on, which indicates a successful connection with your router.


After the WPS pairing, for network security, please connect your wireless device to the newly extended networks and visit www.brostrendwifi.com on a browser to set up a login password for your newly extended networks. Otherwise, the Web UI will be open to any devices connected to the extended networks.

Extended Network Names
XXXXXX_EXT or XXXXXX_5GEXT
(XXXXXX: the WIFi name of your router)
Password
The same as the WiFi password of your existing router.

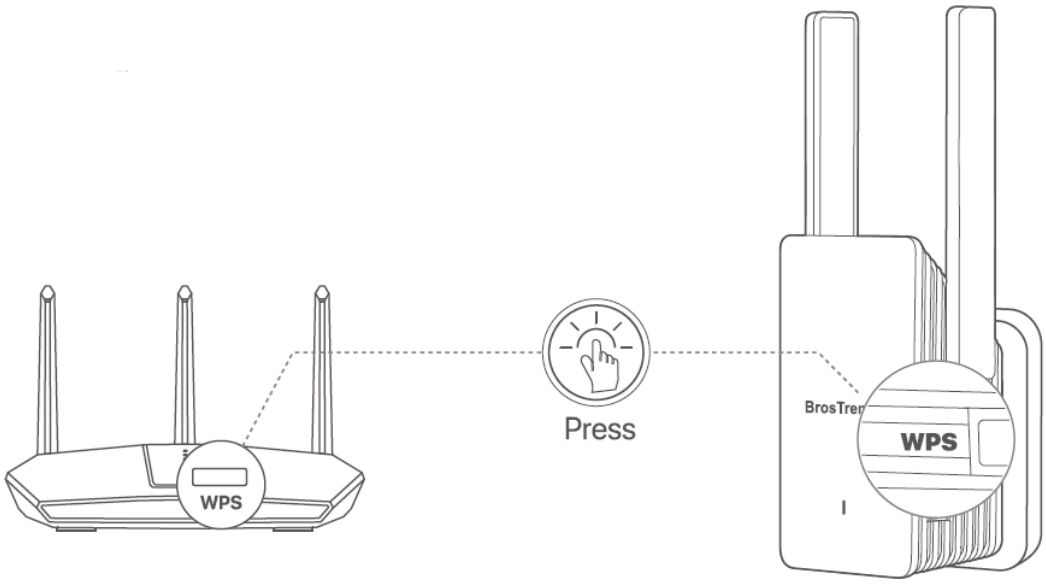

Relocate


- For optimal performance, please plug the extender into an electrical outlet halfway between your Wi-Fi router and the Wi-Fi dead zone.
- The extender must be placed within the range of your Wi-Fi router.
- Keep your extender away from electronics with strong interference, such as microwave oven, induction cooker, and refrigerator.

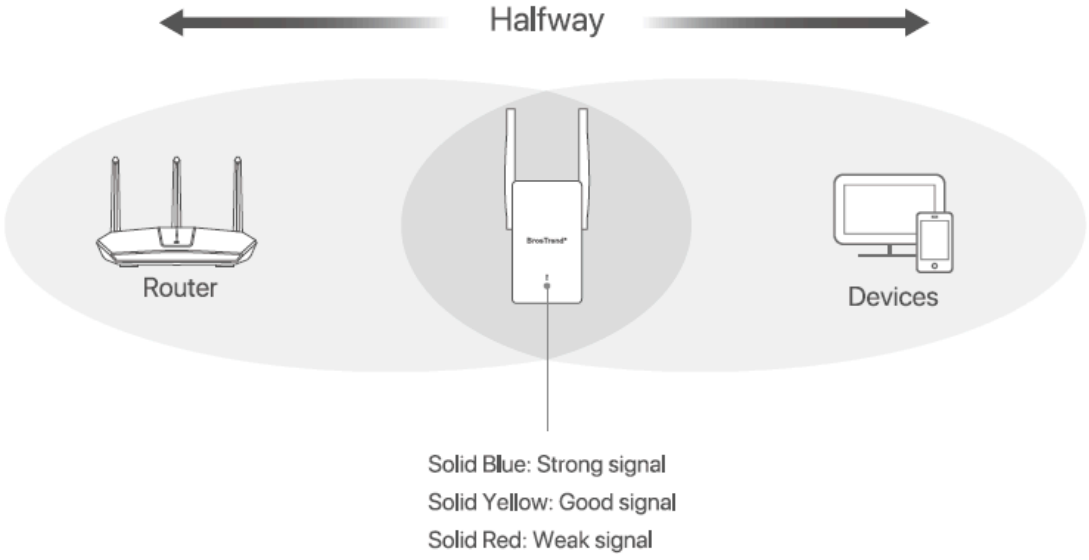


Working Mode 2: Set Up as a Universal Wi-Fi to Ethernet Adapter

1. Please refer to Working Mode 1: Set Up as a Wi-Fi Extender to set up first.

2. Then connect your wired device to this adapter with an Ethernet cable. Setup completed !

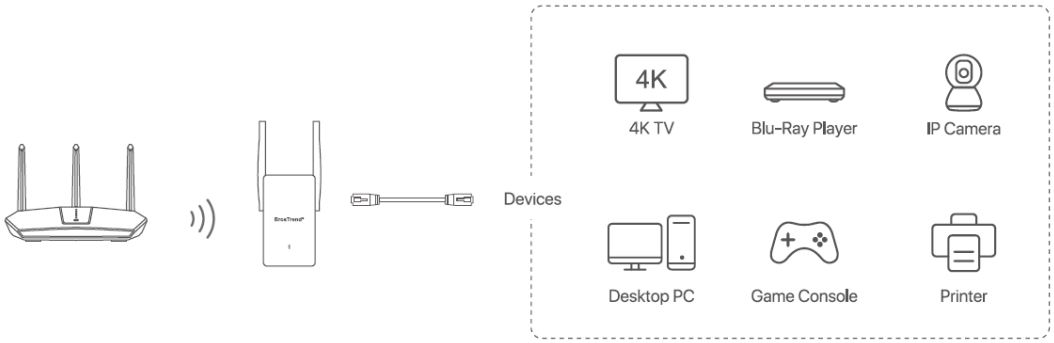

In this case, you need to configure the IP Address and DNS server address of your wired device as AUTO OBTAIN.

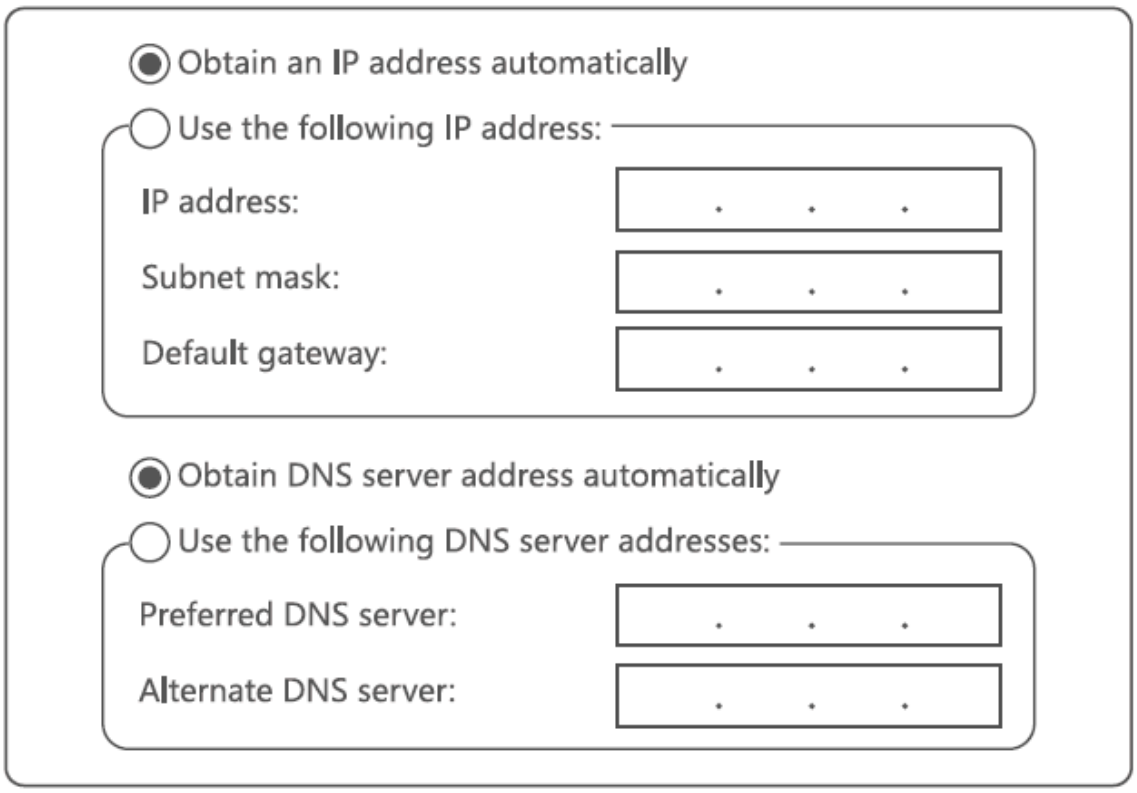

Working Mode 3: Set up as a Wireless Access Point


We here set up on a mobile phone as an example. Actual setup steps on a desktop or tablet could be slightly different.

Power on

- Plug the access point into a power out let.



- Wait until the LED indicator blinks red slowly.

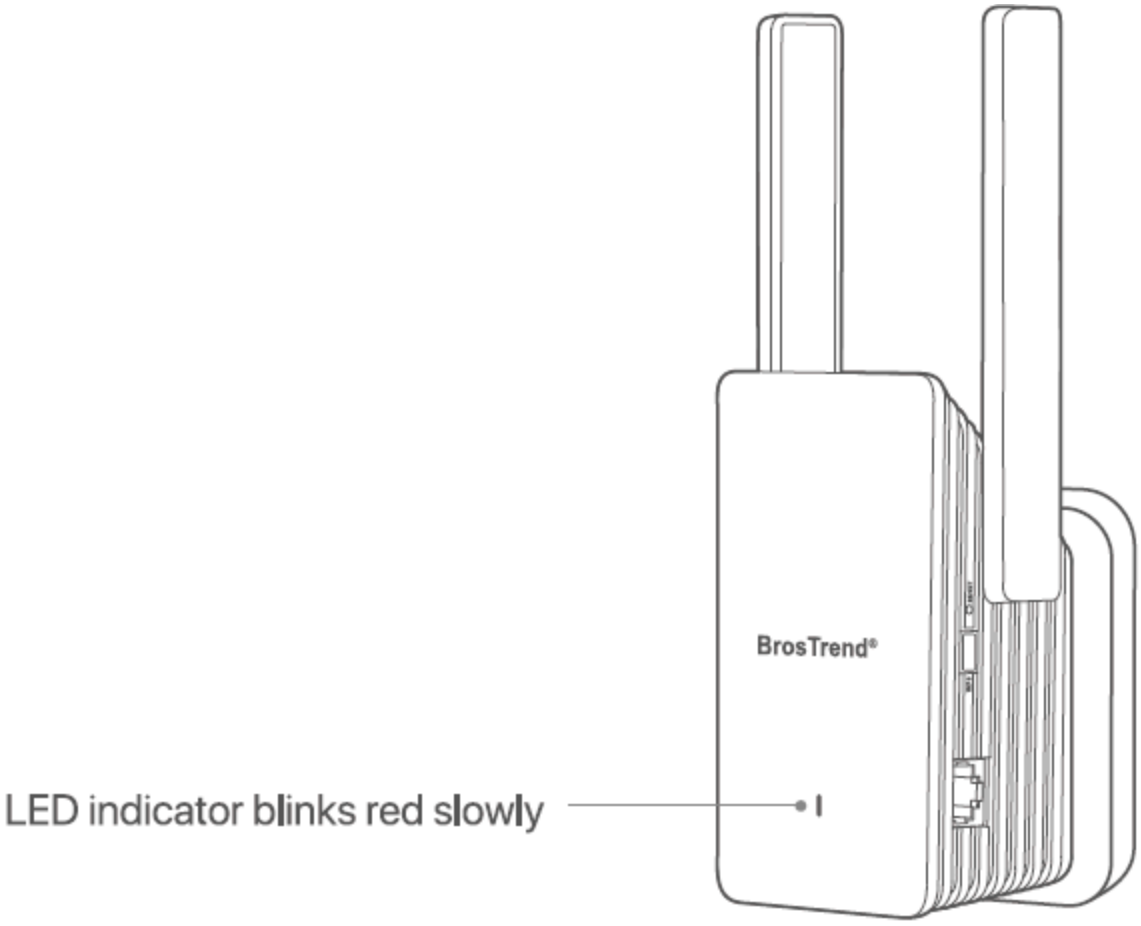

Create Your Wireless Access Point Network

1. Connect your WIFI device to the default WIFI network of this access point: Bros Trend_ EXT, or connect your computer to the Ethernet

port of this access point with an Ethernet cable.




2. Start a Web browser and visit brostrendwifl.com or 192.168.0.254 in the address bar.



* If the Web UI is inaccessible, refer to Q1 in FAQ.


3. Create a login password for future logins. (Recommended)

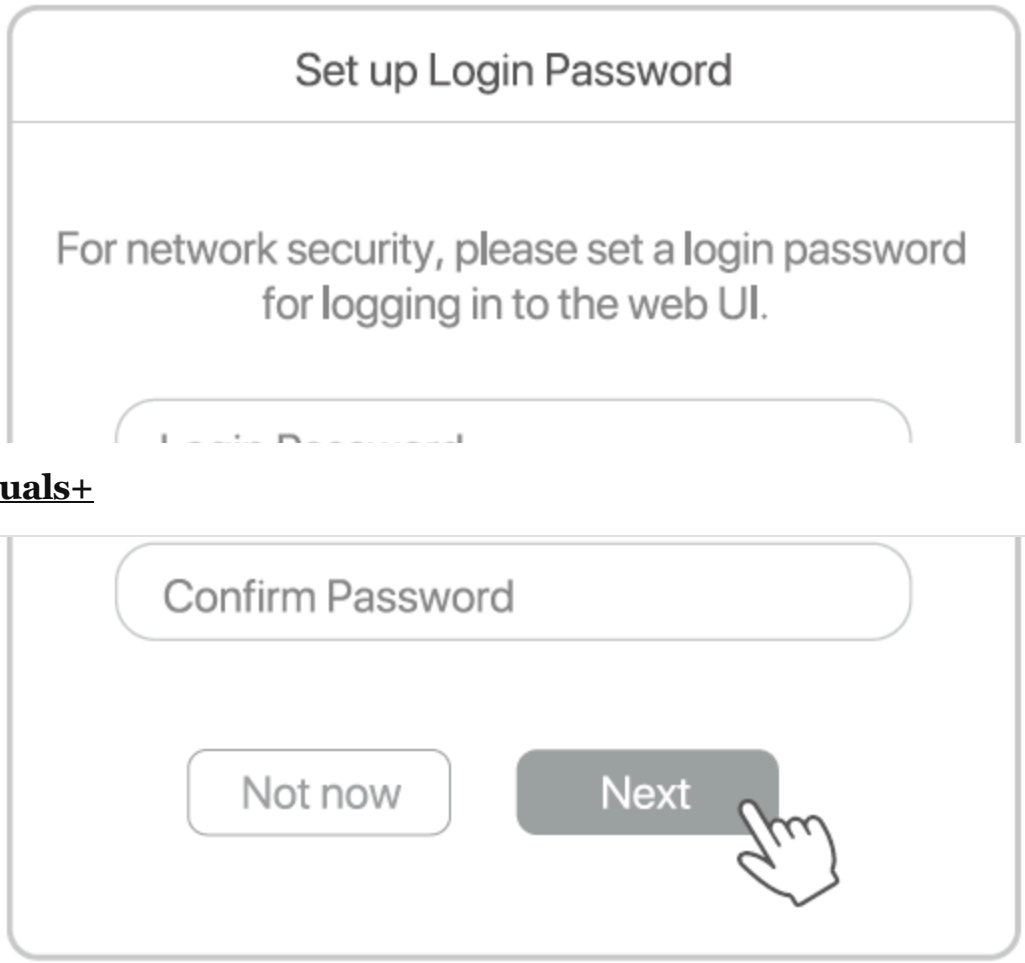

Manuals+

Connect to the Internet


Connect the access point to an Internet-enabled Ethernet port or LAN port of your router with an Ethernet cable. Setup completed'

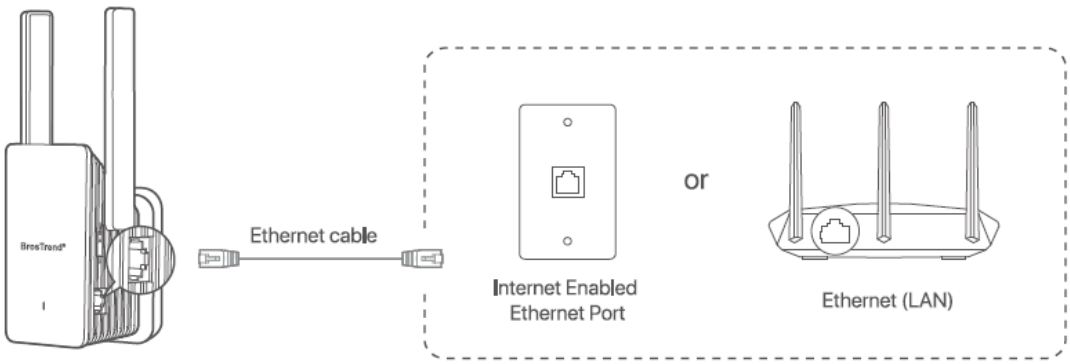


Note

The LED indicator lighting solid blue indicates a successful Internet connection. Otherwise, refer to 02 in FAQ to reset this access point and try again.

4. Select AP Mode, click Next.

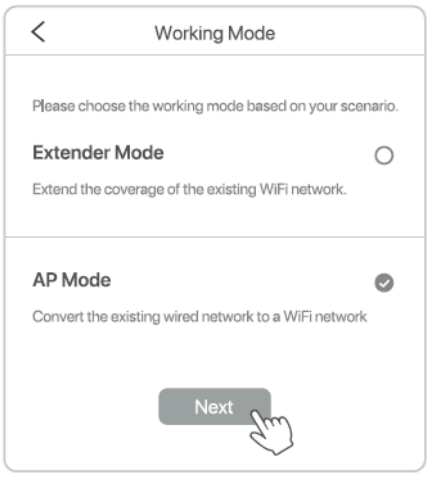

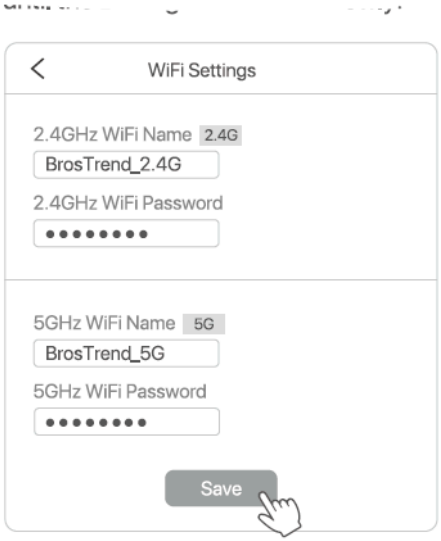

5. Customize the Wi-Fi name and Wi-Fi password, click Save, then wait for about one minute until the LED light blinks red slowly.

FAQ

1. **Q1: I cannot log into the Web UI of the extender.**
   What should I do?
   - For initial setup, ensure your wireless device is convicted to the default network of the extender: Bros Trend _EXT. Ensure that the Mobile Data (if any) function is disabled. If Bros Trend_ EXT is not found, please refer to Q2 to reset the extender back to its default factory setting.
   - If you have set up the extender successfully, you need to connect your device to the newly extended network of this extender and log into the Web UI.
   - Verify that brostrendwifi.com is correctly entered in the address bar of your browser.
   - Use another Web browser and try again.
   - If you are using a wired device, such as a computer, ensure that your computer is set to Obtain an IP address automatically and Obtain DNS server address automatically.
2. **Q2: How to reset the extender back to factory default setting?**
   - When the extender is fully powered on, press the RESET button with a needle-like object, the LED indicator starts blinking yellow fast.

- Wait until the LED indicator blinks red slowly, indicating the extender is reset successfully.

3. **Q3: What should I do if I forget my login password?**
   - Please refer to Q2 to reset the extender first. Then connect to the default network Broslrend_ EXT and visit brostrendwifi.com to create a new login password. Please note down your login password for future logins.
4. **Q4: The extender cannot find the WiFi network of my router. What should I do?**
   - Ensure the WiFi network of your router can be detected by other wireless devices.
   - Change the WiFi channel of your router and try again.
   - Change the encryption type of the router to WPA-PSK/WPA2-PSK or WPA2-PSK/

WPA3-SAE, and try again.

If you need any assistance, please send an email to **support@brostrend.com** together with your on-line order number. We will reply to you within 24 hours.

- **Manufacturer**: BrosTrend Technology LLC
- **Address**: 8 The Green, Suite A, Dover City, DE, U.S.A., Zip code 19901
- **Website**: **www.brostrend.com**
- **Telephone**: +86-17796126768
- **Email address**: **support@brostrend.com**
- For EU/EFT A, this product can be used in the following countries:

Au1horized U.K. Representative Information

- **Name:** APEX CE SPECIALISTS LIMITED
- **Address:** 89 Princess Street, Manchester, M1 4HT, UK contact: Wells
- **Telephone** No.: 00441616371080
- **E-Mail:** **info@apex–ce.com**

Note
on environmental protection: After the implementation of the European Directive 2012/19!EU and 2006/66/EU in the national legal system, the following applies: Electric and electronic devious as well as batteries must not be disposed of with household waste. Consumers are obliged by lawto return electrical and electronic devices as well as batteries at the end of their

service lives to the public collecting points se1 up for this purpose or point of sale. Details to this are defined by the national law of the respective country. This symbol on the product, the instruction manual or the package indicates that a product is subject to these regulations. By recycling, reusing the materials or other fom,s of utilizing old devices/Batteries, you are making an important contribution ta protecting our environment.

FCC Statement

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
Reorient or relocate the receiving antenna.

- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help. This device is restricted to be used in the indoor.

Operation is subject to the following two conditions

1. this device may not cause harmful interference, and
2. this device must accept any interference received, including interference that may cause undesired operation. Radiation Exposure Statement This device complies with FCC radiation exposure limits set forth for an uncontrolled environment

and it also complies with Part 15 of the FCC RF Rules. This equipment should be installed and operated with minimum distance 20cm between the device and your body. Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user’s

authority to operate this equipment. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

NOTE

1. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.
2. To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

CE Mark Warning

This is a Class B product. In a domestic environment, this product may cause radio interference, in which case the user may be required to take adequate measures. Operations in the 5.15-5.25GHz band are restricted to indoor use only. This equipment should be installed and operated with minimum distance 20cm between the device and your body. The mains plug is used as disconnect device, the disconnect device shall remain readily operable. For passthrough devices, plug the power strips into the integrated electrical sockets of the devices, but devices of the same or another type not be stacked in normal use.

NOTE

1. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to this equipment.
2. To avoid unnecessary radiation interference, it is recommended to use a shielded RJ45 cable.

Declaration of Conformity

Hereby, BrosTrend Technology LLC declares that the radio equipment type E3/AX3 are in compliance with Directive 2014/53/EU and 2014/30/EU. The full text of the EU declaration of conformity is available at the following Internet address: **https://brostrend.me/regulatory**

Operating Frequency
2.4GHz: EU/2412-2472 MHz (CH1-CH13)| 5GHz: 5180-5825 MHz (CH36-CH165) EIRP Power

(Max.)

- 2.4GHz: < 20dBm 5GHz: < 21dBm

Software Version

- V16.03.19.06_multi

Producto	NOMBRE DEL PRODUCTO: Extensor de WiFi / Adaptador de WiFi a Ethernet MODELO: E3/AX3
Alimentador de Energía: Alimentación: Salida:	NOM NYCE
PAIS DE ORIGEN: CHINA	

GNU GENERAL PUBLIC LICENSE

Version 2, June 1991 Copyright (C) 1989, 1991 Free Software Foundation, Inc. 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA Everyone is permitted to copy and distribute verbatim copies of this license document, but changing it is not allowed. Preamble The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software- to make sure the software is free for all its users. This General Public License applies to most of the Free Software Foundation's software and to any other program whose authors commit to using it. (Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply it to your programs, too. When we speak of free software, we are referring to freedom, not price. Our General Public Licenses are designed to make sure that you have the freedom to distribute copies of free software (and charge for this service if you wish), that you receive source code or can get it if you want it, that you can change the software or use pieces of it in new free programs; and that you know you can do these things. To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights. These restrictions translate to certain responsibilities for you if you distribute copies of the software, or if you modify it. For example, if you distribute copies of such a program, whether

gratis or for a fee, you must give the recipients all the rights that you have. You must make sure that they, too, receive or can get the source code. And you must show them these terms so they know their rights. We protect your rights with two steps:

1. copyright the software, and
2. offer you this license which gives you legal permission to copy, distribute and/or modify the software. Also, for each author's protection and ours, we want to make certain that everyone understands that there is no warranty for this free software. If the software is modified by someone else and passed on, we want its recipients to know that what they have is not the original, so that any problems introduced by others will not reflect on the original authors' reputations.

Finally, any free program is threatened constantly by software patents. We wish to avoid the danger that redistributors of a free program will individually obtain patent licenses, in effect making the program proprietary. To prevent this, we have made it clear that any patent must be licensed for everyone's free use or not licensed at all. The precise terms and conditions for copying, distribution and modification follow.

TERMS AND CONDITIONS FOR COPYING, DISTRIBUTION AND MODIFICATION

- This License applies to any program or other work which contains a notice placed by the copyright holder saying it may be distributed under the terms of this General Public License.
- The "Program", below, refers to any such program or work, and a "work based on the Program" means either the Program or any derivative work under copyright law: that is to say, a work containing the Program or a portion of it, either verbatim or with modifications and/or translated into another language. (Hereinafter, translation is included without limitation in the term "modification".) Each licensee is addressed as "you". Activities other than copying, distribution and modification are not covered by this License; they are outside its scope.
- The act of running the Program is not restricted, and the output from the Program is covered only if its contents constitute a work based on the Program (independent of having been made by running the Program).

- Whether that is true depends on what the Program does.

1. You may copy and distribute verbatim copies of the Program's source code as you receive it, in any medium, provided that you conspicuously and appropriately publish on each copy an appropriate copyright notice and disclaimer of warranty; keep intact all the notices that refer to this License and to the absence of any warranty; and give any other recipients of the Program a copy of this License along with the Program. You may charge a fee for the physical act of transferring a copy, and you may at your option offer warranty protection in exchange for a fee.
2. You may modify your copy or copies of the Program or any portion of it, thus forming a work based on the Program, and copy and distribute such modifications or work under the terms of Section 1 above, provided that you also meet all of these conditions:
   You must cause the modified files to carry prominent notices stating that you changed the files and the date of any change
   You must cause any work that you distribute or publish, that in whole or in part contains or is derived from the Program or any part thereof, to be licensed as a whole at no charge to all third parties under the terms of this License.
   If the modified program normally reads commands interactively when run, you must cause it, when started running for such interactive use in the most ordinary way, to print or display an announcement including an appropriate copyright notice and a notice that there is no warranty (or else, saying that you provide a warranty) and that users may redistribute the program under these conditions, and telling the user how to view a copy of this License.
   Exception
   if the Program itself is interactive but does not normally print such an announcement, your work based on the Program is not required to print an announcement.)
   |These requirements apply to the modified work as a whole. If identifiable sections of that work are not derived from the Program, and can be reasonably considered independent and separate works in themselves, then this License, and its terms, do not apply to those sections when you distribute them as separate works. But when you distribute the same sections as part of a whole which is a work based on the Program, the distribution of the whole must be on the terms of this License, whose permissions for other licensees extend to the entire

whole, and thus to each and every part regardless of who wrote it. Thus, it is not the intent of this section to claim rights or contest your rights to work written entirely by you; rather, the intent is to exercise the right to control the distribution of derivative or collective works based on the Program. In addition, mere aggregation of another work not based on the Program with the Program (or with a work based on the Program) on a volume of a storage or distribution medium does not bring the other work under the scope of this License.

3. You may copy and distribute the Program (or a work based on it, under Section 2) in object code or executable form under the terms of Sections 1 and 2 above provided that you also do one of the following: a) Accompany it with the complete corresponding machine-readable source code, which must be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or, b) Accompany it with a written offer, valid for at least three years, to give any third party, for a charge no more than your cost of physically performing source distribution, a complete machine-readable copy of the corresponding source code, to be distributed under the terms of Sections 1 and 2 above on a medium customarily used for software interchange; or, | c) Accompany it with the information you received as to the offer to distribute corresponding source code. (This alternative is allowed only for noncommercial distribution and only if you received the program in object code or executable form with such an offer, in accord with Subsection b above.) The source code for a work means the preferred form of the work for making modifications to it. For an executable work, complete source code means all the source code for all modules it contains, plus any associated interface definition files, plus the scripts used to control compilation and installation of the executable. However, as a special exception, the source code distributed need not include anything that is normally distributed (in either source or binary form) with the major components (compiler, kernel, and so on) of the operating system on which the executable runs, unless that component itself accompanies the executable. If distribution of executable or object code is made by offering access to copy from a designated place, then offering equivalent access to copy the source code from the same place counts as distribution of the source code, even though third parties are not compelled to copy the source along with the object code.
4. You may not copy, modify, sublicense, or distribute te Program except as expressly provided under this License. Any attempt otherwise to

copy, modify, sublicense or distribute the Program is void, and will automatically terminate your rights under this License. However, parties who have received copies, or rights, from you under this License not have their incenses terminated so long as such parties remain in comp lance.

5. You are not required to accept this License, since you have not signed it. However, nothing else grants you permission to modify or distribute the Program or its derivative works. These actions are prohibited by law if you do not accept this License. Therefore, by modifying or distributing the Program (or any work based on the Program), you indicate your acceptance of this License to do so, and all its terms and conditions for copying, distributing or modifying the Program or works based on it.
6. Each time you redistribute the Program (or any work based on the Program), the recipient automatically receives a license from the original licensor to copy, distribute or modify the Program subject to these terms and conditions. You may not impose any further restrictions on the recipients exercise of the rights granted herein. You are not responsible for enforcing compliance by third parties to this License.
7. If, as a consequence of a court judgment or allegation of patent infringement or for any other reason (not limited to patent issues), conditions are imposed on you (whether by court order, agreement or otherwise) that contradict the conditions of this License, they do not excuse you from the conditions of this License. If you cannot distribute so as to satisfy simultaneously your obligations under this License and any other pertinent obligations, then as a consequence you may not distribute the Program at all. For example, if a patent license would not permit royalty-free redistribution of the Program by all those who receive copies directly or indirectly through you, then the only way you could satisfy both it and this License would be to refrain entirely from distribution of the Program. If any portion of this section is held invalid or unenforceable under any particular circumstance, the balance of the section is intended to apply and the section as a whole is intended to apply in other circumstances. It is not the purpose of this section to induce you to infringe any patents or other property right claims or to contest validity of any such claims; this section has the sole purpose of protecting the integrity of the free software distribution system, which is implemented by public license practices. Many people have made generous contributions to the wide range of software distributed

through that system in reliance on consistent application of that system; it is up to the author/donor to decide if he or she is willing to distribute software through any other system and a licensee cannot impose that choice. This section is intended to make thoroughly clear what is believed to be a consequence of the rest of this License.

8. If the distribution and/or use of the Program is restricted in certain countries either by patents or by copyrighted interfaces, the original copyright holder who places the Program under this License may add an explicit geographical distribution limitation excluding those countries, so that distribution is permitted only in or among countries not thus excluded. In such case, this License incorporates the limitation as if written in the body of this License.

END OF TERMS AND CONDITIONS

- How to Apply These Terms to Your New Programs If you develop a new program, and you want it to be of the greatest possible use to the public, the best way to achieve this is to make it free software which everyone can redistribute and change under these terms. To do so, attach the following notices to the program. It is safest to attach them to the start of each source file to most effectively convey the exclusion of warranty; and each file should have at least the “copyright” line and a pointer to where the full notice is found. one Ine to give the program’s name and an idea of what & does. Copyright (C) vyyy name of author This program is free software; you can redistribute it and/or modity it under the terms of the GNU General Public License as published by the Free Software Foundation; either version 2 of the License, or (at your option) any later version. This program is distributed in the hope that it will be useful. but WITHOUT ANY
- WARRANTY; without even the implied warranty of MERCHANTABILITY or FITNESS FOR A PARTICULAR PURPOSE. See the GNU General Public License for more detals You should have received a copy of the GNU General Public License along with this program; if not, write to the Free Software Foundation, Inc., 51 Franklin Street, Fifth Floor, Boston, MA 02110-1301, USA.| Also add information on how to contact you by electronic and paper mail. If the program is interactive, make it output a short notice like this when it starts in an interactive mode:

- Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with ABSOLUTELY NO WARRANTY; for detals type show w. This is free software, and you are weloome to redistribute it under certain conditions; type showc' for detals. Tre yot hi commands you use made cale some in the han prit and ofte eney utilicense. mouse-clicks or menu items-whatever suits your program. You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names: Yoyodyne, Inc., hereby disclaims all copyright interest in the program ' Gnomovision' (which makes passes at compilers) written by James Hacker. signature of Ty Coon, 1 April 1989 Ty Coon, President of Vice This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

FCC Statement

- This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 FCC Rules. These limits are designed to provide reasonable protection against harmful interference in presidential installation.
- This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If 1his equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to tiy to eorreet the inference by one or more of the following measures:
- Reorient or relocate the receiving antenna.
  (2) this device must accept any interference received, including interference that may cause undesired operation.

Raidit11tion Expo. sure Statement

This device complies wi1tl FCC radiation exposure limits set forth for an uncontrolled environment and it also complies with Part 15 of the FCC RF

Rules. This equipment should be ins tamed and operated with minimum distance 20cm between title device and your body.

caution
Ally changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to oparat8 this equipment. This transmitter must not be CO located or operating in conj1mction with any other anthem or transmitter.

NOTE

1. The manufacturer is not responsible for any radio or TV interference caused by unauthorized modifications to titlist equipment.
2. To avoid unnecessary radiation interference, it is recommended ta use a shielded RJ45 cable.

CE Mark Warr1ing

- This is a Class B product. In a domestic environment, this product may cause radio interference, in winch case the user may be required to take adequate measures.
- Operations in the 5.1 5-5.25GHz band an, restrici8d to indoor use only.
- This equipment should be installed and operated with minimum dis1ance 20cm between the device and your body.
- The mains plug is used as disconnect device, the disconnect device shall remain readily operable. For passthrough devices, plug the power strips into the integrated electrical sockets of the devices, but devices of the same or another type not be stacked in normal use.

NOTE

(1) The manufacturer is not responsible for any radio or TV interference caused by unauthorized

Declaration of Conformity

- Hereby, Bros Trend Technology LLC declares that the radio equipment type E3/AX3 are in compliance
- with Directive 2014/53/EU and 201 4/30/EU. The full text of the EU declaration of conformity is available at the following lntemet address:

https://brostrend.me/regulatary

- Operating FreqL1ancy:
- 2.4GHz: EU/2412-2472 MHz (CH1-CH13)
- 5GHz: 51 80-5825 MHz (CH3S-CH165)
- EIRP Power (Max:.):
- 2.4GHz: < 20dBm
- 5GHz: < 21dBm
- Software Version: V16.03.1 9.06_multi

GNU GENERAL PUBLIC LICENSE

- The licenses for most software are designed to take away your freedom to share and change it. By contrast, the GNU General Public License is intended to guarantee your freedom to share and change free software-ta make sure the
- software is free for all its users. This General Public License applies to most of the Free Software Foundation's software ambo any other program whose authors commit to using it. {Some other Free Software Foundation software is covered by the GNU Lesser General Public License instead.) You can apply l to your programs, too.
- When we speak of free software, we are retrig to freedom, not price. Oiler General Public Licenses are designed to make sure that you have the freedom to distribute poppies of free software (and charge for this service you wish), that you receive source ode or can get it if you want it, that you can change the software or use pieces of it in new free programs; end that you know you can do these things.
- To protect your rights, we need to make restrictions that forbid anyone to deny you these rights or to ask you to surrender the rights.
- These restrictions trans !Bate to certain responsibilities for you if you distribute copies of the software, °' if you modifyi1.
- For example, if you distribute copies of such a program, whether gratis or for a lee, you must give 1he recipients an the righ1s that you have. You must make sure I hat they, too, receive or can get the source code. And you must show them these their rights.

We protect your rights with two steps;

1. copyright the software, and

2. offer you this license which gives you legal permission to copy, distribute and/or modify the software.

- Also, for each author's prelection and ours, we want to make certain everyone understands that there is no warran1y for this free software. If the so ware is modified by someone else and passed we want its recipients to know that what 1hey have is no1 1he original. so 1hatproblems in1roduoed by others will not reflect on the original authors' reputa1ions.

GNU General Public License Notice


- This product includes software code developed by third parties, including software code subject to the GNU General Public License ("GPL"). For GPL inquiries, please contact us at **support@brostrend.com** or 8 The Green, Suite A. Dover City, DE, U.S.A., Zip 19901. Additionally, Rostered provides for GPL-Code-Center under **https://brostrend.me/gpl** where machair readable copies of the GPL source codes used in Broslrend products are for free to download. Please note, that the GPL-Code-Center is only provided as a courtesy to Bros Trend's customer but may neither offer a full set of source codes used h all products nor always provide for the latest or actual version of such source cod.
- The GPL Code used in these J)(ducts is distributed WITHOUT ANY WARRANTY and is subjec1 to the copyrights of one or more authors.
- Please refer to the following GNU Public License for further information.
- Gnomovision version 69, Copyright (C) year name of author Gnomovision comes with

BSOLUTELY NO WARRANTY

- This is free software, and you are welcome to redistribute it under certain conditions; type commands you use made mouse-clicks or menu items-whatever suits your program. You should also get your employer (if you work as a programmer) or your school, if any, to sign a "copyright disclaimer" for the program, if necessary. Here is a sample; alter the names:, Inc., hereby disclaims all copyright interest in the program ' Gnomovision' (which makes passes at compilers) written by James Hacker. signature of Ty Coon, 1 April 1989 Ty Coon, President of

Vice This General Public License does not permit incorporating your program into proprietary programs. If your program is a subroutine library, you may consider it more useful to permit linking proprietary applications with the library. If this is what you want to do, use the GNU Lesser General Public License instead of this License.

Documents / Resources

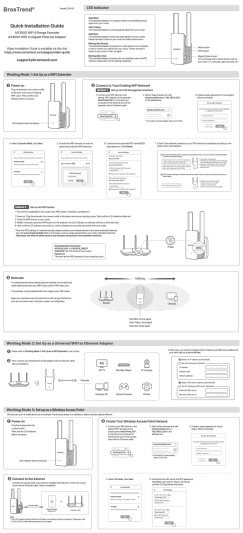

AX3000 WiFi 6 WiFi Extender

Installation Guide · AX3000 WiFi 6 WiFi Extender, AX3000, WiFi 6 WiFi Extender, WiFi Extender, Extender

References

User Manual

manual.tools

Published: December 22, 2023
Updated: December 23, 2023

Related Topics

Extender | AX3000 | WiFi Extender

Latest BrosTrend Manuals

BrosTrend U2 2.5 Usb C Gbps Ethernet Adapter Installation Guide
March 7, 2026

BrosTrend AC9-V2 Wi-Fi to Ethernet Adapter Installation Guide
January 10, 2025

BrosTrend E3/AX3 WiFi to Gigabit Ethernet Adapter Installation Guide
November 25, 2024

BrosTrend E2/AX2 WiFi to Gigabit Ethernet Adapter Installation Guide
November 25, 2024

Manuals+ | **Upload** | **Deep Search** | **About Us** | **Privacy Policy** | **@manuals.plus** | **YouTube** | **LinkedIn** | **FaceBook**

This website is an independent publication and is neither affiliated with nor endorsed by any of the trademark owners. The "Bluetooth®" word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. The "Wi-Fi®" word mark and logos are registered trademarks owned by the Wi-Fi Alliance. Any use of these marks on this website does not imply any affiliation with or endorsement.