


默认IP和账号

web后台地址：192.168.1.1

账号：root

密码：123456

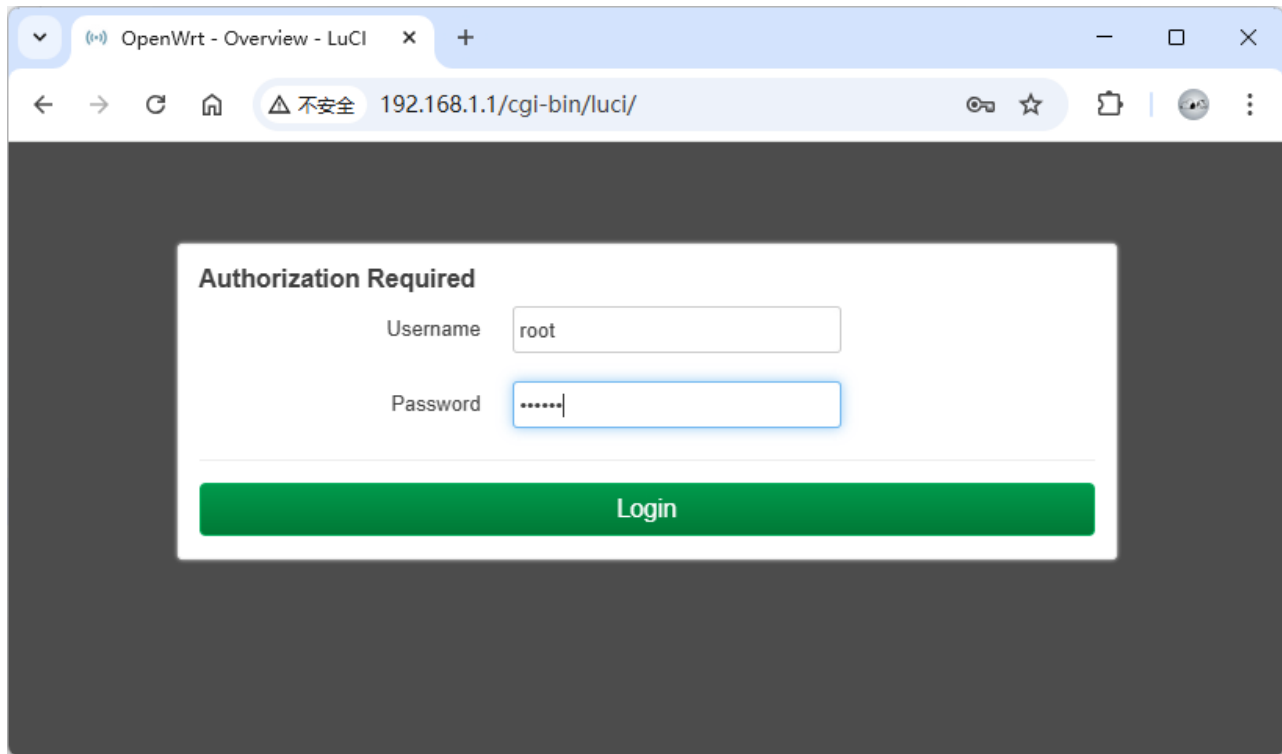

有线连接外网

路由板上电开机，路由板的WAN口连接有网的网线

默认设定如此。

将需要上网的设备（比如电脑）连接到路由板的LAN口，即可上网。

无线连接外网

点击RESET将路由板恢复出厂

按照截图提示，依次点击Network和Wireless

192.168.1.1/cgi-bin/luci/admin/services/management

OpenWrt Status System Services Network Logout

TR-069 Datamodel TR069-STUN TR069-Status

tr-069 client

easycwmpd is a tr-069 client, from [PIVA Software](#). Note, easycwmpd does not have complete UCI support for easycwmpd, but this LuCI applet can be used to configure it for manual configuration.

Local settings

enable ☒

interface

port

ubus_socket

date_format

Network menu: Interfaces, Wireless, Routing, DHCP and DNS, Diagnostics, Firewall, QoS


点击Scan

OpenWrt Status System Services Network Logout REFRESHING


Wireless Overview

radio0	Generic 802.11bgn Channel: 1 (2.412 GHz) Bitrate: ? Mbit/s	Restart Scan Add
---/-94 dBm	SSID: 6569_2GAp Mode: Master BSSID: 00:22:44:11:44:9B Encryption: WPA3 SAE (CCMP)	Disable Edit Remove
disabled	SSID: Tri_Mesh_BH_4499 Mode: Master Wireless is disabled	Enable Edit Remove
disabled	SSID: Tri_Mesh_FH_4499 Mode: Master Wireless is disabled	Enable Edit Remove
disabled	SSID: ? Mode: Client Wireless is disabled	Enable Edit Remove
disabled	SSID: ? Mode: Client Wireless is disabled	Enable Edit Remove
radio1	Generic 802.11nac Channel: 40 (5.200 GHz) Bitrate: 866.7 Mbit/s	Restart Scan Add
---/-91 dBm	SSID: Triductor_5GAp Mode: Master BSSID: 02:22:44:11:44:9C Encryption: None	Disable Edit Remove
disabled	SSID: Tri_Mesh_BH_4499 Mode: Master Wireless is disabled	Enable Edit Remove
disabled	SSID: Tri_Mesh_FH_4499 Mode: Master Wireless is disabled	Enable Edit Remove
	SSID: ? Mode: Client	

选择需要连接的网络，点击Join Network

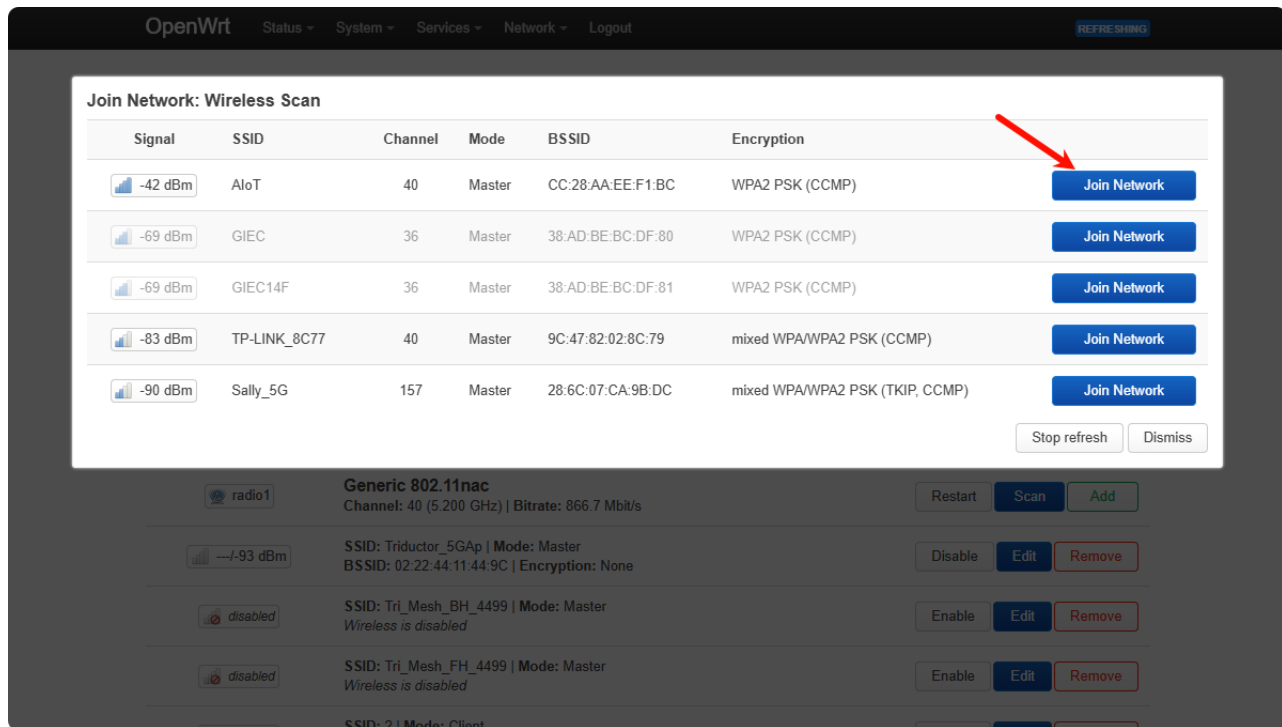

输入需要连接网络的秘密，然后Submit

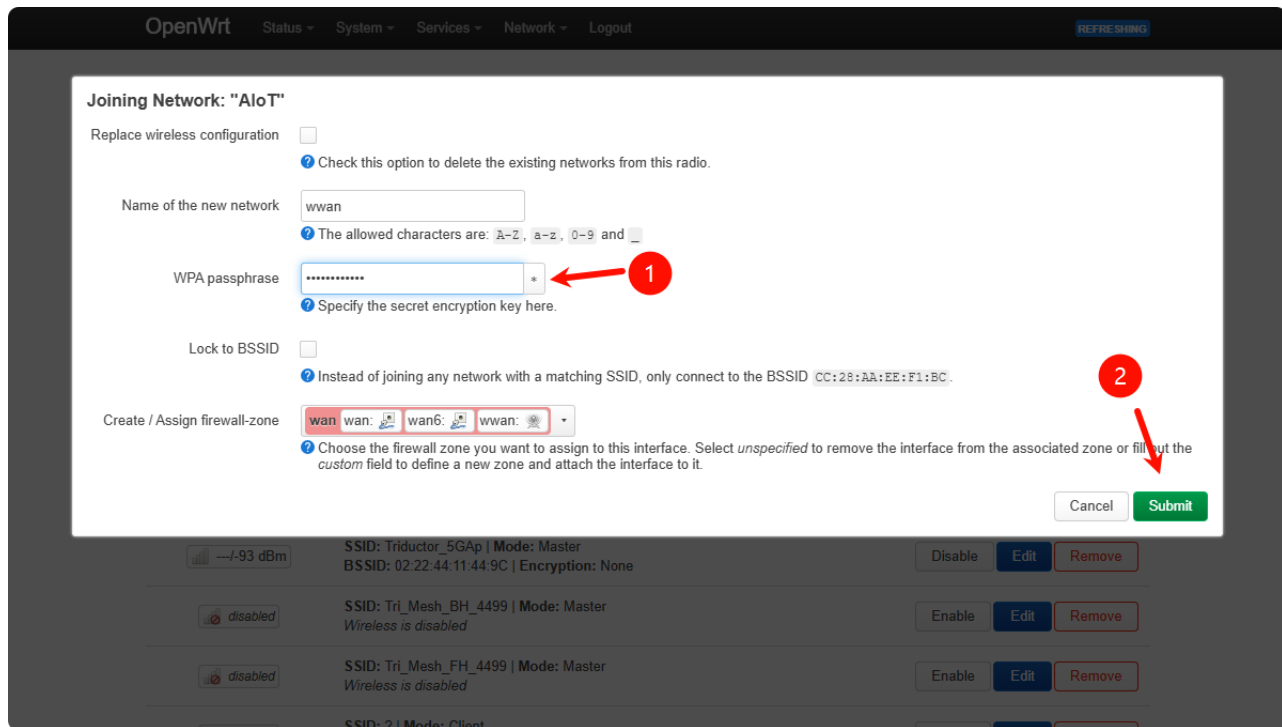

点击Save，并且Save&Apply

Wireless Network: Client "AloT" (radio1.network6)

Device Configuration

General Setup Advanced Settings

Status  Mode: Client | SSID: AloT
-- dBm Wireless is not associated

Wireless network is enabled Disable

Operating frequency Mode: AC Channel: auto Width: 80 MHz

Maximum transmit power: driver default - Current power: unknown
Specifies the maximum transmit power the wireless radio may use. Depending on regulatory requirements and wireless usage, the actual transmit power may be reduced by the driver.

Interface Configuration

General Setup Wireless Security Advanced Settings

Mode: Client

ESSID: AloT

BSSID:

Network: wwan: 

Choose the network(s) you want to attach to this wireless interface or fill out the custom field to define a new network.



Dismiss

Save

Associated Stations

Network	MAC address	Host	Signal / Noise	RX Rate / TX Rate
				6.0 Mbit/s, 20 MHz

OpenWrt Status System Services Network Logout REFRESHING UNSAVED CHANGES: 13

Wireless is disabled

disabled	SSID: Tri_Mesh_FH_4499 Mode: Master Wireless is disabled	Enable Edit Remove
disabled	SSID: ? Mode: Client Wireless is disabled	Enable Edit Remove
disabled	SSID: ? Mode: Client Wireless is disabled	Enable Edit Remove
radio1	Generic 802.11nac Channel: 40 (5.200 GHz) Bitrate: 866.7 Mbit/s	Restart Scan Add
---/-92 dBm	SSID: Triductor_5GAp Mode: Master BSSID: 02:22:44:11:44:9C Encryption: None	Disable Edit Remove
disabled	SSID: Tri_Mesh_BH_4499 Mode: Master Wireless is disabled	Enable Edit Remove
disabled	SSID: Tri_Mesh_FH_4499 Mode: Master Wireless is disabled	Enable Edit Remove
disabled	SSID: ? Mode: Client Wireless is disabled	Enable Edit Remove
-47/-92 dBm	SSID: AloT Mode: Client BSSID: 00:22:44:11:44:9C Encryption: WPA2 PSK (CCMP)	Disable Edit Remove
disabled	SSID: AloT Mode: Client Interface has 7 pending changes	Disable Edit Remove

Associated Stations

Network	MAC address	Host	Signal / Noise	RX Rate / TX Rate
Client "AloT" (wlan1)	CC:28:AA:EE:F1:BC	?	-48/-92 dBm	6.0 Mbit/s, 20 MHz 866.7 Mbit/s, 80 MHz, VHT-MCS 9, VHT-NSS 2, Short GI

Save & Apply Save Reset

Powered by LuCI (250704.06857) / TGP 3.3.4 r19685-512e76967f

通过串口输入命令：

```
1 uci set network.wwan.disabled='0'
2 uci commit
3 /etc/init.d/network restart
```

确认无线连接外网成功

将PC通过有线连接到路由板的LAN口即可上网。

或者，点击Network-Interface，查看WWAN有获取到IP地址。

OpenWrt Status System Services Network Logout REFRESHING

No password set!
There is no password set on this router. Please configure a password to access the web interface.

Interfaces Devices Global network options

Interfaces

AGENT br-lan	MAC: 00:22:44:11:44:99 RX: 1.92 MB (7389 Pkts.) TX: 4.27 MB (8619 Pkts.)	Restart Stop Edit Delete
LAN br-lan	Protocol: Static address Uptime: 0h 3m 2s MAC: 00:22:44:11:44:99 RX: 1.92 MB (7389 Pkts.) TX: 4.27 MB (8619 Pkts.) IPv4: 192.168.1.1/24	Restart Stop Edit Delete
WAN wan	Protocol: DHCP client MAC: 00:22:44:11:44:9A RX: 0 B (0 Pkts.) TX: 0 B (0 Pkts.)	Restart Stop Edit Delete
WAN6 wan	Protocol: DHCPv6 client MAC: 00:22:44:11:44:9A RX: 0 B (0 Pkts.) TX: 0 B (0 Pkts.)	Restart Stop Edit Delete
WWAN wlan1	Protocol: DHCP client Uptime: 0h 2m 50s MAC: 00:22:44:11:44:9C RX: 3.62 MB (8337 Pkts.) TX: 1.88 MB (6519 Pkts.) IPv4: 192.168.50.34/24	Restart Stop Edit Delete

Add new interface...

Save & Apply Save Reset

Powered by LuCI (250704 06857) / TGP 3.3.4 r19685-512e76967f
192.168.1.1/cgi-bin/luci/admin/network/network

修改SSID名称和密码

点击Network-Interface，找到Triductor_2GAp 的SSID点击Edit（5G的同理）

OpenWrt

StatusSystemServicesNetworkLogout

REFRESHING

No password set!

There is no password set on this router. Please configure the web interface.

Interfaces

Wireless

Routing

DHCP and DNS

Diagnostics

Firewall

QoS

Wireless Overview

radio0	Generic 802.11bgn Channel: 1 (2.412 GHz)	RestartScanAdd
-95 dBm	SSID: Triductor_2GAp Mode: Master BSSID: 00:22:44:11:44:9B Encryption: None	DisableEditRemove
disabled	SSID: Tri_Mesh_BH_4499 Mode: Master Wireless is disabled	EnableEditRemove
disabled	SSID: Tri_Mesh_FH_4499 Mode: Master Wireless is disabled	EnableEditRemove
disabled	SSID: ? Mode: Client Wireless is disabled	EnableEditRemove
disabled	SSID: ? Mode: Client Wireless is disabled	EnableEditRemove
radio1	Generic 802.11nac Channel: 157 (5.785 GHz) Bitrate: 585.1 Mbit/s	RestartScanAdd
-92 dBm	SSID: Triductor_5GAp Mode: Master BSSID: 02:22:44:11:44:9C Encryption: None	DisableEditRemove
disabled	SSID: Tri_Mesh_BH_4499 Mode: Master Wireless is disabled	EnableEditRemove
disabled	SSID: Tri_Mesh_FH_4499 Mode: Master Wireless is disabled	EnableEditRemove
disabled	SSID: ? Mode: Client Wireless is disabled	EnableEditRemove
-50/-92 dBm	SSID: AIoT Mode: Client BSSID: 00:22:44:11:44:9C Encryption: WPA2 PSK (CCMP)	DisableEditRemove

Associated Stations

Network	MAC address	Host	Signal / Noise	RX Rate / TX Rate
866.7 Mbit/s 80 MHz VHT-MCS 9				

修改SSID名称、配置密码，点击Save

Interface Configuration

General SetupWireless SecurityMAC-FilterAdvanced Settings

Mode

Access Point

ESSID

Triductor_2GAp

Network

lan

Hide ESSID

WMM Mode

Dismiss

Save

修改2.4GSSID

Interface Configuration

General Setup Wireless Security MAC-Filter Advanced Settings

EncryptionWPA3-SAE (strong security)▼

Key******

选择WPA3的加密类型
在Key输入无线的密码

802.11r Fast Transition☐

Enables fast roaming among access points that belong to the same Mobility Domain

802.11w Management Frame Protection

Required▼

Note: Some wireless drivers do not fully support 802.11w. E.g. mwlwifi may have problems

802.11w maximum timeout

1000

802.11w Association SA Query maximum timeout

802.11w retry timeout

201

802.11w Association SA Query retry timeout

Enable key reinstallation (KRACK) countermeasures☐

Complicates key reinstallation attacks on the client side by disabling retransmission of EAPOL-Key frames that are used to install keys. This workaround might cause interoperability issues and reduced robustness of key negotiation especially in environments with heavy traffic load.

Dismiss Save

返回上一页， 点击Save&Apply

OpenWrt

StatusSystemServicesNetworkLogout

REFRESHINGUN SAVED CHANGES: 4

disabled

SSID: Tri_Mesh_BH_4499 | Mode: Master
Wireless is disabled

EnableEditRemove

disabled

SSID: Tri_Mesh_FH_4499 | Mode: Master
Wireless is disabled

EnableEditRemove

disabled

SSID: ? | Mode: Client
Wireless is disabled

EnableEditRemove

disabled

SSID: ? | Mode: Client
Wireless is disabled

EnableEditRemove

radio1

Generic 802.11nac
Channel: 157 (5.785 GHz) | Bitrate: 780 Mbit/s

RestartScanAdd

---/-92 dBm

SSID: Triductor_5GAp | Mode: Master
BSSID: 02:22:44:11:44:9C | Encryption: None

DisableEditRemove

disabled

SSID: Tri_Mesh_BH_4499 | Mode: Master
Wireless is disabled

EnableEditRemove

disabled

SSID: Tri_Mesh_FH_4499 | Mode: Master
Wireless is disabled

EnableEditRemove

disabled

SSID: ? | Mode: Client
Wireless is disabled

EnableEditRemove

-51/-92 dBm

SSID: AloT | Mode: Client
BSSID: 00:22:44:11:44:9C | Encryption: WPA2 PSK (CCMP)

DisableEditRemove

Associated Stations

Network	MAC address	Host	Signal / Noise	RX Rate / TX Rate
Client "AloT" (wlan1)	CC:28:AA:EE:F1:BC	?	-54/-92 dBm	526.6 Mbit/s, 80 MHz, VHT-MCS 6, VHT-NSS 2 780.0 Mbit/s, 80 MHz, VHT-MCS 8, VHT-NSS 2, Short GI

1

Save & ApplySaveReset

可以看到2.4G的wifi名称已经修改， 并且需要密码连接

其他网络

CHUANG_2GAp



GIEC



GIEC14F



GIEC15F



Sally



Sally_5G



TP-LINK_5G_6AA9



TP-LINK_6AA9



TPLINK



Triductor_5GAp



其他...

隐藏SSID

点击Network-Interface，找到Triductor_5GAp 的SSID点击Edit（2.4G的同理）

勾选Hide ESSID，然后点击Save

返回上一页，点击Save&Apply

Interface Configuration

[General Setup](#) [Wireless Security](#) [MAC-Filter](#) [Advanced Settings](#)

Mode

Access Point

ESSID

Triductor_5GAp

Network

lan: 

?

 Choose the network(s) you want to attach to this wireless interface or fill out the *custom* field to define a new network.

Hide ESSID

☐

?

 Where the ESSID is hidden, clients may fail to roam and airtime efficiency may be significantly reduced.

WMM Mode

☒

?

 Where Wi-Fi Multimedia (WMM) Mode QoS is disabled, clients may be limited to 802.11a/802.11g rates.

Dismiss

Save

修改网关地址

点击Network-Interface，选择LAN，Edit

OpenWrt

Status

System

Services

Network

Logout

REFRESHING

UNSAVED CHANGES: 3

No password set!

There is no password set on this router. Please configure the web interface.

Interfaces

Devices

Global network options

Interfaces

AGENT

br-lan

Protocol: Static address

MAC: 00:22:44:11:44:99

RX: 13.98 MB (44615 Pkts.)

TX: 36.33 MB (58026 Pkts.)

Restart

Stop

Edit

Delete

LAN

br-lan

Protocol: Static address

Interface has 3 pending changes

Restart

Stop

Edit

Delete

WAN

wan

Protocol: DHCP client

MAC: 00:22:44:11:44:9A

RX: 0 B (0 Pkts.)

TX: 0 B (0 Pkts.)

Restart

Stop

Edit

Delete

WAN6

wan

Protocol: DHCPv6 client

MAC: 00:22:44:11:44:9A

RX: 0 B (0 Pkts.)

TX: 0 B (0 Pkts.)

Restart

Stop

Edit

Delete

WWAN

wlan1

Protocol: DHCP client

Uptime: 0h 25m 15s

MAC: 00:22:44:11:44:9C

RX: 14.57 MB (30344 Pkts.)

TX: 6.74 MB (19453 Pkts.)

IPv4: 192.168.50.34/24

Restart



Stop

Edit

Delete

输入需要修改的IP地址和网关地址， 点击Save


返回上一页， 点击Save&Apply， 选择Apple and keep settings

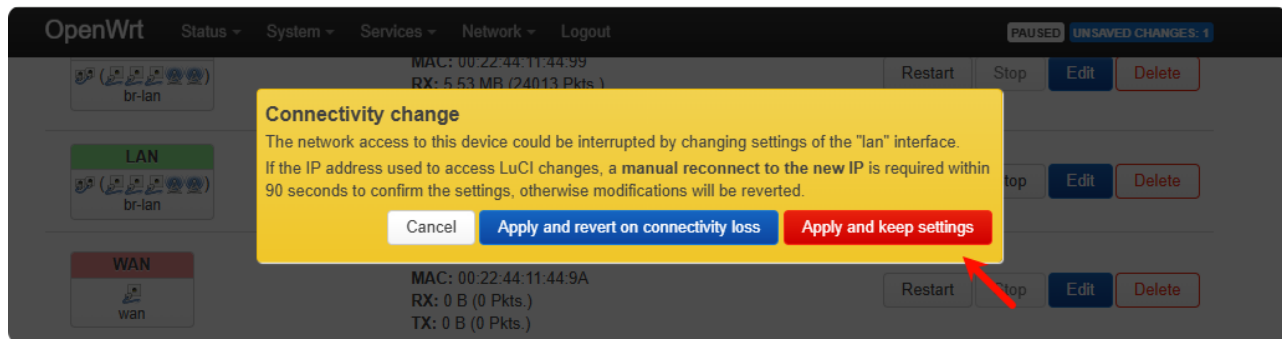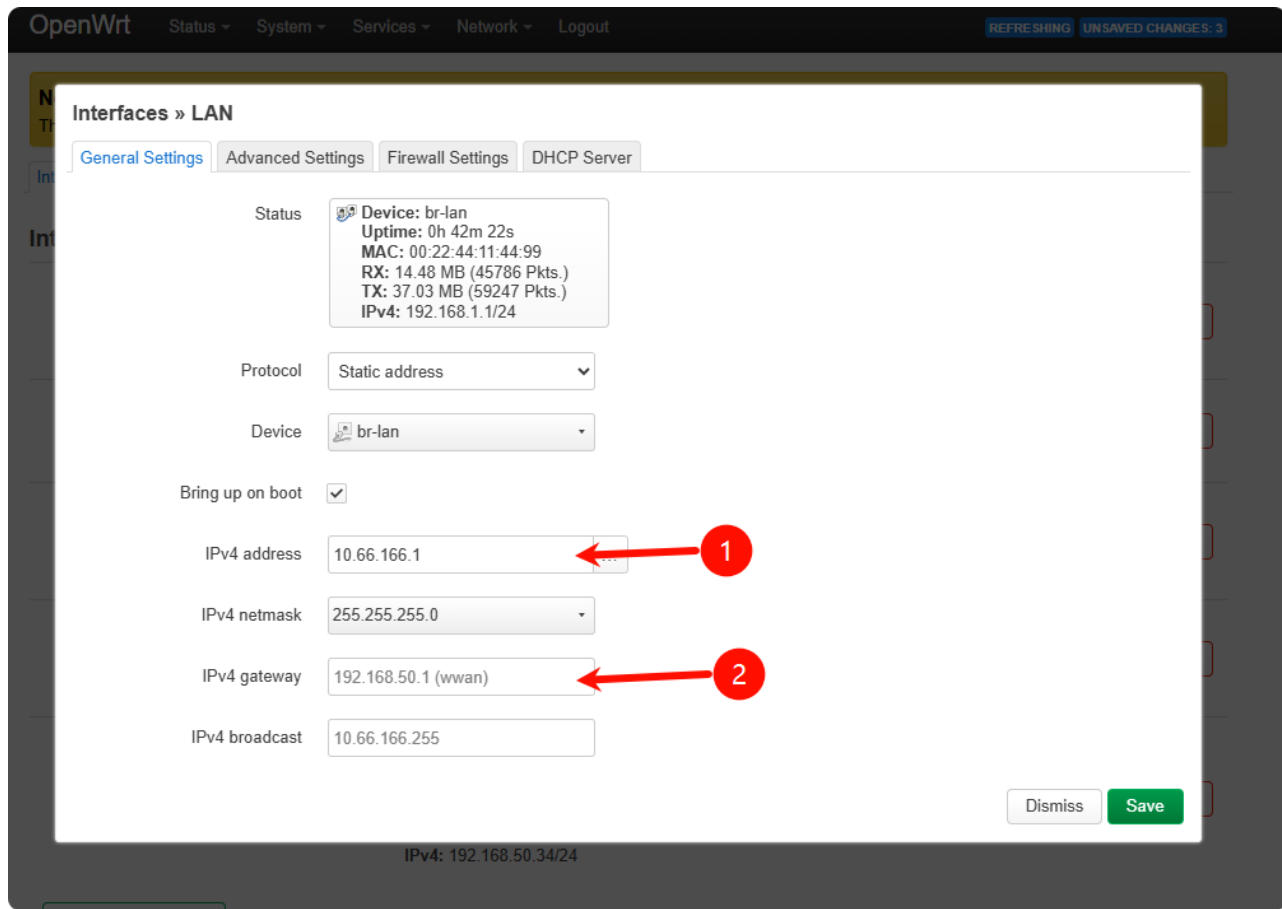

可以看到PC（连接到路由的LAN口）的IP已经更改。


```
以太网适配器 以太网 2:
    连接特定的 DNS 后缀 . . . . . : lan
    本地链接 IPv6 地址. . . . . : fe80::b57a:858b:3a53:3564%7
    IPv4 地址 . . . . . : 10.66.166.210
    子网掩码 . . . . . : 255.255.255.0
    默认网关. . . . . : 10.66.166.1
```

注意：修改网关后，后面访问web后台的地址也改为网关地址。

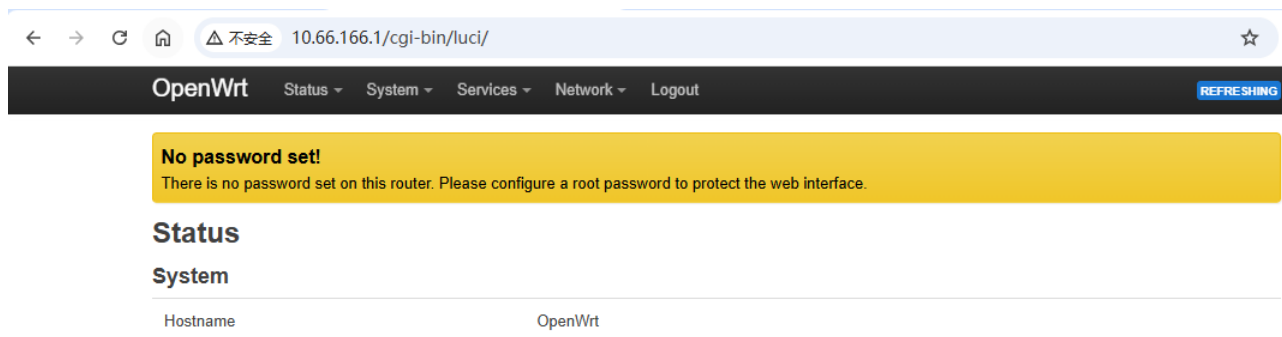


固定IP

点击Network-DHCP and DNS， Static Leases， 选择Add

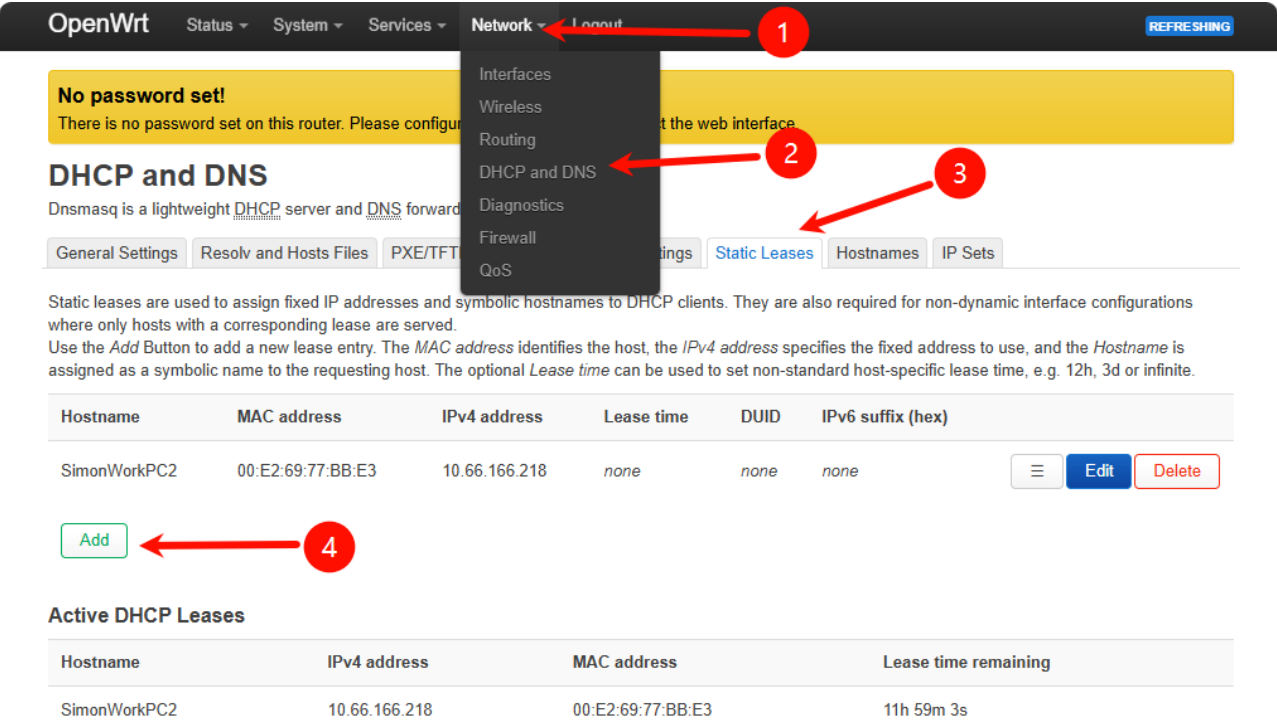

添加需要固定IP的Hostname、MAC地址以及IP地址。点击Save
返回上一页， 点击Save&Apply， 选择Apple and keep settings

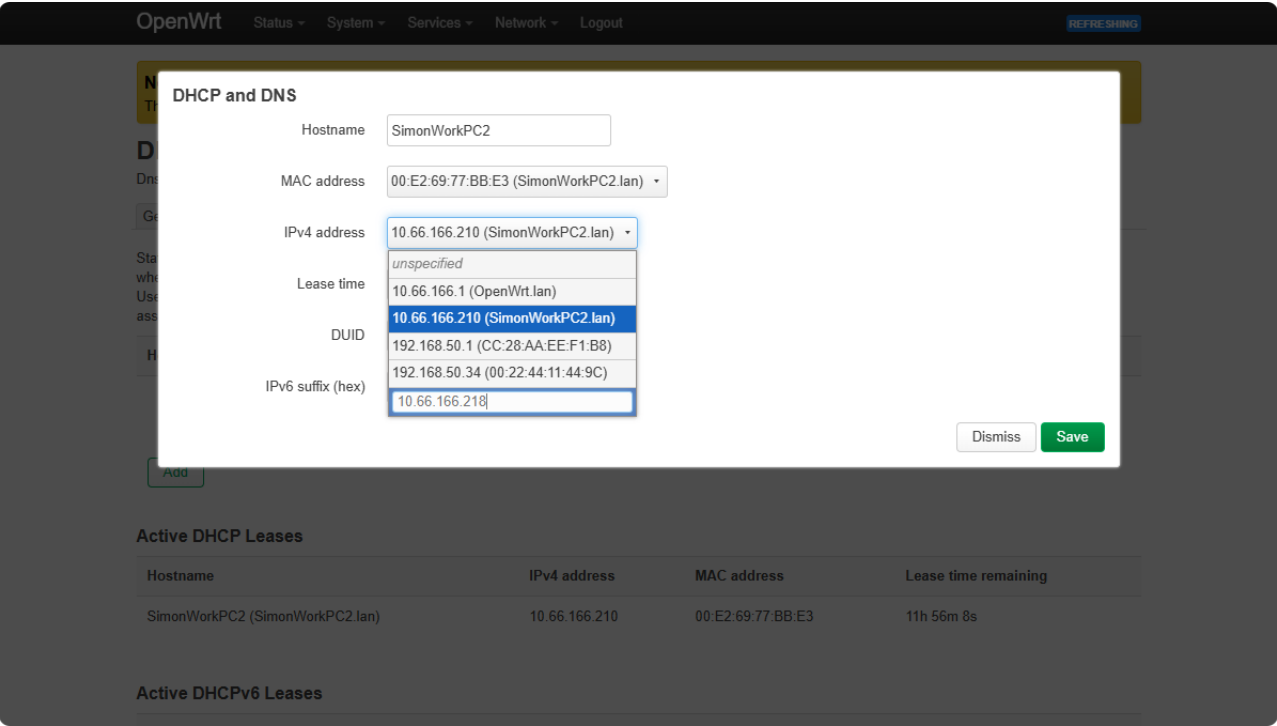


这样路由板重启后，或者设备重启后， IP将固定为设定的IP

```
以太网适配器 以太网 2:
连接特定的 DNS 后缀 . . . . . : lan
本地连接 IPv6 地址. . . . . : fe80::b57a:858b:3a53:3564%7
IPv4 地址 . . . . . : 10.66.166.218
子网掩码 . . . . . : 255.255.255.0
默认网关. . . . . : 10.66.166.1
```

无线转有线

将有线接入路由板的WAN口，将WWAN点击Stop，将WAN点击Restart

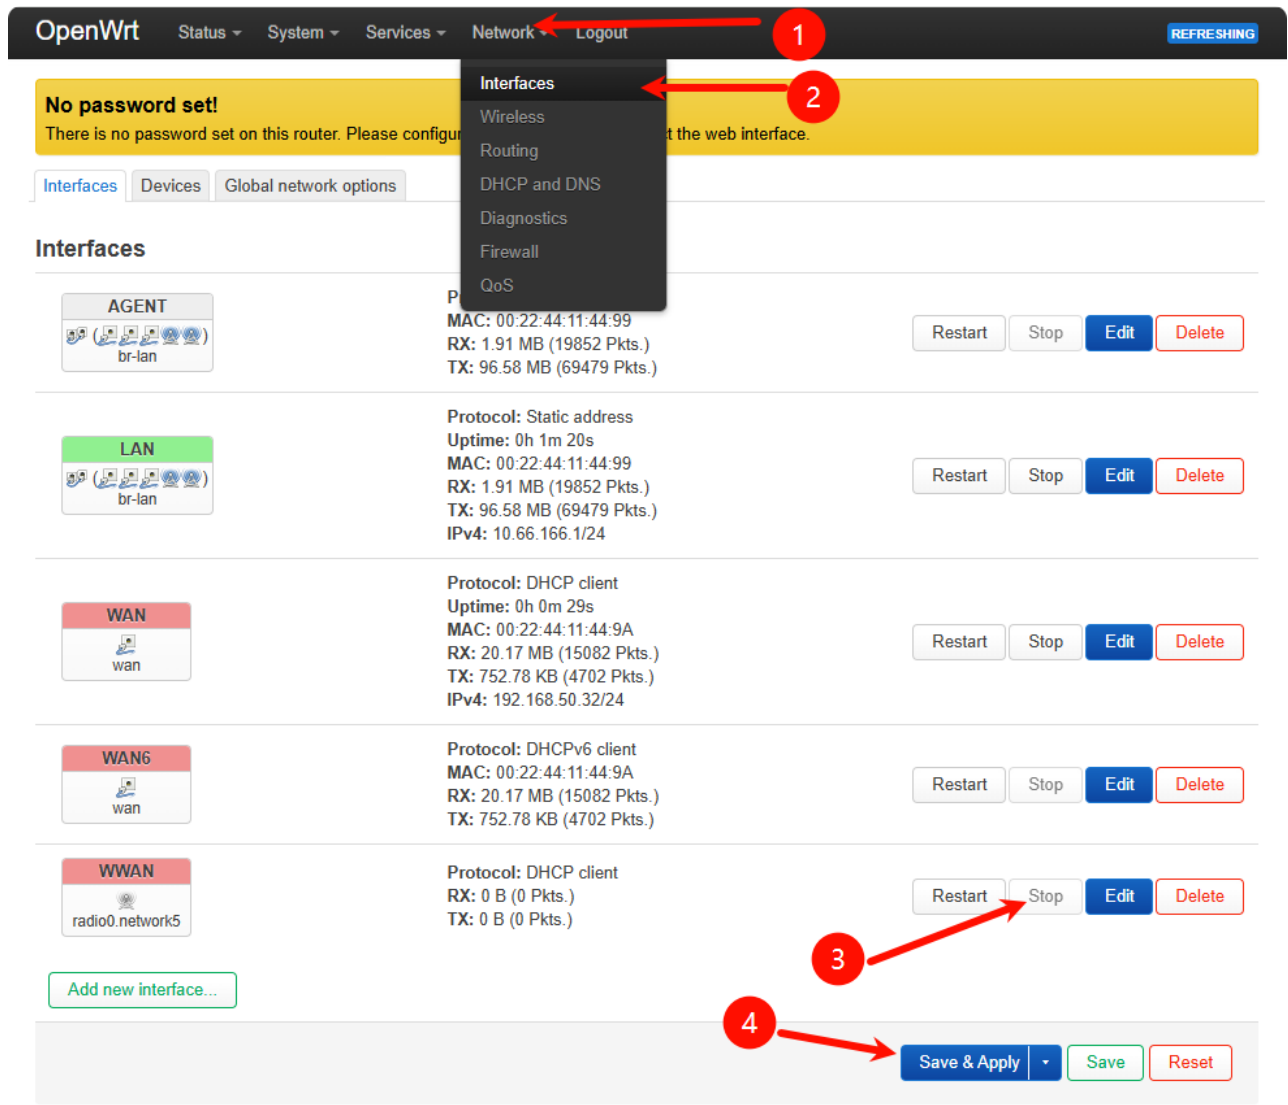

有线转无线

与无线转有线相反

OpenWrt

StatusSystemServicesNetworkLogout




REFRESHING

No password set!

There is no password set on this router. Please configure the web interface.

InterfacesDevicesGlobal network options

Interfaces

AGENT br-lan	Protocol: Static address Uptime: 0h 3m 42s MAC: 00:22:44:11:44:99 RX: 3.18 MB (23975 Pkts.) TX: 99.72 MB (74487 Pkts.)	Restart Stop Edit Delete
LAN br-lan	Protocol: Static address Uptime: 0h 3m 42s MAC: 00:22:44:11:44:99 RX: 3.18 MB (23975 Pkts.) TX: 99.72 MB (74487 Pkts.) IPv4: 10.66.166.1/24	Restart Stop Edit Delete
WAN wan	Protocol: DHCP client MAC: 00:22:44:11:44:9A RX: 22.78 MB (19731 Pkts.) TX: 1.82 MB (7799 Pkts.)	Restart Stop Edit Delete
WAN6 wan	Protocol: DHCPv6 client MAC: 00:22:44:11:44:9A RX: 22.78 MB (19731 Pkts.) TX: 1.82 MB (7799 Pkts.)	Restart Stop Edit Delete
WWAN wlan1	Protocol: DHCP client Uptime: 0h 0m 5s MAC: 00:22:44:11:44:9C RX: 249.93 KB (529 Pkts.) TX: 134.26 KB (402 Pkts.) IPv4: 192.168.50.34/24	Restart Stop Edit Delete

路由板恢复出厂

按一下路由板上的RESET按键即可恢复出厂。