



TECNOLÓGICO NACIONAL DE MÉXICO  
INSTITUTO TECNOLÓGICO DE TLÁHUAC

---

---



# TOPICOS DE PROGRAMACION CON MVC

“CURSO DE HTML5”

PROF. ROLDAN AQUINO SEGURA

MALDONADO MARTINEZ ADRIANA

7s2

## Contenido

GENERAR MI PRIMER HTML.....	3
ESTRUCTURA DE UN DOCUMENTO HTML.....	4
TITULOS Y PARRAFOS.....	5
DIV Y SECTION .....	6
LISTAS ORDENADAS Y NO ORDENADAS .....	7
FORMULARIOS .....	8
CONTROLES DE FORMULARIOS O INPUTS .....	11
TEXT AREA.....	12
CONTROL SELECT O LISTA DESPLEGABLE .....	14
CONTROL RADIO .....	16
CONTROL CHECKBOX.....	21
BOTONES .....	23
LINKS .....	25
TABLAS .....	32
VALIDACION DE DATOS .....	40
AGREGAR IMÁGENES.....	46
AGREGAR AUDIO .....	49
AGREGAR VIDEO .....	50
AGREGAR VIDEO DE YOUTUBE .....	54
AGREGAR ARCHIVO CSS Y REGLAS CSS.....	57
AGREGAR ICONOS CON FONT AWESOME .....	63
FUENTES DE LETRA CON GOOGLE FONTS.....	68
AGREGAR MI GOOGLE MAPS .....	73
MI PRIMER PAGINA WEB P1 .....	76
MI PRIMER PAGINA WEB P2 .....	89
PROBAR PAGINA WEB EN UN SERVIDOR LOCAL.....	96

# GENERAR MI PRIMER HTML

Se desarrolla una sencilla página web donde agregamos un título el cual es el HOLA MUNDO

The screenshot shows a Windows desktop environment. At the top is the taskbar with icons for File Explorer, Start, Task View, Edge, File Explorer, Mail, Photos, OneDrive, and Sublime Text. The system tray shows the date and time as 11/10/2020 21:10, and language settings as ESP. In the center is a Sublime Text window titled "C:\Users\PARAMORE\Documents\cursohtml\index.html (cursohtml) - Sublime Text (UNREGISTERED)". The file contains the following HTML code:


```
<!DOCTYPE html>
<html>
<head>
    <title> Mi WEB</title>
</head>
<body>
    <h1>Hola Mundo</h1>
</body>
</html>
```

The bottom right corner of the Sublime Text window shows "Tab Size: 4" and "HTML". Below the Sublime Text window is a browser window titled "2.- Curso de html básico - Ge... index.html". The browser's address bar shows the path "C:/Users/PARAMORE/Documents/cursohtml/index.html". The main content area of the browser displays the text "Hola Mundo".

**Hola Mundo**

# ESTRUCTURA DE UN DOCUMENTO HTML


Se utiliza encabezados, los head nos permite colocar archivos de estilo y titulo de la pestaña, en el body permite agregar contenido en nuestra pagina

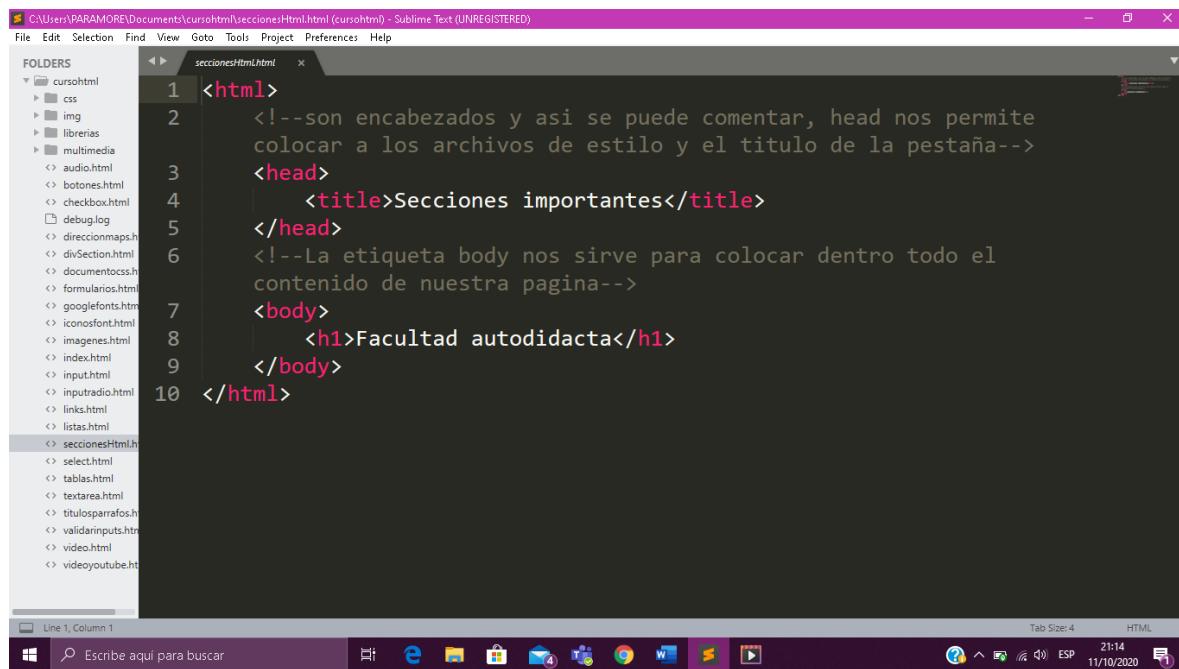

The screenshot shows the Sublime Text interface with the file 'seccionesHtml.html' open. The code editor displays the following HTML structure:

```
<html>
    <!--son encabezados y asi se puede comentar, head nos permite colocar a los archivos de estilo y el titulo de la pestaña-->
    <head>
        <title>Secciones importantes</title>
    </head>
    <!--La etiqueta body nos sirve para colocar dentro todo el contenido de nuestra pagina-->
    <body>
        <h1>Facultad autodidacta</h1>
    </body>
</html>
```

The sidebar on the left shows a project structure with various HTML files like 'audio.html', 'botones.html', etc. The status bar at the bottom indicates 'Line 1, Column 1' and 'Tab Size: 4'.



**Facultad autodidacta**




# TITULOS Y PARRAFOS

Se describe que los títulos son del 1 al 6 para una fuente más grande a la más pequeña, con `<h1>` y párrafos se agregan con `<p>`

The screenshot shows the Sublime Text interface with the file 'titulos y parrafos.html' open. The code is as follows:


```
<html>
  <head>
    <title>titulos y parrafos</title>
  </head>
  <body>
    <!--Los titulos van del 1 al 6, siendo h1 hasta h6 siendo que
        el numero mas alto tiene la fuente mas pequena-->
    <h1>Titulo principal</h1>
    <h2>Parrafo 1</h2>
    <p>
      Este es un parrafo de prueba
    </p>
  </body>
</html>
```

The code editor has syntax highlighting for HTML. The status bar at the bottom indicates 'Line 7, Column 20'. The bottom taskbar shows various application icons.




# DIV Y SECTION

Permite dar estilos, los cuales son tag, en el div contiene todo encapsulado para poder dar estilos, con id, para poder modificar letra, fuente, color, etc. En el section es otro párrafo para llevar otro estilo

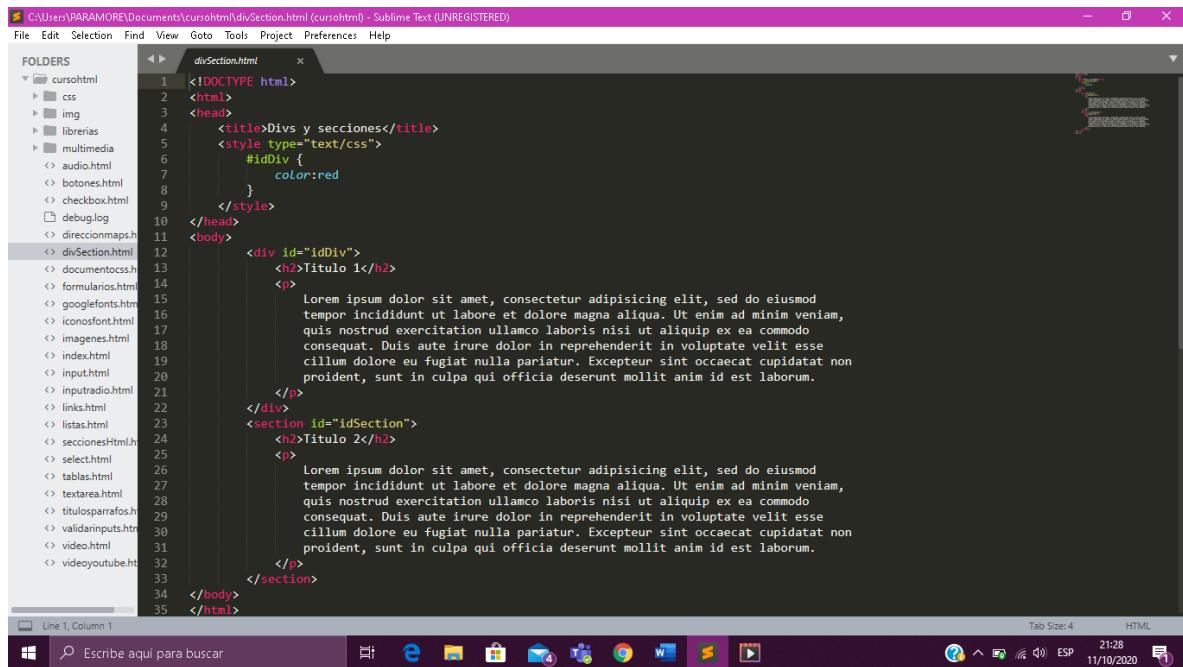

```
C:\User\PARAMORE\Documents\cursohtml\divSection.html (cursohtml) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
divSection.html
1 <!DOCTYPE html>
2 <html>
3   <head>
4     <title>Divs y secciones</title>
5     <style type="text/css">
6       #idDiv {
7         color:red
8       }
9     </style>
10   </head>
11   <body>
12     <div id="idDiv">
13       <h2>Titulo 1</h2>
14       <p>
15         Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod
16         tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam,
17         quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo
18         consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse
19         cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non
20         proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
21       </p>
22     </div>
23     <section id="idSection">
24       <h2>Titulo 2</h2>
25       <p>
26         Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod
27         tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam,
28         quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo
29         consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse
30         cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non
31         proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
32       </p>
33     </section>
34   </body>
35 </html>
```



## Titulo 1

## Titulo 2



# LISTAS ORDENADAS Y NO ORDENADAS

El comando `<ol>` permite ordenar números o elementos y con `<li>` agregamos elementos.

El comando `<ul>` permite declarar una lista no ordenada en el cual mostrara solo signos.

The screenshot shows the Sublime Text interface with the file 'listas.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>listas ordenadas y no ordenadas</title>
</head>
<body>
    <!--Así se declara una lista ordenada y nos mostrara numeros en los elementos-->
    <ol>
        <li>elemento</li>
        <li>elemento</li>
    </ol>
    <!--Declaramos una lista no ordenada con ul y nos mostrara solo signos no numeros ya que no es ordenada (unorden)-->
    <ul>
        <li>elemento</li>
        <li>elemento</li>
    </ul>
</body>
</html>
```


The status bar at the bottom indicates 'Line 1, Column 1' and 'HTML'. Below the Sublime Text window is a Windows taskbar with various pinned icons and a search bar.



- 1. elemento
  - 2. elemento
- elemento
  - elemento




# FORMULARIOS

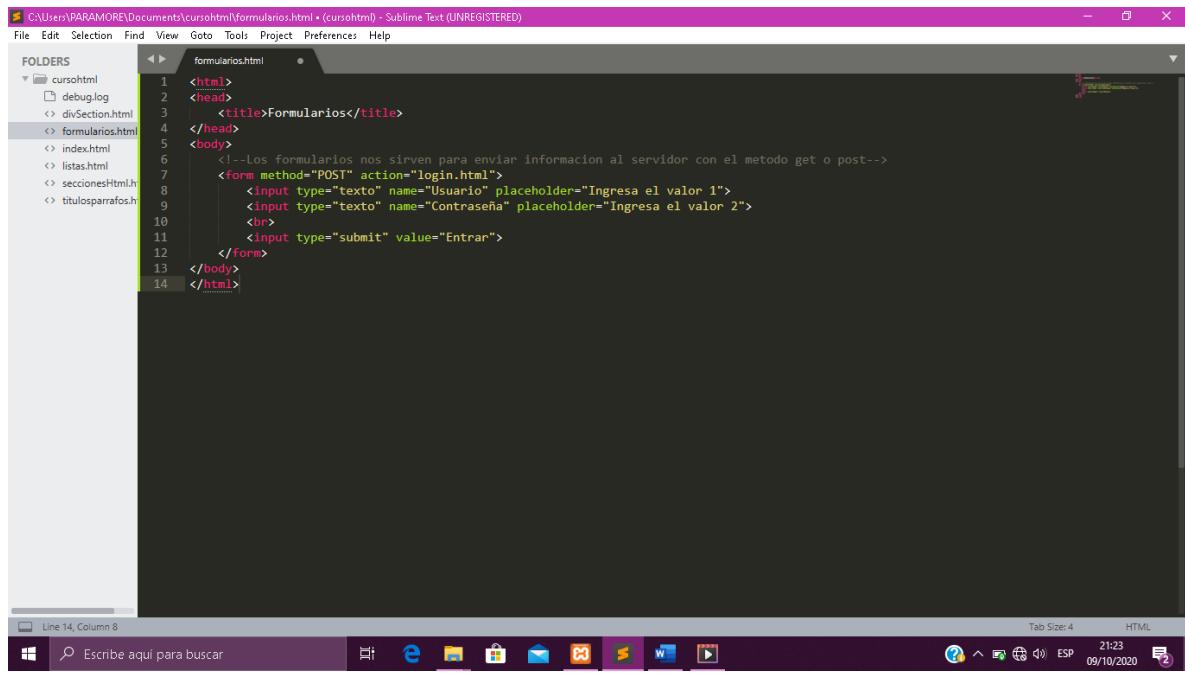

The screenshot shows the Sublime Text editor with the file 'formularios.html' open. The code is as follows:

```
<html>
<head>
<title>Formularios</title>
</head>
<body>
    <!--los formularios nos sirven para enviar informacion al servidor con el metodo get o post-->
    <form method="POST" action="login.html">
        <input type="texto" name="Usuario" placeholder="Ingresa el valor 1">
        <input type="texto" name="Contraseña" placeholder="Ingresa el valor 2">
        <br>
        <input type="submit" value="Entrar">
    </form>
</body>
</html>
```

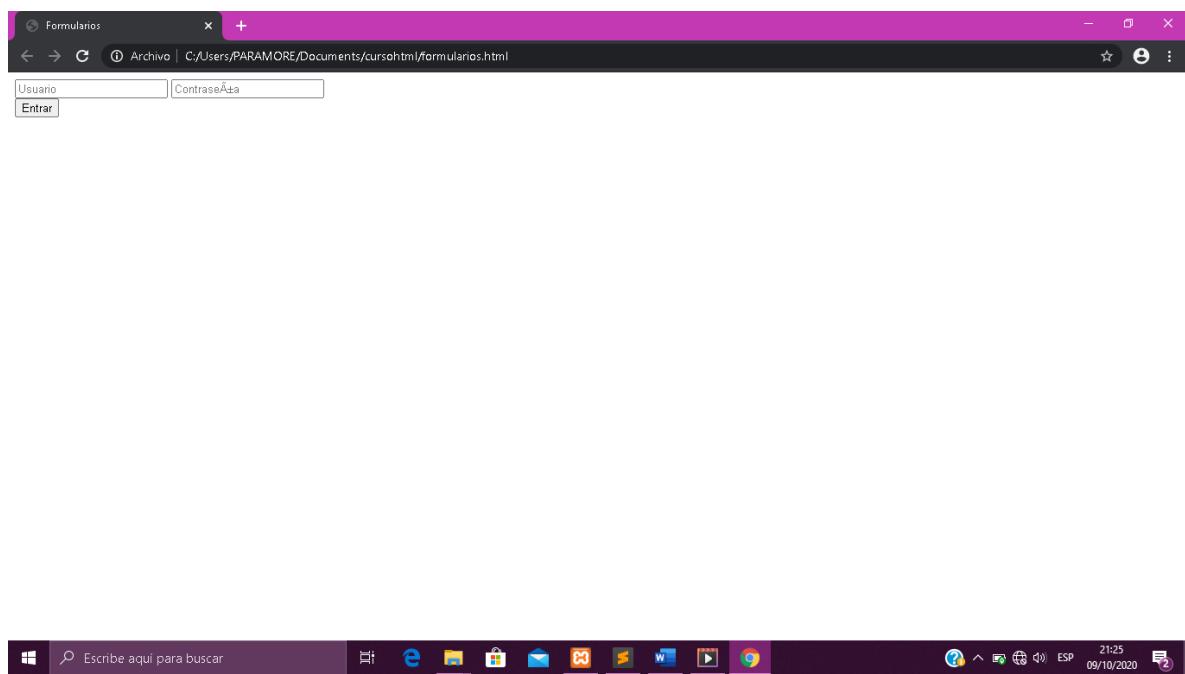The status bar at the bottom indicates 'Line 14, Column 8'.  


The screenshot shows a Microsoft Edge browser window titled 'Formularios'. The address bar shows 'Archivo | C:/Users/PARAMORE/Documents/cursodehtml/formularios.html'. The page contains two input fields labeled 'Usuario' and 'Contraseña', and a submit button labeled 'Entrar'. The status bar at the bottom indicates '21:23 ESP 09/10/2020'.

Para los caracteres extraños agregamos el comando <meta> es un tipo de coding

C:\Users\PARAMORE\Documents\cursohtml\formularios.html (cursohtml) - Sublime Text (UNREGISTERED)

File Edit Selection Find View Goto Tools Project Preferences Help

FOLDERS

- cursohtml
  - debug.log
  - divSection.html
  - formularios.html
  - index.html
  - listas.html
  - seccionesHtml.h
  - titulosparrafos.h

formularios.html

```
1 <html>
2 <head>
3   <title>Formularios</title>
4   <meta charset="utf-8">
5 </head>
6 <body>
7   <!--Los formularios nos sirven para enviar informacion al servidor con el metodo get o post-->
8   <form method="POST" action="login.html">
9     <input type="text" name="val1" placeholder="Usuario">
10    <br>
11    <input type="text" name="val2" placeholder="Contraseña ">
12    <br>
13    <input type="submit" value="Entrar">
14  </form>
15 </body>
16 </html>
```


Line 11, Column 26; Undo: Left Delete

Tab Size: 4    HTML

Windows taskbar: Escribe aquí para buscar, Start button, File Explorer, Edge, Microsoft Store, Mail, Photos, File Explorer, Settings, Word, Excel, Powerpoint, OneDrive, Task View, Taskbar icons, Date/Time.



Para hacer que la contraseña no se vea se utiliza password

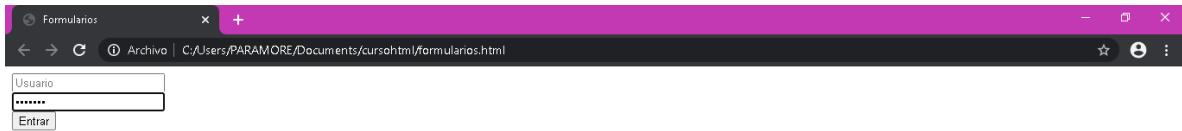
A screenshot of the Sublime Text editor. The title bar says "C:\User\PARAMORE\Documents\cursodehtml\0formularios.html (0formularios.html) - Sublime Text (UNREGISTERED)". The left sidebar shows a file tree with "FOLDERS" and files like "debug.log", "divSection.html", "index.html", "listas.html", "seccionesHTML.h", and "titulosparrafos.h". The main editor area contains the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
<title>Formularios</title>
<meta charset="utf-8">
</head>
<body>
<!--los formularios nos sirven para enviar informacion al servidor con el metodo get o post-->
<form method="GET" action="Login.html">
<input type="text" name="val1" placeholder="Usuario">
<br>
<input type="password" name="val2" placeholder="Contraseña ">
<br>
<input type="submit" value="Entrar">
</form>
</body>
</html>
```

The status bar at the bottom indicates "Line 16, Column 8" and "Tab Size: 4".


# CONTROLES DE FORMULARIOS O INPUTS

Se utilizan los formularios ya que se mandan a servidores, los controles inputs tienen un label. El for apunta al nombre del control, o fecha, tiempo, etc.

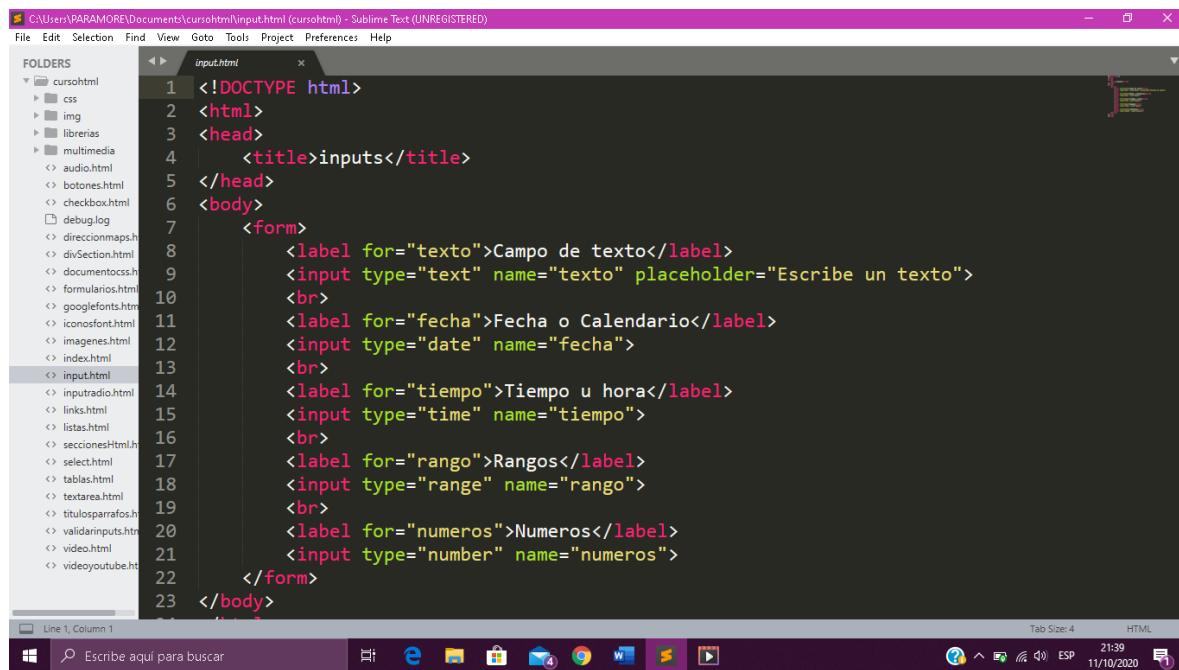


The screenshot shows the Sublime Text editor with the file "input.html" open. The code displays various HTML input types with their corresponding labels:

```
<!DOCTYPE html>
<html>
<head>
    <title>inputs</title>
</head>
<body>
    <form>
        <label for="texto">Campo de texto</label>
        <input type="text" name="texto" placeholder="Escribe un texto">
        <br>
        <label for="fecha">Fecha o Calendario</label>
        <input type="date" name="fecha">
        <br>
        <label for="tiempo">Tiempo u hora</label>
        <input type="time" name="tiempo">
        <br>
        <label for="rango">Rangos</label>
        <input type="range" name="rango">
        <br>
        <label for="numeros">Numeros</label>
        <input type="number" name="numeros">
    </form>
</body>
```

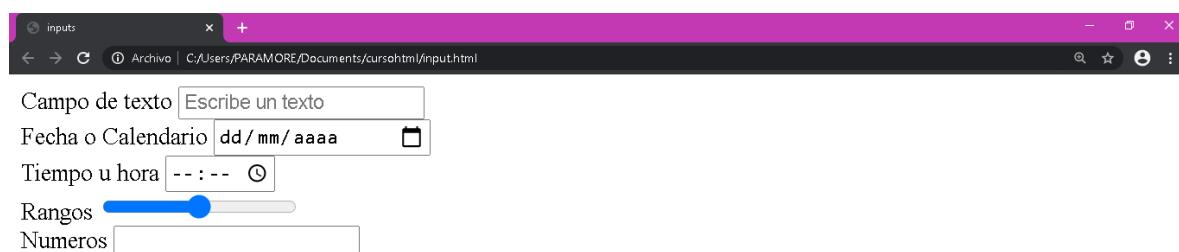

# TEXT AREA

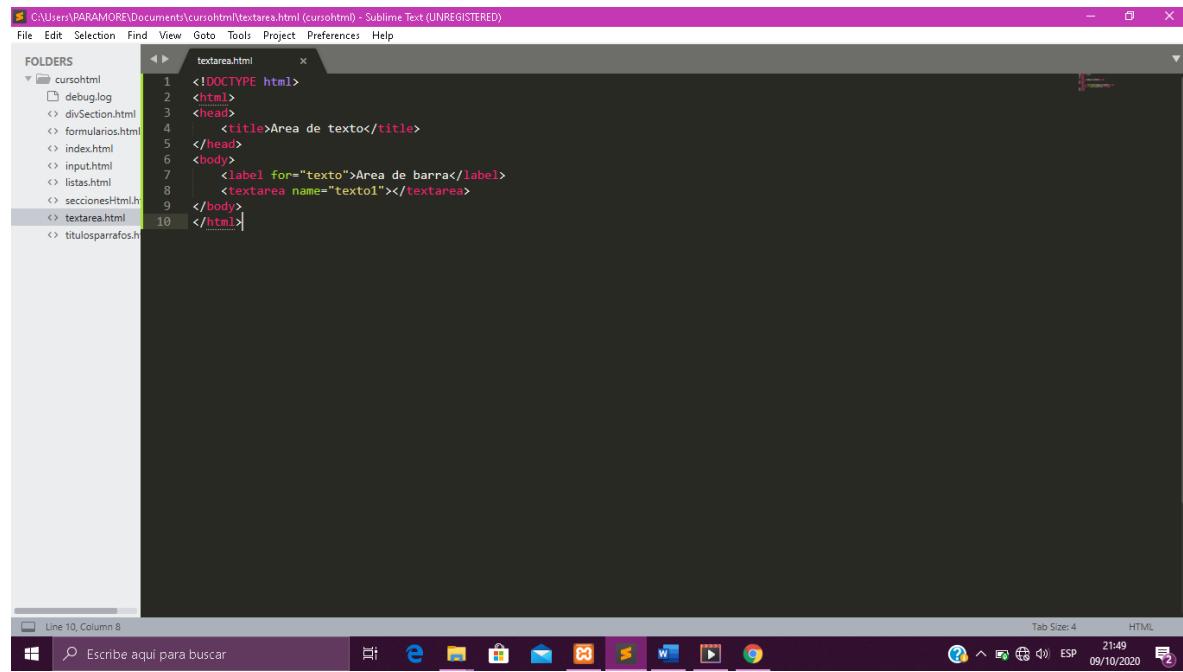

The screenshot shows the Sublime Text interface with the following details:

- File Menu:** File, Edit, Selection, Find, Goto, Tools, Project, Preferences, Help.
- Folders:** A sidebar showing a folder named "cursohtml" containing files like "debug.log", "divSection.html", "formularios.html", "index.html", "input.html", "listas.html", "seccionesHtml.h", "textarea.html", and "titulosparrafos.h".
- Code Editor:** The main window displays the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
<title>Area de texto</title>
</head>
<body>
<label for="texto">Area de barra</label>
<textarea name="texto1"></textarea>
</body>
</html>
```
- Status Bar:** Shows "Line 10, Column 8", "Tab Size: 4", and "HTML".
- Taskbar:** Shows the Windows Start button, a search bar with placeholder "Escribe aqui para buscar", and a row of icons for various Windows applications.



El usuario puede mover el cuadro para ello se requiere agregar una regla css, para que este en su posición correcta

The screenshot shows a Sublime Text window with the file 'textarea.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>Area de texto</title>
    <style type="text/css">
        textarea {
            resize: none;
        }
    </style>
</head>
<body>
    <label for="texto">Area de barra</label>
    <textarea name="textol"></textarea>
</body>
</html>
```


The cursor is at line 7, column 26. The status bar at the bottom shows 'Line 7, Column 26'. The bottom right corner of the window displays the date and time as '09/10/2020 21:53'.

Se agrega rows y cols los cuales funcionan como vertical y horizontal, para poder dar forma al área de texto

The screenshot shows a Sublime Text window with the file 'textarea.html' open. The code has been modified to include 'rows' and 'cols' attributes in the textarea element:

```
<!DOCTYPE html>
<html>
<head>
    <title>Area de texto</title>
    <style type="text/css">
        textarea {
            resize: none;
        }
    </style>
</head>
<body>
    <label for="texto">Area de barra</label>
    <textarea name="textol" rows="" cols=""></textarea>
</body>
</html>
```

The cursor is at line 15, column 8. The status bar at the bottom shows 'Line 15, Column 8'. The bottom right corner of the window displays the date and time as '09/10/2020 21:55'.

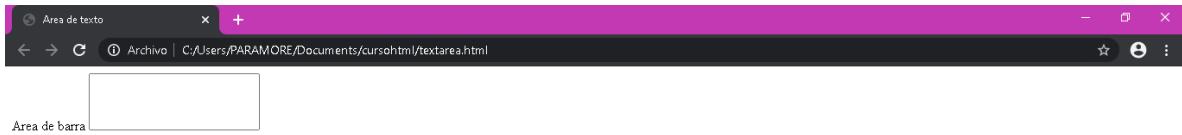


## CONTROL SELECT O LISTA DESPLEGABLE

Los select se les agrega el comando option y dentro del option se llena con un value y con un texto.


A screenshot of the Sublime Text code editor. The title bar reads "C:\Users\PARAMORE\Documents\cursodehtml\select.html - (cursodehtml) - Sublime Text (UNREGISTERED)". The editor displays the following HTML code:<!DOCTYPE html>
<html>
<head>
<title>Select o lista desplegable</title>
</head>
<body>
<label for="paises">Paises</label>
<select>
<option disabled="">Selecciona una opcion</option>
<option value="Mexico">Mexico</option>
<option value="Argentina">Argentina</option>
<option value="Chile">Chile</option>
</select>
</body>
</html>The code editor has a dark theme with syntax highlighting for HTML tags and attributes. The status bar at the bottom indicates "Line 15, Column 8" and "Tab Size: 4".

El comando disable solo permite elegir una opción, deshabilita opciones.

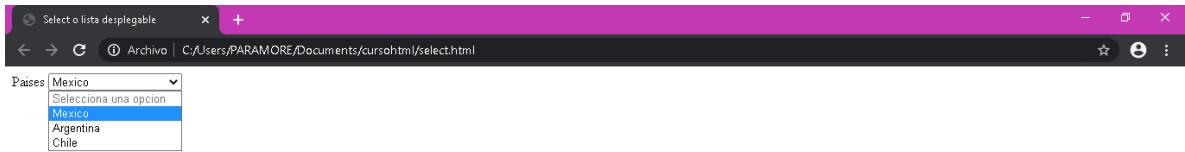


# CONTROL RADIO

Para usar radios se requiere de dos,

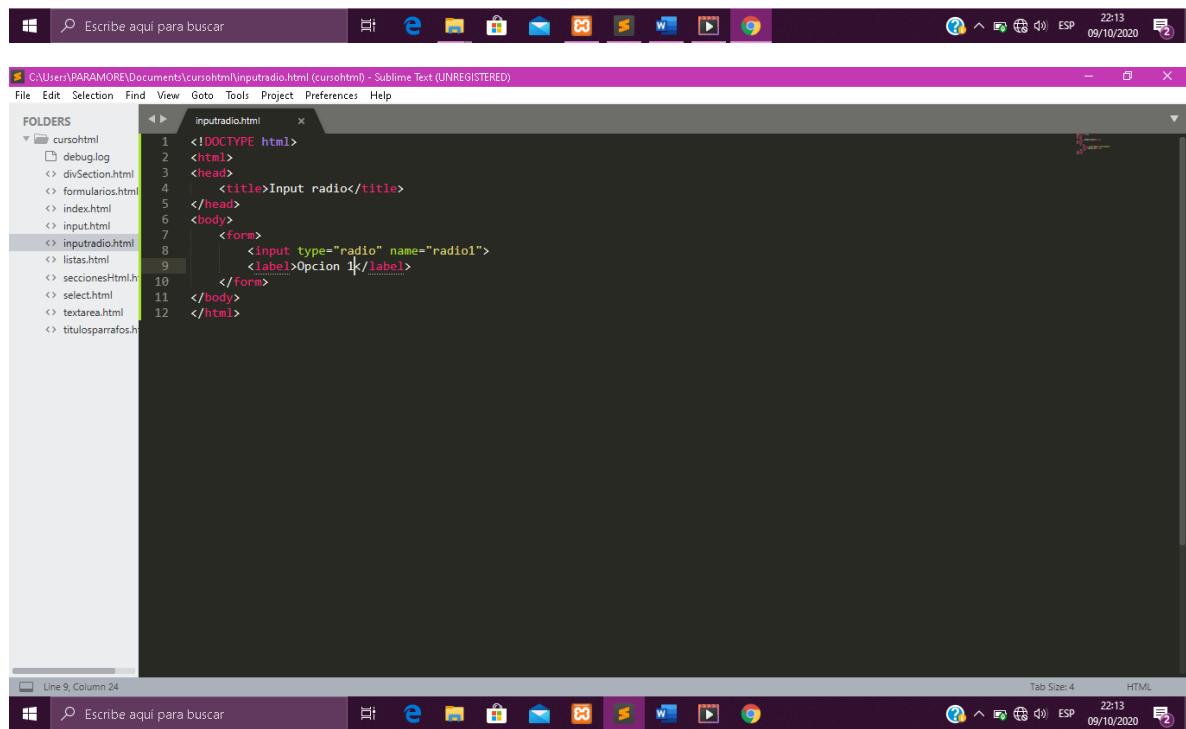

Requiere tener los mismos nombres en los radios ya que puede generar uno nuevo y podría el usuario utilizar los dos.




The screenshot shows a Windows desktop environment with a Sublime Text editor window open. The title bar of the Sublime Text window reads "C:\User\PARAMORE\Documents\cursodehtml\inputradio.html (Cursodehtml) - Sublime Text (UNREGISTERED)". The editor displays the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
<title>Input radio</title>
</head>
<body>
<form>
<input type="radio" name="radio1">
<label>Opcion 1</label>
<input type="radio" name="radio2">
<label>Opcion 2</label>
</form>
</body>
</html>
```

The code is syntax-highlighted, with tags in blue, attributes in green, and text in white. The Sublime Text interface includes a sidebar showing a folder structure under "FOLDERS" with files like "debug.log", "divSection.html", "formularios.html", "index.html", "input.html", "inputradio.html", "listas.html", "seccionesHtml.h", "select.html", "textarea.html", and "titulosparrafos.h". The status bar at the bottom of the Sublime Text window indicates "Line 10, Column 41" and "Tab Size: 4". The system tray at the bottom of the screen shows the date and time as "09/10/2020 22:16" and language as "ESP".


Así funciona cuando usamos el mismo nombre en (name)

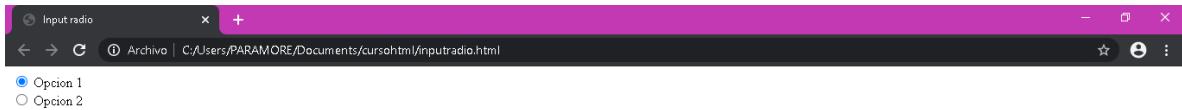


A screenshot of the Sublime Text 3 editor. The title bar says "C:\User\PARAMORE\Documents\cursohtml\inputradio.html (cursohtml) - Sublime Text (UNREGISTERED)". The left sidebar shows a folder structure under "FOLDERS" with "cursohtml" expanded, containing files like "debug.log", "divSection.html", "formularios.html", "index.html", "input.html", "inputradio.html" (which is the active tab), "listas.html", "seccionesHtml.h", "select.html", "textarea.html", and "titulosparrafos.h". The main editor area contains the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
<title>Input radio</title>
</head>
<body>
<form>
<input type="radio" name="radiol">
<label>Opcion 1</label>
<br>
<input type="radio" name="radiol">
<label>Opcion 2</label>
</form>
</body>
</html>
```

The status bar at the bottom indicates "Line 10, Column 13; Saved C:\Users\PARAMORE\Documents\cursohtml\inputradio.html (UTF-8)" and "Tab Size: 4 HTML".

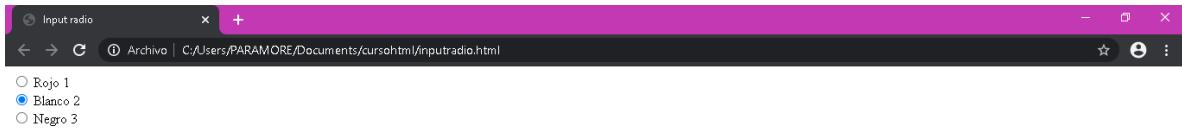

Se requiere poner value para que se describa de que valor es

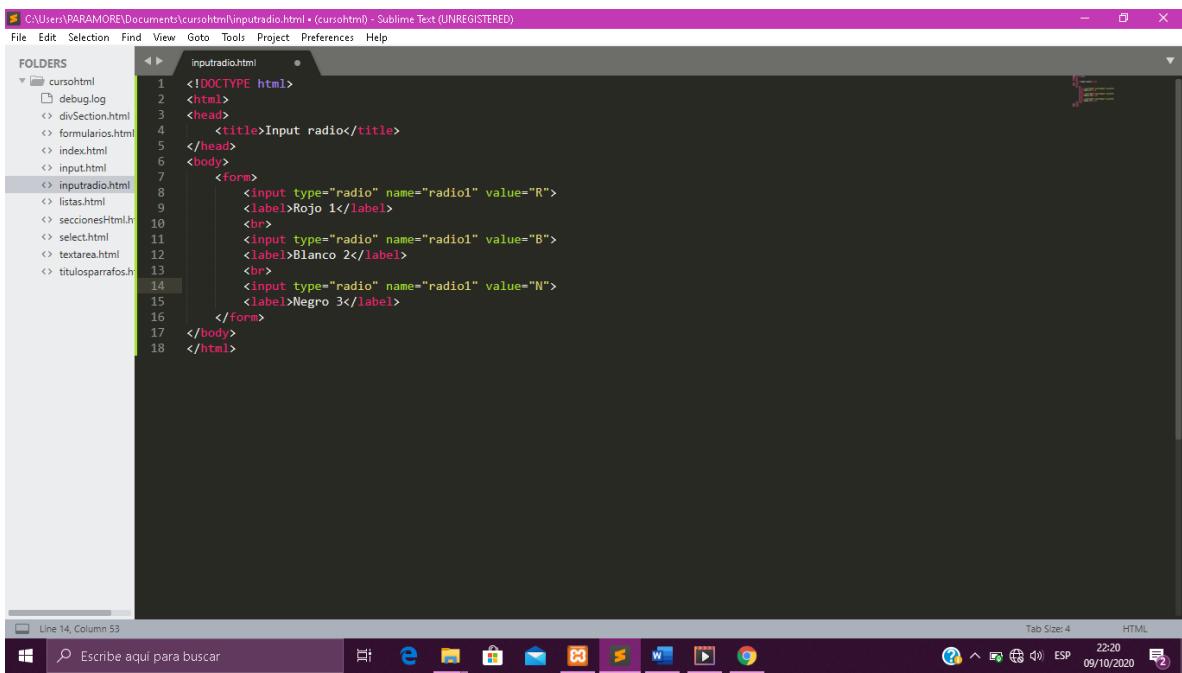


Para dejar una por defecto se utiliza el comando checked

The screenshot shows a Sublime Text window with the file 'inputradio.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
<title>Input radio</title>
</head>
<body>
<form>
<input type="radio" name="radio1" value="R">
<label>Rojo 1</label>
<br>
<input type="radio" checked="" name="radio1" value="B">
<label>Blanco 2</label>
<br>
<input type="radio" name="radio1" value="N">
<label>Negro 3</label>
</form>
</body>
</html>
```


The status bar at the bottom indicates 'Line 18, Column 8; Saved C:\Users\PARAMORE\Documents\cursohtml\inputradio.html (UTF-8)'. The bottom right corner shows 'Tab Size: 4', 'HTML', '22:21', 'ESP', '09/10/2020', and a notification icon.

Así se visualiza

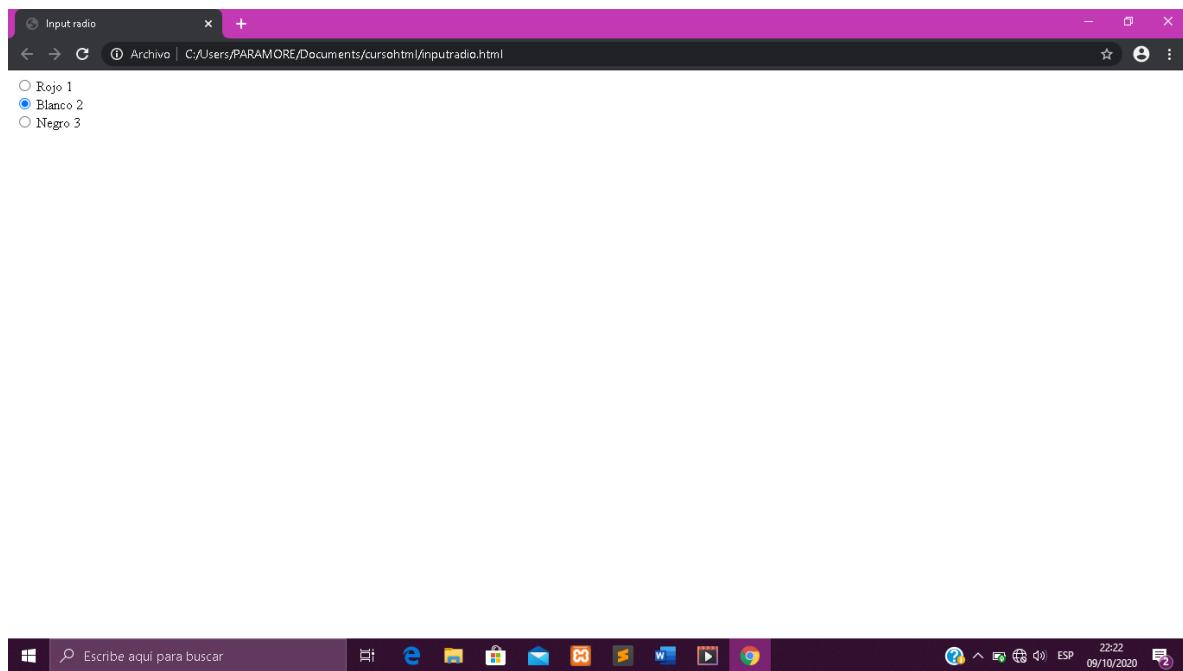

# CONTROL CHECKBOX

Se puede agregar checked para dejarlo seleccionado por defecto, y el disable

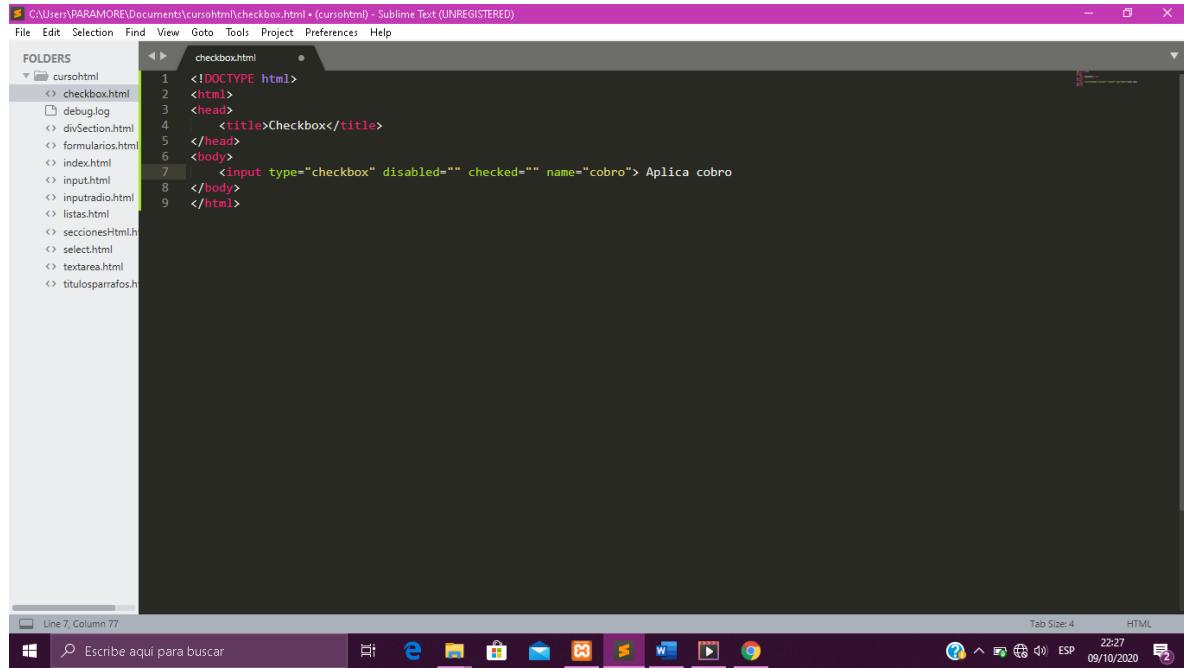


The screenshot shows the Sublime Text interface with a dark theme. A file named 'checkbox.html' is open in the center editor pane. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
<title>Checkbox</title>
</head>
<body>
<input type="checkbox" disabled="" checked="" name="cobro"> Aplica cobro
</body>
</html>
```

The status bar at the bottom indicates 'Line 7, Column 77'. The bottom right corner shows 'Tab Size: 4' and 'HTML'. The system tray at the very bottom shows the date and time as '09/10/2020 22:27'.




Esto se utiliza por ejemplo si hay algún dato que no se llena.




# BOTONES


Se debe agregar formulario cuando se utiliza controles, se puede agregar de dos formas el botón una por input como se puede ver en el código, aquí se agrega value.

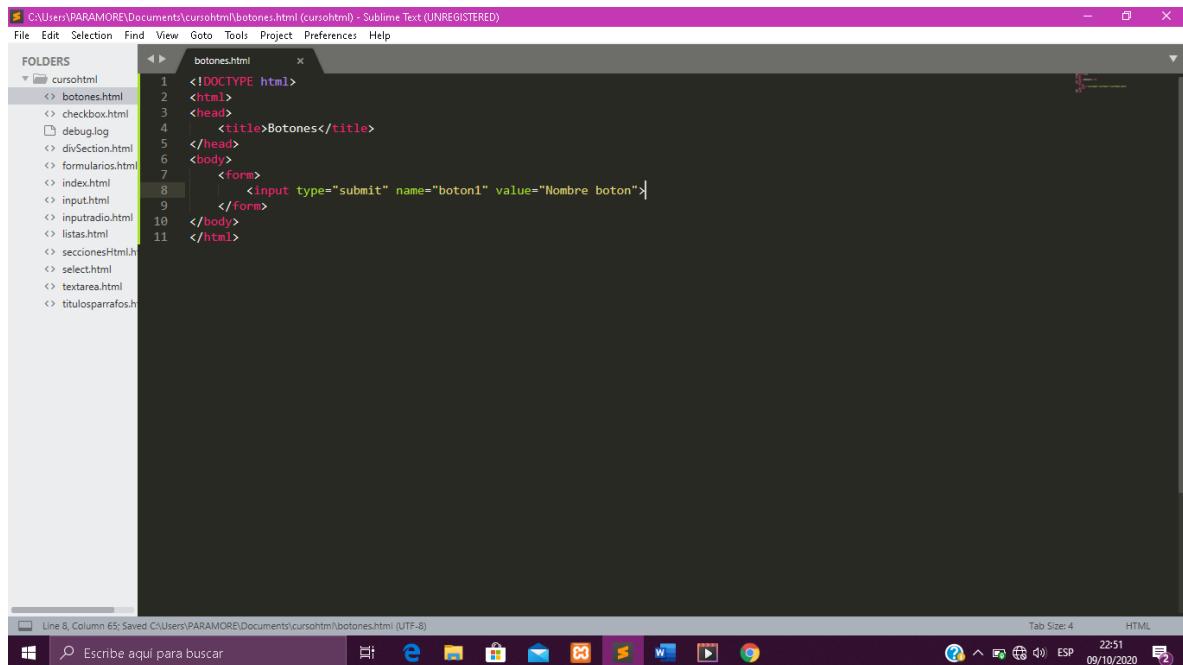

```
<!DOCTYPE html>
<html>
<head>
<title>Botones</title>
</head>
<body>
<form>
<input type="submit" name="boton1" value="Nombre boton">
</form>
</body>
</html>
```

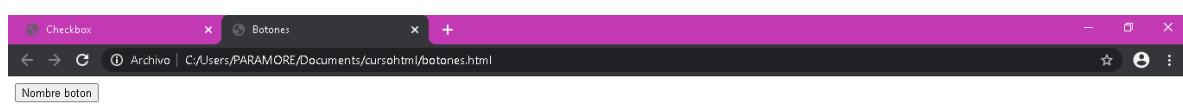

La segunda forma es con el button, que permiten enviar datos en el formulario

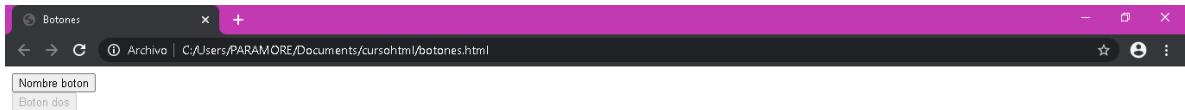


## Un ejemplo de un menú

A screenshot of the Sublime Text editor. The title bar says "C:\Users\PARAMORE\Documents\cursodehtml\botones.html (cursodehtml) - Sublime Text (UNREGISTERED)". The left sidebar shows a folder structure with "FOLDERS" and "cursodehtml" containing files like "checkbox.html", "debug.log", "divSection.html", "formularios.html", "index.html", "input.html", "inputradio.html", "listas.html", "seccionesHtml.h", "select.html", "textarea.html", and "titulosparrafos.h". The main editor area displays the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
<title>Botones</title>
</head>
<body>
<form>
<button>Inicio</button>
<button>Menu</button>
<button>Contacto</button>
<button>Galeria</button>
</form>
</body>
</html>
```

The status bar at the bottom indicates "Line 11, Column 24" and "Tab Size: 4 HTML".

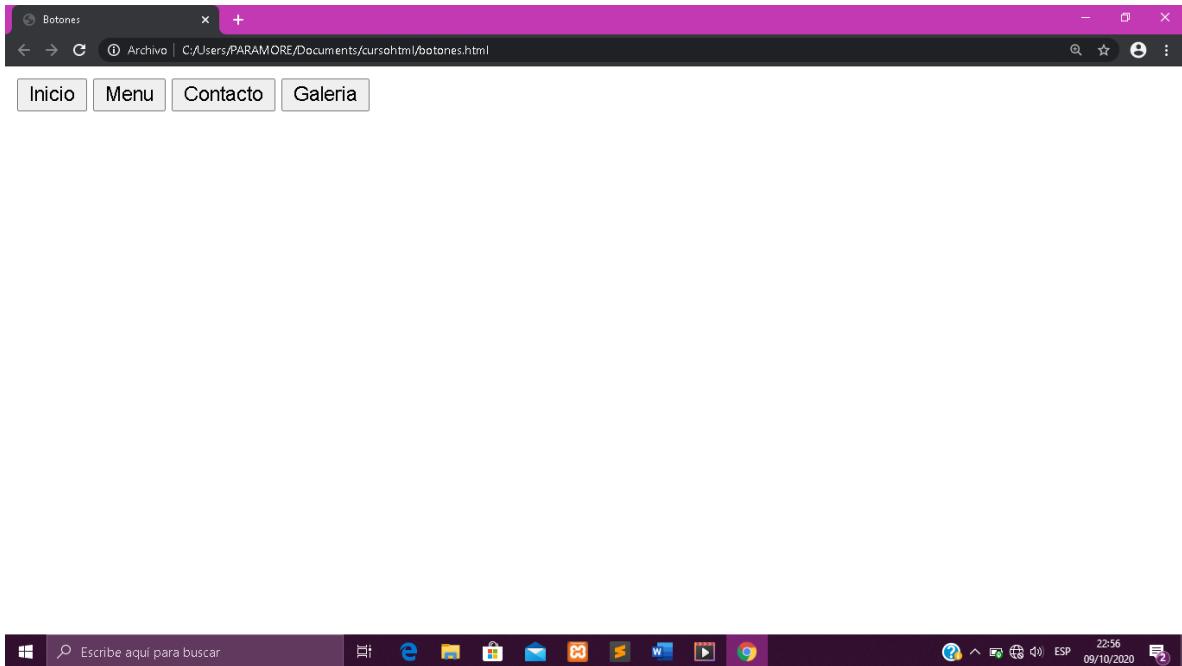

## LINKS


A screenshot of the Sublime Text editor. The title bar indicates the file is "links.html" located at "C:\Users\PARAMORE\Documents\cursodehtml". The menu bar includes File, Edit, Selection, Find, View, Goto, Tools, Project, Preferences, and Help. The left sidebar shows a folder structure under "FOLDERS" with "cursohtml" expanded, containing files like "botones.html", "checkbox.html", "debug.log", "divSection.html", "formularios.html", "index.html", "input.html", "inputradio.html", "links.html", "listas.html", "seccioneshtml.h", "select.html", "textarea.html", and "titulosparrafos.h". The main editor area displays the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Links</title>
</head>
<body>
    <a href=""></a>
</body>
</html>
```

The status bar at the bottom shows "Line 7, Column 14" and "Tab Size: 4". The bottom navigation bar is identical to the one at the top of the image.

href permite direccionar, va a abrir una página. Para poder ir hasta en una página se requiere poner toda la ruta

Ejemplo:

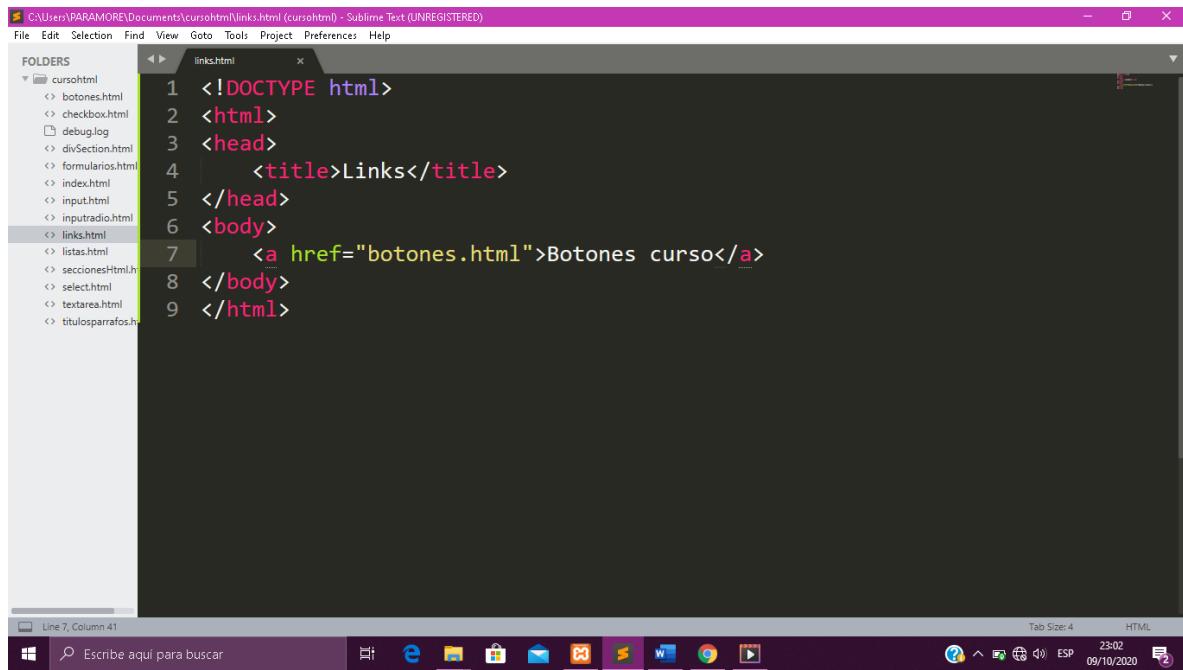


The screenshot shows a Sublime Text window with the following code in the 'links.html' file:

```
<!DOCTYPE html>
<html>
<head>
    <title>Links</title>
</head>
<body>
    <a href="botones.html">Botones curso</a>
</body>
</html>
```

The code defines a simple HTML page with a title 'Links' and a single link to 'botones.html'.

Aquí nos mostrara la dirección

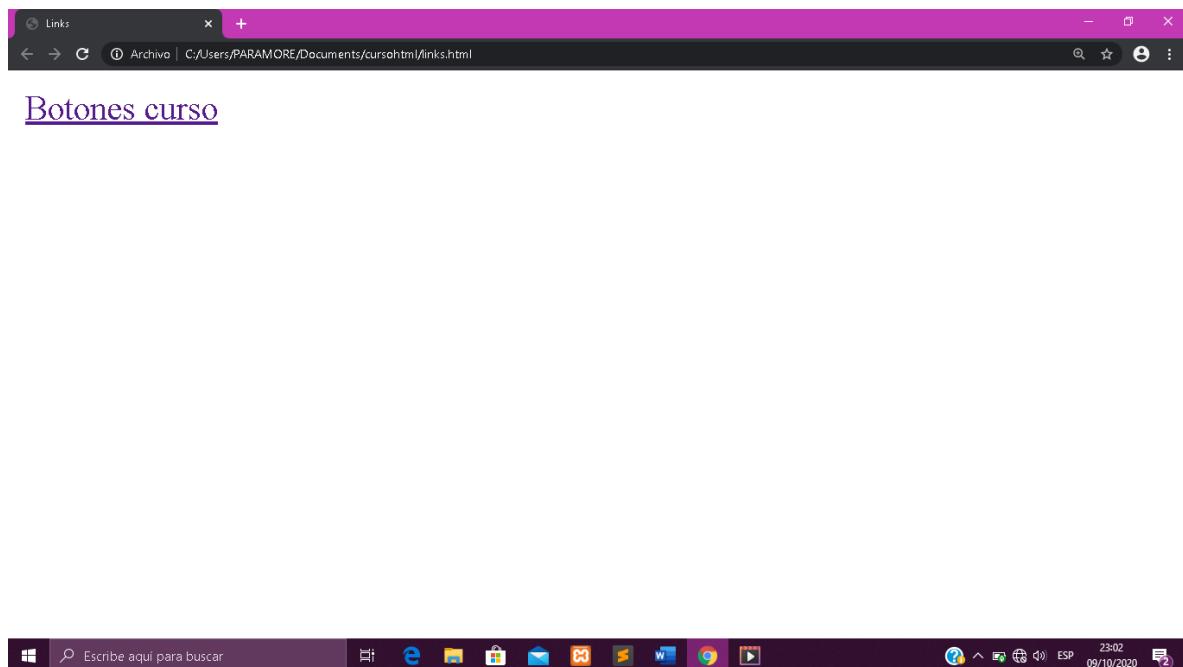

Ejemplo 2:

The screenshot shows a Windows desktop environment. At the top is the taskbar with various pinned icons. Below it is a Sublime Text editor window titled 'links.html' containing the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Links</title>
</head>
<body>
    <a href="">Google</a>
</body>
</html>
```

The status bar at the bottom of the Sublime Text window indicates 'Line 7, Column 22'. To the right of the Sublime Text window is a Microsoft Edge browser window. The address bar in Edge shows the file path: 'C:\Users\PARAMORE\Documents\cursohtml\links.html'. The main content area of the browser displays the word 'Google' in purple text, which is underlined, indicating it is a hyperlink.

# Google



Al seleccionar no realizara nada ya que no tiene una dirección en href.

Se muestra un ejemplo en el que se direcciona

A screenshot of a Windows desktop environment. At the top is the taskbar with various icons. In the center is a Sublime Text window titled 'C:\Users\PARAMORE\Documents\cursohtml\links.html - Sublime Text (UNREGISTERED)'. The file content is:


```
1 <!DOCTYPE html>
2 <html>
3 <head>
4     <title>Links</title>
5 </head>
6 <body>
7     <a href="botones.html">Google</a>
8 </body>
9 </html>
```

The status bar at the bottom of the Sublime Text window shows 'Line 7, Column 26' and 'Tab Size: 4'. To the right of the Sublime Text window is a browser window titled 'Links'. The address bar in the browser shows 'C:\Users\PARAMORE\Documents\cursohtml\links.html'. The browser's status bar shows '23:07 09/10/2020'.

## Botones



Este muestra al seleccionar el botones

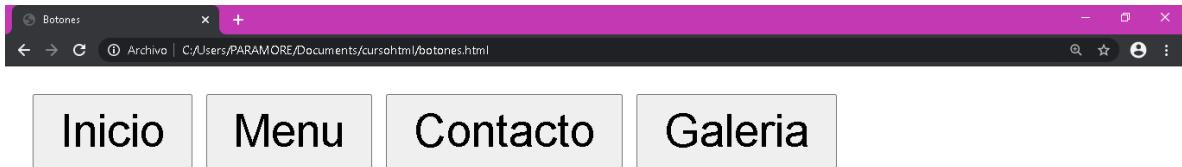


El comando `<hr>` se usa para poner otra sección

Agregamos la dirección en youtube

A screenshot of the Sublime Text code editor. The file being edited is "links.html" located in the "cursohtml" folder. The code is as follows:

```
1  <!DOCTYPE html>
2  <html>
3  <head>
4      <title>Links</title>
5  </head>
6  <body>
7      <a href="botones.html">Botones</a>
8
9      <hr>
10
11     <a href="https://www.youtube.com/">Youtube</a>
12 </body>
13 </html>
```

The line containing the `<hr>` tag is highlighted with a yellow background. The status bar at the bottom indicates "Line 11, Column 38".



## Botones

---


## Youtube



El comando target permite abrir una pestaña nueva


```
C:\Users\PARAMORE\Documents\cursodehtml\links.html - (cursodehtml) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  - cursohtml
    -> botones.html
    -> checkbox.html
    -> debug.log
    -> divSection.html
    -> formularios.html
    -> index.html
    -> input.html
    -> inputradio.html
    -> links.html
    -> listas.html
    -> seccionesHTML.html
    -> select.html
    -> textarea.html
    -> titulosparrafos.html
links.html
1  <!DOCTYPE html>
2  <html>
3  <head>
4      <title>Links</title>
5  </head>
6  <body>
7      <a href="botones.html" target="_blank">Botones</a>
8
9      <hr>
10     <a href="https://www.youtube.com/">Youtube</a>
11
12 </body>
13 </html>

Line 7, Column 42 - Field 1 of 2
Tab Size: 4   HTML
Windows Escribe aquí para buscar  Escribe aquí para buscar  23:15  ESP  09/10/2020
```




# TABLAS

Se agrega <thead> para encabezados, nombre de columnas. <tr> son filas horizontales, <td> son columnas verticales



columna

A screenshot of a Windows desktop with Sublime Text open. The title bar says 'C:\Users\PARAMORE\Documents\cursodehtml\tablas.html (cursodehtml) - Sublime Text (UNREGISTERED)'. The code editor shows the following HTML:<!DOCTYPE html>
<html>
<head>
 <title>Tablas</title>
</head>
<body>
 <table>
 <thead>
 <tr>
 <td>Columna 1</td>
 <td>Columna 2</td>
 </tr>
 </thead>
 <tbody>
 </tbody>
 </table>
</body>
</html>The line number 11 is highlighted. The status bar at the bottom left says 'Line 11, Column 30'. The status bar at the bottom right says 'Tab Size: 4' and 'HTML'. The taskbar at the bottom shows various icons for Windows applications like File Explorer, Edge, and File Explorer again.



Columna 1 Columna 2




Se agrega la propiedad border

A screenshot of the Sublime Text code editor. The file being edited is "tablas.html" located at "C:\Users\PARAMORE\Documents\cursohtml\tablas.html". The code is as follows:


```
<!DOCTYPE html>
<html>
<head>
    <title>Tablas</title>
</head>
<body>
    <table border="1">
        <thead>
            <tr>
                <td>Columna 1</td>
                <td>Columna 2</td>
            </tr>
        </thead>
        <tbody>
        </tbody>
    </table>
</body>
</html>
```

The line "border="1"" is highlighted in green. The status bar at the bottom indicates "Line 7, Column 21 - Field 1 of 2".

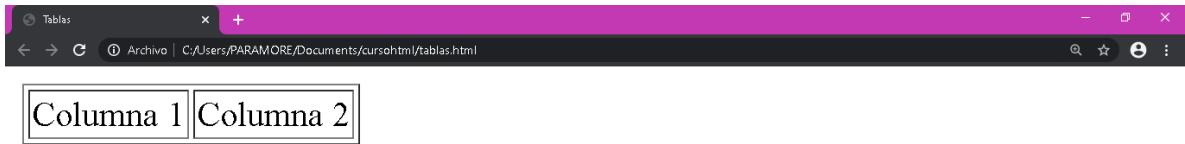


<tbody> permite presentar todos los datos <td> permite agregar datos

A screenshot of the Sublime Text code editor. The title bar shows the file path "C:\Users\PARAMORE\Documents\cursodehtml\tablas.html (cursodehtml) - Sublime Text (UNREGISTERED)". The left sidebar shows a folder structure with various HTML files. The main editor area contains the following HTML code:!DOCTYPE html>
<html>
<head>
<title>Tablas</title>
</head>
<body>
<table border="1">
<thead>
<tr>
<td>Columna 1</td>
<td>Columna 2</td>
</tr>
</thead>
<tbody>
<tr>
<td>dato 1</td>
<td>dato 2</td>
</tr>
<tr>
<td>dato 2 columna 1</td>
<td>dato 2 columna 2</td>
</tr>
</tbody>
</table>
</body>
</html>The code uses the "HTML" tab in the bottom right corner of the editor.

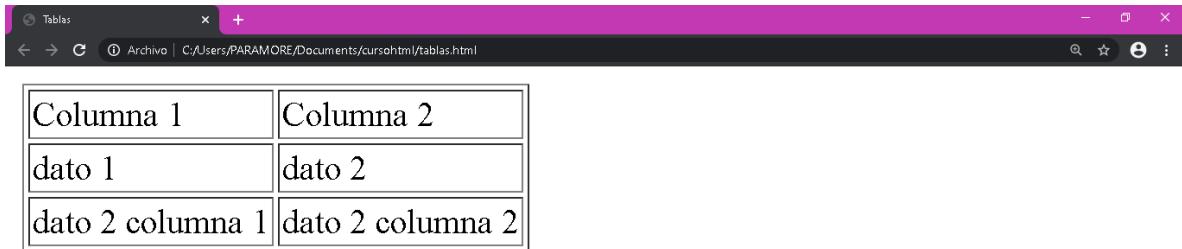

A screenshot of a web browser window displaying a table with 3 rows and 2 columns. The first row has two cells: 'Columna 1' and 'Columna 2'. The second row has two cells: 'dato 1' and 'dato 2'. The third row has two cells: 'dato 2 columna 1' and 'dato 2 columna 2'. All cells have a black border.

Columna 1	Columna 2
dato 1	dato 2
dato 2 columna 1	dato 2 columna 2

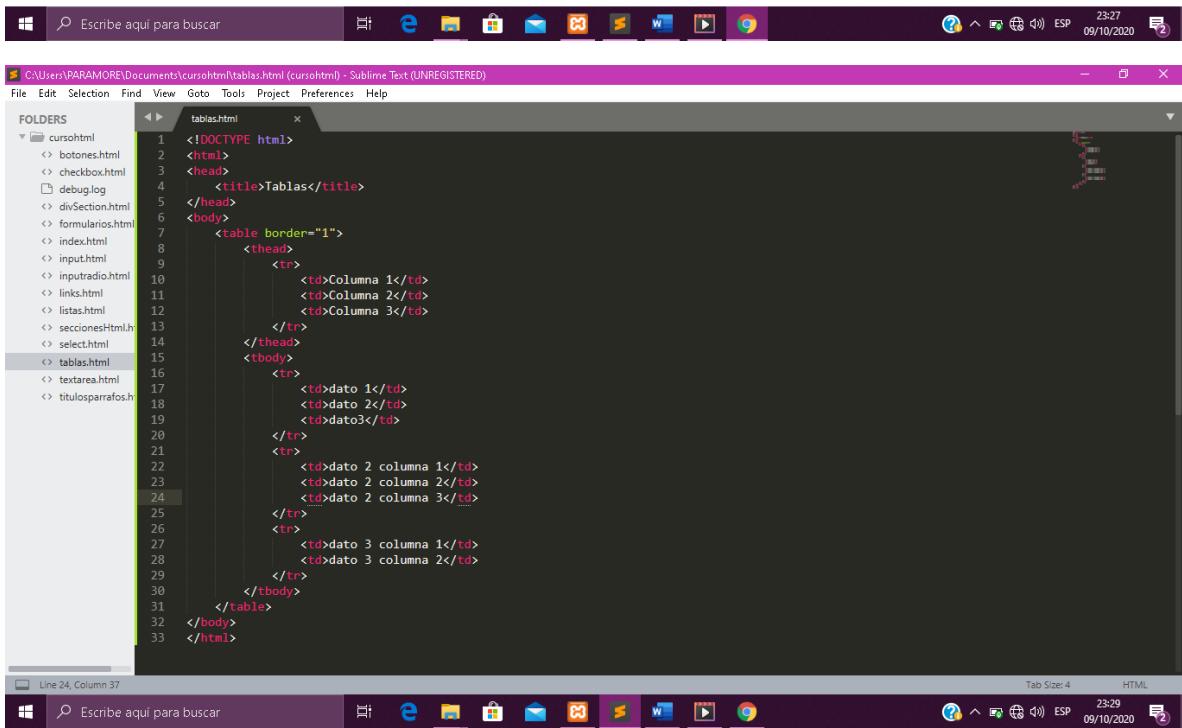

A screenshot of the Sublime Text code editor showing the HTML code for the table. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>Tablas</title>
</head>
<body>
    <table border="1">
        <thead>
            <tr>
                <td>Columna 1</td>
                <td>Columna 2</td>
                <td>Columna 3</td>
            </tr>
        </thead>
        <tbody>
            <tr>
                <td>dato 1</td>
                <td>dato 2</td>
                <td>dato3</td>
            </tr>
            <tr>
                <td>dato 2 columna 1</td>
                <td>dato 2 columna 2</td>
                <td>dato 2 columna 3</td>
            </tr>
            <tr>
                <td>dato 3 columna 1</td>
                <td>dato 3 columna 2</td>
            </tr>
        </tbody>
    </table>
</body>
</html>
```

The code editor interface shows the file path 'C:\User\PARAMORE\Documents\cursohtml\tablas.html' at the top. The status bar at the bottom indicates 'Line 24, Column 37' and 'Tab Size: 4'.

A screenshot of a web browser window titled "Tablas". The address bar shows the file path: "Archivo C:/Users/PARAMORE/Documents/cursodehtml/tablas.html". The page content displays a 3x3 table with a border of 1 pixel. The table has three columns labeled "Columna 1", "Columna 2", and "Columna 3". The rows contain the following data:

Columna 1	Columna 2	Columna 3
dato 1	dato 2	dato3
dato 2 columna 1	dato 2 columna 2	dato 2 columna 3
dato 3 columna 1	dato 3 columna 2	




Se puede utilizar datos como número, escritura.

A screenshot of Sublime Text 3 showing the file "tablas.html". The code is as follows:


```
<!DOCTYPE html>
<html>
<head>
<title>Tablas</title>
</head>
<body>
<table border="1">
<thead>
<tr>
<td>Columna 1</td>
<td>Columna 2</td>
<td>Columna 3</td>
</tr>
</thead>
<tbody>
<tr>
<td>dato 1</td>
<td>dato 2</td>
<td>3</td>
</tr>
<tr>
<td>dato 2 columna 1</td>
<td>dato 2 columna 2</td>
<td>3</td>
</tr>
<tr>
<td>dato 3 columna 1</td>
<td>dato 3 columna 2</td>
<td>3</td>
</tr>
</tbody>
</table>
</body>
</html>
```

The status bar at the bottom indicates "Line 29, Column 22; Saved C:/Users/PARAMORE/Documents/cursodehtml/tablas.html (UTF-8)". The bottom taskbar is identical to the one in the previous screenshot.

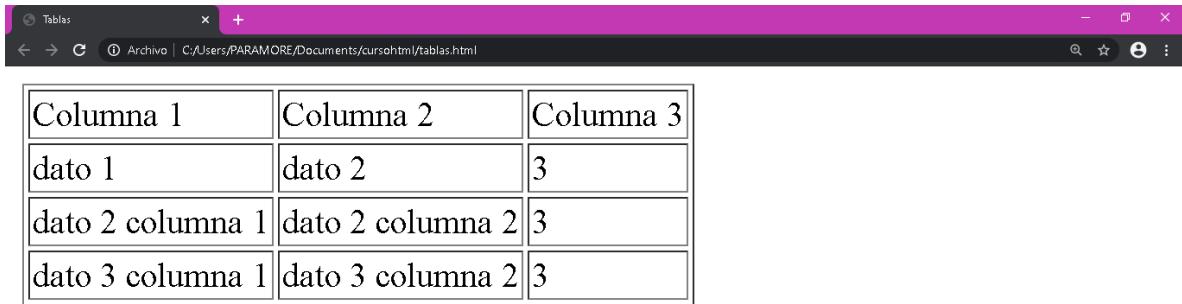

A screenshot of a web browser window displaying a 3x3 table. The table has three columns labeled "Columna 1", "Columna 2", and "Columna 3". The rows contain the following data:

Columna 1	Columna 2	Columna 3
dato 1	dato 2	3
dato 2 columna 1	dato 2 columna 2	3
dato 3 columna 1	dato 3 columna 2	3

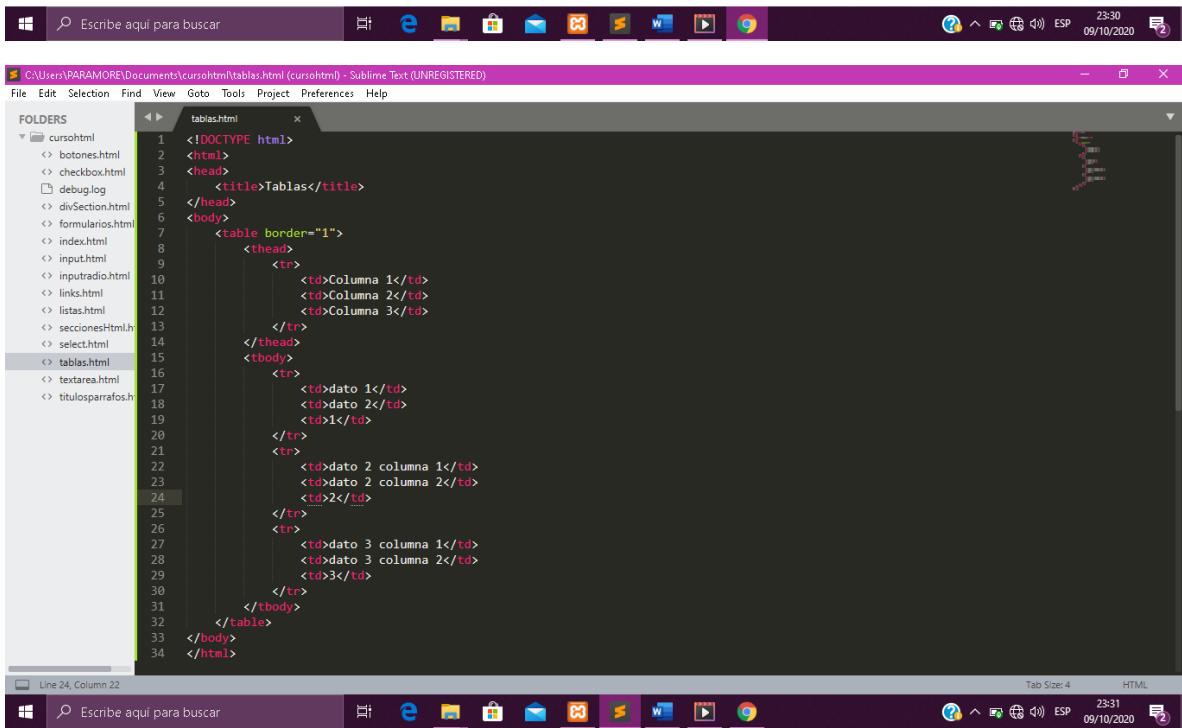

A screenshot of the Sublime Text code editor showing the HTML code for the table. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
<title>Tablas</title>
</head>
<body>
    <table border="1">
        <thead>
            <tr>
                <td>Columna 1</td>
                <td>Columna 2</td>
                <td>Columna 3</td>
            </tr>
        </thead>
        <tbody>
            <tr>
                <td>dato 1</td>
                <td>dato 2</td>
                <td>3</td>
            </tr>
            <tr>
                <td>dato 2 columna 1</td>
                <td>dato 2 columna 2</td>
                <td>3</td>
            </tr>
            <tr>
                <td>dato 3 columna 1</td>
                <td>dato 3 columna 2</td>
                <td>3</td>
            </tr>
        </tbody>
    </table>
</body>
</html>
```

A screenshot of a web browser window titled "Tablas". The address bar shows the file path: "Archivo C:/Users/PARAMORE/Documents/cursodehtml/tablas.html". The content of the page is a 3x3 table with the following data:

Columna 1	Columna 2	Columna 3
dato 1	dato 2	1
dato 2 columna 1	dato 2 columna 2	2
dato 3 columna 1	dato 3 columna 2	3



Se va a agregar una regla CSS

A screenshot of Sublime Text showing the file "tablas.html". The code is as follows:

```
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
C:\Users\PARAMORE\Documents\cursodehtml
tablas.html
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Tablas</title>
5 </head>
6 <body>
7   <table border="1" style="border-collapse: collapse;">
8     <thead>
9       <tr>
10         <td>Columna 1</td>
11         <td>Columna 2</td>
12         <td>Columna 3</td>
13     </tr>
14   </thead>
15   <tbody>
16     <tr>
17       <td>dato 1</td>
18       <td>dato 2</td>
19       <td>1</td>
20     </tr>
21     <tr>
22       <td>dato 2 columna 1</td>
23       <td>dato 2 columna 2</td>
24       <td>2</td>
25     </tr>
```

The code editor has syntax highlighting for HTML and CSS. The status bar at the bottom indicates "Line 7, Column 56" and "Tab Size: 4".

El border collapse permite tener bordes más estilizadas

Tables

Archivo C:/Users/PARAMORE/Documents/cursinho/ tablas.html

Columna 1	Columna 2	Columna 3
dato 1	dato 2	1
dato 2 columna 1	dato 2 columna 2	2
dato 3 columna 1	dato 3 columna 2	3



# VALIDACION DE DATOS

Se muestra cómo se valida la información.

The screenshot shows the Sublime Text interface with the file 'validarinputs.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>Validar inputs</title>
</head>
<body>
    <form method="POST" action="#">
        <label for="numeros">Numeros</label>
        <input type="text" name="numeros" required>
        <br>
        <button>Enviar</button>
    </form>
</body>
</html>
```

The status bar at the bottom indicates 'Line 14, Column 8'. The taskbar below shows various application icons.

The screenshot shows a browser window with the title 'Validar inputs'. The page displays the following HTML code:

```
Numeros   

```

The browser's address bar shows the URL 'C:/Users/PARAMORE/Documents/cursodehtml/validarinputs.html#'. The taskbar below shows various application icons.



El comando <required> obliga a contestar

The screenshot shows a Sublime Text window with the file 'validarinputs.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>Validar inputs</title>
</head>
<body>
    <form method="POST" action="#">
        <label for="numeros">Numeros</label>
        <input type="text" name="numeros" required="">
        <br>
        <button>Enviar</button>
    </form>
</body>
</html>
```

The Sublime Text interface includes a sidebar with a 'FOLDERS' section containing various HTML files, and a status bar at the bottom indicating 'Line 9, Column 55'.



Si queremos especificar lo que debe escribir el usuario se utiliza el comando `<pattern>`


Screenshot of Sublime Text showing the code for 'validarinputs.html'. The code defines a form with a text input field named 'numeros' that requires digits only, as indicated by the pattern '[0-9]+'. The file is located in the 'cursohtml' folder.

```
<!DOCTYPE html>
<html>
<head>
    <title>Validar inputs</title>
</head>
<body>
    <form method="POST" action="#">
        <label for="numeros">Numeros</label>
        <input type="text" name="numeros" required="" pattern="[0-9]+"/>
        <br>
        <button>Enviar</button>
    </form>
</body>
</html>
```




A screenshot of the Sublime Text editor. The title bar shows the path: C:\Users\PARAMORE\Documents\cursohtml\validarinputs.html (cursohtml) - Sublime Text (UNREGISTERED). The menu bar includes File, Edit, Selection, Find, View, Goto, Tools, Project, Preferences, Help. The sidebar on the left lists 'FOLDERS' and files like botones.html, checkbox.html, debug.log, divSection.html, formularios.html, index.html, input.html, inputradio.html, links.html, listas.html, seccionesHtml.html, select.html, tablas.html, textarea.html, titulosparrafos.html, and validarinputs.htm. The main pane displays the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Validar inputs</title>
</head>
<body>
    <form method="POST" action="#">
        <label for="numeros">Numeros</label>
        <input type="text" name="numeros" required="" pattern="[0-9]+"/>
        <br>
        <label for="letras">letras</label>
        <input type="text" name="letras" required="" pattern="[a-zA-Z]+"/>
        <br>
        <button>Enviar</button>
    </form>
</body>
</html>
```

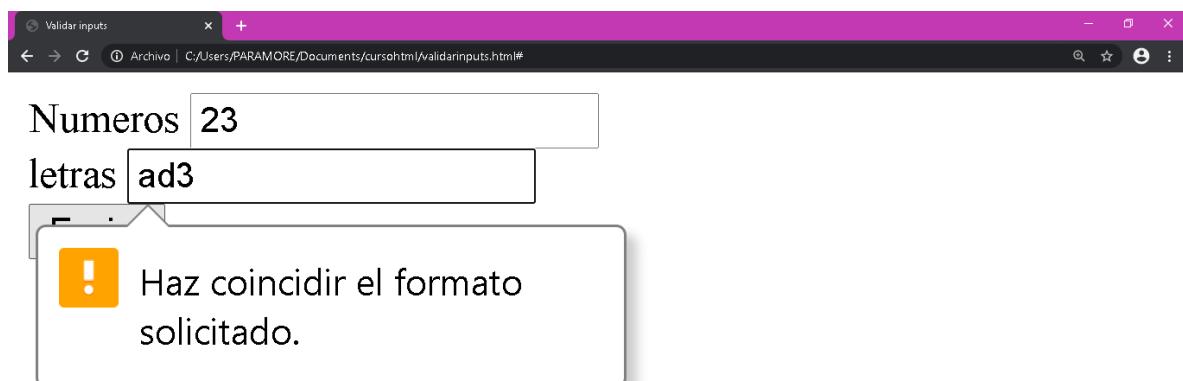

Si agrego lo que requiere valida los datos



Numeros

letras

Enviar



El comando max y min son caracteres.

A screenshot of Sublime Text 3. The file 'validarinputs.html' is open. The code is as follows:<!DOCTYPE html>
<html>
<head>
 <title>Validar inputs</title>
</head>
<body>
 <form method="POST" action="#">
 <label for="numeros">Numeros</label>
 <input maxlength="10" minlength="4" type="text" name="numeros" required="" pattern="[0-9]+"/>
 <br>
 <label for="letras">letras</label>
 <input type="text" name="letras" required="" pattern="[a-zA-Z]+"/>
 <br>
 <label for="textoArea">Area</label>
 <textarea name="textoArea" required=""></textarea>
 <br>
 <button>Enviar</button>
 </form>
</body>
</html>The status bar at the bottom indicates 'Line 15, Column 50 - Field 1 of 2; Saved C:/Users/PARAMORE/Documents/cursodehtml/validarinputs.html (UTF-8)'. The tab size is set to 4 and the language is HTML.

Validar inputs

Archivo C:/Users/PARAMORE/Documents/cursodehtml/validarinputs.html#

Numeros

letras

Area



# AGREGAR IMÁGENES

The screenshot shows a Sublime Text window with the file 'imagenes.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>Imagenes</title>
</head>
<body>
    <img src="">
</body>
</html>
```


The cursor is at the end of the 'src' attribute in the first 'img' tag. The status bar at the bottom left shows 'Line 7, Column 15 - Field 1 of 2'. The status bar at the bottom right shows 'Tab Size: 4' and 'HTML'.

Src , es la fuente de donde está mi imagen, agregamos el tamaño

The screenshot shows a Sublime Text window with the file 'imagenes.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>Imagenes</title>
</head>
<body>
    
</body>
</html>
```

The 'src' attribute now includes the path 'img/paramore.jpg'. The status bar at the bottom left shows 'Line 7, Column 43 - Field 1 of 2'. The status bar at the bottom right shows 'Tab Size: 4' and 'HTML'.

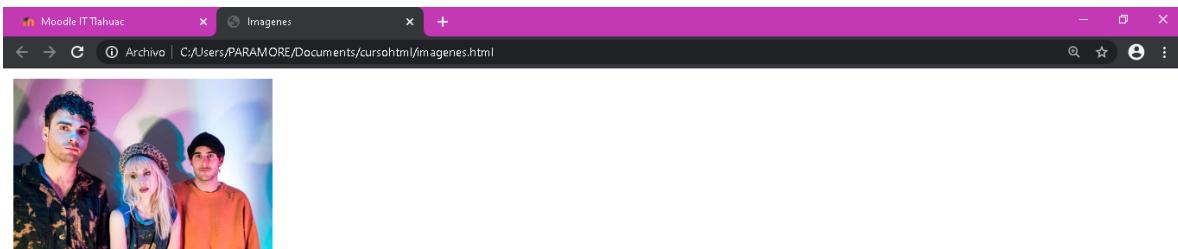

Agregamos una imagen de la web

C:\User\PARAMORE\Documents\cursohtml\imagenes.html (cursohtml) - Sublime Text (UNREGISTERED)

File Edit Selection Find View Goto Tools Project Preferences Help

FOLDERS

- cursohtml
- img
  - paramore.jpg
- botones.html
- checkbox.html
- debug.log
- divSection.html
- formularios.html
- imagenes.html
- index.html
- input.html
- inputradio.html
- links.html
- listas.html
- seccionesHtml.h
- select.html
- tablas.html
- textarea.html
- titulosparrafos.h
- validarinputs.h


Line 9, Column 104

Tab Size: 4    HTML

imagenes.html

```
1 <!DOCTYPE html>
2 <html>
3   <head>
4     <title>Imagenes</title>
5   </head>
6   <body>
7     
8     <br>
9     
10   </body>
11 </html>
```


20:16  
10/10/2020

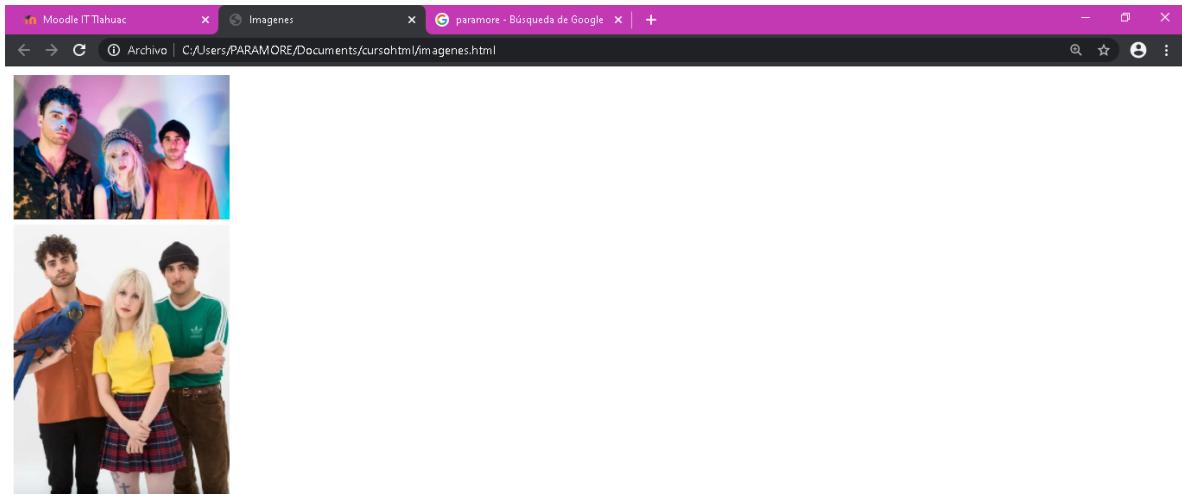

Se puede usar ancho <width> y alto con <height>, para darle tamaño a la imagen

# AGREGAR AUDIO

Se requiere de poner en un archivo el audio, en el video se pone en formato mp4, en mi caso utilice el formato mp3. Se usa controls para que pueda funcionar y tenga la forma de audio

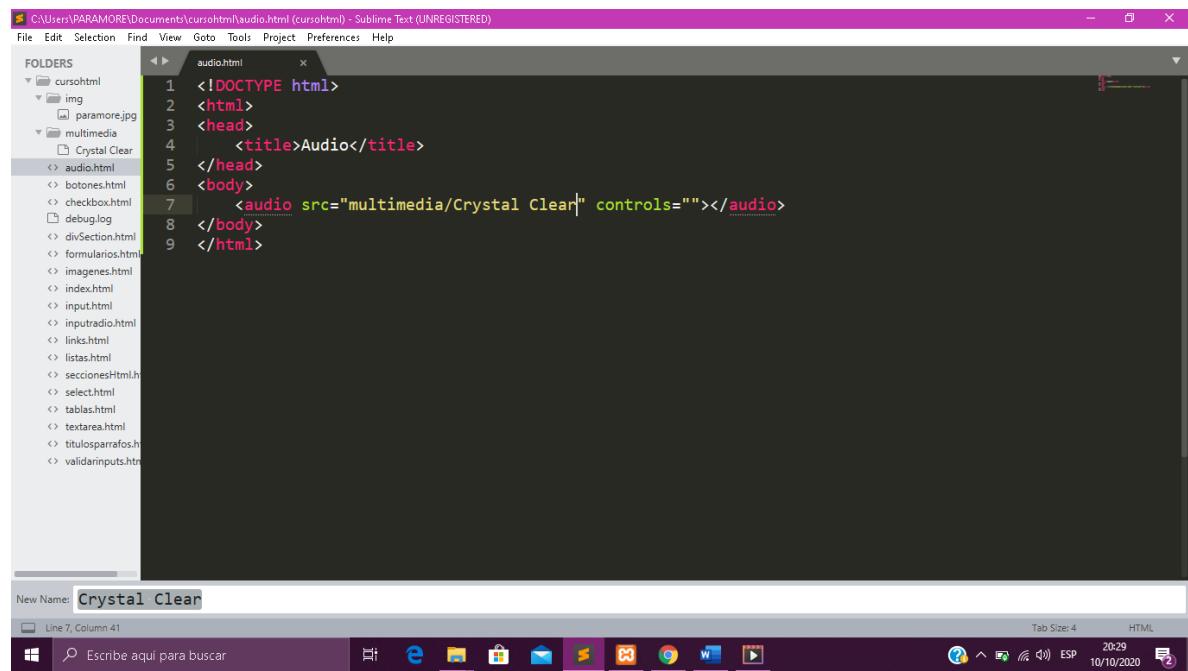


The screenshot shows the Sublime Text editor with a dark theme. The file being edited is 'audio.html' located at 'C:\User\PARAMORE\Documents\cursohtml\audio.html'. The code in the editor is:

```
<!DOCTYPE html>
<html>
<head>
<title>Audio</title>
</head>
<body>
<audio src="multimedia/Crystal Clear.mp3" controls=""></audio>
</body>
</html>
```


The code includes an `<audio>` tag with `src="multimedia/Crystal Clear.mp3"` and `controls=""`. The file path 'multimedia/Crystal Clear.mp3' is highlighted in yellow. The Sublime Text interface shows a sidebar with a 'FOLDERS' section containing 'cursohtml' and its subfolders 'img' (with 'paramore.jpg') and 'multimedia' (with 'Crystal Clear'). The status bar at the bottom shows 'Line 7, Column 41' and the file name 'audio.html'.

Se puede utilizar la función <loop> para que se repita

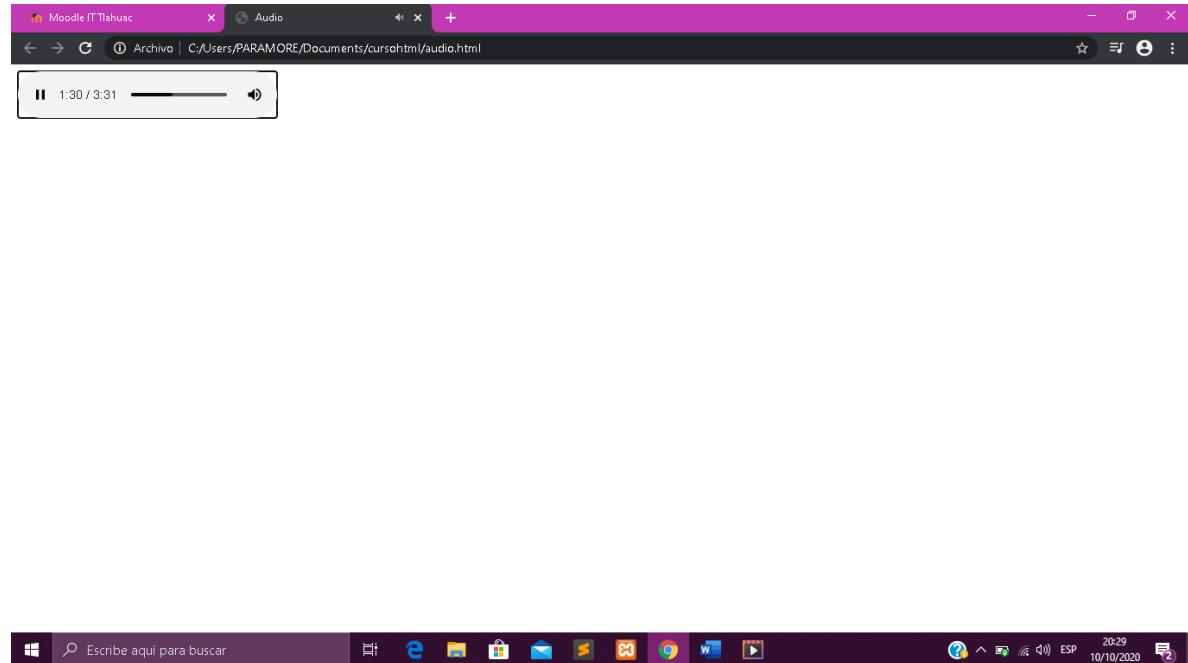

# AGREGAR VIDEO


Se realiza de la misma manera que la imagen y el audio, se utiliza src para reconocer la dirección donde se ubica el video

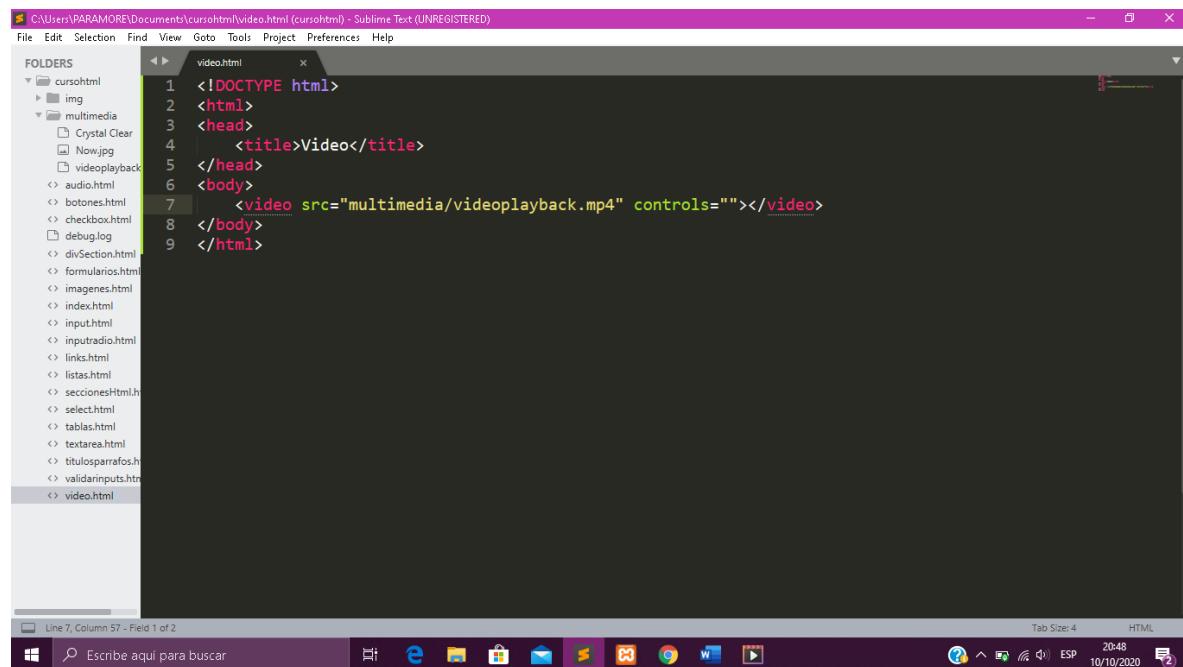


The screenshot shows the Sublime Text editor with the file 'video.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
    <title>Video</title>
</head>
<body>
    <video src="multimedia/videoplayback.mp4" controls=""></video>
</body>
</html>
```

The code includes a title, a body containing a video element with a source file path and controls attribute, and a closing html tag.


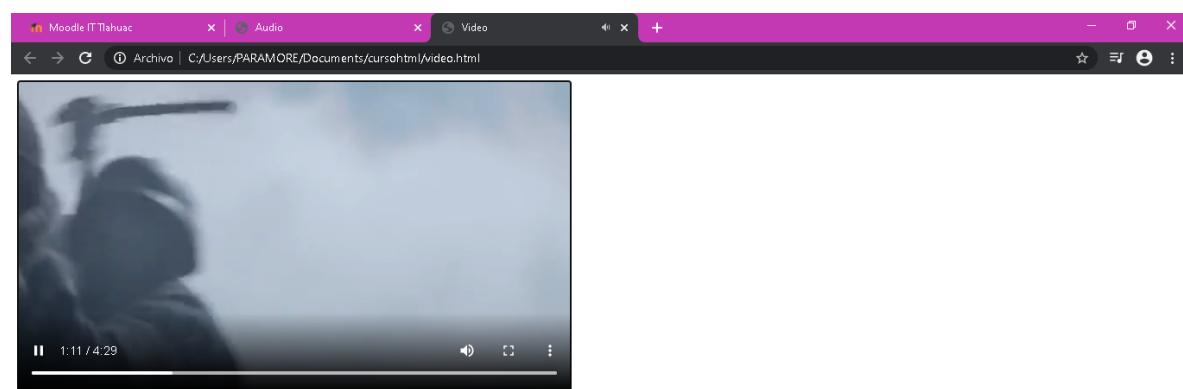


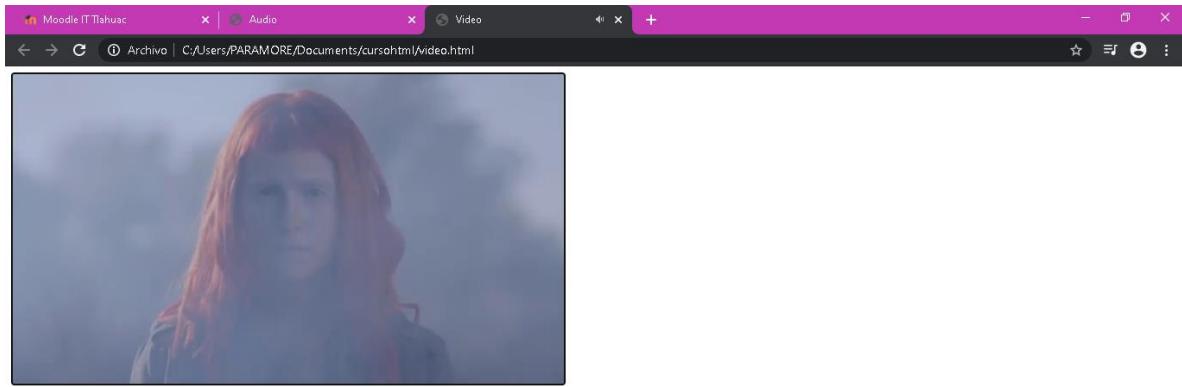A screenshot of the Sublime Text editor. The title bar shows the file path "C:\User\PARAMORE\Documents\cursodehtml\video.html (cursodehtml) - Sublime Text (UNREGISTERED)". The menu bar includes File, Edit, Selection, Find, View, Goto, Tools, Project, Preferences, and Help. The sidebar shows a "FOLDERS" tree with "cursohtml" expanded, showing "img" and "multimedia" subfolders, and files like "Now.jpg", "videoplayback.mp4", "audio.html", "botones.html", "checkbox.html", "debug.log", "divSection.html", "formularios.html", "imagenes.html", "index.html", "input.html", "inputradio.html", "links.html", "listas.html", "seccionesHtml.html", "select.html", "tablas.html", "textarea.html", "titulosparrafos.html", "validarinputs.htm", and "video.html". The main editor pane contains the following HTML code:

```
<!DOCTYPE html>
<html>
<head>
<title>Video</title>
</head>
<body>
<video src="multimedia/videoplayback.mp4" controls="" width="400px" height="320px"></video>
</body>
</html>
```

The status bar at the bottom shows "Line 7, Column 71" and "Tab Size: 4 HTML".


Le agregamos ancho y altura

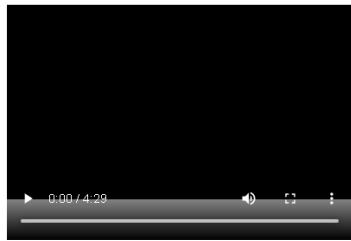

Usamos el comando <poster> para dar la miniatura


```
C:\Users\PARAMORE\Documents\cursodehtml\video.html - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  ▾ cursohtml
    ▾ multimedia
      Crystal Clear
      Now.jpg
      videoplayback
    ▾ audio.html
    ▾ botones.html
    ▾ checkbox.html
    debug.log
    ▾ divSection.html
    ▾ formularios.html
    ▾ imagenes.html
    ▾ index.html
    ▾ input.html
    ▾ inputradio.html
    ▾ links.html
    ▾ listas.html
    ▾ seccionesHtml.h
    ▾ select.html
    ▾ tablas.html
    ▾ textarea.html
    ▾ titulosparrafos.h
    ▾ validarinputs.htm
    ▾ video.html
Line 9, Column 68
  1  <!DOCTYPE html>
  2  <html>
  3  <head>
  4  |   <title>Video</title>
  5  </head>
  6  <body>
  7  |   <video src="multimedia/videoplayback.mp4"
  8  |       controls=""
  9  |       width="400px" height="320px" poster="multimedia/now.jpg">
 10 |   </video>
 11 </body>
 12 </html>
```

Tab Size: 4    HTML

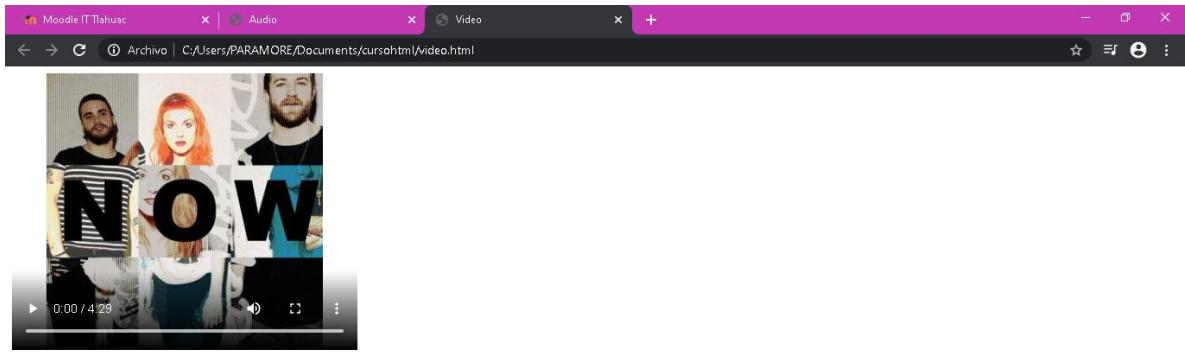

# AGREGAR VIDEO DE YOUTUBE


Se agrega un video de YouTube mediante el siguiente código

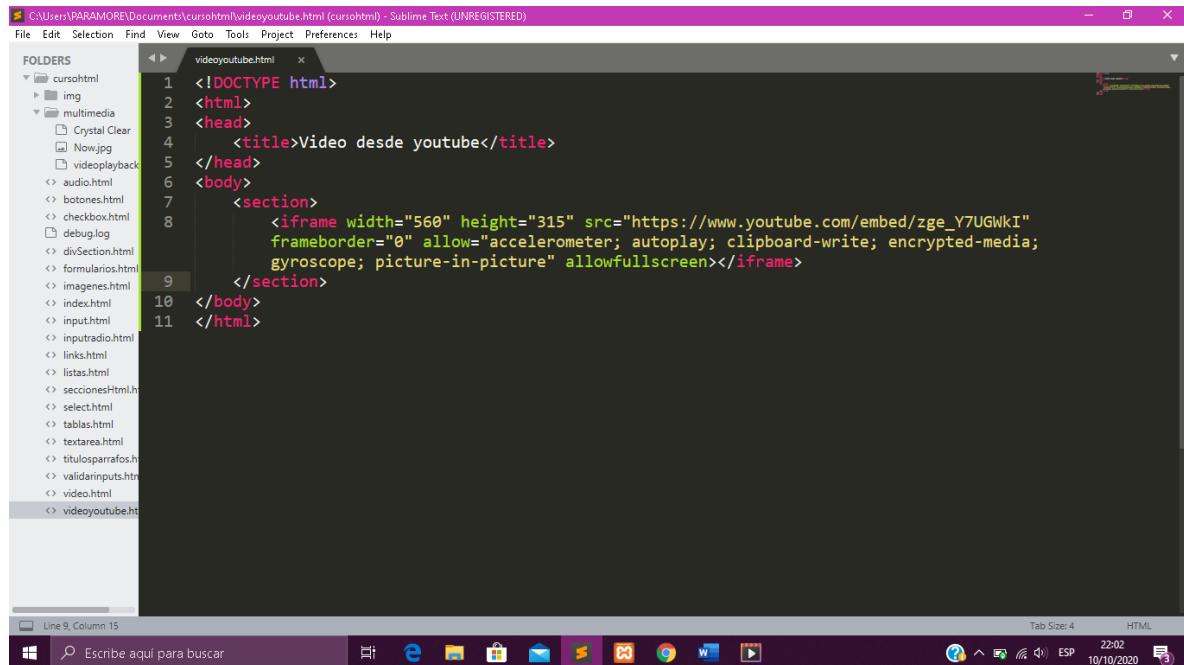

The screenshot shows a Sublime Text window with the file "videoyoutube.html" open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
<title>Video desde youtube</title>
</head>
<body>
<section>
<iframe width="560" height="315" src="https://www.youtube.com/embed/zge_Y7UGWkI" frameborder="0" allow="accelerometer; autoplay; clipboard-write; encrypted-media; gyroscope; picture-in-picture" allowfullscreen></iframe>
</section>
</body>
</html>
```

The code includes an `<iframe>` tag with attributes for width, height, source URL, and various permissions.

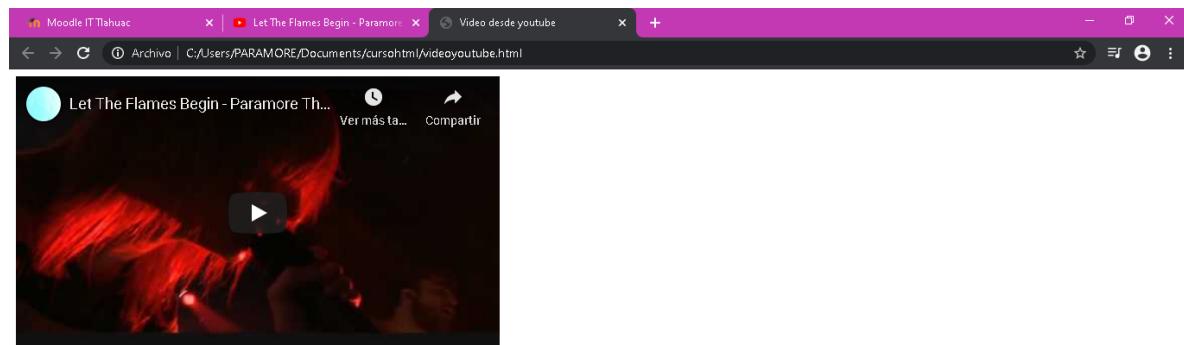

Se agrega tablas para darle formato, con el (ctrl+shift+p) permite indentar para poder tener un mejor orden

C:\Users\PARAMORE\Documents\cursohtml\videoyoutube.html (cursohtml) - Sublime Text (UNREGISTERED)

Folders

- cursohtml
  - img
  - multimedia
    - Crystal Clear
    - Now.jpg
    - videoplayback
  - audio.html
  - botones.html
  - checkbox.html
  - debug.log
  - divSection.html
  - formularios.html
  - imagenes.html
  - index.html
  - input.html
  - inputradio.html
  - links.html
  - listas.html
  - seccionesHTML.h
  - select.html
  - tablas.html
  - textarea.html
  - titulosparafos.h
  - validarinputs.htm
  - video.html
  - videoyoutube.htm

videoyoutube.html

```
3 <head>
4     <title>Video desde youtube</title>
5 </head>
6 <body>
7     <h1>Paramore</h1>
8     <table>
9         <tr>
10            <td>Let the Flames Begin </td>
11            <td>
12                <section>
13                    <iframe width="560" height="315" src="https://www.youtube.com/embed/zge_Y7UGWkI" frameborder="0" allow="accelerometer; autoplay; clipboard-write; encrypted-media; gyroscope; picture-in-picture" allowfullscreen></iframe>
14                </section>
15            </td>
16        </tr>
17    </table>
18 </body>
19 </html>
```


Line 10, Column 38

Windows taskbar: Escribe aquí para buscar, File Explorer, Edge, Microsoft Store, Mail, File, Google Chrome, Word, Powerpoint, Task View, Taskbar icons, Date/Time: 22:09, 10/10/2020.

Moodle IT Tlalhuac | Let The Flames Begin - Paramore | Video desde youtube | Archivo | C:/Users/PARAMORE/Documents/cursohtml/videoyoutube.html

## Paramore





## Paramore



# AGREGAR ARCHIVO CSS Y REGLAS CSS

Se comienza a trabajar con CSS. El CSS son hojas de estilo en cascada, para poder trabajar se agregó una carpeta css, en el que contendrá reglas css. Link contendrá las hojas de estilo, texto css, el id permite hacer cambios con el css, para afectar un solo párrafo. O lo que queramos darle estilo

C:\Users\PARAMORE\Documents\cursohtml\documentohtml.html (cursohtml) - Sublime Text (UNREGISTERED)

File Edit Selection Find View Goto Tools Project Preferences Help

FOLDERS

- cursohtml
  - css
    - reglas.css
  - img
  - multimedia
    - Crystal Clear
    - Now.jpg
    - videoplayback
  - audio.html
  - botones.html
  - checkbox.html
  - debug.log
  - divSection.html
  - documentohtml.h
  - formularios.html
  - imagenes.html
  - index.html
  - input.html
  - inputradio.html
  - links.html
  - listas.html
  - seccionesHTML.h
  - select.html
  - tablas.html
  - textarea.html
  - titulosparrafos.h
  - validarinputs.htm
  - video.html
  - videoyoutube.htm

Line 9, Column 46

```
<!DOCTYPE html>
<html>
<head>
    <title>Trabajando con css</title>
    <link rel="stylesheet" type="text/css" href="css/reglas.css">
</head>
<body>
    <h1 id="miTitulo">Trabajando con css</h1>
    <section id="seccion1">
        <p>
            Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
        </p>
    </section>
    <section id="seccion2">
        <p>
            Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
        </p>
    </section>
</body>
</html>
```

Tab Size: 4    HTML    22:31    ESP    10/10/2020

Escribe aquí para buscar

C:\Users\PARAMORE\Documents\cursohtml\css\reglas.css (cursohtml) - Sublime Text (UNREGISTERED)

File Edit Selection Find View Goto Tools Project Preferences Help

FOLDERS


- cursohtml
  - css
    - reglas.css
  - img
  - multimedia
    - Crystal Clear
    - Now.jpg
    - videoplayback
  - audio.html
  - botones.html
  - checkbox.html
  - debug.log
  - divSection.html
  - documentohtml.h
  - formularios.html
  - imagenes.html
  - index.html
  - input.html
  - inputradio.html
  - links.html
  - listas.html
  - seccionesHTML.h
  - select.html
  - tablas.html
  - textarea.html
  - titulosparrafos.h
  - validarinputs.htm
  - video.html
  - videoyoutube.htm

Line 3, Column 16

```
#miTitulo
{
    color: blue
}
```

Tab Size: 4    CSS    22:24    ESP    10/10/2020

Escribe aquí para buscar




## Trabajando con css


LOREM IPSUM DOLOR SIT AMET, CONSECTEUR ADIPSICING ELIT, SED DO EIUSMOD TEMPOR INCIDIDUNT UT LABORE ET DOLORE MAGNA ALIQUA. UT ENIM AD MINIM VENIAM, QUS NOSTRUD EXERCITATION ULLAMCO LABORIS NISI UT ALIQUIP EX EA COMMODO CONSEQUAT. DUIS AUTÈ IRURE DOLOR IN REPREHENDENT IN VOLUNTATE VELET ESSE CILLOM DOLORE EU FUGIAT NILLA PARIATUR. EXCEPTEUR SINT OCCAECAT CUPIDITAT NON PROIDENT, SUNT IN CULPA QUI OFFICIA DESERUNT MOLLIT ANIM ID EST LABORUM.

Consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.



Se puede buscar color en punto hexadecimal, pero es a la preferencia, se pone ":" para poder agregar más atributos

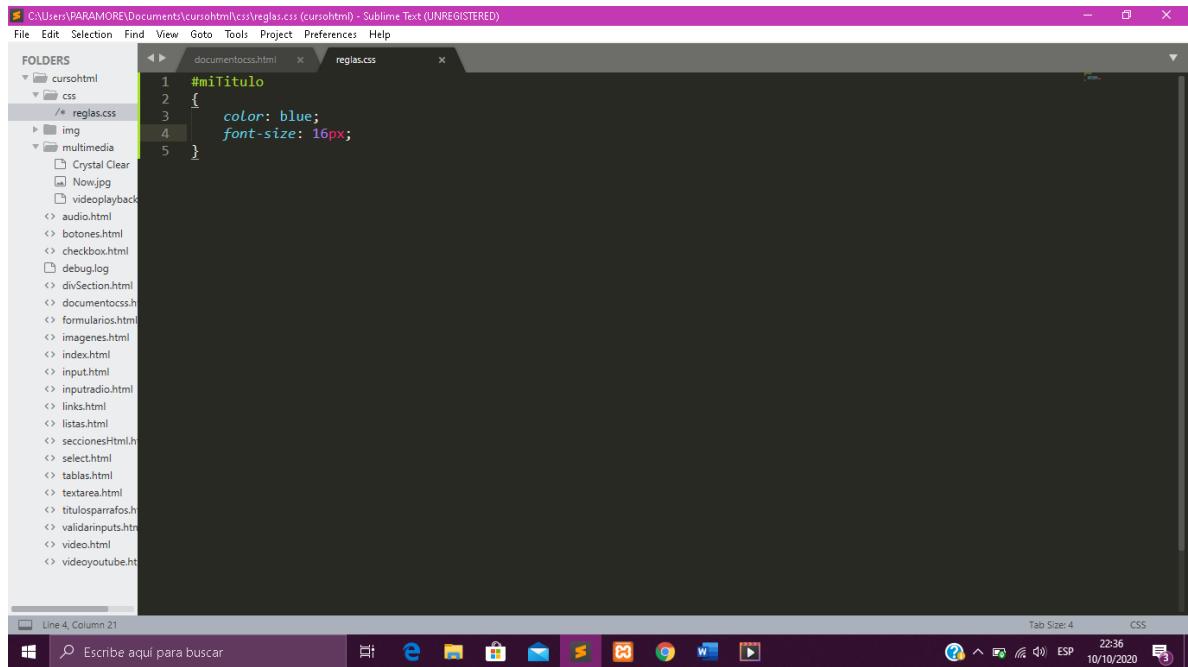



### Trabajando con css

Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.


Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.



Para poder poner bordes en css, se utiliza el siguiente código

```
C:\Users\PARAMORE\Documents\cursohtml\css\reglas.css (cursohtml) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  - cursohtml
    - css
      - reglas.css
        - img
        - multimedia
          - Crystal Clear
          - Now.jpg
          - videoplayback
        - audio.html
        - botones.html
        - checkbox.html
        - debug.log
        - divSection.html
        - documentocss.html
        - formularios.html
        - imagenes.html
        - index.html
        - input.html
        - inputradio.html
        - links.html
        - listas.html
        - seccioneshtml.html
        - select.html
        - tablas.html
        - textarea.html
        - titulosparrafos.html
        - validarinputs.html
        - video.html
        - videoyoutube.html
documentocss.html
reglas.css
#miTitulo
{
  color: blue;
  font-size: 16px;
}
#seccion1
{
  border: red 5px dashed;
}


Line 9, Column 27
Tab Size: 4
CSS
Windows Escribe aqui para buscar 22:40 10/10/2020
```

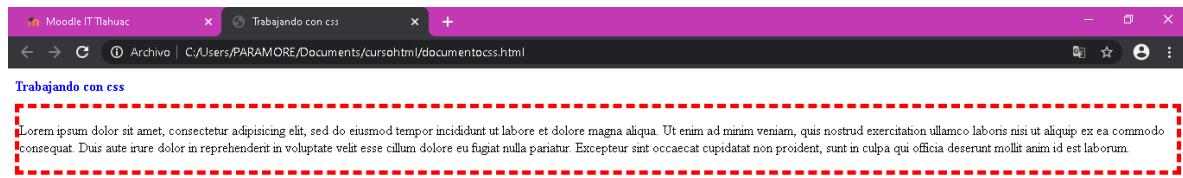


El resultado es que el border se aplica a todos los tags <p> que contiene el selector.



Para todos los tags <p> se puede agregar bordes

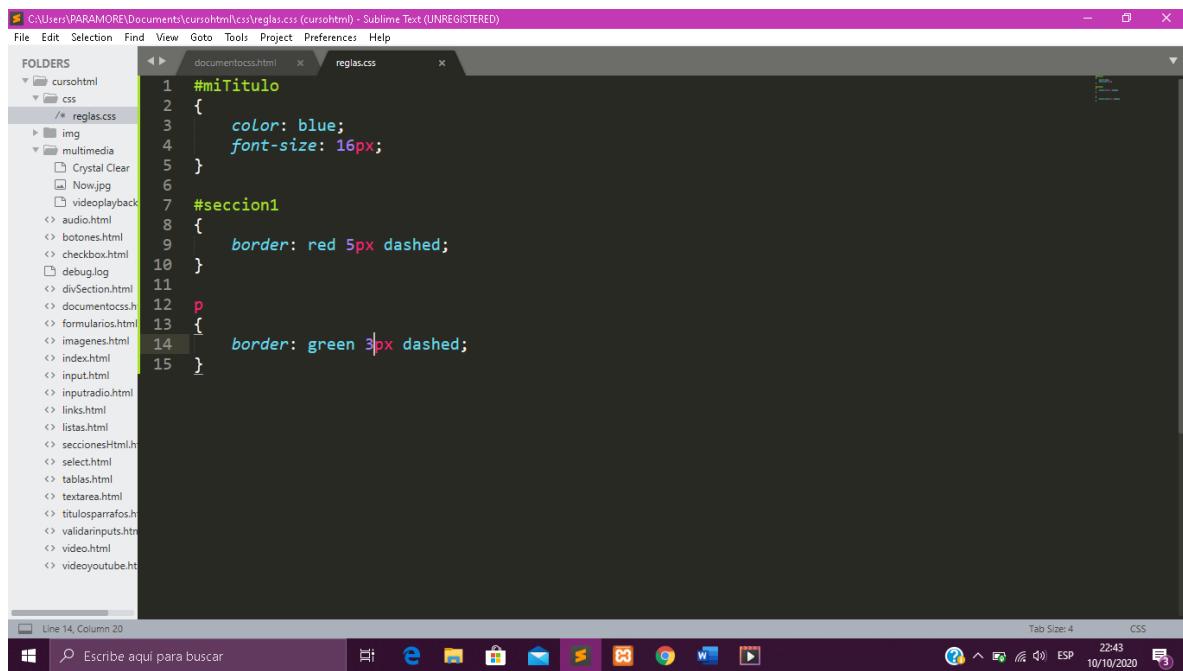

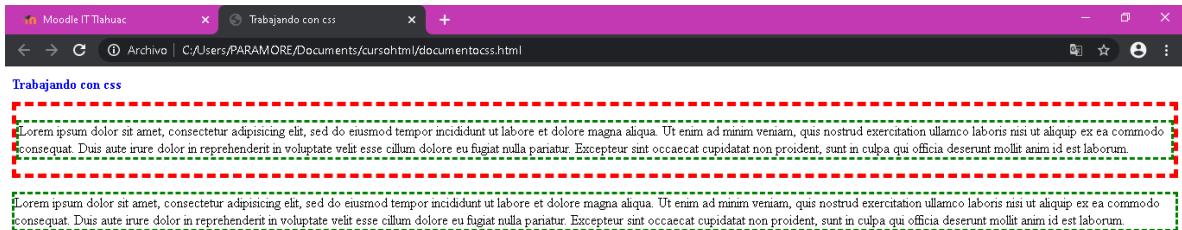


Para agregar una clase en css se utiliza. colorLetra

The screenshot shows the Sublime Text editor with a file named 'reglas.css'. The code defines a class 'colorLetra' with a purple color. The file is part of a project structure shown in the sidebar.


```
C:\Users\PARAMORE\Documents\cursohtml\css\reglas.css (cursohtml) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  - cursohtml
    - css
      - reglas.css
        - img
        - multimedia
          - Crystal Clear
          - Now.jpg
          - videoplayback
        - audio.html
        - botones.html
        - checkbox.html
        - debug.log
        - divSection.html
        - documentocss.h
        - formularios.html
        - imagenes.html
        - index.html
        - input.html
        - inputradio.html
        - links.html
        - listas.html
        - seccioneshtml.h
        - select.html
        - tablas.html
        - textarea.html
        - titulosparrafos.h
        - validarinputs.htm
        - video.html
        - videoyoutube.htm
documentocss.html
reglas.css
#miTitulo
{
  color: blue;
  font-size: 16px;
}
#seccion1
{
  border: red 5px dashed;
}
p
{
  border: green 3px dashed;
}
.colorLetra
{
  color:purple;
}
```

```
<!DOCTYPE html>
<html>
<head>
    <title>Trabajando con css</title>
    <link rel="stylesheet" type="text/css" href="css/reglas.css">
</head>
<body>
    <h1 id="miTitulo">Trabajando con css</h1>
    <section id="seccion1">
        <p>Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.</p>
    </section>
    <section id="seccion2">
        <p class="colorLetra">Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.</p>
    </section>
</body>
</html>
```

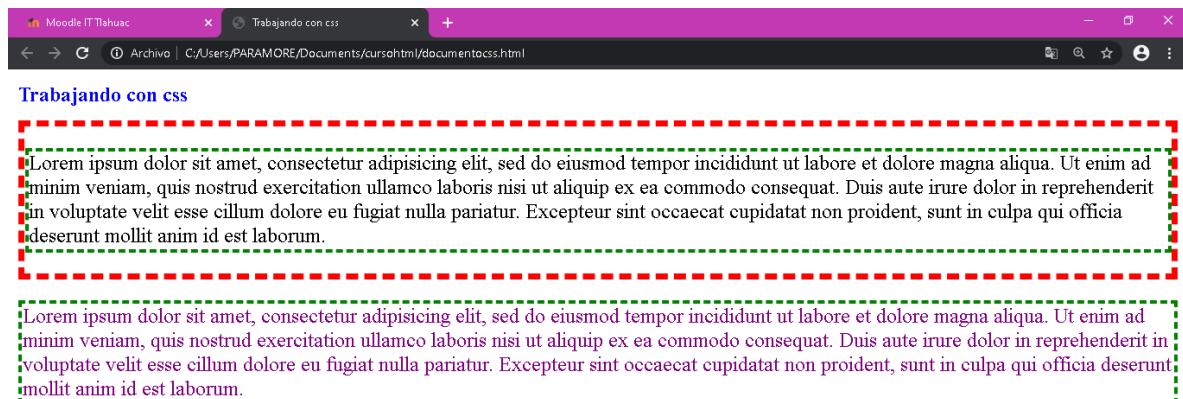

# AGREGAR ICONOS CON FONT AWESOME


Se agrega iconos, ocupando la librería Font awesome, se agrega en el HTML, la ruta de la librería Font awesome.

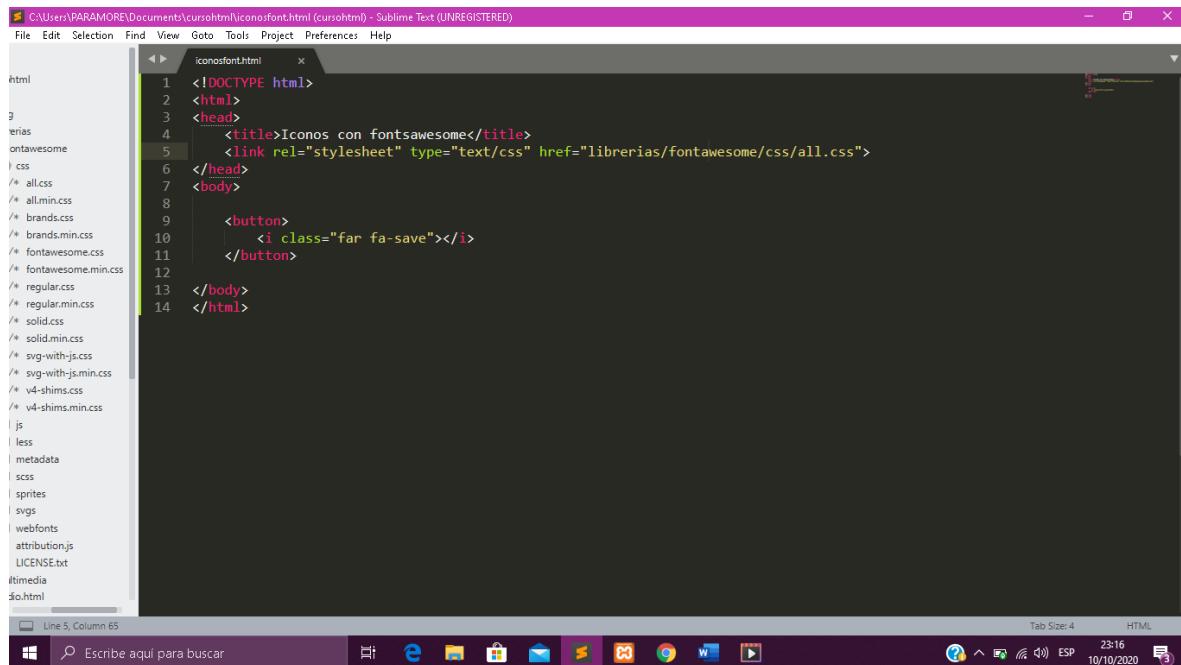

The screenshot shows the Sublime Text interface with the file 'iconosfont.html' open. The code is as follows:

```
<!DOCTYPE html>
<html>
<head>
<title>Iconos con fontawesome</title>
<link rel="stylesheet" type="text/css" href="librerias/fontawesome/css/all.css">
</head>
<body>
<button>
<i class="far fa-save"></i>
</button>
</body>
</html>
```

The sidebar on the left lists various CSS files from the 'librerias/fontawesome' directory, including 'all.css', 'all.min.css', 'brands.css', 'brands.min.css', 'fontawesome.css', 'fontawesome.min.css', 'regular.css', 'regular.min.css', 'solid.css', 'solid.min.css', 'svg-with-js.css', 'svg-with-js.min.css', 'v4-shims.css', 'v4-shims.min.css', 'js', 'less', 'metadata', 'scss', 'sprites', 'svgs', and 'webfonts'. There are also 'attribution.js', 'LICENSE.txt', 'litemedia', and 'do.html' files.



Aquí se descarga los iconos

Font Awesome

Search icons...

Start Icons Docs Support Plans Blog

Now Brewing... Font Awesome 6!

The next generation of our icon library + toolkit is coming with [more icons](#), [more styles](#), more services, and [more awesome](#). Pre-order now to get early access and releases over the next year!

Learn More!

Brands Style (fab) • 📺 • f17b • <i class="fab fa-android"></i> • 📁

Updated: Version 5.12.0

```
<!DOCTYPE html>
<html>
<head>
<title>Iconos con fontawesome</title>
<link rel="stylesheet" type="text/css" href="librerias/fontawesome/css/all.css">
</head>
<body>
<button>
<i class="far fa-save"></i> Guardar
</button>
<button style="background-color: green ">
<i class="fab fa-android"></i>
</button>
</body>
</html>
```

Escribe aquí para buscar


File Edit Selection Find View Goto Tools Project Preferences Help

iconosfont.html

Line 12, Column 46

Tab Size: 4    HTML

23:19 10/10/2020 ESP





Se agrega color

```
C:\Users\PARAMORE\Documents\cursodehtml\iconosfont.html (cursodehtml) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
iconosfont.html ×
1 <!DOCTYPE html>
2 <html>
3 <head>
4   <title>Iconos con fontawesome</title>
5   <link rel="stylesheet" type="text/css" href="librerias/fontawesome/css/all.css">
6 </head>
7 <body>
8
9   <button>
10    <i class="far fa-save"></i> Guardar
11  </button>
12  <button style="background-color: green; color: white">
13    <i class="fab fa-android"></i>
14  </button>
15
16 </body>
17 </html>

Line 12, Column 57
Tab Size: 4      HTML
Windows Escribe aquí para buscar 10/10/2020 23:21
```

A screenshot of a Windows desktop showing the Sublime Text editor. The code in the editor has been modified to include a CSS style rule for the second button: 'background-color: green; color: white'. The Sublime Text interface includes tabs for 'iconosfont.html', 'index.html', and 'index2.html'. The status bar at the bottom shows the file path 'C:\Users\PARAMORE\Documents\cursodehtml\iconosfont.html (cursodehtml)', the tab size 'Tab Size: 4', and the language 'HTML'. The taskbar at the bottom shows the date/time '10/10/2020 23:21'.

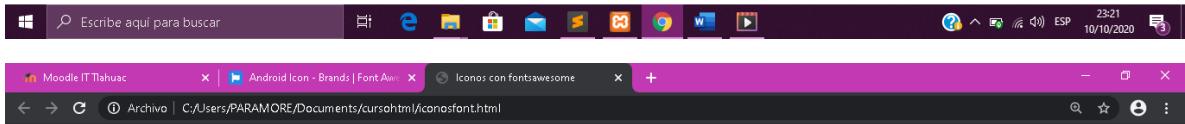


The screenshot shows a Sublime Text window with the following details:

- Title Bar:** C:\Users\PARAMORE\Documents\cursohtml\iconosfont.html (cursohtml) - Sublime Text (UNREGISTERED)
- File Menu:** File Edit Selection Find View Goto Tools Project Preferences Help
- Code Editor:** The file "iconosfont.html" is open, containing the following code:

```
<!DOCTYPE html>
<html>
<head>
    <title>Iconos con fontawsome</title>
    <link rel="stylesheet" type="text/css" href="librerias/fontawesome/css/all.css">
</head>
<body>
    <button>
        <i class="far fa-save"></i> Guardar
    </button>
    <button style="background-color: green; color: white">
        <i class="fab fa-android"></i> Android
    </button>
</body>
</html>
```
- Sidebar:** A sidebar on the left lists various CSS files and other files in the project directory.
- Status Bar:** Shows "Line 13, Column 41", "Tab Size: 4", "HTML", "23:25", "ESP", "10/10/2020", and a notification icon.


# FUENTES DE LETRA CON GOOGLE FONTS

Aquí se busca las fuentes

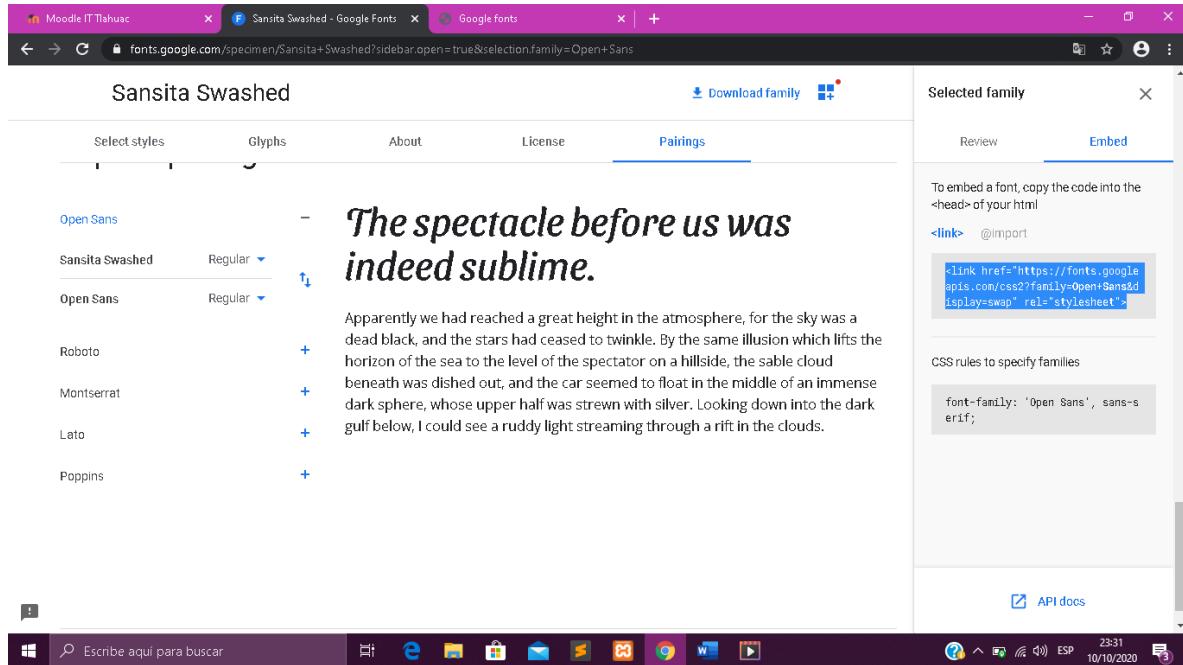

The screenshot shows the Google Fonts website interface. A font family is selected: 'Sansita Swashed'. The main content area displays a quote: 'The spectacle before us was indeed sublime.' with a detailed description below it. The right sidebar shows the 'Selected family' section with options for 'Review' and 'Embed'. The 'Embed' tab is active, showing the HTML code for embedding the font: <link href='https://fonts.googleapis.com/css2?family=Open+Sans&display=swap' rel='stylesheet'>. Below this, CSS rules to specify families are shown: font-family: 'Open Sans', sans-serif;

Se diseña el HTML, agregando el link que aparece en Google fonts, seleccionando el nombre y luego aparece el icono (+), copiamos el link que aparece en la imagen se pega en donde estamos trabajando como se muestra

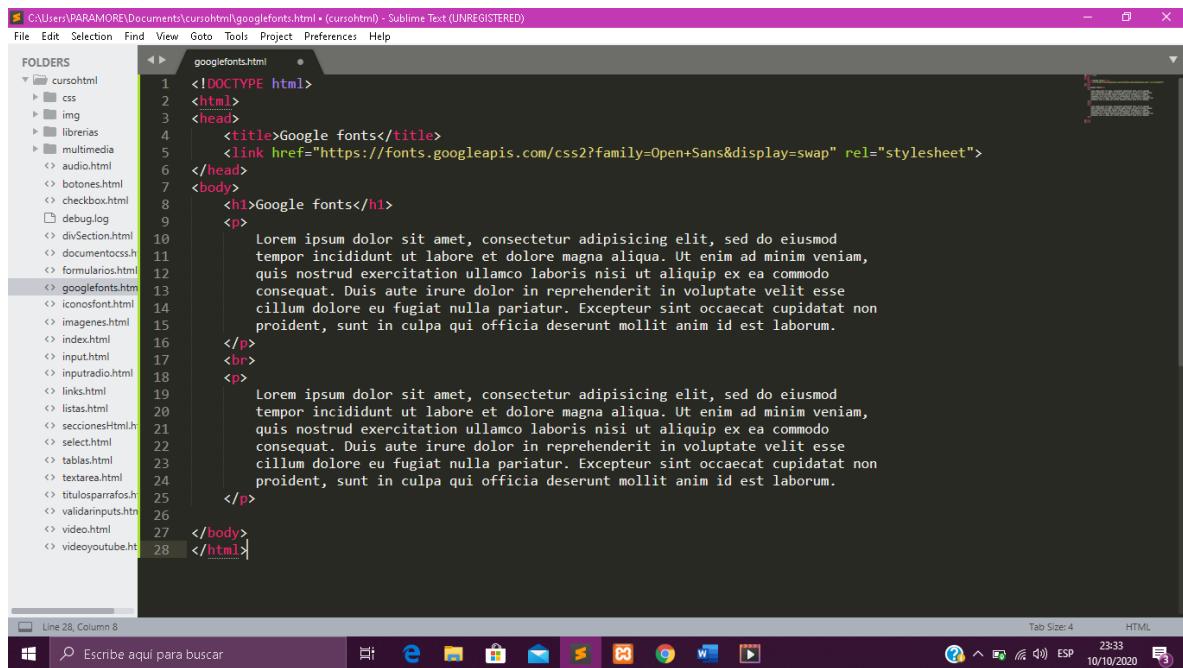

```
<!DOCTYPE html>
<html>
<head>
<title>Google fonts</title>
<link href="https://fonts.googleapis.com/css2?family=Open+Sans&display=swap" rel="stylesheet">
</head>
<body>
<h1>Google fonts</h1>
<p>Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.</p>
<br>
<p>Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.</p>
</body>
</html>
```

Luego en <p> se agrega la fuente

The screenshot shows the Google Fonts website interface. On the left, there's a sidebar with font pairing suggestions: Open Sans, Sansita Swashed (selected), Open Sans, Roboto, Montserrat, Lato, and Poppins. The main content area displays a specimen of the Sansita Swashed font in a large, bold, italicized font. Below the specimen, a paragraph of text is shown in a smaller version of the same font. To the right, there's a sidebar titled 'Selected family' with tabs for 'Review' and 'Embed'. The 'Embed' tab is active, showing the HTML code for embedding the font:


```
<link href="https://fonts.googleapis.com/css2?family=Open+Sans&display=swap" rel="stylesheet">
```

The screenshot shows a Sublime Text editor window with the file 'googlefonts.html' open. The code in the file is as follows:

```
<!DOCTYPE html>
<html>
<head>
<title>Google fonts</title>
<link href="https://fonts.googleapis.com/css2?family=Open+Sans&display=swap" rel="stylesheet">
</head>
<body>
<h1>Google fonts</h1>
<p style="font-family: 'Open Sans', sans-serif;">
    Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod
    tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim
    veniam,
    quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo
    consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse
    cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat
    non
    proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
</p>
<br>
<p>
    Lorem ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod
    tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim

```

Así es como se visualiza



## Google fonts

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.



## Podemos agregar las fuentes que queramos

A screenshot of the Sublime Text code editor. The file is named 'googlefonts.html' and contains an HTML document with two paragraphs. The first paragraph uses the 'Open Sans' font, and the second paragraph uses the 'Oswald' font. Both paragraphs have a sans-serif font style. The code editor interface shows the file structure on the left and the code on the right.




# Google fonts

Lore ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

Lore ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.

```
<!DOCTYPE html>
<html>
<head>
<title>Google fonts</title>
<link href="https://fonts.googleapis.com/css2?family=Lobster&family=Open+Sans&family=Oswald&display=swap" rel="stylesheet">
</head>
<body>
<h1 style="font-family: 'Lobster', cursive;">Google fonts</h1>
<p style="font-family: 'Open Sans', sans-serif;">
    Lore ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod
    tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam,
    quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo
    consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse
    cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non
    proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
</p>
<br>
<p style="font-family: 'Oswald', sans-serif;">
    Lore ipsum dolor sit amet, consectetur adipisicing elit, sed do eiusmod
    tempor incididunt ut labore et dolore magna aliqua. Ut enim ad minim veniam,
    quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo
    consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse
    cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non
    proident, sunt in culpa qui officia deserunt mollit anim id est laborum.
</p>
</body>
</html>
```



Google fonts


*Etiam tempore et labore dolorem magna aliqua ut enim ad minim veniam quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident sunt in culpa qui officia deserunt mollit anim id est laborum.*

*Etiam tempore et labore magna aliqua. Ut enim ad minim veniam, quis nostrud exercitation ullamco laboris nisi ut aliquip ex ea commodo consequat. Duis aute irure dolor in reprehenderit in voluptate velit esse cillum dolore eu fugiat nulla pariatur. Excepteur sint occaecat cupidatat non proident, sunt in culpa qui officia deserunt mollit anim id est laborum.*




# AGREGAR MI GOOGLE MAPS

Se realiza la búsqueda de un mapa para poder realizar el HTML

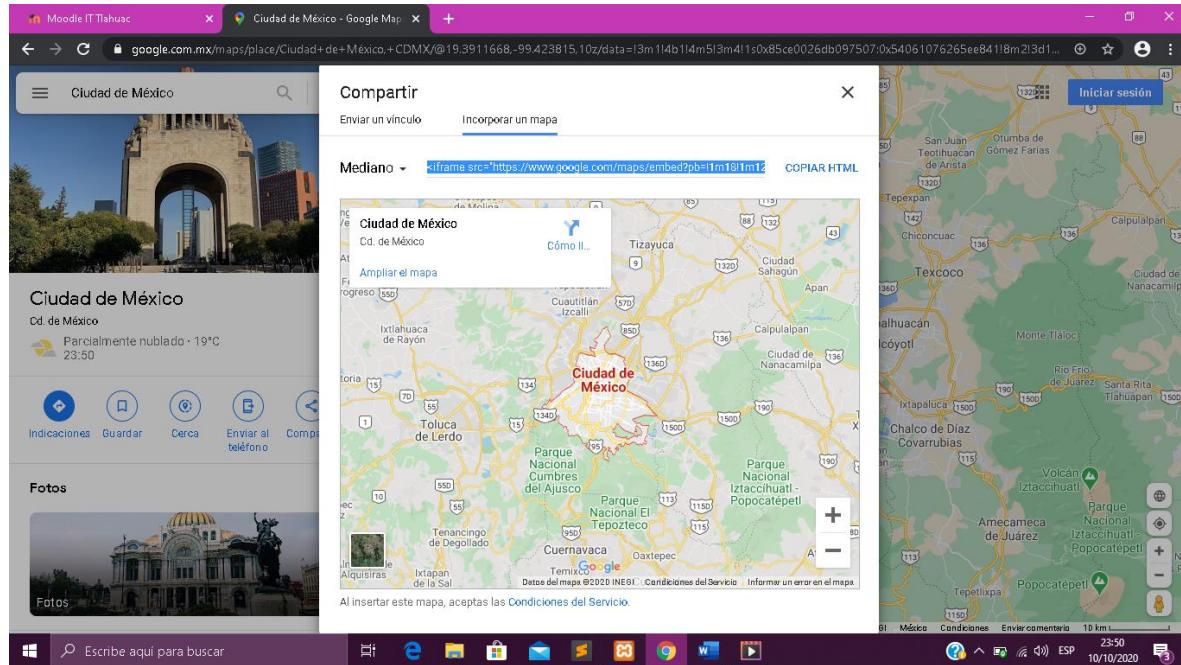


Luego se utiliza copiar HTML y lo pegamos en nuestro código

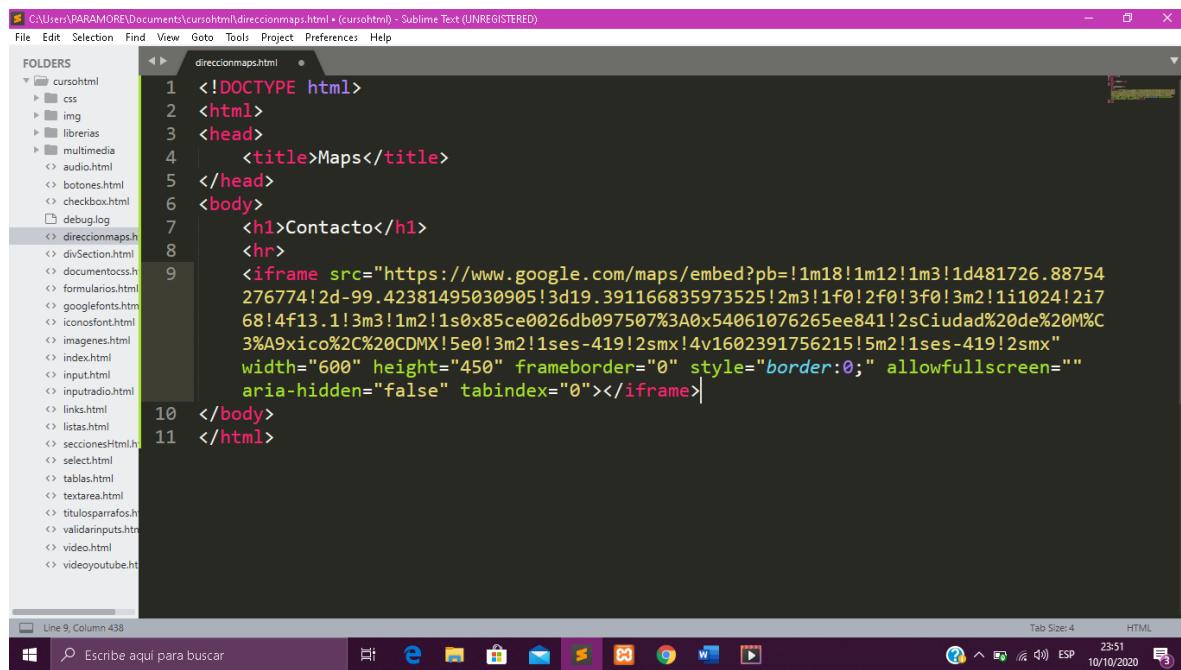



```
<!DOCTYPE html>
<html>
<head>
<title>Maps</title>
</head>
<body>
<h1>Contacto</h1>
<hr>
<iframe src="https://www.google.com/maps/embed?pb=!1m18!1m12!1m3!1d481726.88754276774!2d-99.42381495030905!3d19.391166835973525!2m3!1f0!2f0!3f0!3m2!1i1024!2i768!4f13.1!3m3!1m2!1s0x85ce0026db097507%3A0x54061076265ee841!2sCiudad%20de%20M%C3%A9xico%20CDMX!5e0!3m2!1ses-419!2smx!4v1602391756215!5m2!1ses-419!2smx" width="600" height="450" frameborder="0" style="border:0;" allowfullscreen="" aria-hidden="false" tabindex="0"></iframe>
```

Así se visualiza




## Contacto

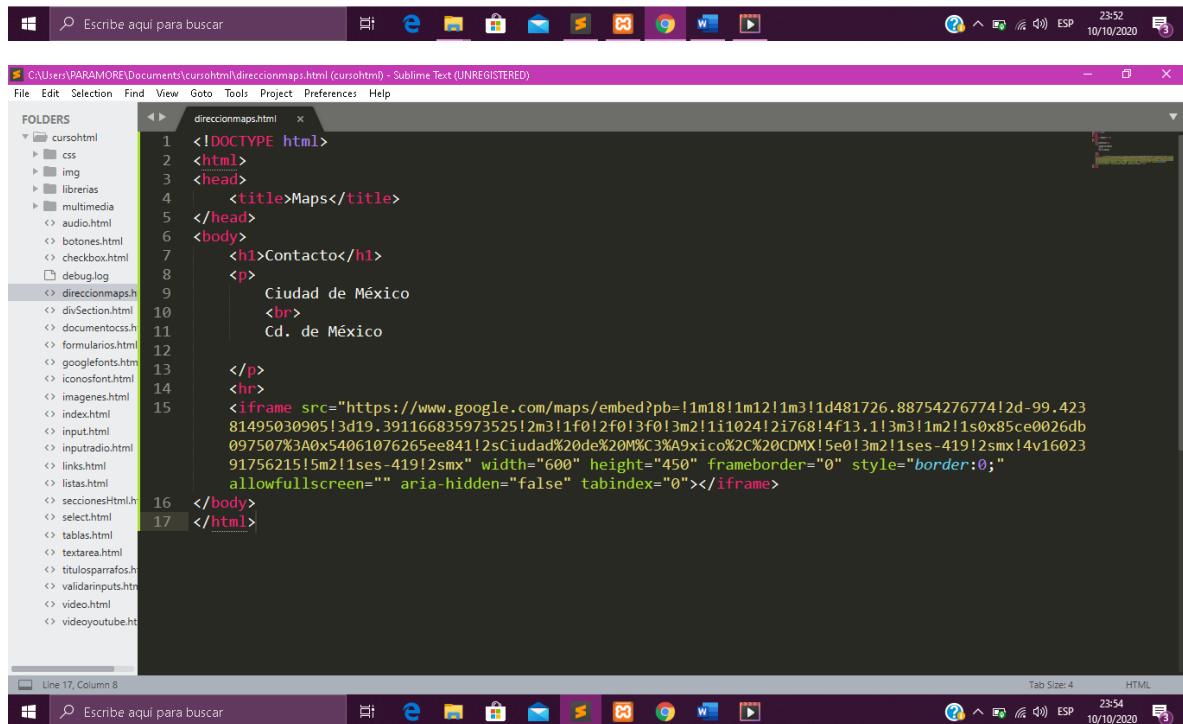

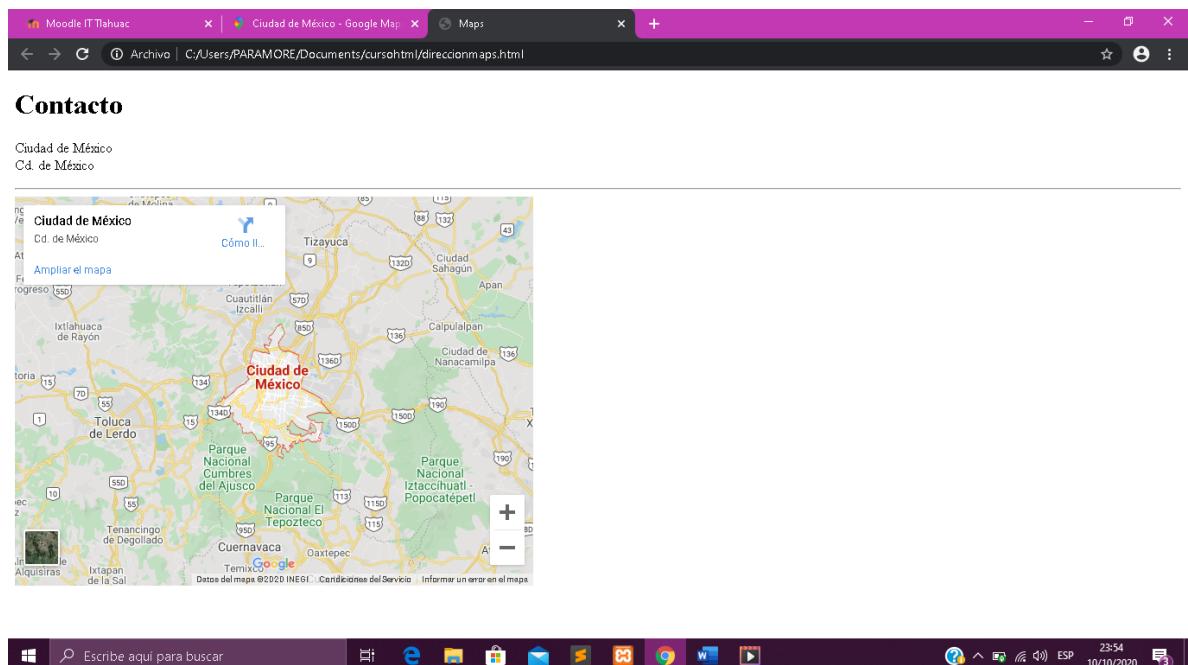

# MI PRIMER PAGINA WEB P1

Se realizará mi primer página web, para ello se requiere de Bootstrap, jQuery, todas las librerías que requerimos.

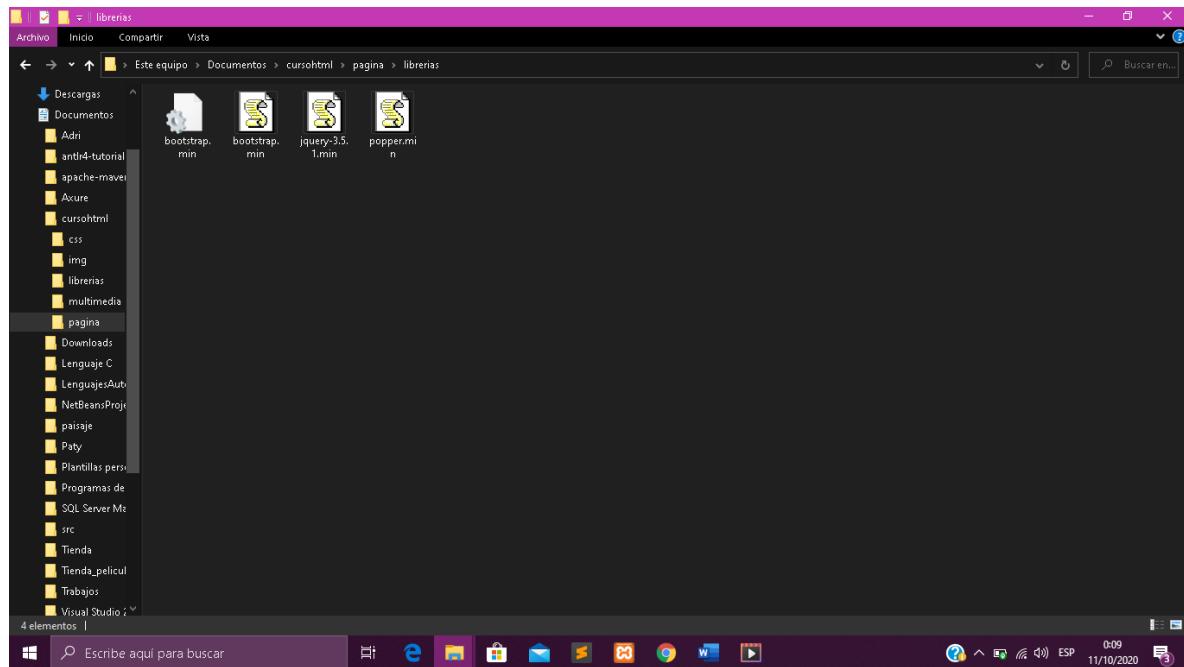

Se agrega en el código las librerías para tener listo el entorno de trabajo


```
C:\Users\PARAMORE\Documents\cursohtml\pagina\index.html • (cursohtml) - Sublime Text (UNREGISTERED)
```

```
<!DOCTYPE html>
<html>
<head>
    <title>Inicio</title>
    <link rel="stylesheet" type="text/css" href="librerias/bootstrap.min.css">
</head>
<body>
    <script src="librerias/jquery-3.5.1.min.js"></script>
    <script src="librerias/popper.min.js"></script>
    <script src="librerias/bootstrap.min.js"></script>
</body>
</html>
```

The screenshot shows the code editor for index.html in Sublime Text. The code includes the following imports:

- <link rel="stylesheet" type="text/css" href="librerias/bootstrap.min.css">
- <script src="librerias/jquery-3.5.1.min.js"></script>
- <script src="librerias/popper.min.js"></script>
- <script src="librerias/bootstrap.min.js"></script>


Se agrega el menú

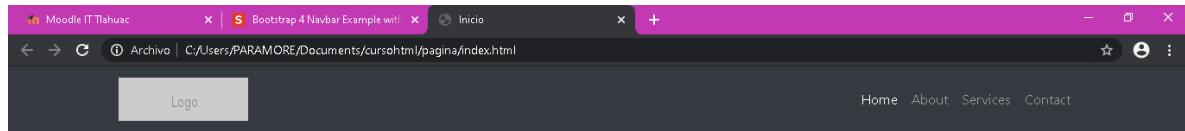

Se agregan los siguientes comandos

```
<!DOCTYPE html>
<html>
  <head>
    <title>Inicio</title>
    <link rel="stylesheet" type="text/css" href="librerias/bootstrap.min.css">
  </head>
  <body>
    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
    <!-- Navegación -->
    <nav class="navbar navbar-expand-lg navbar-dark bg-dark static-top">
      <div class="container">
        <a class="navbar-brand" href="#">
          
        </a>
        <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarSupportedContent" aria-label="Toggle navigation">
          <span class="navbar-toggler-icon"></span>
        </button>
        <div class="collapse navbar-collapse" id="navbarSupportedContent">
          <ul class="navbar-nav ml-auto">
            <li class="nav-item active">
              <a class="nav-link" href="#">Home
                <span class="sr-only">(current)</span>
              </a>
            </li>
            <li class="nav-item">
              <a class="nav-link" href="#">About</a>
            </li>
            <li class="nav-item">
              <a class="nav-link" href="#">Services</a>
            </li>
            <li class="nav-item">
              <a class="nav-link" href="#">Contact</a>
            </li>
          </ul>
        </div>
      </div>
    </nav>
    <script src="librerias/jquery-3.5.1.min.js"></script>
    <script src="librerias/popper.min.js"></script>
    <script src="librerias/bootstrap.min.js"></script>
  </body>
</html>
```

Así se visualiza al utilizar comandos de Bootstrap, para que pueda ajustarse al tamaño del dispositivo en el que se emplea

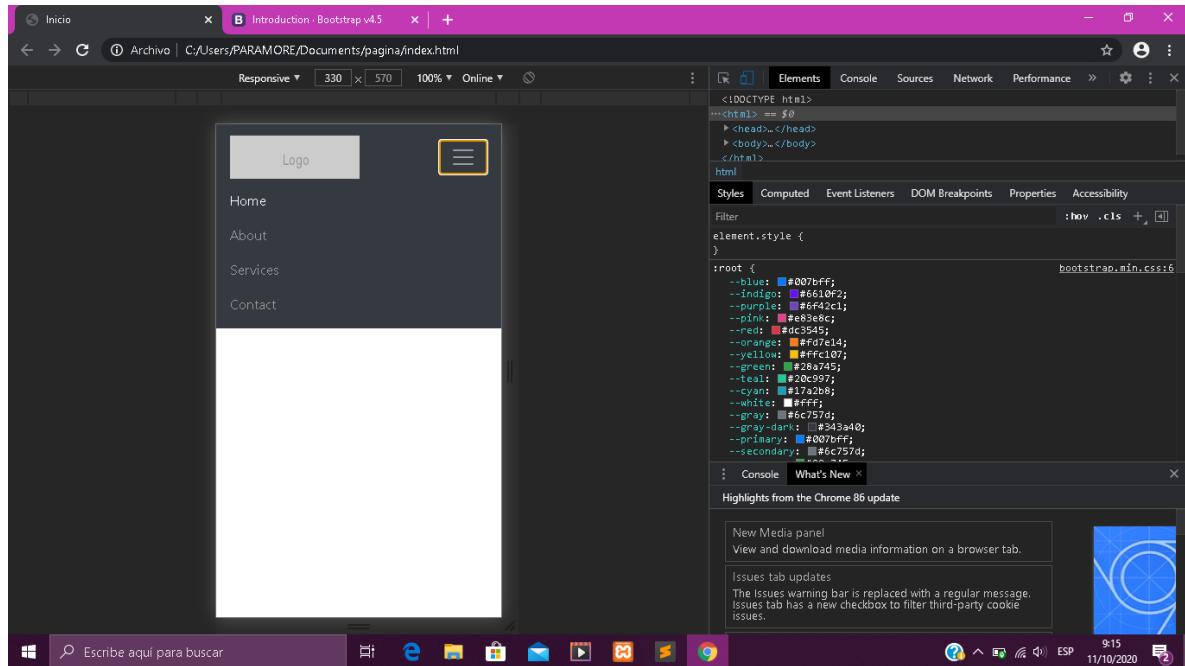

Se agrega un logo

C:\Users\PARAMORE\Documents\pagina\index.html (pagina) - Sublime Text (UNREGISTERED)

```

File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  - pagina
    - img
    - librerias
      - bootstrap.min
      - bootstrap.min.map
      - jquery-3.5.1.map
      - popper.min.js
  - debug.log
  <> index.html


index.html
1  <!DOCTYPE html>
2  <html>
3  <head>
4    <title>Inicio</title>
5    <link rel="stylesheet" type="text/css" href="librerias/bootstrap.min.css">
6  </head>
7  <body>
8
9    <meta charset="utf-8">
10   <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
11
12   <!-- Navigation -->
13   <nav class="navbar navbar-expand-lg navbar-dark bg-dark static-top">
14     <div class="container">
15       <a class="navbar-brand" href="#">
16         
17       </a>
18       <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-label="Toggle navigation">
19         <span class="navbar-toggler-icon"></span>
20       </button>
21       <div class="collapse navbar-collapse" id="navbarResponsive">
22         <ul class="navbar-nav ml-auto">
23           <li class="nav-item active">
24             <a class="nav-link" href="#">Home
25               <span class="sr-only">(current)</span>
26             </a>
27           </li>
28           <li class="nav-item">
29             <a class="nav-link" href="#">About</a>
30           </li>
31           <li class="nav-item">
32             <a class="nav-link" href="#">Services</a>
33           </li>
34           <li class="nav-item">

```

Line 16, Column 53 - Field 1 of 2

Escribe aquí para buscar

Así se visualiza

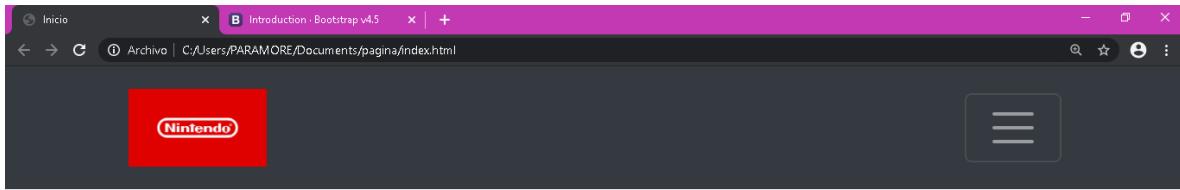

Se modifica en la línea 24 agregando inicio, en donde se encontraba el HOME. En el href se agrega el index.html

```
C:\Users\PARAMORE\Documents\pagina\index.html • (pagina) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  paginas
    img
      logo.png
    librerias
      bootstrap.min
      jquery-3.5.1.min
      popper.min.js
  debug.log
  index.html

index.html
  5   <link rel="stylesheet" type="text/css" href="librerias/bootstrap.min.css">
  6 </head>
  7 <body>
  8
  9   <meta charset="utf-8">
 10   <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
 11
 12   <!-- Navigation -->
 13   <nav class="navbar navbar-expand-lg navbar-dark bg-dark static-top">
 14     <div class="container">
 15       <a class="nav-item nav-link" href="#">
 16         
 17       </a>
 18       <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-label="Toggle navigation">
 19         <span class="navbar-toggler-icon"></span>
 20       </button>
 21       <div class="collapse navbar-collapse" id="navbarResponsive">
 22         <ul class="navbar-nav ml-auto">
 23           <li class="nav-item active">
 24             <a class="nav-link" href="index.html">Inicio<br>|(current)</a>
 25           <span class="sr-only">(current)</span>
 26         </li>
 27         <li class="nav-item">
 28           <a class="nav-link" href="#">About</a>
 29         </li>
 30         <li class="nav-item">
 31           <a class="nav-link" href="#">Contact</a>
 32         </li>
 33       </ul>
 34     </div>
 35   </nav>
 36
 37   <div class="container" style="margin-top: 20px;">
 38     <h1>¡Bienvenido a la página de ejemplo!</h1>
 39     <p>Este es un sitio web simple creado con Bootstrap 4.5.1. Puedes navegar por las páginas de inicio, sobre nosotros y contacto.</p>
 40   </div>
 41
 42 </body>
 43 </html>
```



Se agrega el siguiente código en las líneas 29, 32, 35

C:\Users\PARAMORE\Documents\pagina\index.html - (pagina) - Sublime Text (UNREGISTERED)

```

File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  paginas
    img
      logo.png
    librerias
      bootstrap.min.js
      bootstrap.min.css
      jquery-3.5.1.min.js
      popper.min.js
    debug.log
  index.html
index.html
  1 <!-- Navigation -->
  2 <nav class="navbar navbar-expand-lg navbar-dark bg-dark static-top">
  3   <div class="container">
  4     <a class="navbar-brand" href="#">
  5       
  6     </a>
  7     <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-label="Toggle navigation">
  8       <span class="navbar-toggler-icon"></span>
  9     </button>
 10    <div class="collapse navbar-collapse" id="navbarResponsive">
 11      <ul class="navbar-nav ml-auto">
 12        <li class="nav-item active">
 13          <a class="nav-link" href="index.html">Inicio
 14            <span class="sr-only">(current)</span>
 15          </a>
 16        </li>
 17        <li class="nav-item">
 18          <a class="nav-link" href="nosotros.html">Nosotros</a>
 19        </li>
 20        <li class="nav-item">
 21          <a class="nav-link" href="servicios.html">Servicios</a>
 22        </li>
 23        <li class="nav-item">
 24          <a class="nav-link" href="contactos.html">Contactos</a>
 25        </li>
 26      </ul>
 27    </div>
 28  </div>
 29 </nav>
 30
 31
 32
 33
 34
 35
 36
 37
 38
 39
 40
 41
 42

```

Line 35, Column 62

Escribe aquí para buscar

Spaces: 2    HTML    9:30    11/10/2020

Se agrega el mismo código en las páginas que son servicios, contactos, nosotros

C:\Users\PARAMORE\Documents\pagina\servicios.html - (pagina) - Sublime Text (UNREGISTERED)

```

File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  paginas
    img
      logo.png
    librerias
      bootstrap.min.js
      bootstrap.min.css
      jquery-3.5.1.min.js
      popper.min.js
    contactos.html
    debug.log
    index.html
    nosotros.html
    servicios.html
servicios.html
  1 <!DOCTYPE html>
  2 <html>
  3   <head>
  4     <title>Servicios</title>
  5     <link rel="stylesheet" type="text/css" href="librerias/bootstrap.min.css">
  6   </head>
  7   <body>
  8     <meta charset="utf-8">
  9     <meta name="viewport" content="width=device-width, initial-scale=1, shrink-to-fit=no">
 10
 11   <!-- Navigation -->
 12   <nav class="navbar navbar-expand-lg navbar-dark bg-dark static-top">
 13     <div class="container">
 14       <a class="navbar-brand" href="#">
 15         
 16       </a>
 17       <button class="navbar-toggler" type="button" data-toggle="collapse" data-target="#navbarResponsive" aria-controls="navbarResponsive" aria-expanded="false" aria-label="Toggle navigation">
 18         <span class="navbar-toggler-icon"></span>
 19       </button>
 20     <div class="collapse navbar-collapse" id="navbarResponsive">
 21       <ul class="navbar-nav ml-auto">
 22         <li class="nav-item active">
 23           <a class="nav-link" href="index.html">Inicio
 24             <span class="sr-only">(current)</span>
 25           </a>
 26         </li>
 27         <li class="nav-item">
 28           <a class="nav-link" href="nosotros.html">Nosotros</a>
 29         </li>
 30         <li class="nav-item">
 31           <a class="nav-link" href="servicios.html">Servicios</a>
 32         </li>
 33         <li class="nav-item">
 34           <a class="nav-link" href="contactos.html">Contactos</a>
 35         </li>
 36       </ul>
 37     </div>
 38   </div>
 39 </nav>
 40
 41
 42




```




Line 4, Column 19


Escribe aquí para buscar

Spaces: 2    HTML    9:35    11/10/2020

Puede visualizarse en el navegador

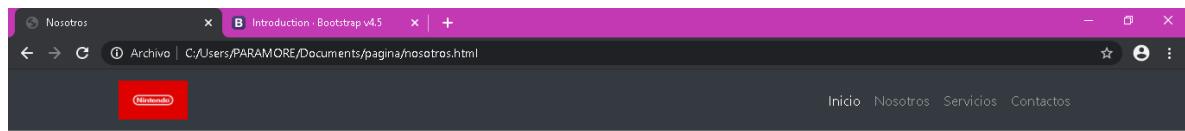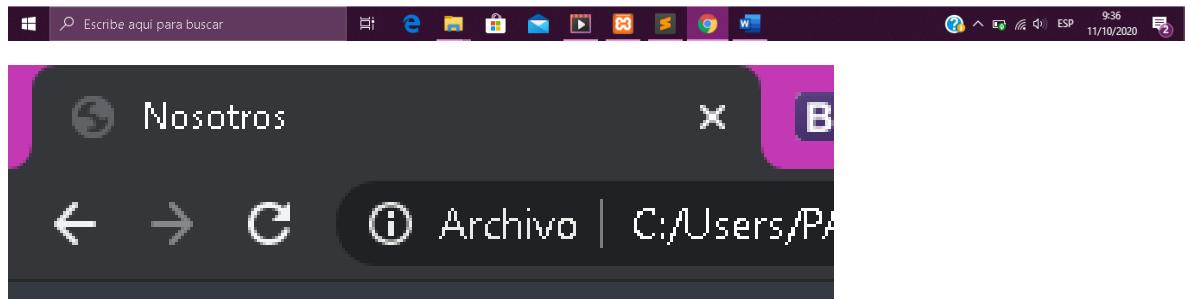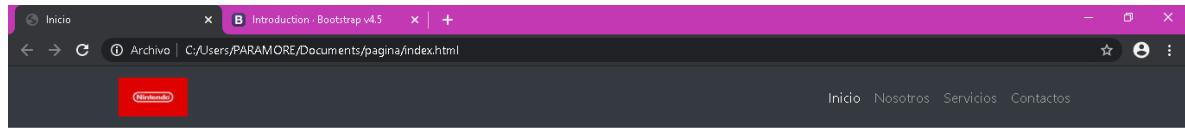

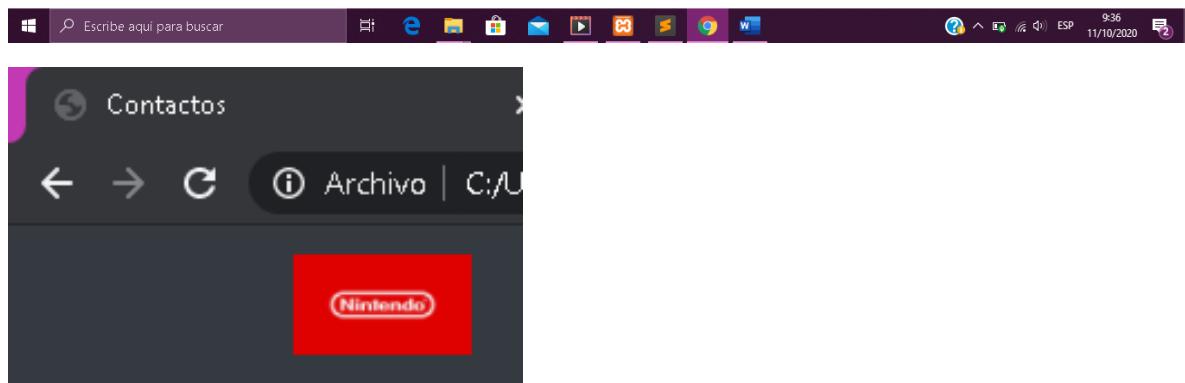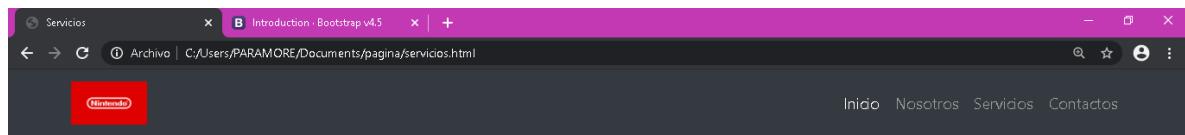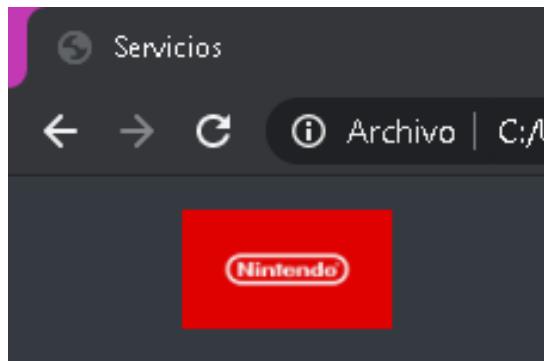

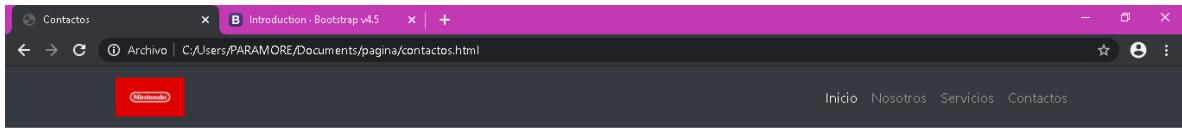

Vamos agregar un container, row que es fila, y agregamos una celda <col-sm-12>

C:\Users\PARAMORE\Documents\pagina\index.html - (pagina) - Sublime Text (UNREGISTERED)

```
File Edit Selection Find View Goto Tools Project Preferences Help
```

FOLDERS

- pagina
- img
- librerias
- contactos.html
- debug.log
- index.html
- nosotros.html
- servicios.html


index.html

```
28     <li class="nav-item">
29         <a class="nav-link" href="nosotros.html">Nosotros</a>
30     </li>
31     <li class="nav-item">
32         <a class="nav-link" href="servicios.html">Servicios</a>
33     </li>
34     <li class="nav-item">
35         <a class="nav-link" href="contactos.html">Contactos</a>
36     </li>
37 </ul>
38 </div>
39 </div>
40 </nav>
41
42 <div class="container">
43     <div class="row">
44         <div class="col-sm-12">
45             <h1>Bienvenido</h1>
46         </div>
47     </div>
48 </div>
49
50 <script src="librerias/jquery-3.5.1.min.js"></script>
51 <script src="librerias/popper.min.js"></script>
52 <script src="librerias/bootstrap.min.js"></script>
53 </body>
54 </html>
```

Line 45, Column 25

Spaces: 2    HTML

11/10/2020 9:41

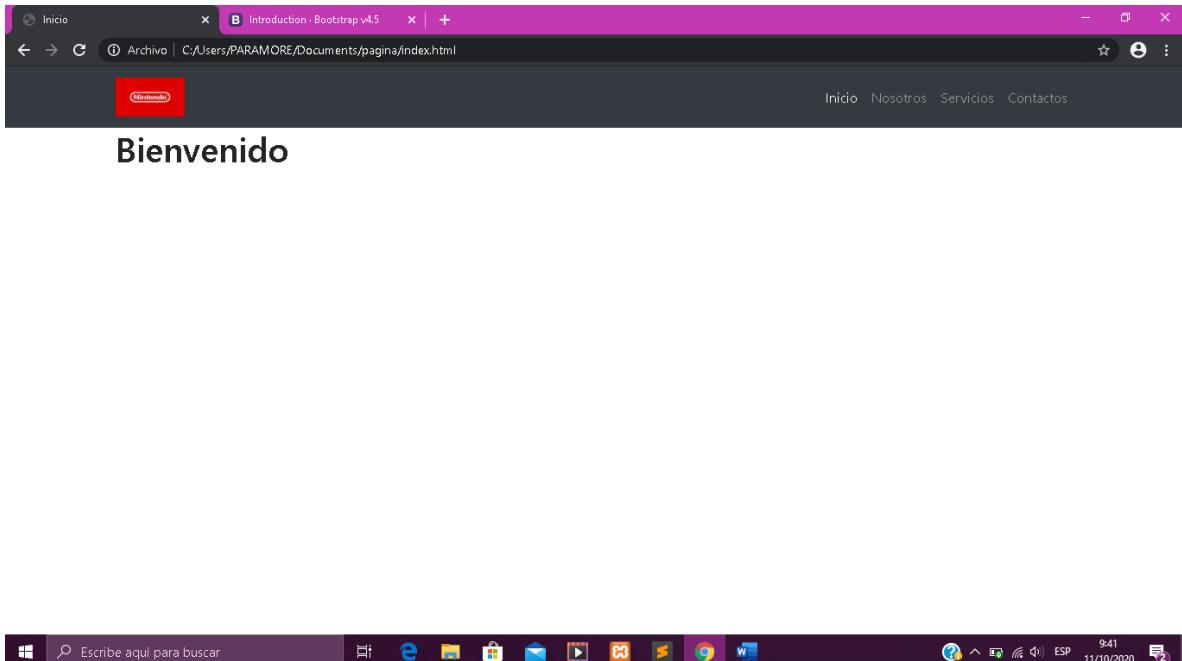

El código mostrado se le agrega a las demás páginas

A screenshot of Sublime Text showing the code for 'contactos.html'. The code is as follows:

```
File Edit Selection Find View Goto Tools Project Preferences Help
C:\Users\PARAMORE\Documents\pagina\contactos.html - Sublime Text (UNREGISTERED)
Folders
index.html
contactos.html
nosotros.html
servicios.html
37     </ul>
38   </div>
39 </div>
40 </nav>
41
42 <div class="container">
43   <div class="row">
44     <div class="col-sm-12">
45       <h1>Contactos</h1>
46     </div>
47   </div>
48 </div>
49
50   <script src="librerias/jquery-3.5.1.min.js"></script>
51   <script src="librerias/popper.min.js"></script>
52   <script src="librerias/bootstrap.min.js"></script>
53 </body>
54 </html>
```

The status bar at the bottom indicates 'Line 45, Column 24' and 'Spaces: 2 HTML'.

C:\User\PARAMORE\Documents\pagina\nosotros.html (pagina) - Sublime Text (UNREGISTERED)

```
File Edit Selection Find View Goto Tools Project Preferences Help
```

FOLDERS

- pagina
  - img
    - logo.png
  - librerias
    - bootstrap.min
    - bootstrap.min
    - jquery-3.5.1.m
    - popper.min.js
- contactos.html
- debug.log
- index.html
- nosotros.html
- servicios.html

```
index.html x contactos.html x nosotros.html x servicios.html x
```

```
36     </li>
37   </ul>
38 </div>
39 </div>
40 </nav>
41
42
43 <div class="container">
44   <div class="row">
45     <div class="col-sm-12">
46       <h1>Nosotros</h1>
47     </div>
48   </div>
49 </div>
50
51 <script src="librerias/jquery-3.5.1.min.js"></script>
52 <script src="librerias/popper.min.js"></script>
53 <script src="librerias/bootstrap.min.js"></script>
54 </body>
55 </html>
```

Line 46, Column 23

Spaces: 2    HTML    9:43    11/10/2020

C:\User\PARAMORE\Documents\pagina\servicios.html (pagina) - Sublime Text (UNREGISTERED)

```
File Edit Selection Find View Goto Tools Project Preferences Help
```

FOLDERS

- pagina
  - img
    - logo.png
  - librerias
    - bootstrap.min
    - bootstrap.min
    - jquery-3.5.1.m
    - popper.min.js
- contactos.html
- debug.log
- index.html
- nosotros.html
- servicios.html


```
index.html x contactos.html x nosotros.html x servicios.html x
```

```
33     </li>
34   <li class="nav-item">
35     <a class="nav-link" href="contactos.html">Contactos</a>
36   </li>
37 </ul>
38 </div>
39 </div>
40 </nav>
41
42
43 <div class="container">
44   <div class="row">
45     <div class="col-sm-12">
46       <h1>Servicios</h1>
47     </div>
48   </div>
49 </div>
50
51 <script src="librerias/jquery-3.5.1.min.js"></script>
52 <script src="librerias/popper.min.js"></script>
53 <script src="librerias/bootstrap.min.js"></script>
54 </body>
55 </html>
```


Line 45, Column 14

Spaces: 2    HTML    9:43    11/10/2020

Así es como se visualiza

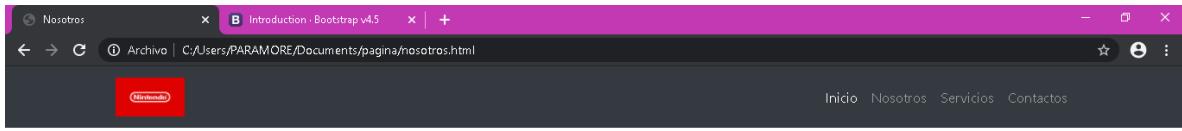


## Nosotros

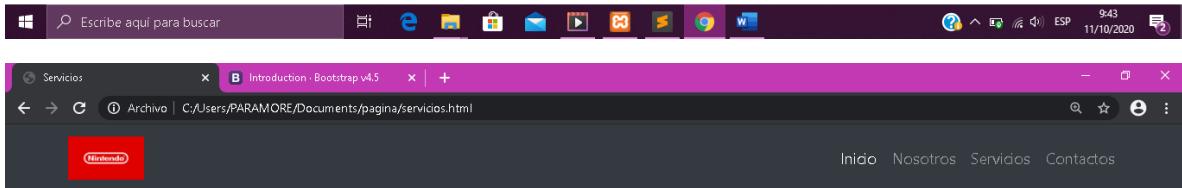

## Servicios



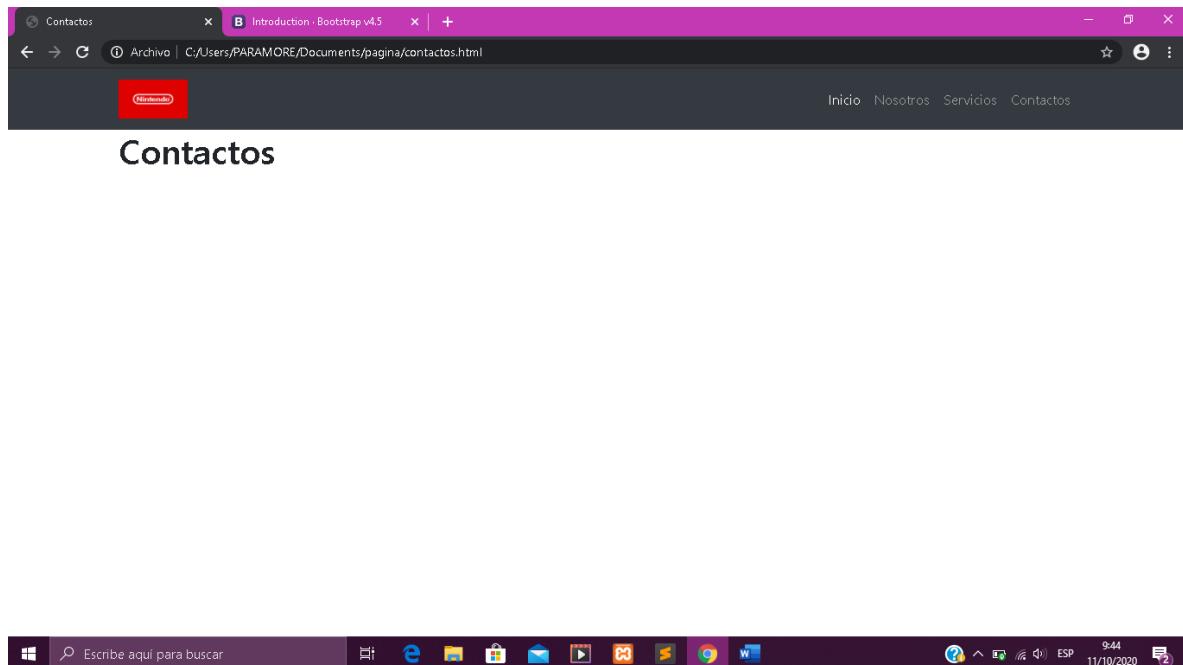


Debe redireccionar cuando pulsa logo, con el siguiente código

A screenshot of the Sublime Text editor. The title bar says "C:\Users\PARAMORE\Documents\pagina\servicios.html - Sublime Text (UNREGISTERED)". The sidebar shows a folder structure with "index.html", "contactos.html", "nosotros.html", and "servicios.html". The main pane displays the following HTML code:


```
<!DOCTYPE html>
<html>
<head>
    <title>Servicios</title>
    <link rel="stylesheet" type="text/css" href="librerias/bootstrap.min.css">
</head>
<body>

    <meta charset="utf-8">
    <meta name="viewport" content="width=device-width, initial-scale=1,
        shrink-to-fit=no">
    <!-- Navigation -->
    <nav class="navbar navbar-expand-lg navbar-dark bg-dark static-top">
        <div class="container">
            <a class="navbar-brand" href="index.html">
                
            </a>
            <button class="navbar-toggler" type="button" data-toggle="collapse"
                data-target="#navbarResponsive" aria-controls="navbarResponsive"
                aria-expanded="false" aria-label="Toggle navigation">
                <span class="navbar-toggler-icon"></span>
            </button>
```

The code is syntax-highlighted with colors for different tags and attributes.

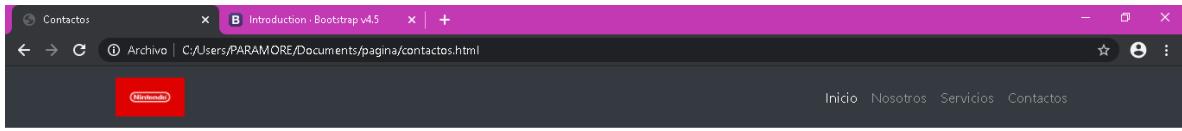

## Contactos

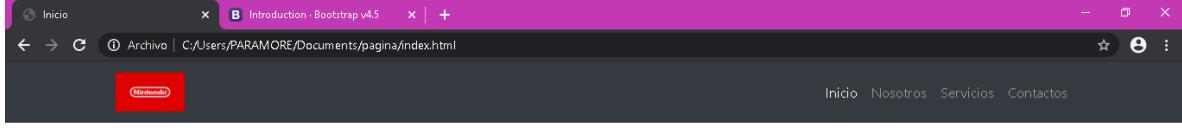

Bienvenido



# MI PRIMER PAGINA WEB P2

Se utiliza la herramienta Bootstrap, en este caso usamos jumbotron

The screenshot shows the Bootstrap v4.5 documentation page for the Jumbotron component. The URL is [getbootstrap.com/docs/4.5/components/jumbotron/](https://getbootstrap.com/docs/4.5/components/jumbotron/). The page has a purple header with the Bootstrap logo and navigation links for Home, Documentation, Examples, Icons, Themes, Expo, and Blog. A 'Download' button is also present. On the left, there's a sidebar with 'Getting started', 'Layout', 'Content', and a 'Components' section listing Alerts, Badge, Breadcrumb, Buttons, Button group, Card, Carousel, Collapse, Dropdowns, Forms, Input group, and Jumbotron. The main content area features a large heading 'Jumbotron' and a sub-heading 'Lightweight, flexible component for showcasing hero unit style content.' Below this is a sample code snippet:

```
<div class="jumbotron">
  <h1 class="display-4">Hello, world!</h1>
  <p class="lead">This is a simple hero unit, a simple jumbotron-style component for calling extra attention to certain elements. It uses utility classes for typography and spacing to space content out within the larger container.</p>
  <hr class="my-4">
  <p>It uses utility classes for typography and spacing to space content out within the larger container.</p>
  <a class="btn btn-primary btn-lg" href="#" role="button">Learn more</a>
</div>
```

Copiendo el siguiente código

The screenshot shows the same Bootstrap v4.5 documentation page for the Jumbotron component. The URL is [getbootstrap.com/docs/4.5/components/jumbotron/](https://getbootstrap.com/docs/4.5/components/jumbotron/). The page structure is identical to the previous screenshot. In the main content area, there is a 'Copy' button next to the sample code snippet. The copied code is:


```
<div class="jumbotron">
  <h1 class="display-4">Hello, world!</h1>
  <p class="lead">This is a simple hero unit, a simple jumbotron-style component for calling extra attention to certain elements. It uses utility classes for typography and spacing to space content out within the larger container.</p>
  <hr class="my-4">
  <p>It uses utility classes for typography and spacing to space content out within the larger container.</p>
  <a class="btn btn-primary btn-lg" href="#" role="button">Learn more</a>
</div>
```

Se agrega al código de index.html

The screenshot shows the Sublime Text editor with the file 'index.html' open. The code displays a navigation bar with links to 'Servicios' and 'Contactos', followed by a jumbotron section containing a heading 'Hello, world!', a lead paragraph, and a button labeled 'Learn more'. The code also includes script tags for jQuery, Popper.js, and Bootstrap.js.

```
</li>
<li class="nav-item">
    <a class="nav-link" href="servicios.html">Servicios</a>
</li>
<li class="nav-item">
    <a class="nav-link" href="contactos.html">Contactos</a>
</li>
</ul>
</div>
</div>
</nav>
<div class="container">
<div class="row">
    <div class="col-sm-12">
        <div class="jumbotron">
            <h1 class="display-4">Hello, world!</h1>
            <p class="lead">This is a simple hero unit, a simple jumbotron-style component for calling extra attention to featured content or information.</p>
            <hr class="my-4">
            <p>It uses utility classes for typography and spacing to space content out within the larger container.</p>
            <a class="btn btn-primary btn-lg" href="#" role="button">Learn more</a>
        </div>
    </div>
</div>
</div>
</div>
<script src="librerias/jquery-3.5.1.min.js"></script>
<script src="librerias/popper.min.js"></script>
<script src="librerias/bootstrap.min.js"></script>
</body>
```

Así se visualiza

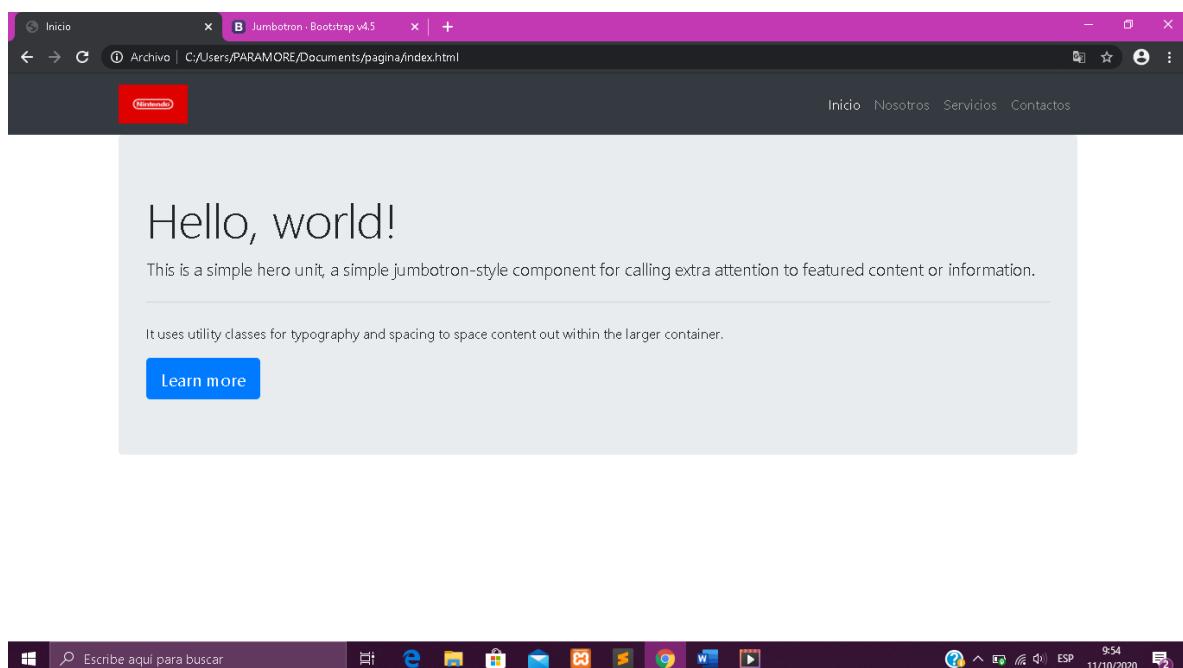


Se agrega lo siguiente en el código

The screenshot shows the Sublime Text editor with the file 'index.html' open. The code is as follows:

```
36     </li>
37   </ul>
38 </div>
39 </div>
40 </nav>
41
42 <div class="container">
43   <div class="row">
44     <div class="col-sm-12">
45       <div class="jumbotron">
46         <h1 class="display-4">Nintendo</h1>
47         <p class="lead">La mejor compagnia de videojuegos</p>
48         <hr class="my-4">
49         <p>Aqui encontraras variedad de juegos y consolas y productos Nintendo</p>
50         <a class="btn btn-primary btn-lg" href="contactos.html" role="button">Contactos</a>
51     </div>
52   </div>
53 </div>
54 </div>
55
56 <script src="librerias/jquery-3.5.1.min.js"></script>
57 <script src="librerias/popper.min.js"></script>
58 <script src="librerias/bootstrap.min.js"></script>
59 </body>
60 </html>
```

The status bar at the bottom indicates 'Line 49, Column 81'. The taskbar below shows icons for various Windows applications.

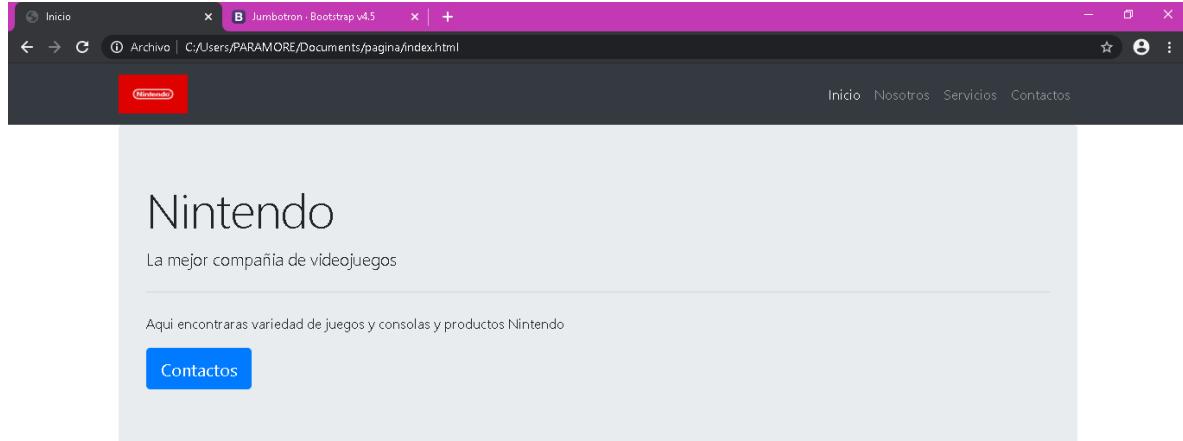

Para la pestaña nosotros agregamos un código más de Bootstrap

```
C:\Users\PARAMORE\Documents\pagina\nosotros.html (pagina) - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help
FOLDERS
  pagina
    img
      logo.png
  librerias
    bootstrap.min
    jquery-3.5.1.m
    popper.min.js
  contactos.html
  debug.log
  index.html
  nosotros.html
  servicios.html
index.html x contactos.html x nosotros.html x servicios.html x
28      <li class="nav-item">
29        <a class="nav-link" href="nosotros.html">Nosotros</a>
30      </li>
31      <li class="nav-item">
32        <a class="nav-link" href="servicios.html">Servicios</a>
33      </li>
34      <li class="nav-item">
35        <a class="nav-link" href="contactos.html">Contactos</a>
36      </li>
37    </ul>
38  </div>
39 </div>
40 </nav>
41
42
43 <div class="container">
44   <div class="row">
45     <div class="col-sm-12">
46       <div class="jumbotron jumbotron-fluid">
47         <div class="container">
48           <h1 class="display-4">Nosotros</h1>
49           <p class="lead">Es una empresa de entretenimiento dedicada a la investigación y desarrollo, producción y distribución de software y hardware de videojuegos, y juegos de cartas, con sede en Kioto, Japón</p>
50         </div>
51       </div>
52     </div>
53   </div>
54 </div>
55
56 <script src="librerias/jquery-3.5.1.min.js"></script>
<script src="librerias/popper_min.js"></script>
Line 48, Column 43
Spaces: 2
HTML
Windows Escribe aquí para buscar
E-mail
File
Edit
View
Start
Search
Task View
File Explorer
This PC
Downloads
OneDrive
Mail
Photos
Videos
Music
PowerShell
Calculator
File History
File History
10:04
ESP
11/10/2020
```



Se agrega cards group para poder poner un diseño en nuestra pestaña servicios

C:\Users\PARAMORE\Documents\pagina\servicios.html - Sublime Text (UNREGISTERED)

Folders

- pagina
- img
- logo.png
- librerias
- bootstrap.min
- bootstrap.min
- jquery-3.5.1.m
- popper.min.js
- contactos.html
- debug.log
- index.html
- nosotros.html
- servicios.html

```
39   </div>
40 </nav>
41
42
43 <div class="container">
44   <div class="row">
45     <div class="col-sm-12">
46       <div class="jumbotron jumbotron-fluid">
47         <div class="container">
48           <h1 class="display-4">Servicios</h1>
49           <p class="lead">
50             <div class="card-group">
51               <div class="card">
52                 
53                 <div class="card-body">
54                   <h5 class="card-title">Card title</h5>
55                   <p class="card-text">This is a wider card with supporting text below as a natural lead-in to additional content. This content is a little bit longer.</p>
56                   <p class="card-text"><small class="text-muted">Last updated 3 mins ago</small></p>
57                 </div>
58               </div>
59               <div class="card">
60                 
61                 <div class="card-body">
62                   <h5 class="card-title">Card title</h5>
63                   <p class="card-text">This card has supporting text below as a natural lead-in to additional content.</p>
64                   <p class="card-text"><small class="text-muted">Last updated 3 mins ago</small></p>
65                 </div>
66               </div>
67             </div>


```

Line 48, Column 44

Spaces: 2    HTML

Windows Escribe aquí para buscar    e Microsoft Edge Apl. de compras Correo Noticias F1 WPS Office YouTube

10:11 ESP 11/10/2020

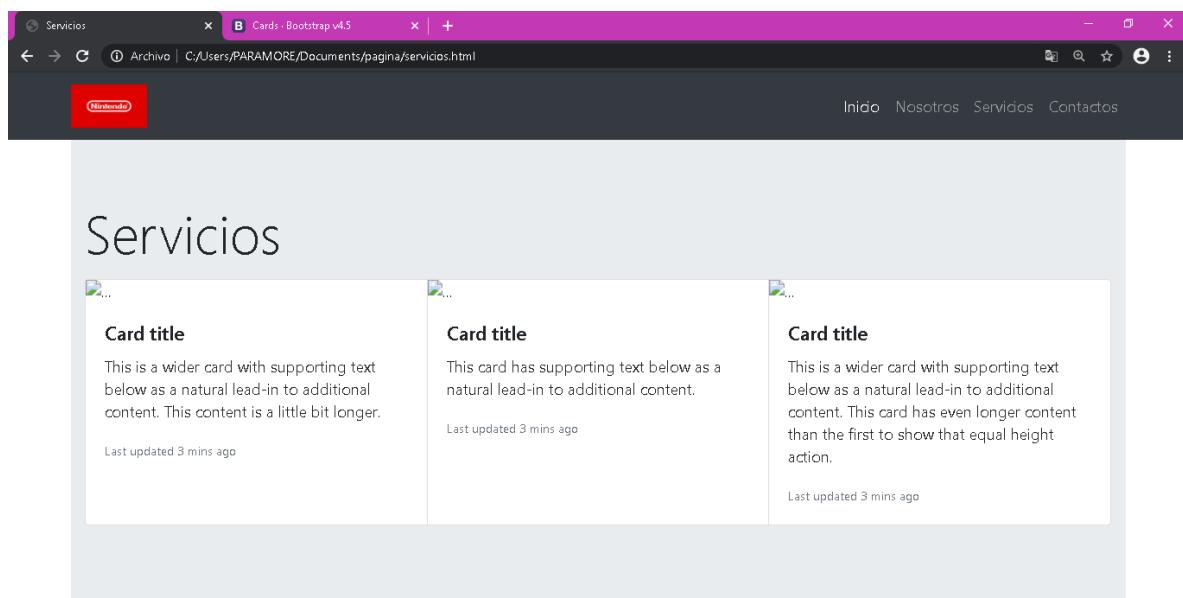

Vamos agregar imágenes y descripción.

C:\Users\PARAMORE\Documents\pagina\servicios.html - Sublime Text (UNREGISTERED)

Folders

- pagina
  - img
    - logo.png
    - mario.jpg
    - super.jpg
    - zelda.jpg
  - librerias
    - bootstrap.min
    - jquery-3.5.1.m
    - popper.min.js
- contactos.html
- debug.log
- index.html
- nosotros.html
- servicios.html

```

42
43 <div class="container">
44   <div class="row">
45     <div class="col-sm-12">
46       <div class="jumbotron jumbotron-fluid">
47         <div class="container">
48           <h1 class="display-4">servicios</h1>
49           <p class="lead">
50             Visitad el portal para ver vuestra propia línea temporal interactiva de Mario y descubrir los próximos eventos que llegarán a juegos como Super
51             Mario Maker 2 y Super Smash Bros. Ultimate, ¡incluso un festival de Splatoon 2 inspirado en Super Mario!
52             <p class="card-text">Este año se cumple el 35.o aniversario del lanzamiento original de Super Mario Bros. en Japón y hay un montón de maneras
53             en las que podrás participar en esta ocasión tan especial, ¡incluido nuestro recientemente inaugurado portal del 35.o aniversario de Super
54             Mario Bros.!
55             Visitad el portal para ver vuestra propia línea temporal interactiva de Mario y descubrir los próximos eventos que llegarán a juegos como Super
56             Mario Maker 2 y Super Smash Bros. Ultimate, ¡incluso un festival de Splatoon 2 inspirado en Super Mario!
57             <p class="card-text"><small>Last updated 3 mins ago</small></p>
58           </div>
59         </div>
60       <div class="card">
61         
62         <div class="card-body">
63           <h3 class="card-title">Hyrule Warriors</h3>
64           <p class="card-text">Descubre el Hyrule de 100 años antes del juego Legend of Zelda: Breath of the Wild y experimenta los eventos del gran
65             cataclismo
66             Únete a la lucha que puso a Hyrule de rodillas. Conoce más a Zelda, a los cuatro campeones, al rey de Hyrule y mucho más a través de dramáticas
67             animaciones mientras intentas salvar el reino del Cataclismo. Comienza tu aventura en el juego Hyrule Warriors: Age of Calamity para descubrir
68             qué fue lo que pasó hace 100 años.</p>
69             <p class="card-text"><small>Last updated 3 mins ago</small></p>
70           </div>
71         <div class="card">
72           
73           <div class="card-body">
74             <h3 class="card-title">Super Smash Bros.</h3>
75             <p class="card-text">Tras adquirir el pase de combatientes tendrás acceso a contenido adicional que incluye cinco combatientes jugables, cinco
76               escenarios y más temas musicales.</p>
77             <p class="card-text"><small>Last updated 3 mins ago</small></p>
78           </div>
79         </div>
80       </div>
81     </div>
82   </div>

```

Line 72, Column 60

Spaces: 2    HTML

Escribe aquí para buscar

Windows Taskbar: Escribe aquí para buscar, Internet Explorer, Microsoft Edge, Microsoft Store, Correo, Noticias, YouTube, Word, Excel, PowerPoint, OneDrive, OneNote, File Explorer, Control Panel, 14:32, ESP, 11/10/2020

Servicios

Archivo | C:\Users\PARAMORE\Documents\pagina\servicios.html

### Mario Bros

Este año se cumple el 35.<sup>o</sup> aniversario del lanzamiento original de Super Mario Bros. en Japón y hay un montón de maneras en las que podrás participar en esta ocasión tan especial, ¡incluido nuestro recientemente inaugurado portal del 35.<sup>o</sup> aniversario de Super Mario Bros.! Visitad el portal para ver vuestra propia línea temporal interactiva de Mario y descubrir los próximos eventos que llegarán a juegos como Super Mario Maker 2 y Super Smash Bros. Ultimate, ¡incluso un festival de Splatoon 2 inspirado en Super Mario!

Last updated 3 mins ago

### Hyrule warriors

Descubre el Hyrule de 100 años antes del juego Legend of Zelda: Breath of the Wild y experimenta los eventos del gran cataclismo. Únete a la lucha que puso a Hyrule de rodillas. Conoce más a Zelda, a los cuatro campeones, al rey de Hyrule y mucho más a través de dramáticas animaciones mientras intentas salvar el reino del Cataclismo. Comienza tu aventura en el juego Hyrule Warriors: Age of Calamity para descubrir qué fue lo que pasó hace 100 años.

Last updated 3 mins ago

### Super Smash Bros

Tras adquirir el pase de combatientes tendrás acceso a contenido adicional que incluye cinco combatientes jugables, cinco escenarios y más temas musicales.

Last updated 3 mins ago

Windows Taskbar: Escribe aquí para buscar, Internet Explorer, Microsoft Edge, Microsoft Store, Correo, Noticias, YouTube, Word, Excel, PowerPoint, OneDrive, OneNote, File Explorer, Control Panel, 14:32, ESP, 11/10/2020

Se agrega información en contacto, con los siguientes códigos

C:\Users\PARAMORE\Documents\pagina\contactos.html (pagina) - Sublime Text (UNREGISTERED)

Folders

- pagina
  - img
    - logo.png
    - mario.jpg
    - super.jpg
    - zelda.jpg
  - librerias
    - bootstrap.min
    - bootstrap.min
    - jquery-3.5.1.m
    - popper.min.js
- contactos.html
- debug.log
- index.html
- nosotros.html
- servicios.html


```
<ul>
    <li class="nav-item"><a class="nav-link" href="nosotros.html">Nosotros</a></li>
    <li class="nav-item"><a class="nav-link" href="servicios.html">Servicios</a></li>
    <li class="nav-item"><a class="nav-link" href="contactos.html">Contactos</a></li>
</ul>
</div>
</div>
</nav>

<div class="container">
    <div class="row">
        <div class="col-sm-12">
            <div class="card jumbotron-fluid">
                <div class="container">
                    <h1 class="display-4">Contacto</h1>
                    <div class="row">
                        <div class="col-sm-7">
                            <iframe src="https://www.google.com/maps/embed?pb=Im18!1m12!1m3!1d481726.88754276774!2d-99.42381495030905!3d19.391166835973525!2m3!1f0!2f0!3f0!3m2!1s11024!2i1768!4f13.1!3m1!1s0x85ce0026db097507%3A0x54061076265ee841!2sciudad%20de%20m%C3%A9xico!2C2K0CDMX!5e0!3m2!1ses-419!2smx!4v1602447276487!5m2!1ses-419!2smx" width="600" height="450" frameborder="0" style="border:0;" allowfullscreen="" aria-hidden="false" tabindex="0"></iframe>
                        </div>
                        <div class="col-sm-5">
                            <p>Correo: correo@gmail.com</p>
                            <p>Teléfono: 5524638190</p>
                            <p>Colonia pino numero 50</p>
                        </div>
                    </div>
                </div>
            </div>
        </div>
    </div>
</div>
<script src="librerias/jquery-3.5.1.min.js"></script>
<script src="librerias/popper.min.js"></script>
<script src="librerias/bootstrap.min.js"></script>
</body>
</html>
```

Line 51, Column 21



Spaces: 2    HTML

Windows taskbar: Escribe aquí para buscar, e, Microsoft Edge, Microsoft Store, Mail, File Explorer, Photos, YouTube, Word, Excel, Powerpoint, OneDrive, Task View, Taskbar settings, 15:19, 11/10/2020

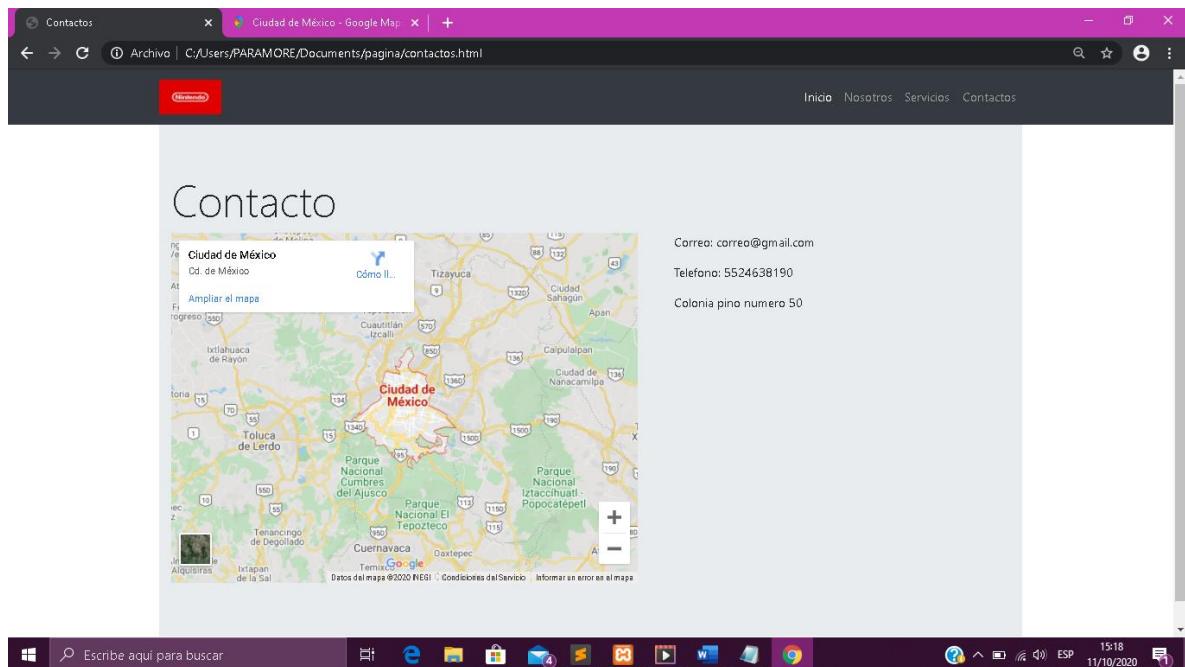

# PROBAR PAGINA WEB EN UN SERVIDOR LOCAL

Se utiliza el localhost, para poder visualizar la página web. Agregamos nuestra carpeta en htdocs en XAMPP

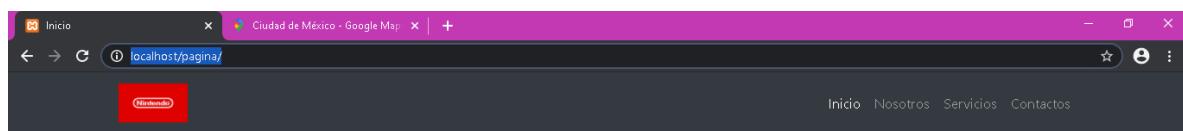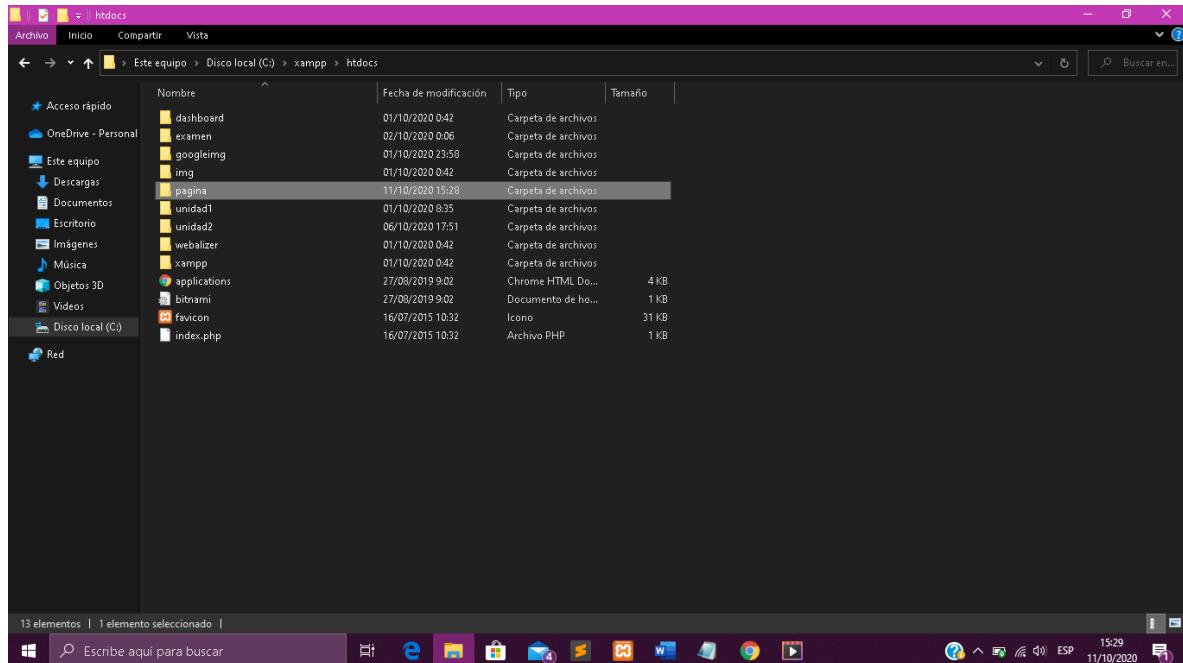


Entramos al cmd para verificar que estamos en una conexión local, Agregamos el comando ipconfig, nos mostrara ip.

```
cmd Símbolo del sistema
Estado de los medios. . . . . : medios desconectados
Sufijo DNS específico para la conexión. . . :
Adaptador de LAN inalámbrica Wi-Fi:
  Sufijo DNS específico para la conexión. . . : huawei.net
  Dirección IPv6 . . . . . : 2806:106e:1d2afa:ec7e:c9ba:eed7:49f1
  Dirección IPv6 temporal. . . . . : 2806:106e:1d2afa:8d95:6c03:3b9a:cba4
  Vínculo: dirección IPv6 local. . . : fe00:ec7e:c9ba:eed7:49f1%9
  Dirección IPv4. . . . . : 192.168.1.92
  Máscara de subred. . . . . : 255.255.255.0
  Puerta de enlace predeterminada. . . . . : fe80::129
                                         192.168.1.254

Adaptador de Ethernet Conexión de red Bluetooth:
  Estado de los medios. . . . . : medios desconectados
  Sufijo DNS específico para la conexión. . . :

C:\Users\PARAMORE>
```

Copiamos la dirección ipv4 y lo agregamos en el url de Google, en donde este localhost

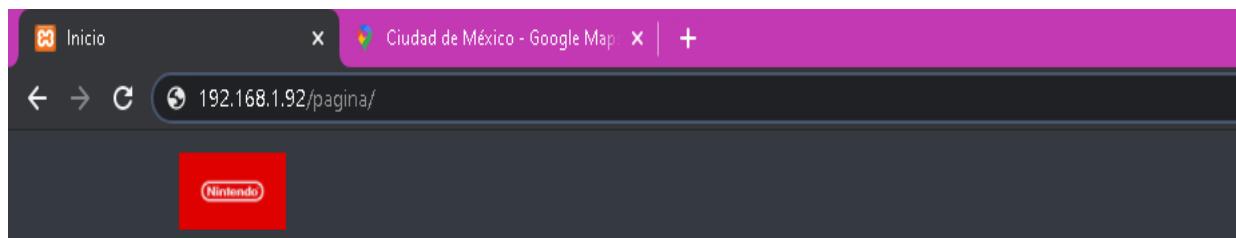

Esto es para ver que si esta en un servidor local