


Adriana Lea Sánchez


Tarea UD6

<https://github.com/AdrianaLeaS/dwcs/tree/main/www/UD6/entregaTarea>


1. Ejemplo de registro de un usuario

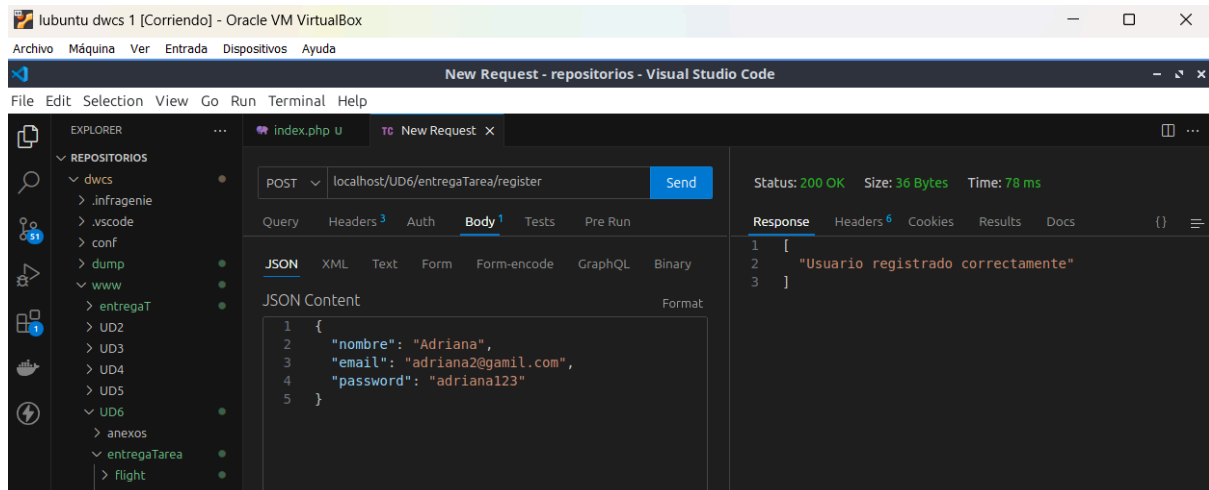


2. Ejemplo de login del usuario registrado. Se ve el token generado que se utiliza en la configuración para el resto de consultas. Ver configuración en punto 8.

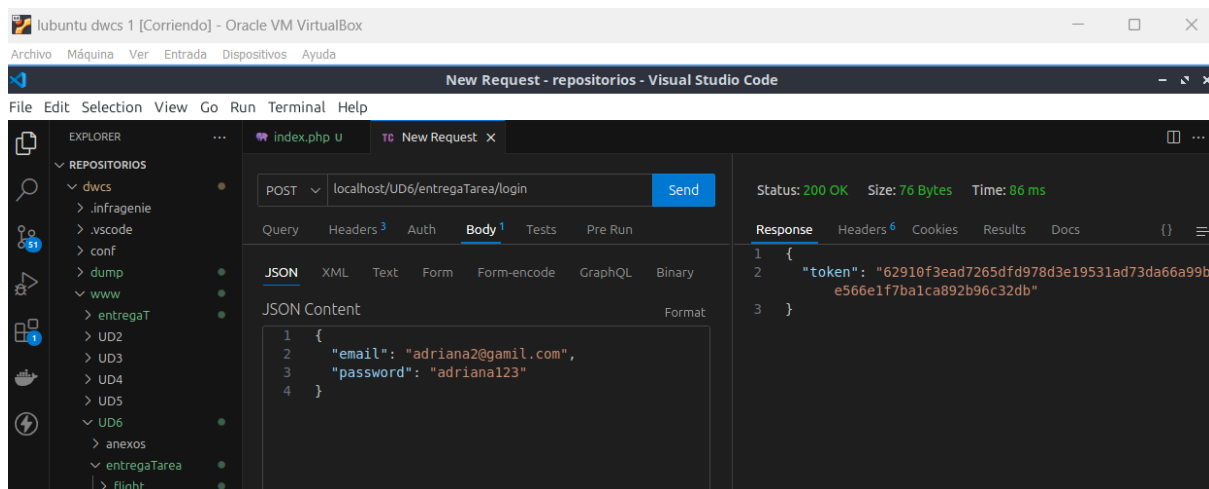


3. Ejemplo de primer contacto añadido.

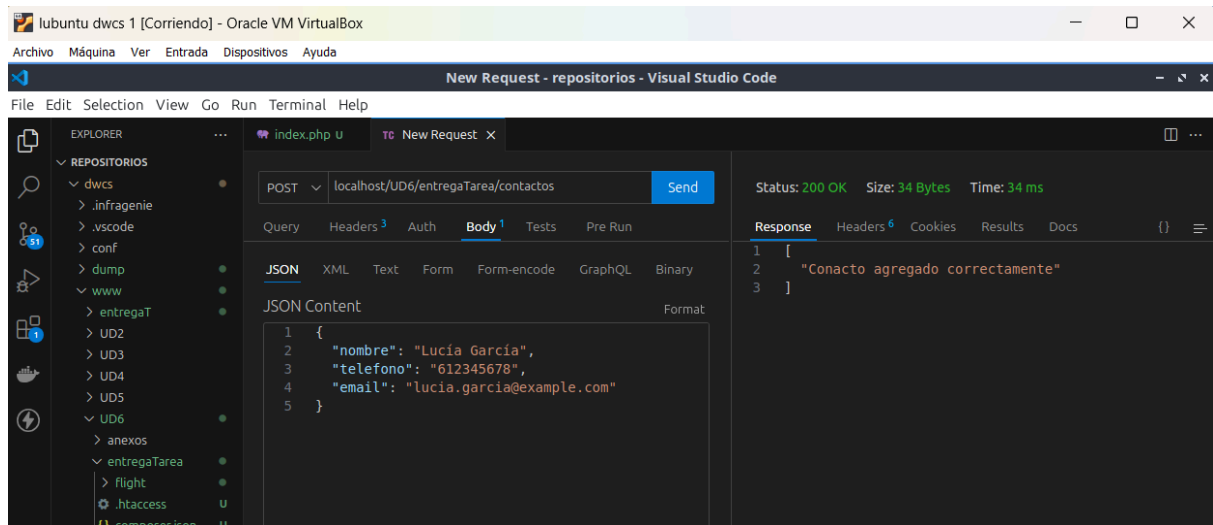

4. Ejemplo de listado de todos los contactos.

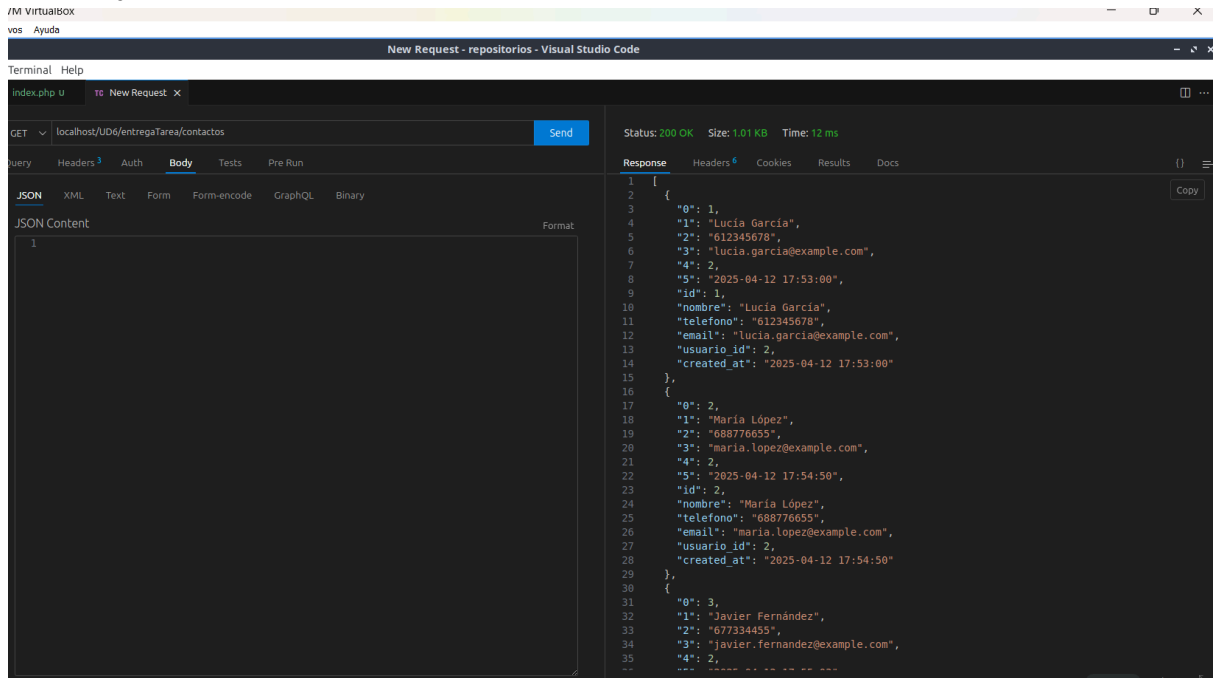

5. Ejemplo de contacto buscado por id=2.

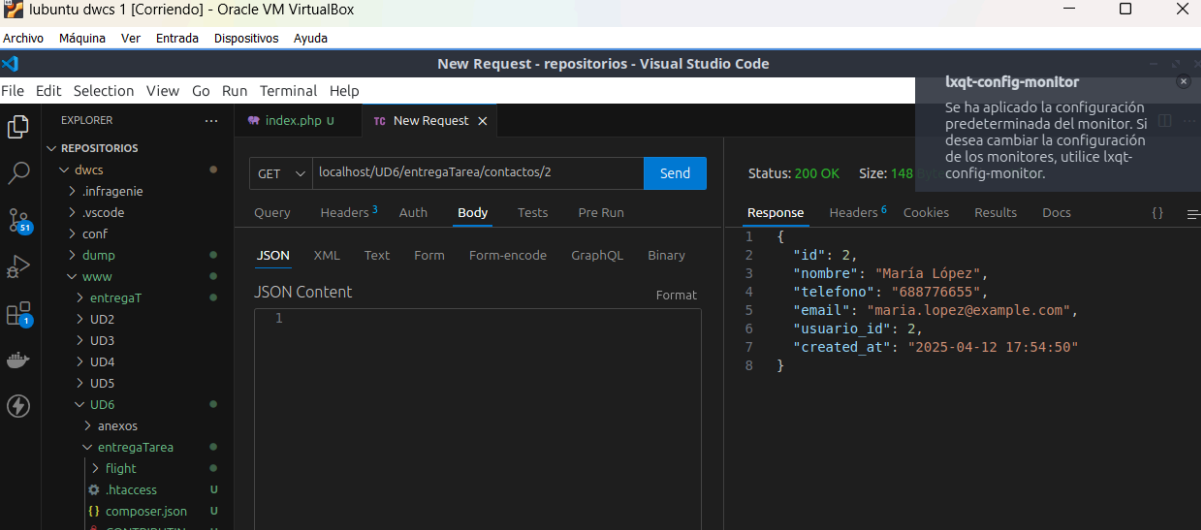


The screenshot shows the Visual Studio Code interface with a REST client window titled "New Request - repositorios - Visual Studio Code". The request is a GET to `localhost/UD6/entregaTarea/contactos/2`. The response is a JSON object with the following structure:

```
1 {
2   "id": 2,
3   "nombre": "Maria López",
4   "telefono": "688776655",
5   "email": "maria.lopez@example.com",
6   "usuario_id": 2,
7   "created_at": "2025-04-12 17:54:50"
8 }
```

A notification bubble in the top right corner reads: "Se ha aplicado la configuración predeterminada del monitor. Si desea cambiar la configuración de los monitores, utilice lxqt-config-monitor."

6. Ejemplo de modificación de contacto (id=2).

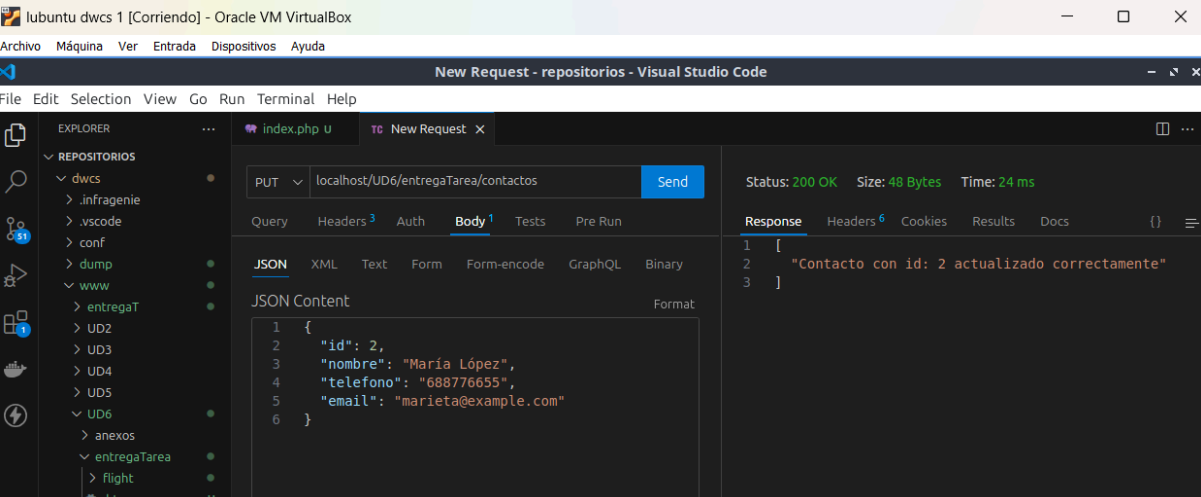


The screenshot shows the Visual Studio Code interface with a REST client window titled "New Request - repositorios - Visual Studio Code". The request is a PUT to `localhost/UD6/entregaTarea/contactos`. The request body is a JSON object:

```
1 {
2   "id": 2,
3   "nombre": "Maria López",
4   "telefono": "688776655",
5   "email": "marieta@example.com"
6 }
```

The response is a JSON array with a single string element:

```
1 [
2   "Contacto con id: 2 actualizado correctamente"
3 ]
```

7. Ejemplo de borrado de contacto (id=2).

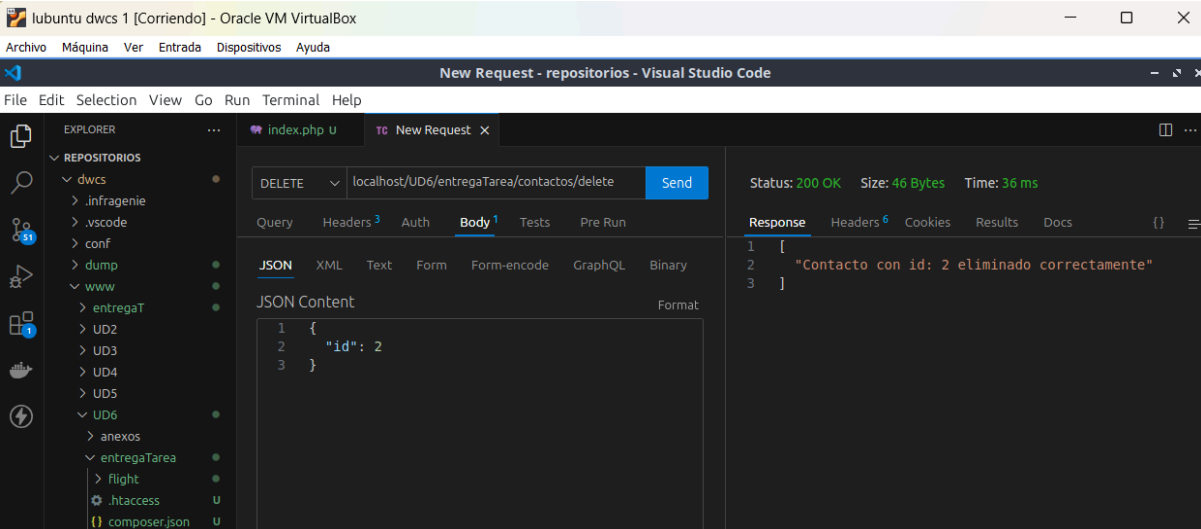

The screenshot shows the Visual Studio Code interface with a REST client window titled "New Request - repositorios - Visual Studio Code". The request is a DELETE to `localhost/UD6/entregaTarea/contactos/delete`. The response is a JSON array with a single string element:

```
1 [
2   "Contacto con id: 2 eliminado correctamente"
3 ]
```

8. Listado de contactos con el 2 eliminado y la configuración del token.

Visual Studio Code interface showing a REST client request to `localhost/UD6/entregaTarea/contactos`. The request is a GET method with the following headers:

- Accept: */*
- User-Agent: Thunder Client (https://www.thunderclient.com)
- X-Token: 62910f3ead7265dfd978d3e19531

The response is a 200 OK status with a JSON array of two contact objects:

```
1 [{
2   {
3     "0": 1,
4     "1": "Lucía García",
5     "2": "612345678",
6     "3": "lucia.garcia@example.com",
7     "4": 2,
8     "5": "2025-04-12 17:53:00",
9     "id": 1,
10    "nombre": "Lucía García",
11    "telefono": "612345678",
12    "email": "lucia.garcia@example.com",
13    "usuario_id": 2,
14    "created_at": "2025-04-12 17:53:00"
15  },
16  {
17    "0": 3,
18    "1": "Javier Fernández",
19    "2": "677334455",
20    "3": "javier.fernandez@example.com",
21    "4": 2,
22    "5": "2025-04-12 17:55:03",
23    "id": 3,
24    "nombre": "Javier Fernández",
25    "telefono": "677334455",
26    "email": "javier.fernandez@example.com",
27    "usuario_id": 2,
28    "created_at": "2025-04-12 17:55:03"
29  }
30 }]
```

9. Ejemplo de error utilizando una contraseña no válida.

Visual Studio Code interface showing a REST client request to `localhost/UD6/entregaTarea/login`. The request is a POST method with the following JSON body:

```
1 {
2   "email": "adriana2@gmail.com",
3   "password": "adrianaabc"
4 }
```

The response is a 401 Unauthorized status with a JSON object containing an error message:

```
1 {
2   "error": "Credenciales no válidas"
3 }
```