



Getting Started: primeros pasos en Angular

Alumno: Adrian Valdivieso Paredes


1. Creamos la carpeta donde vamos a iniciar el proyecto:

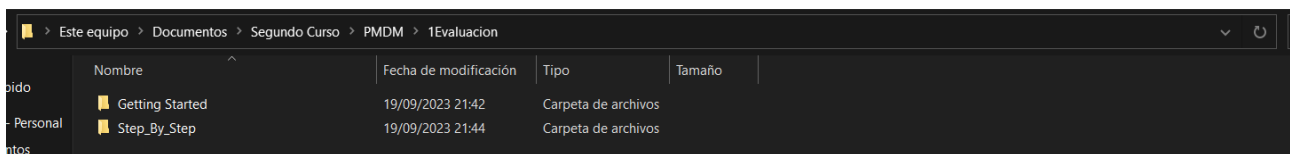

2. Iniciamos la consola de Visual Studio Code y escribimos el siguiente comando:

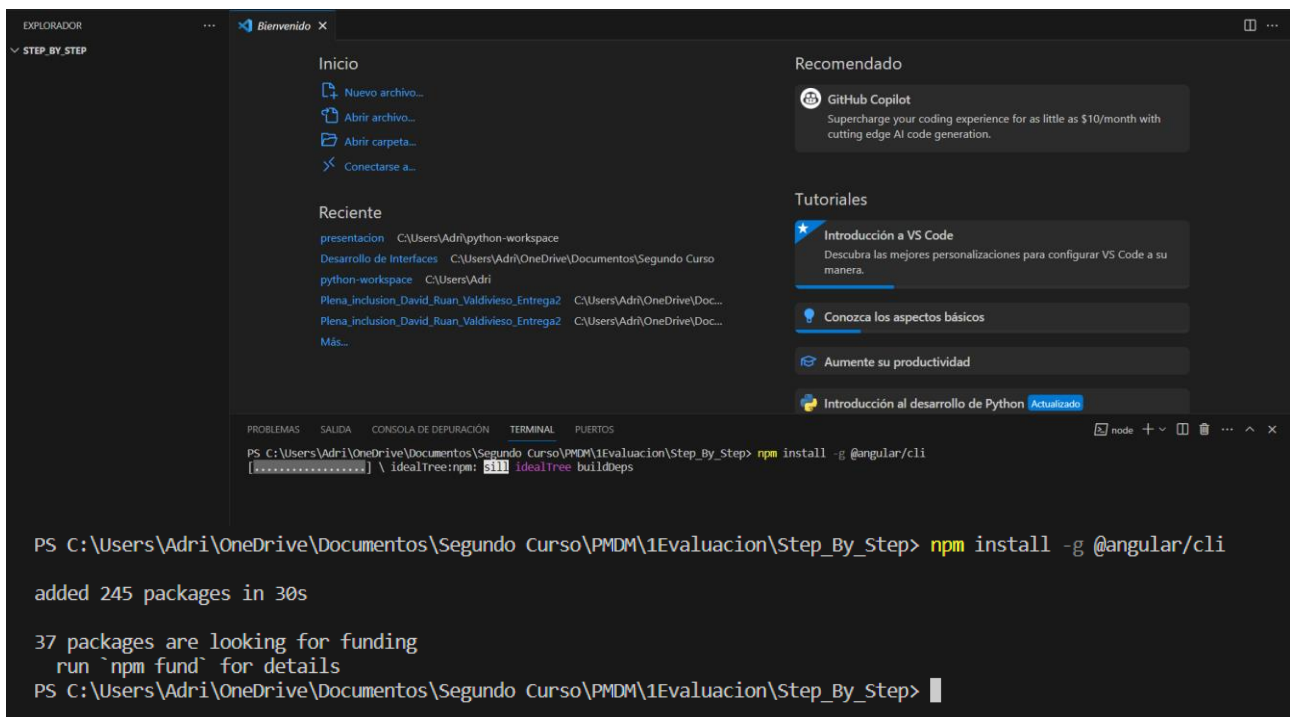

3. Ejecutamos este nuevo comando `Set-ExecutionPolicy -Scope CurrentUser -ExecutionPolicy RemoteSigned`, esto hace que clientes de Windows puedan ejecutar Scripts de PowerShell porque por defecto están desactivados.





salesianos

COLEGIO NTRA. SRA. DEL PILAR ZARAGOZA

4. Crearemos el Wrok-Space con el siguiente comando: `ng new my-app` y le daremos el nombre de my-app, aceptamos por defecto todas las opciones que nos salen.

```
PS C:\Users\Adri\OneDrive\Documentos\Segundo Curso\PMDD\1Evaluacion\Step_By_Step> ng new my-app
? Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.io/analytics. Yes
```

Thank you for sharing pseudonymous usage data. Should you change your mind, the following command will disable this feature entirely:

```
ng analytics disable --global
```

Global setting: enabled

Local setting: No local workspace configuration file.

Effective status: enabled

? Would you like to add Angular routing? Yes

? Which stylesheet format would you like to use? (Use arrow keys)

> CSS

```
SCSS [ https://sass-lang.com/documentation/syntax#scss ]
Sass [ https://sass-lang.com/documentation/syntax#the-indented-syntax ]
Less [ http://lesscss.org ]
```

! Which stylesheet format would you like to use? CSS

```
CREATE my-app/angular.json (2700 bytes)
CREATE my-app/package.json (1037 bytes)
CREATE my-app/README.md (1059 bytes)
CREATE my-app/tsconfig.json (901 bytes)
CREATE my-app/.editorconfig (274 bytes)
CREATE my-app/.gitignore (548 bytes)
CREATE my-app/tsconfig.app.json (263 bytes)
CREATE my-app/tsconfig.spec.json (273 bytes)
CREATE my-app/.vscode/extensions.json (130 bytes)
CREATE my-app/.vscode/launch.json (470 bytes)
CREATE my-app/.vscode/tasks.json (938 bytes)
CREATE my-app/src/main.ts (214 bytes)
CREATE my-app/src/favicon.ico (948 bytes)
CREATE my-app/src/index.html (291 bytes)
CREATE my-app/src/styles.css (80 bytes)
CREATE my-app/src/app/app-routing.module.ts (245 bytes)
CREATE my-app/src/app/app.module.ts (393 bytes)
CREATE my-app/src/app/app.component.html (23115 bytes)
CREATE my-app/src/app/app.component.spec.ts (991 bytes)
CREATE my-app/src/app/app.component.ts (210 bytes)
CREATE my-app/src/app/app.component.css (0 bytes)
CREATE my-app/src/assets/.gitkeep (0 bytes)
: Installing packages (npm)...
```

- Nos movemos a la carpeta que acabamos de entrar y ejecutamos el siguiente código para levantar el servidor:


```
PS C:\Users\Adri\OneDrive\Documentos\Segundo Curso\PMDM\1Evaluacion\Step_By_Step> cd my-app
PS C:\Users\Adri\OneDrive\Documentos\Segundo Curso\PMDM\1Evaluacion\Step_By_Step\my-app> ng serve --open
? Would you like to share pseudonymous usage data about this project with the Angular Team
at Google under Google's Privacy Policy at https://policies.google.com/privacy. For more
details and how to change this setting, see https://angular.io/analytics. Yes

Thank you for sharing pseudonymous usage data. Should you change your mind, the following
command will disable this feature entirely:

  ng analytics disable

Global setting: enabled
Local setting: enabled
Effective status: enabled
* Generating browser application bundles (phase: setup)...
```

- El comando `ng serve` lanza el servidor, revisa los archivos y los cambia según los cambios realizados en los archivos. El comando `--open` inmediatamente abre el navegador y si todo ha ido bien se debería ver la siguiente pagina:

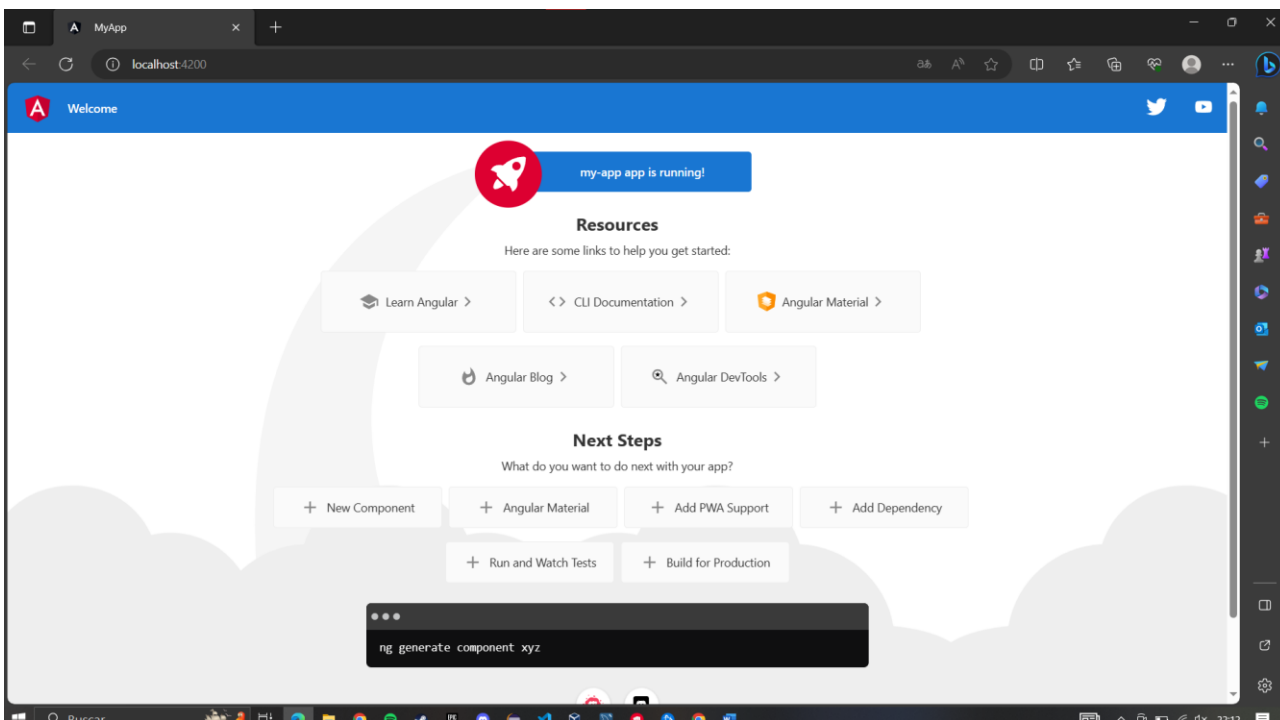

Bibliografía

- <https://angular.io/guide/setup-local>