**CSE301 Computer Organization**
**Spring 2015**
**Programming Assignment #1**

1. **Overview**: In this programming assignment, you will implement the quick sort algorithm using the MIPS assembly language. Please follow the steps below.

   - Refer to the quick sort code written in the C programming language, which we have provided.
   - Translate the quick_sort and partition functions written in C to the MIPS assembly language by exactly following the MIPS calling conventions.
   - Test (and debug) your assembly code using the SPIM simulator.

2. **Deliverables**

   - The assembly file (quick_sort.s) that implements the quick sort algorithm.
   - A screenshot that clearly shows the final output (e.g., the values stored in the memory) after successfully executing your assembly program in the SPIM simulator.

3. **How to submit**

   - Email your deliverables to TA (Email address: kyuyeunk @ UNIST).
   - **Due: 11:59pm, Apr. 19, 2015**

4. **Grading (tentative)**

   - Correctness: 60%
     - We may test your code with input data sets different from the ones provided in the skeleton code.
   - Code quality: 40%
     - For example, we will check if your code exactly follows the MIPS calling conventions.

5. **How to test your assembly code using the SPIM simulator**

   - How to download and install the SPIM simulator
     - http://sourceforge.net/projects/spimsimulator/files/
       go to above link and download file according to your OS.
     - Install normally

   - How to load and edit your assembly file
     - Use notepad to write and edit assembly file

- How to execute your assembly code

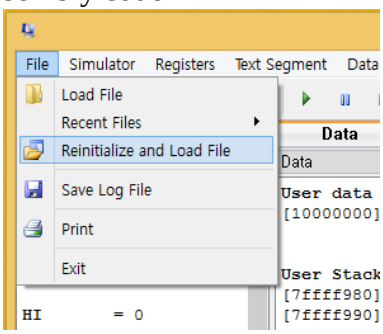


  - Open up QtSpim and go to file -> Reinitialize and Load File
  - Select file you want to run and press Open (in this example, we will use the quick_sort.s file we have provided).
  - Press Run/Continue button (play button) to execute assembly code until end
  - Repeat above steps to run assembly code again

- How to check the output after executing your assembly program

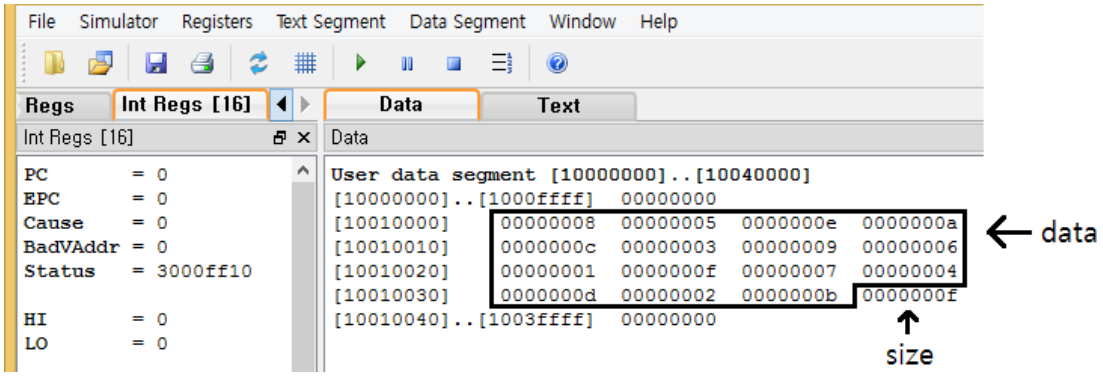


  - Left column will be about registers. Make sure it is set to “Int Regs [16]” tab
  - On the right column, switch to “Data” tab to see Data segment.
  - If quick_sort.s file is loaded successfully, the first n variables will indicate “data” array and last variable will indicate “size” variable in quick_sort.s.
  - If the sorting ran successfully, first n variable will be in ascending order

- How to debug your assembly code

  - Press button in rectangle to run instructions in single step

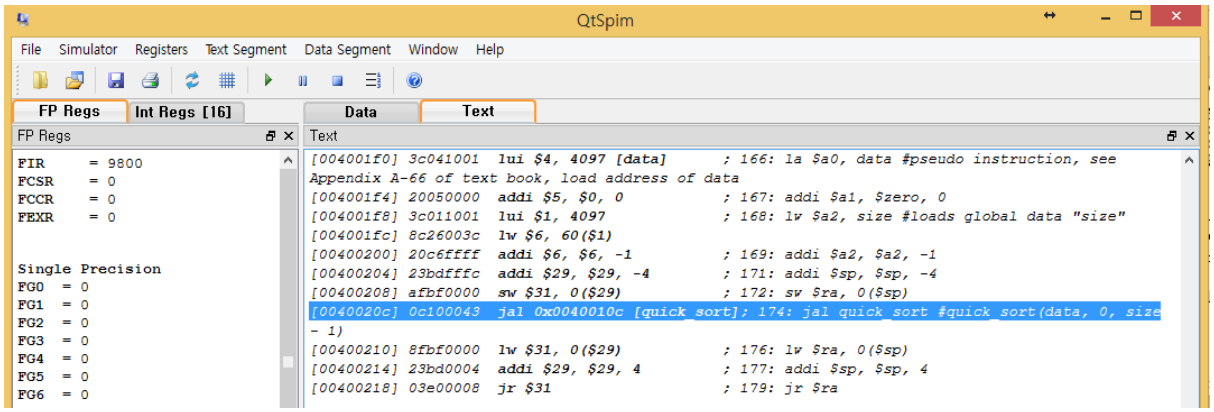


  - On the right column, “Text” tab will highlight the next instruction to be executed.

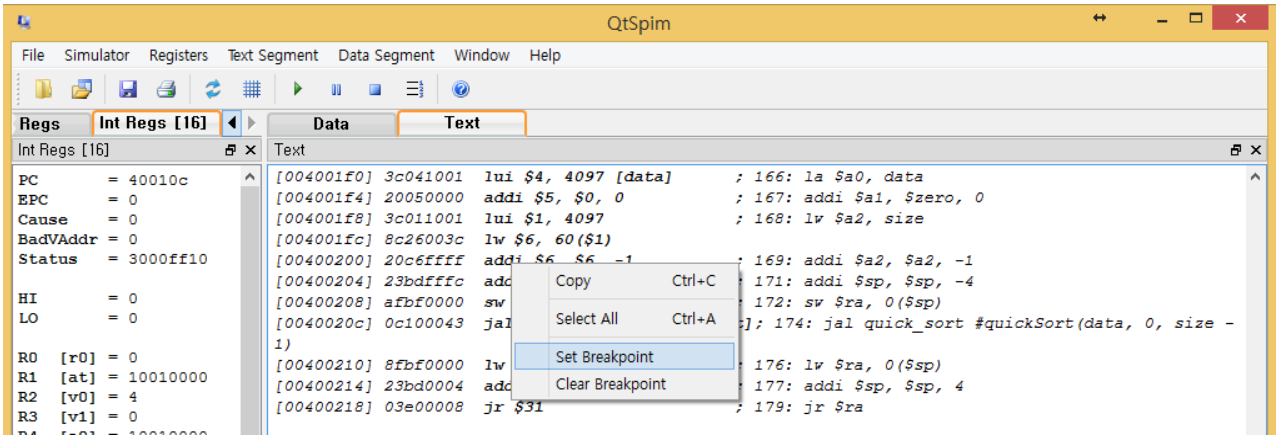


  - To set breakpoint, go to the “Text” tab. Right click on instruction you want to set breakpoint and Click “set breakpoint”
  - If Run button is pressed, program will stop when it reaches breakpoint
  - Right click instruction and click “Clear Breakpoint” to remove breakpoint