
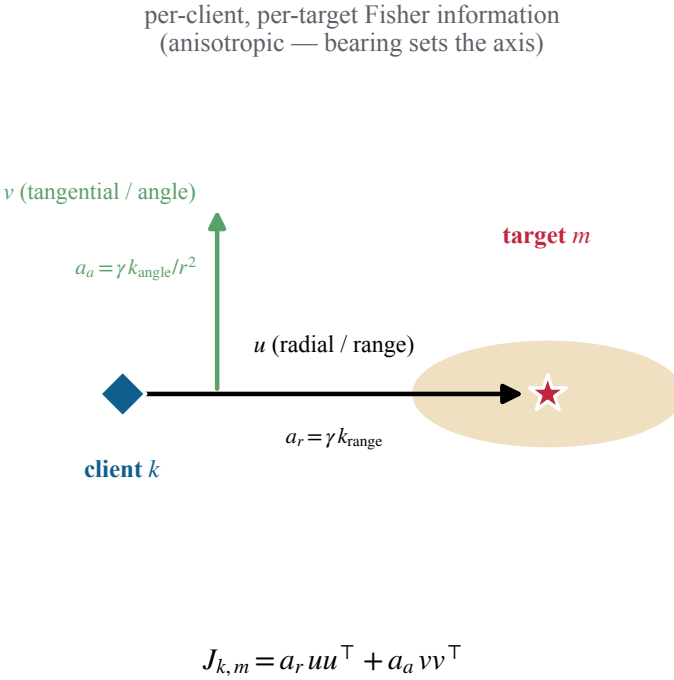


SCOUT-FL system model: the ISAC network

A base station selects K of N clients per round for joint AirComp model aggregation and multistatic target sensing

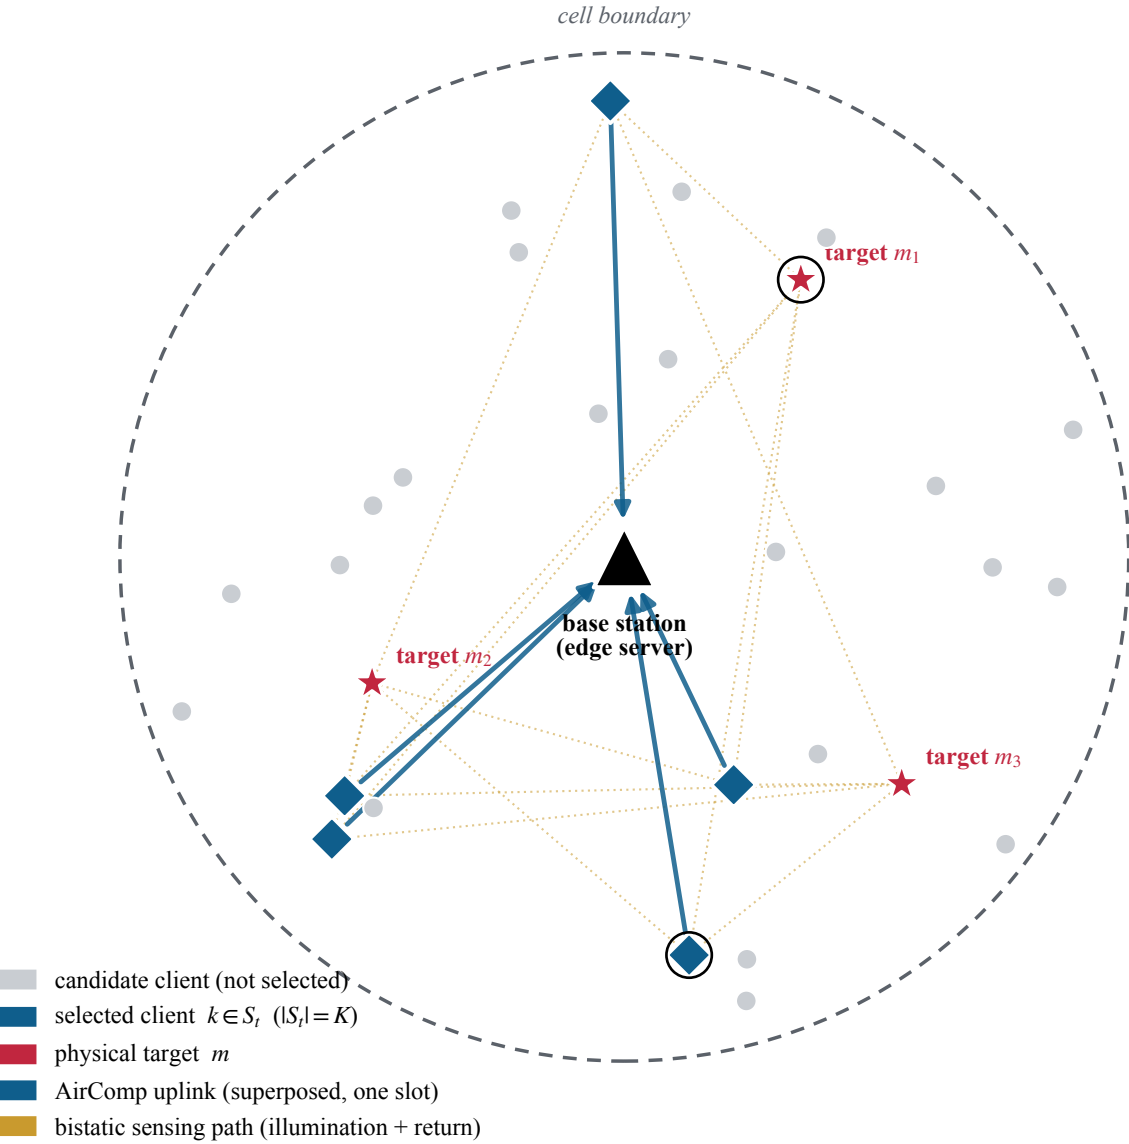

Two clients at similar bearings pile information onto the same axis of $J_{k,m}$ (diminishing sensing return); angular diversity across selected clients — not raw SNR — drives $\log \det$ information gain.