


Alternative: A container approach

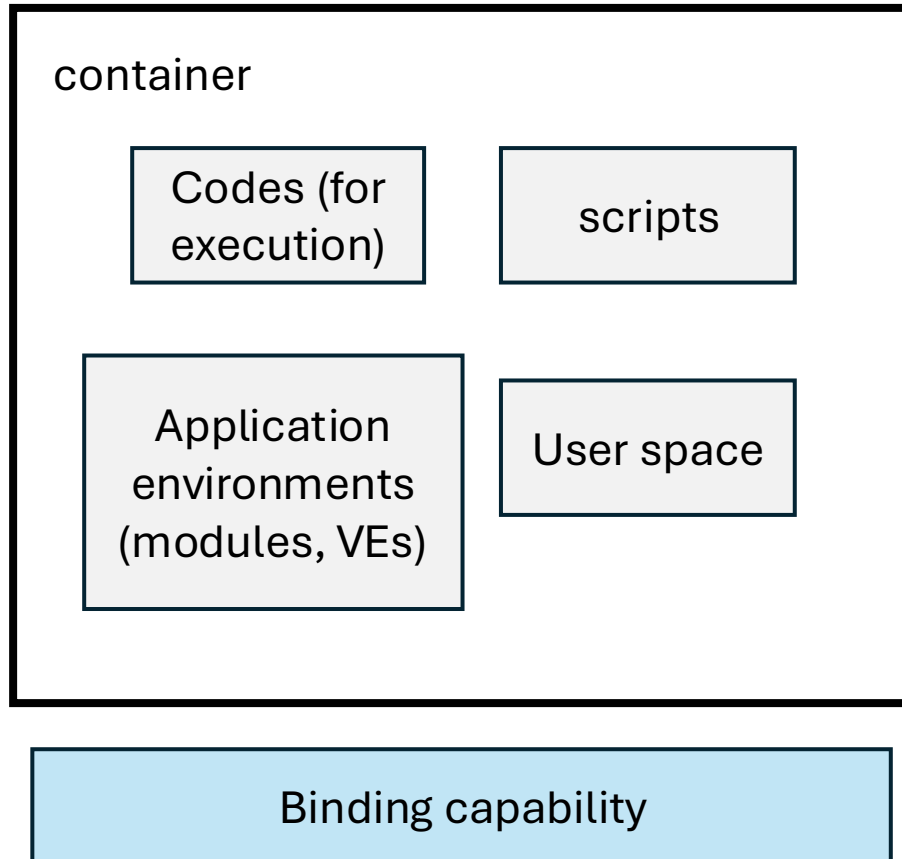

High-Level Perspective

1. You build a container with the codes (apps) and scripts, and environment needed to run the container.
2. You give the container to other.
3. Other runs the apps from within the container (variations on this).
4. Other need not have any source code, libraries, compilers, modules, etc. loaded on their system.
5. "Their system" can be a different cluster, a different type of machine (e.g., laptop).
6. Other's OS need not be the same on which the container was built.
 1. But if you are not using a Linux OS, then you have to do extra work (e.g., Windows, Mac).

Realized Features

Portability
Customizability
Sameness
Permanence