Synthetic test performance by language

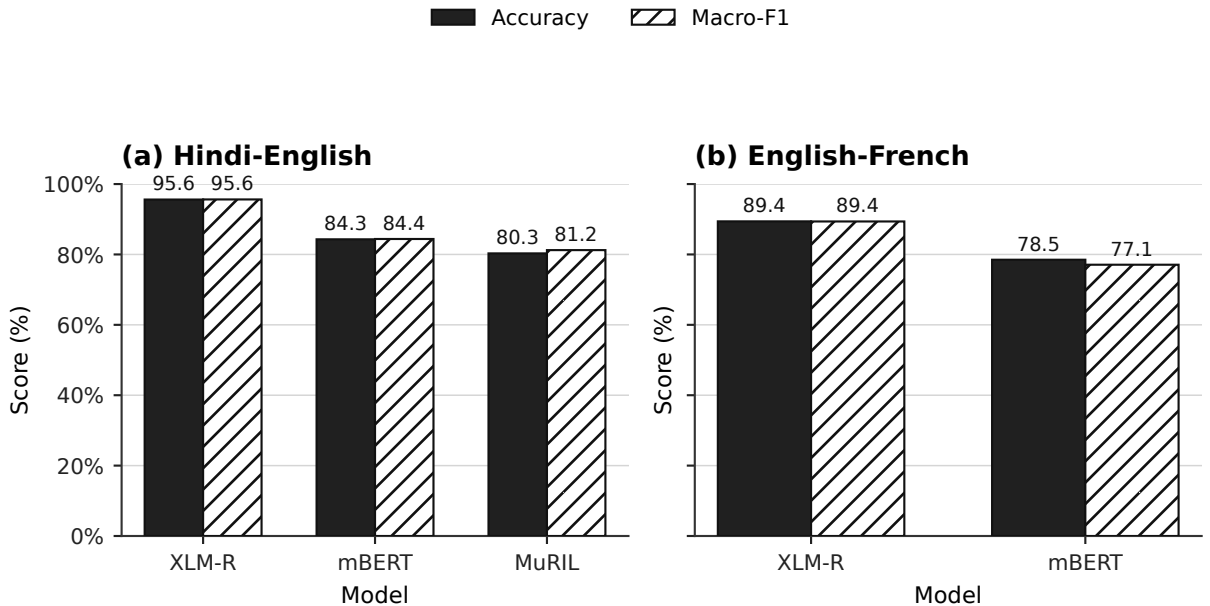

Bars show saved test accuracy and macro-F1 (n=1,000 per language/model). MuRIL used a separate 8k-train hi-en split; XLM-R and mBERT used 16k bilingual training rows.