

1. Domain Architecture & Network Topology

2. DNS Zone Record Configuration (adviceintelligence.tech)

DNS for `adviceintelligence.tech` is registered and served by IONOS. Both hostnames are CNAME records pointing at their Firebase Hosting sites. These records are in place and resolving.


DNS resolving is necessary but not sufficient. Each hostname must also be registered against its site inside Firebase Hosting. If it is not, the site answers “Site Not Found” even though the CNAME resolves correctly. Firebase issues and renews the TLS certificate automatically once the domain is connected and DNS has propagated.

3. Hosting & Deployment Model

The route in use: Firebase Hosting in front of Cloud Run

[!IMPORTANT]

Cloud Run domain mappings are not available in europe-west2. The custom domains therefore cannot be mapped directly onto the Cloud Run service. Firebase Hosting provides the custom domain and TLS, and rewrites requests to the Cloud Run service behind it.

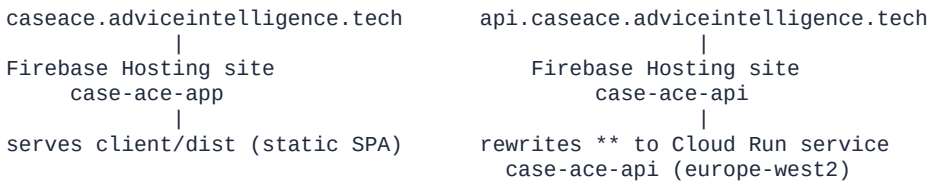

Both sites live on the case-ace-v2 project and are described by `firebase.json` at the repository root, so the routing and the security headers are version controlled rather than configured by hand in a console.

Step 1: Deploy the backend

Cloud Build compiles the container image in Google Cloud from repository source. No local

Docker installation is needed.

```
gcloud run deploy case-ace-api \
  --project=case-ace-v2 \
  --region=europe-west2 \
  --source=. \
  --dockerfile=infrastructure/docker/Dockerfile.backend \
  --service-account=case-ace-api-sa@case-ace-v2.iam.gserviceaccount.com \
  --allow-unauthenticated \
  --set-env-vars=APP_ENV=pilot,GCP_REGION=europe-west2,GCP_PROJECT_ID=case-ace-
v2,ALLOW_TOTP_IN_PILOT=true \
  --set-secrets=JWT_SECRET=case-ace-jwt-secret:latest
```

Step 2: Build and deploy the SPA

```
VITE_APP_ENV=pilot npm run build
firebase deploy --only hosting --project case-ace-v2
```

VITE_APP_ENV is required. client/src/config/environments.ts fails closed to the local environment, so a build without it produces an SPA pointing at <http://localhost:8080>.

Residency caveat

Cloud Run, Speech-to-Text and Vertex AI are pinned to europe-west2. Firebase Hosting is a global anycast CDN, so TLS terminates at the Google edge nearest the adviser, which may be outside the United Kingdom. A regional external Application Load Balancer in europe-west2 would keep termination inside the UK. A global external load balancer would not, since it terminates at the same global edge. This is an open decision that should be settled and recorded in the DPIA before the pilot processes real client consultations.

4. Updating Identity & Telephony Integrations

After provisioning caseace.adviceintelligence.tech, update the external identity and telephony OAuth callbacks:

1. Microsoft Entra ID App Registration

Navigate to the Microsoft Entra Admin Center (<https://entra.microsoft.com>).

Go to Identity → Applications → App registrations → Select Case Ace Consultation Assistant.

Under Authentication → Redirect URIs:

Add Web / SPA Redirect URI:

<https://caseace.adviceintelligence.tech/auth/callback>

Under Single Sign-On, ensure ID tokens and Access tokens are permitted for PKCE authorization flows.

Save changes.

2. Cisco Webex Developer Portal

Navigate to the Webex Developer Portal (<https://developer.webex.com/my-apps>).

Select your Case Ace Telephony Ingest Integration.

Under Redirect URI(s):

Add: <https://caseace.adviceintelligence.tech/api/auth/webex/callback>

Add: <https://api.caseace.adviceintelligence.tech/api/auth/webex/callback>

Save changes.

5. Post-Deployment Verification & Smoke Test

Run the following verification suite from your terminal once DNS propagation is complete:

```
# 1. Test HTTPS & TLS 1.3 Handshake on Frontend
curl -s -I https://caseace.adviceintelligence.tech | grep -iE "http|content-security-policy|strict-transport-security"

# Expected Output:
# HTTP/2 200 (or HTTP/1.1 200 OK)
# strict-transport-security: max-age=63072000; includeSubDomains; preload
# content-security-policy: default-src 'none'; script-src 'self' 'wasm-unsafe-eval'...

# 2. Test Backend Health Check & Region Pinning
```

```
curl -s https://api.caseace.adviceintelligence.tech/health

# Expected Output:
# {"status":"healthy","environment":"pilot","gcpRegion":"europe-west2",
#  "isSyntheticOnly":false,"timestamp":"2026-..."}
#
# An HTML page headed "Congratulations | Cloud Run" means the placeholder image is
# still deployed and the backend deployment has not taken effect.

# 3. Test Ephemeral Credential Minting Endpoint (Authenticated)
curl -s -X POST https://api.caseace.adviceintelligence.tech/api/v1/credentials/issue \
  -H "Content-Type: application/json" \
  -H "Authorization: Bearer <ADVISER_JWT>" \
  -d '{"purpose":"speech-to-text"}'

# Expected Output:
# {"accessToken":"gcp_sts_...", "expiresInSeconds":300, "region":"europe-west2"}
```

6. Ongoing Maintenance & Health Monitoring

SSL Expiry Alerting: Automated monitoring via uptime check probes testing TLS validity every 24 hours.

Downtime Fallback: If caseace.adviceintelligence.tech is unreachable, advisers immediately execute the Business Continuity Procedure and switch to manual note-taking in Casebook CRM. Advice delivery is never delayed.