


Cel:

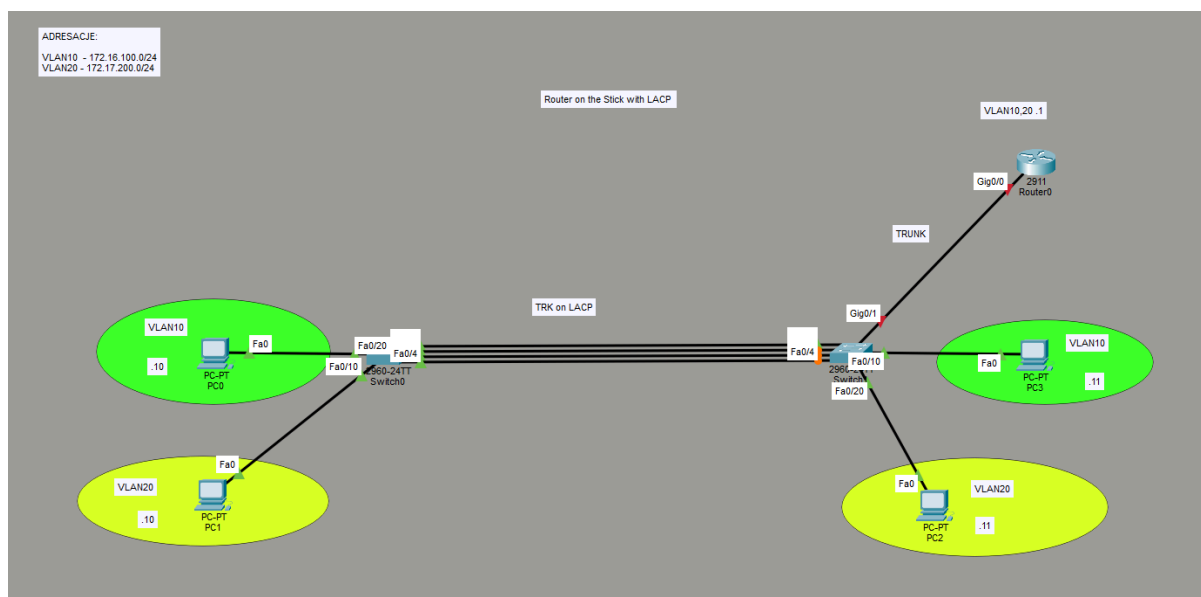

Rozwiązanie:

```
Switch>en
Switch#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Switch(config)#hostname SW0
SW0(config)#vlan 10
SW0(config-vlan)#vlan 20
SW0(config-vlan)#int fa0/20
SW0(config-if)#switchport mode access
SW0(config-if)#switchport access vlan 10
SW0(config-if)#no shut
SW0(config-if)#int f0/10
SW0(config-if)#switchport mode access
SW0(config-if)#switchport access vlan 20
SW0(config-if)#end
SW0#
%SYS-5-CONFIG_I: Configured from console by console

SW0#conf t
Enter configuration commands, one per line. End with CNTL/Z.
SW0(config)#interface port-channel 1
SW0(config-if)#switchport mode trunk
SW0(config-if)#no shut
SW0(config-if)#int range fa0/1 - 4
SW0(config-if-range)#channel-group 1 mode active
%EC-5-L3DONTBNDL2: Fa0/1 suspended: LACP currently not enabled on the remote port.
%EC-5-L3DONTBNDL2: Fa0/2 suspended: LACP currently not enabled on the remote port.
%EC-5-L3DONTBNDL2: Fa0/3 suspended: LACP currently not enabled on the remote port.
%EC-5-L3DONTBNDL2: Fa0/4 suspended: LACP currently not enabled on the remote port.
```

```
SW0(config-if-range)#do show etherchannel summary
Flags:  D - down          P - in port-channel
        I - stand-alone  s - suspended
        H - Hot-standby (LACP only)
        R - Layer3       S - Layer2
        U - in use       f - failed to allocate aggregator
        u - unsuitable for bundling
        w - waiting to be aggregated
        d - default port
```

```
Number of channel-groups in use: 1
Number of aggregators:          1
```

Group	Port-channel	Protocol	Ports
1	Pol(SD)	LACP	Fa0/1(s) Fa0/2(s) Fa0/3(s) Fa0/4(s)

```
SW0(config-if-range)#
```

```
Switch>
Switch>en
Switch#conf t
Enter configuration commands, one per line.  End with CNTL/Z.
Switch(config)#hostname SW1
SW1(config)#vlan 10
SW1(config-vlan)#vlan 20
SW1(config-vlan)#int fa0/10
SW1(config-if)#swi m acc
SW1(config-if)#sw acc vlan 10
SW1(config-if)#no shut
SW1(config-if)#int f0/20
SW1(config-if)#sw m acc
SW1(config-if)#sw acc vlan 20
SW1(config-if)#no shut
SW1(config-if)#interface port-channel 1
SW1(config-if)#switchport mode trunk
SW1(config-if)#no shut
SW1(config-if)#int range f0/1 - 4
SW1(config-if-range)#channel
SW1(config-if-range)#channel-group 1 mode active
```

na obydwóch switchach:

```
SW1(config-if-range)#int port-channel 1
SW1(config-if)#sw m trunk
SW1(config-if)#
%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/1, changed state to down

%EC-5-CANNOT_BUNDLE2: Fa0/1 is not compatible with Po1 and will be suspended (dtp mode of
Fa0/1 is off, Po1 is on)

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/2, changed state to down

%EC-5-CANNOT_BUNDLE2: Fa0/2 is not compatible with Po1 and will be suspended (dtp mode of
Fa0/2 is off, Po1 is on)

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/3, changed state to down


%EC-5-CANNOT_BUNDLE2: Fa0/3 is not compatible with Po1 and will be suspended (dtp mode of
Fa0/3 is off, Po1 is on)

%LINEPROTO-5-UPDOWN: Line protocol on Interface FastEthernet0/4, changed state to down

%EC-5-CANNOT_BUNDLE2: Fa0/4 is not compatible with Po1 and will be suspended (dtp mode of
Fa0/4 is off, Po1 is on)

SW1(config-if)#sw trunk allowed vlan 10,20
SW1(config-if)#sw trunk native vlan 400
SW1(config-if)#
```

(na wszystkich portach w srodku port channela tez trunki!)

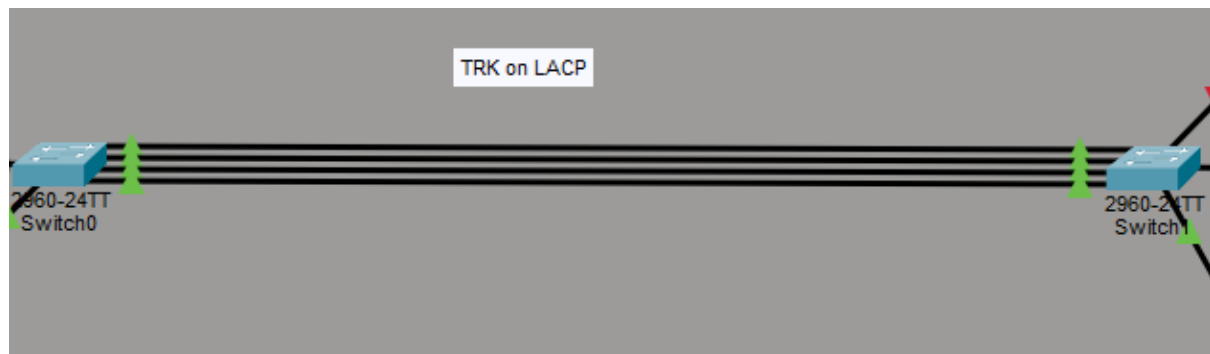

i dzięki temu smiga, lecimy dalej

```
SW1(config-if-range)#
SW1(config-if-range)#int g0/1
SW1(config-if)#sw m trunk
SW1(config-if)#sw t a vlan 10,20
SW1(config-if)#
```

```

Router>
Router>en
Router#conf t
Enter configuration commands, one per line. End with CNTL/Z.
Router(config)#int g0/0.10
Router(config-subif)#enca
Router(config-subif)#encapsulation dot
Router(config-subif)#encapsulation dot1Q ?
    <1-4094> IEEE 802.1Q VLAN ID
Router(config-subif)#encapsulation dot1Q 10
Router(config-subif)#no shut
Router(config-subif)#int g0/0.20
Router(config-subif)#encapsulation dot1Q 20
Router(config-subif)#no shut
Router(config-subif)#int g0/0
Router(config-if)#no shut

Router(config-if)#
%LINK-5-CHANGED: Interface GigabitEthernet0/0, changed state to up

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0, changed state to up

%LINK-3-UPDOWN: Interface GigabitEthernet0/0.10, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.10, changed state to up

%LINK-3-UPDOWN: Interface GigabitEthernet0/0.20, changed state to down

%LINEPROTO-5-UPDOWN: Line protocol on Interface GigabitEthernet0/0.20, changed state to up

Router(config-if)#

Router(config)#int g0/0.10
Router(config-subif)#172.16.100.1 255.255.255.0
    ^
% Invalid input detected at '^' marker.

Router(config-subif)#ip add 172.16.100.1 255.255.255.0
    ^
% Invalid input detected at '^' marker.

Router(config-subif)#ip add 172.16.100.1 255.255.255.0
Router(config-subif)#int g0/0.20
Router(config-subif)#ip add 172.17.100.1 255.255.255.0
Router(config-subif)#

```

test vlanow po konfiguracji IP kompow:
PC2:

```
C:\>ping 172.17.100.255

Pinging 172.17.100.255 with 32 bytes of data:

Reply from 172.17.100.1: bytes=32 time<1ms TTL=255
Reply from 172.17.100.10: bytes=32 time<1ms TTL=128
Reply from 172.17.100.1: bytes=32 time=11ms TTL=255
Reply from 172.17.100.10: bytes=32 time=1ms TTL=128

Ping statistics for 172.17.100.255:
    Packets: Sent = 2, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 11ms, Average = 3ms

Control-C
^C
C:\>ping 172.16.100.10

Pinging 172.16.100.10 with 32 bytes of data:

Request timed out.
Reply from 172.16.100.10: bytes=32 time<1ms TTL=127
Reply from 172.16.100.10: bytes=32 time<1ms TTL=127
Reply from 172.16.100.10: bytes=32 time=1ms TTL=127

Ping statistics for 172.16.100.10:
    Packets: Sent = 4, Received = 3, Lost = 1 (25% loss),
Approximate round trip times in milli-seconds:
    Minimum = 0ms, Maximum = 1ms, Average = 0ms

C:\>
```

czyli klasa.