EXPERIMENT NO 13

Name : Adwait Shelare PRN : 25070521169

13.1.1 Fibonacci sequence using modules

Algorithm

Step 1: Start
Step 2: Input number of commands n
Step 3: Create empty dictionary ph = {}
Step 4: Repeat steps for i = 1 to n

- Input command and split it into list cmd
- If cmd[0] == "ADD"
  - Add contact → ph[name] = number
- Else if cmd[0] == "REMOVE"
  - Remove contact → ph.pop(name)
- Else if cmd[0] == "DISPLAY"
  - If phonebook is empty → Print "No contacts"
  - Else → Print all contacts in sorted order

  Step 5: Stop

Flowchart

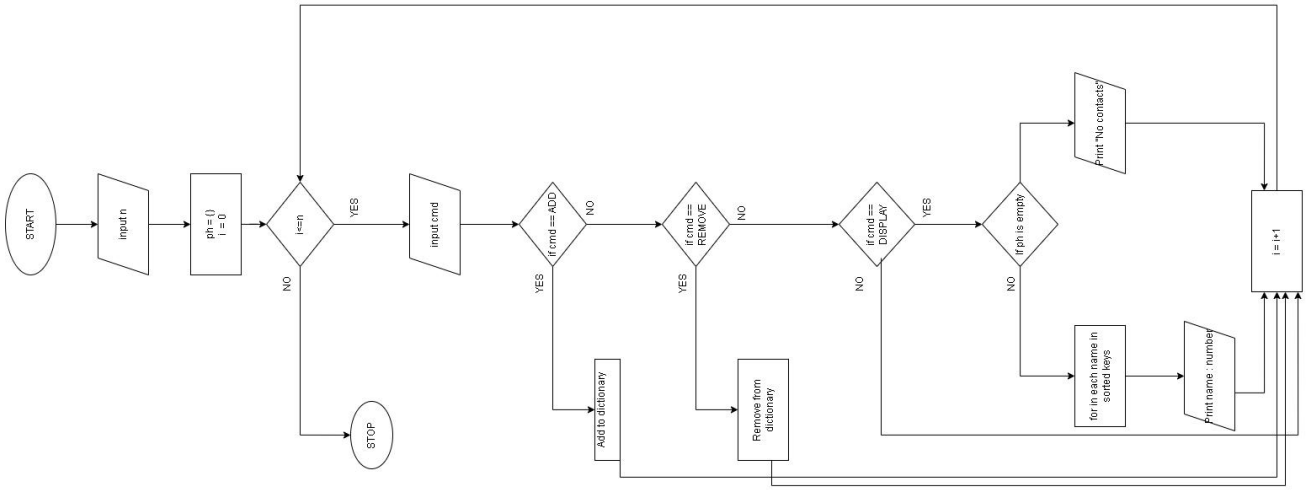

Python code

```
n= int(input())
ph={}
for i in range (n):
```

EXPERIMENT NO 13

```
cmd = input().split()
if cmd[0]=="ADD":
        ph[cmd[1]]=cmd[2]
elif cmd[0]=="REMOVE":
        ph.pop(cmd[1],None)
elif cmd[0]=="DISPLAY":
        if len(ph)==0:
                print("No contacts")
        else:
                for name in sorted(ph):
                        print(f"{name}: {ph[name]}")
```
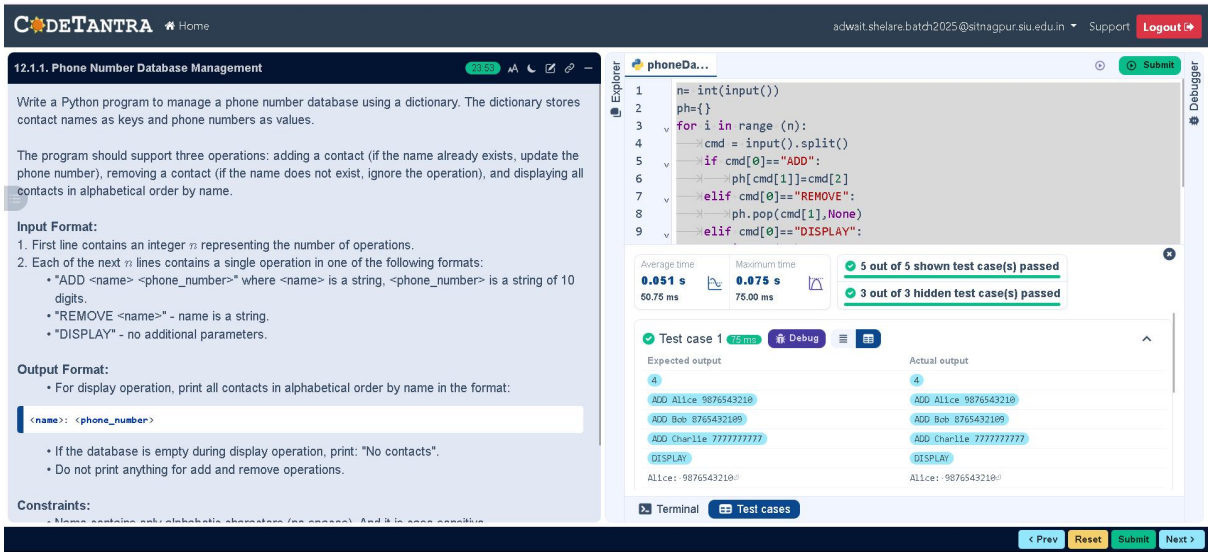
EXCECUTION