
# Task 1

**Handwritten code**

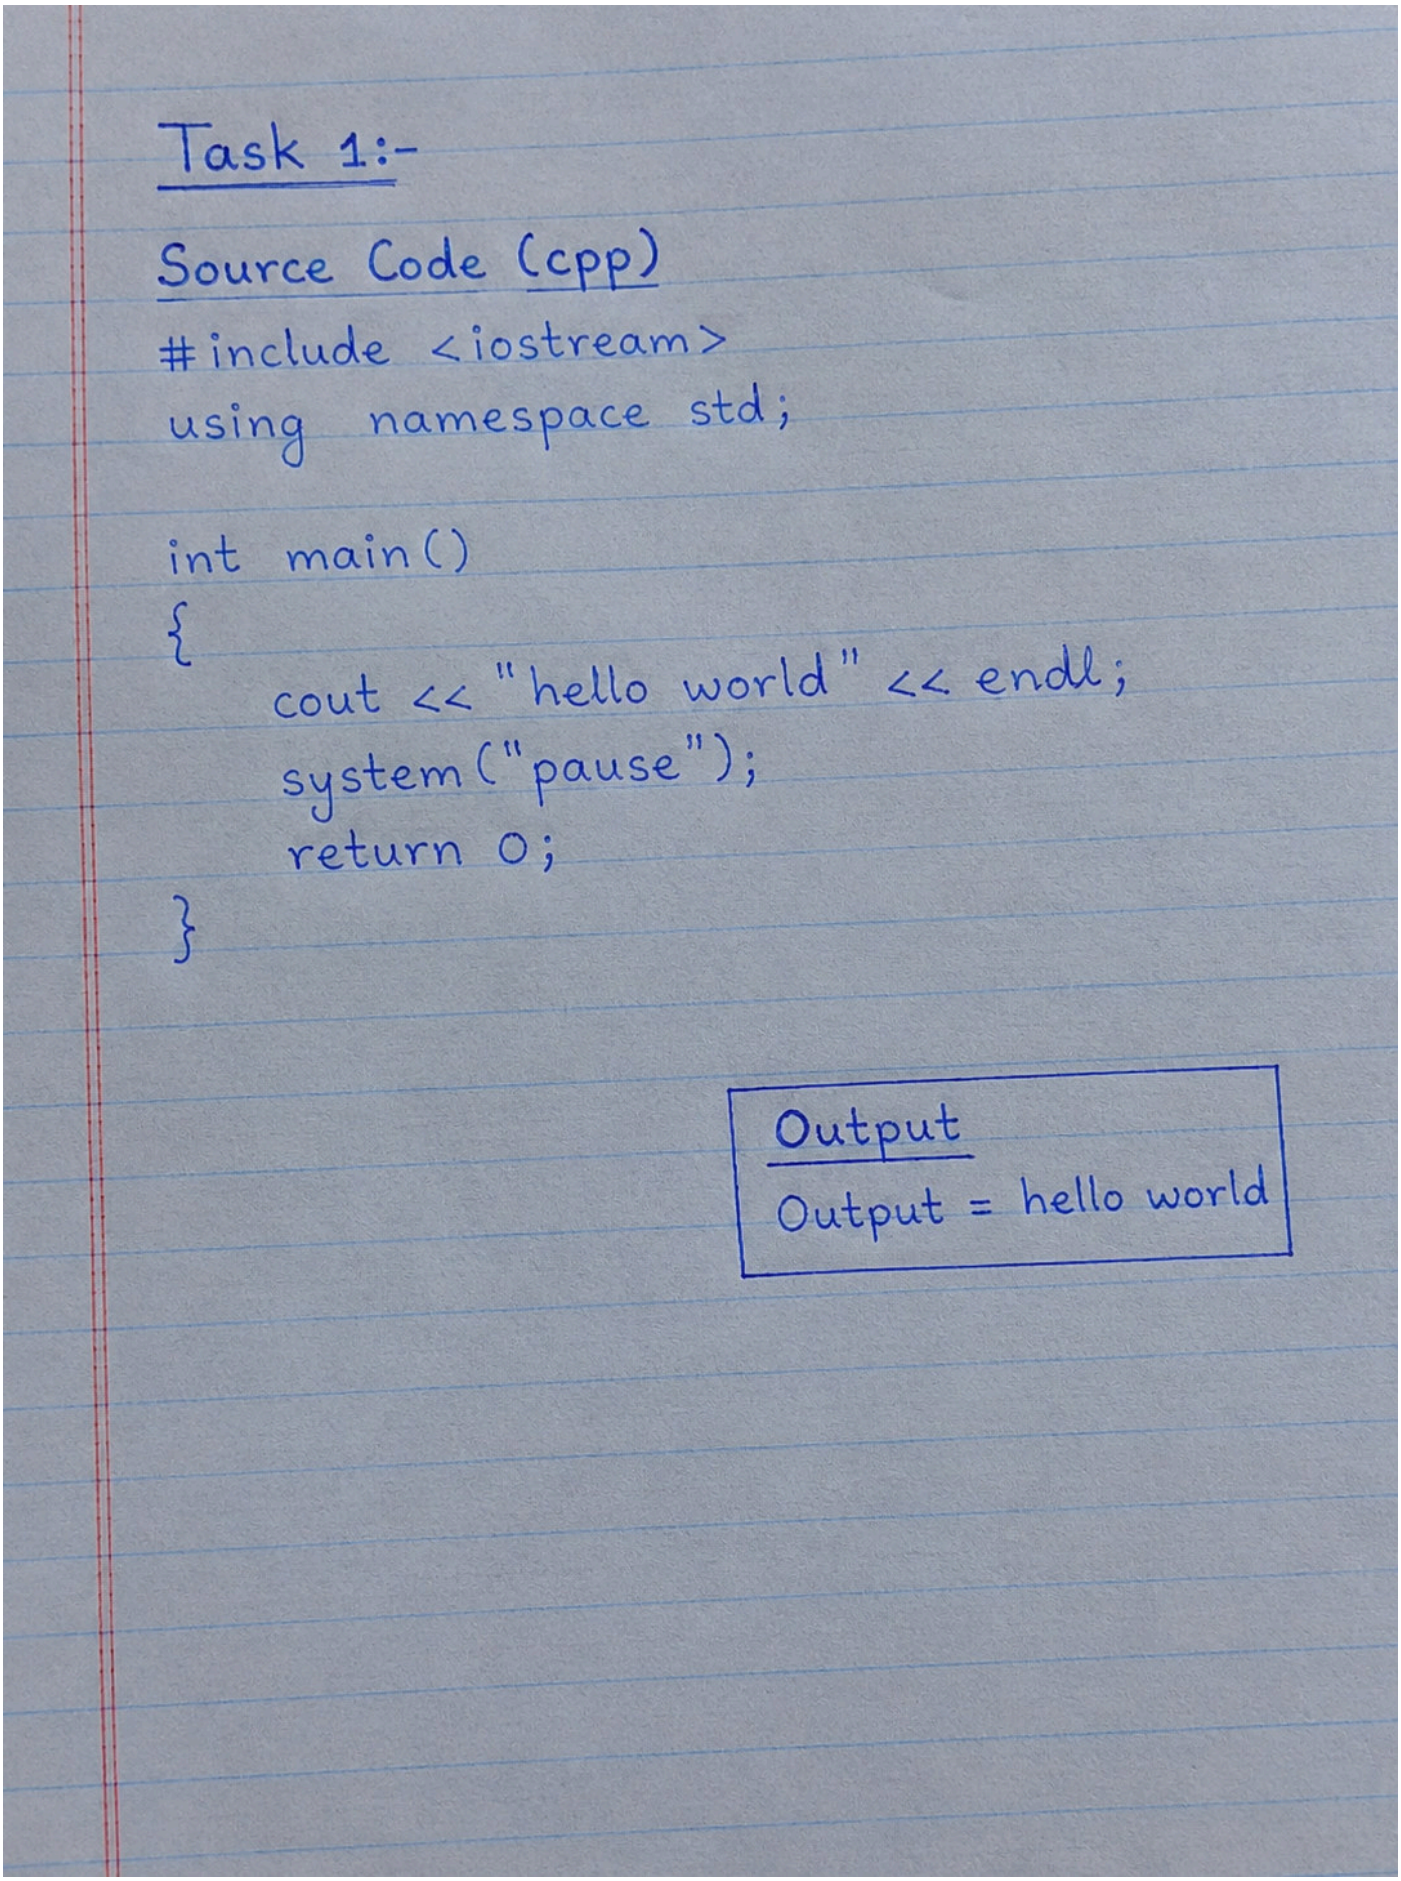

Task 1:-

Source Code (cpp)

```
#include <iostream>
using namespace std;


int main()
{
    cout << "hello world" << endl;
    system("pause");
    return 0;
}
```

Output


Output = hello world

# Task 1

### Typed code (lab1_task1.cpp)

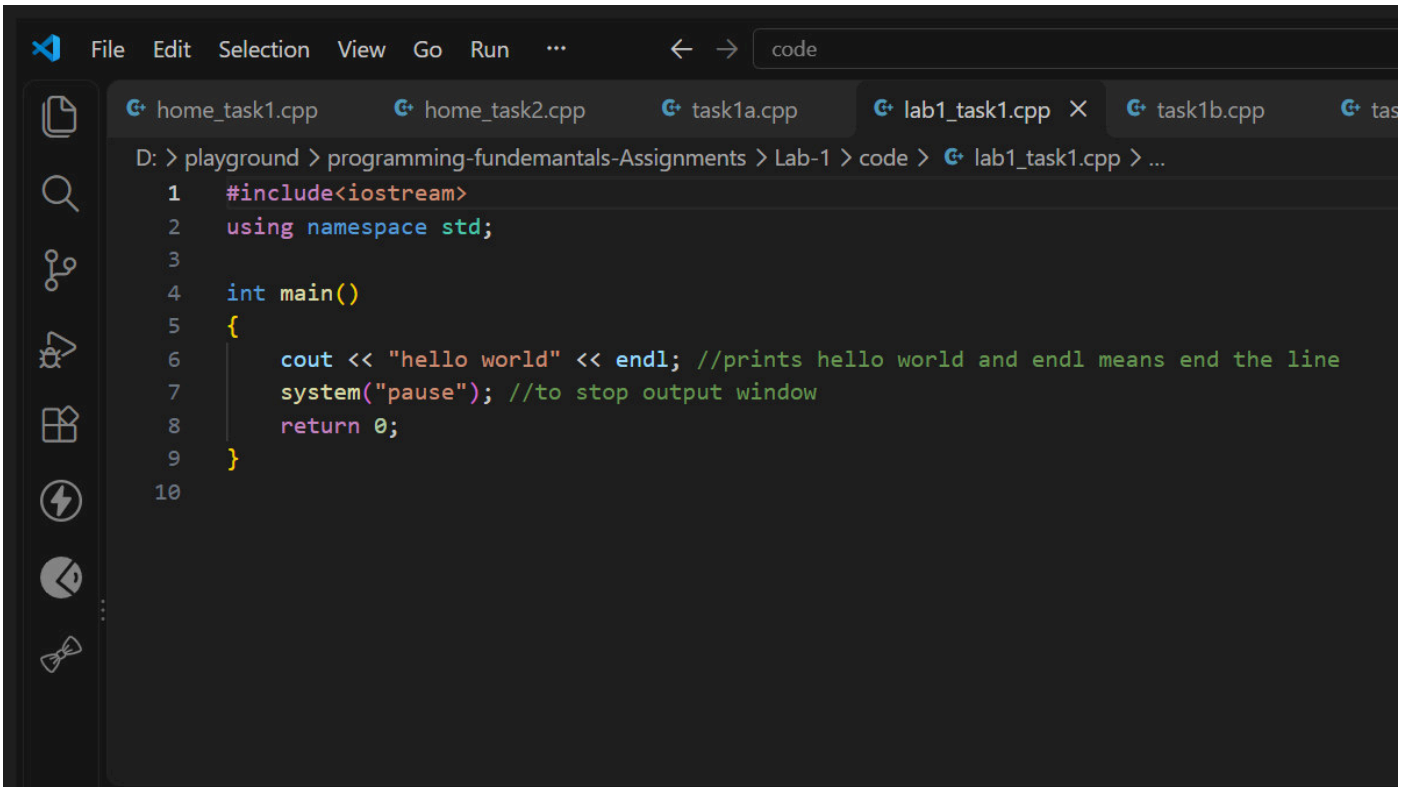



### Output

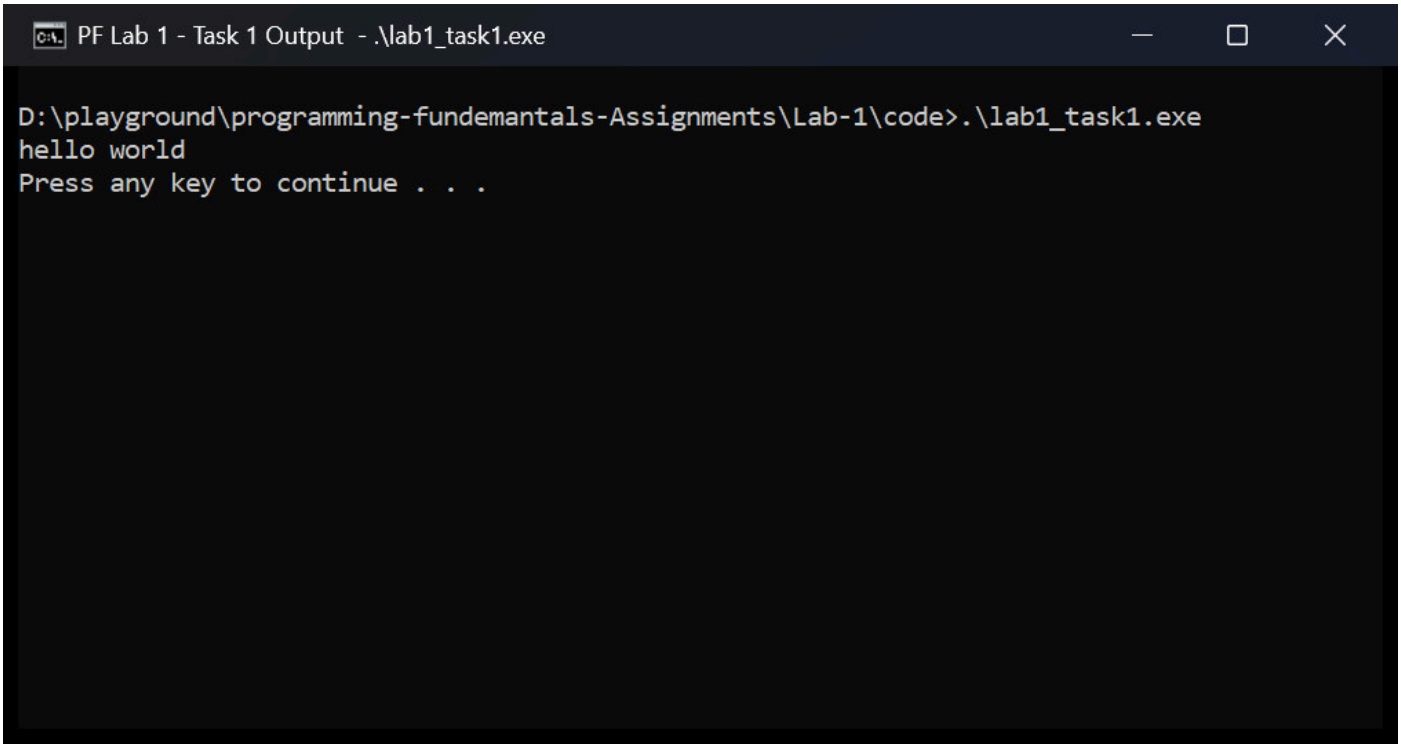


# Task 2

**Handwritten code**

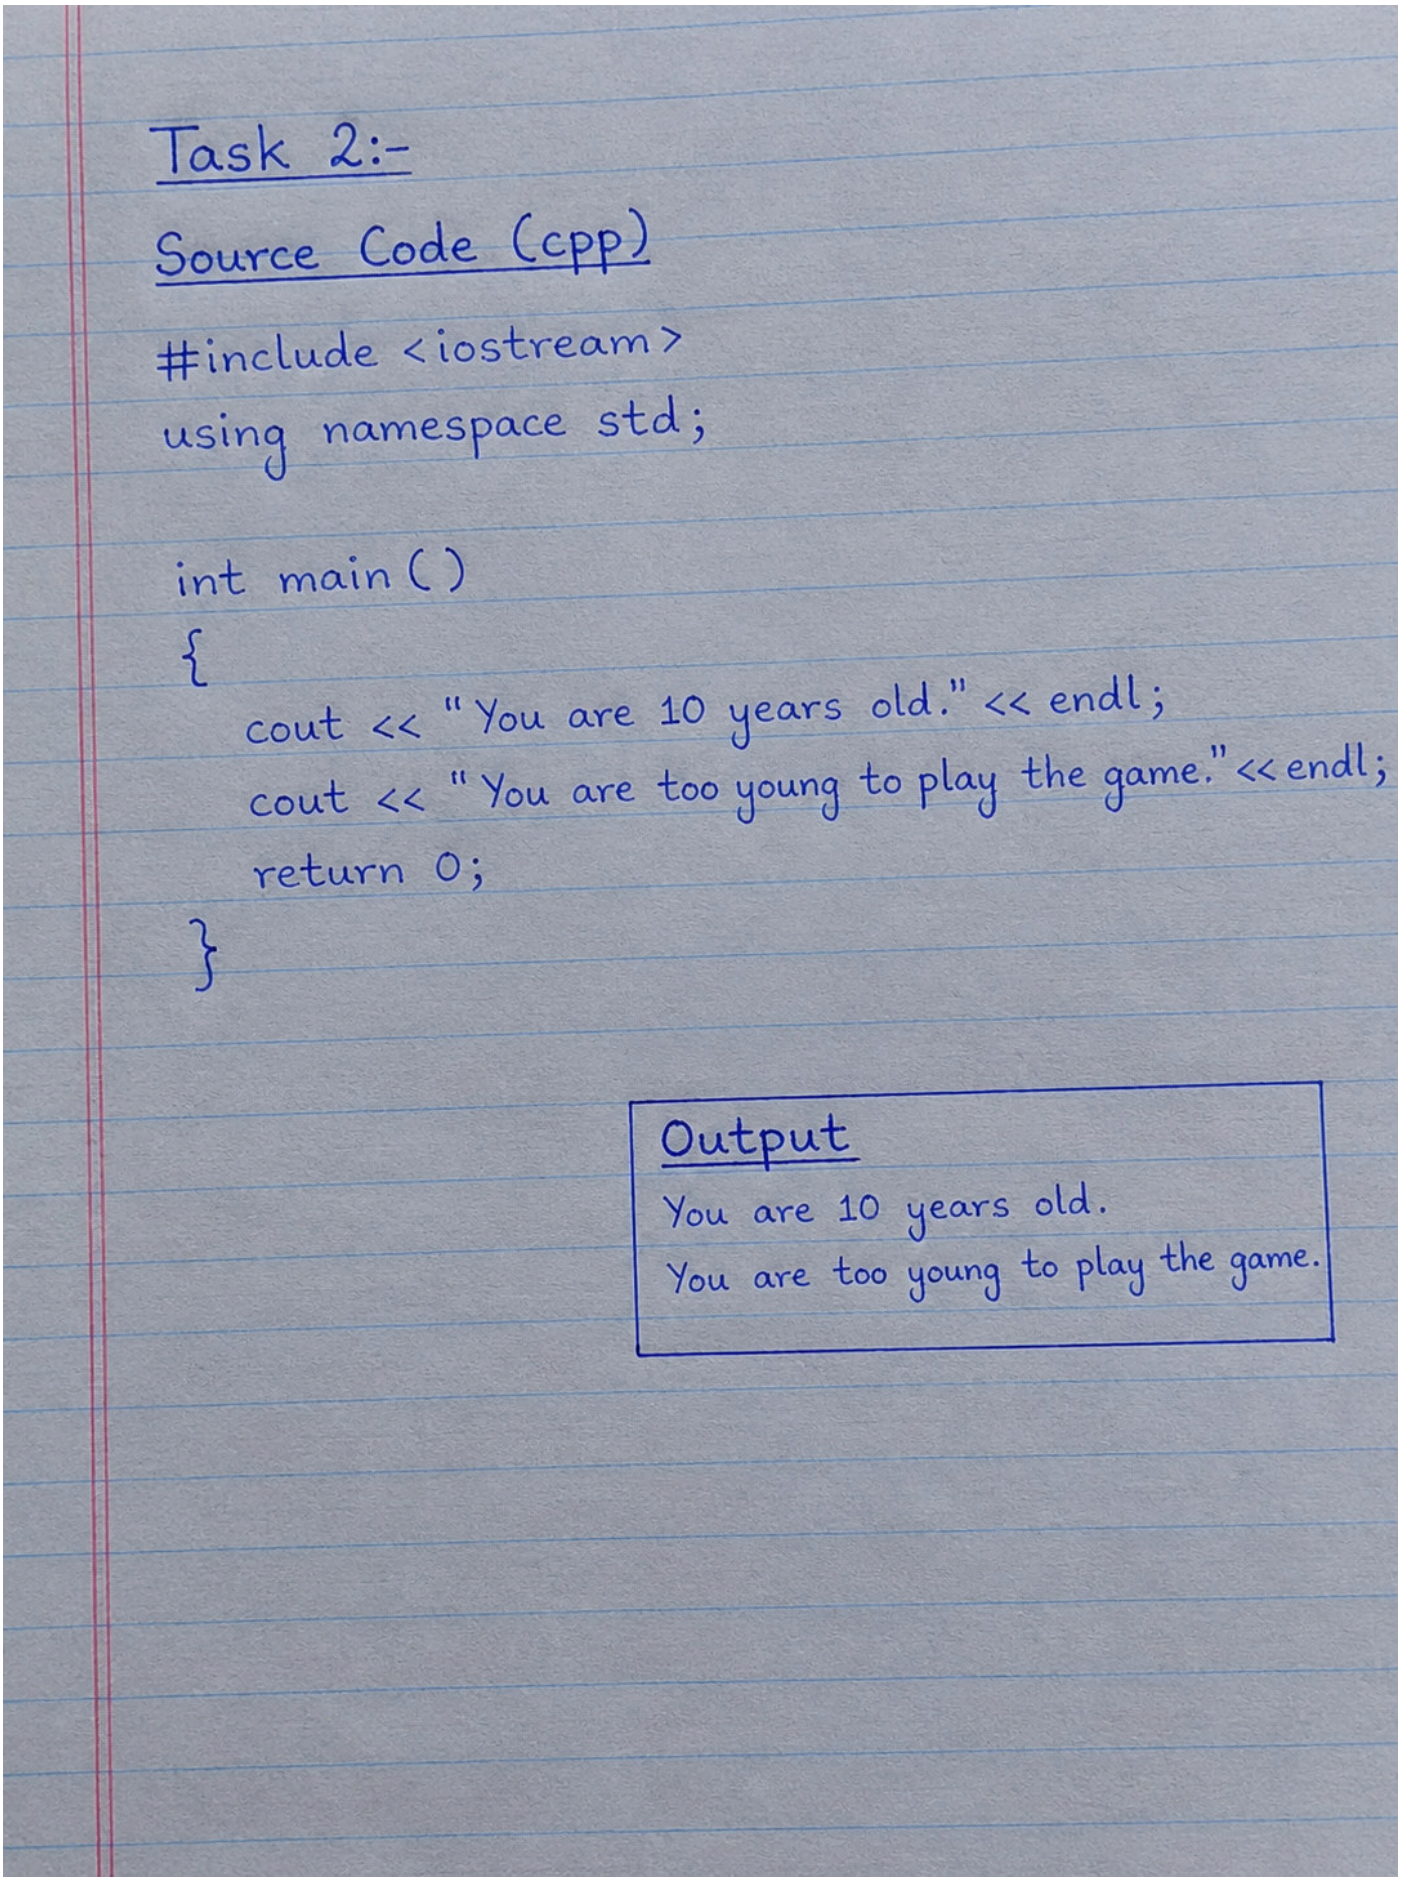


# Task 2

### Typed code (lab1_task2.cpp)

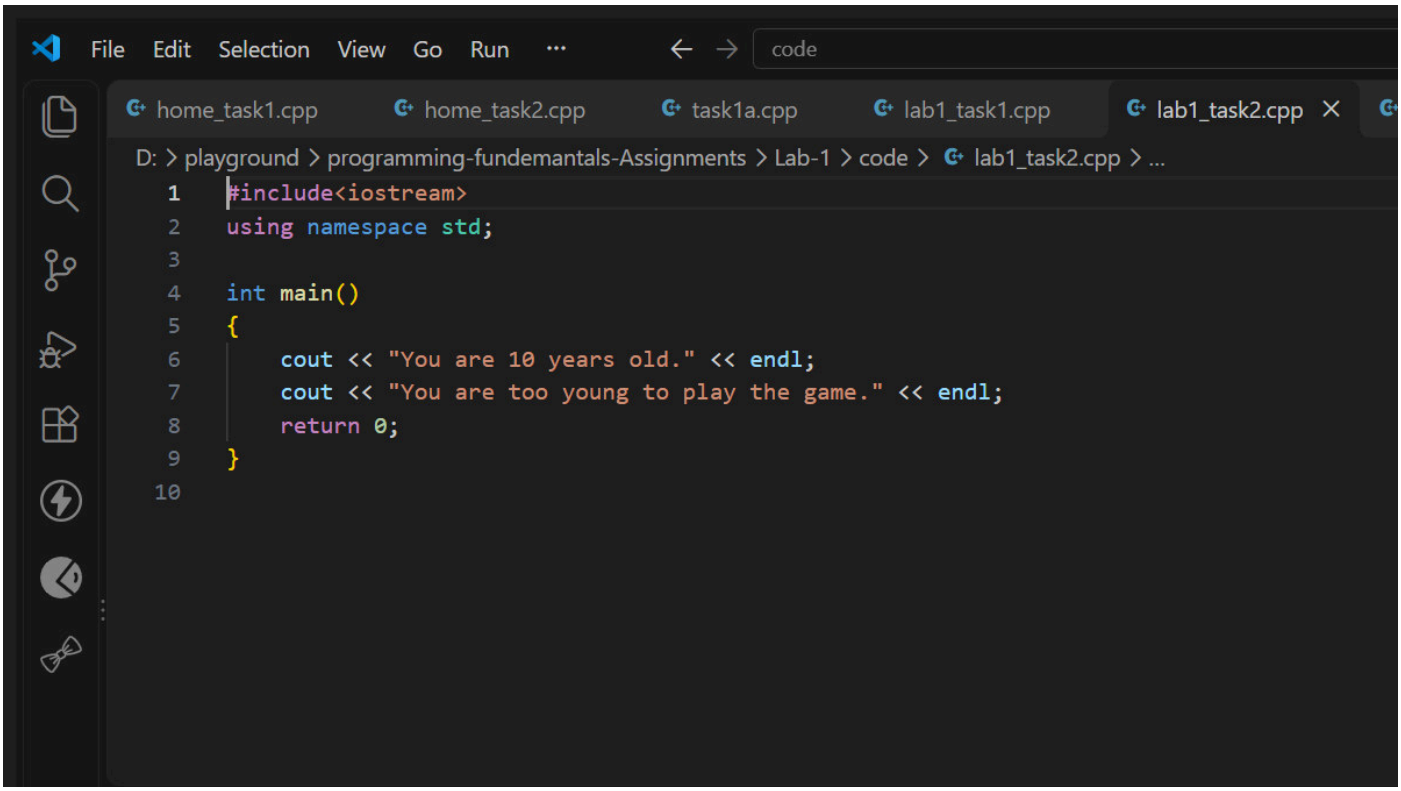



### Output

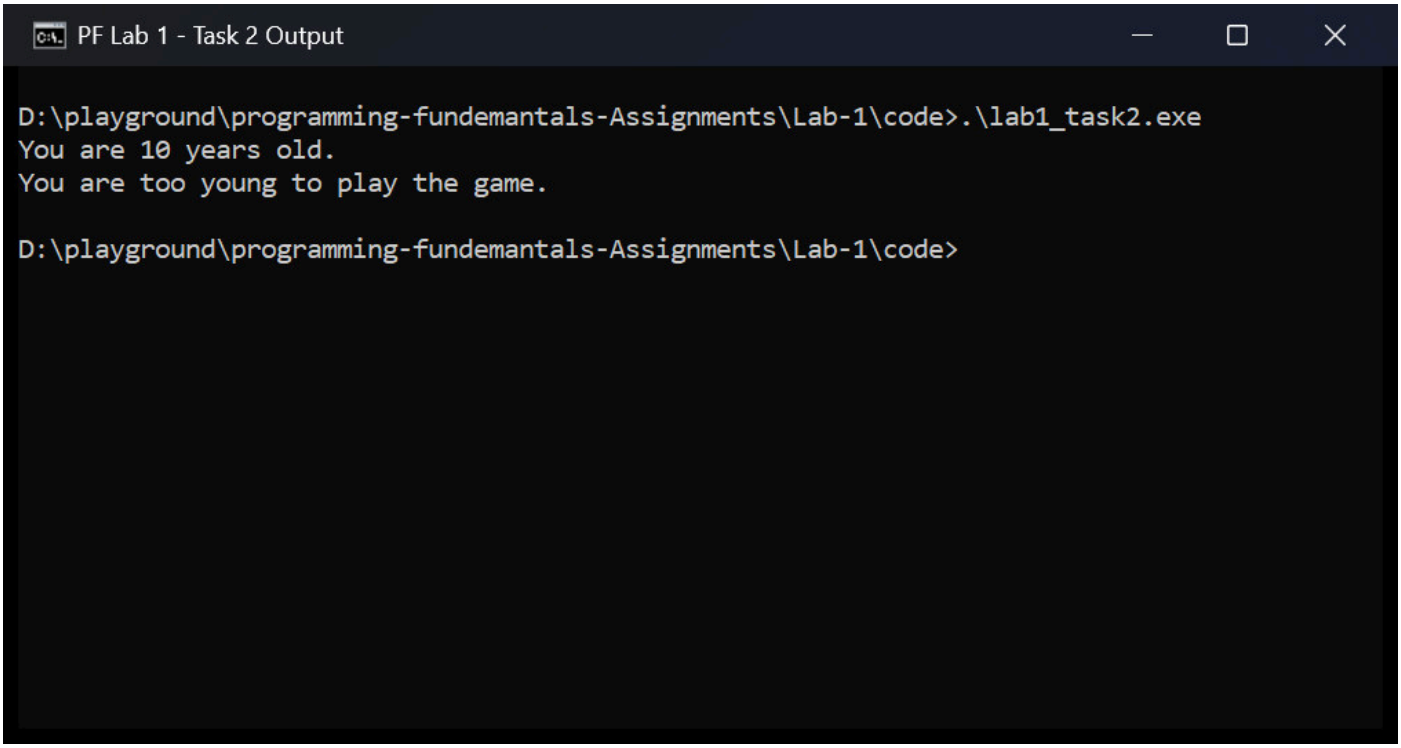

# Task 3

**Handwritten code**

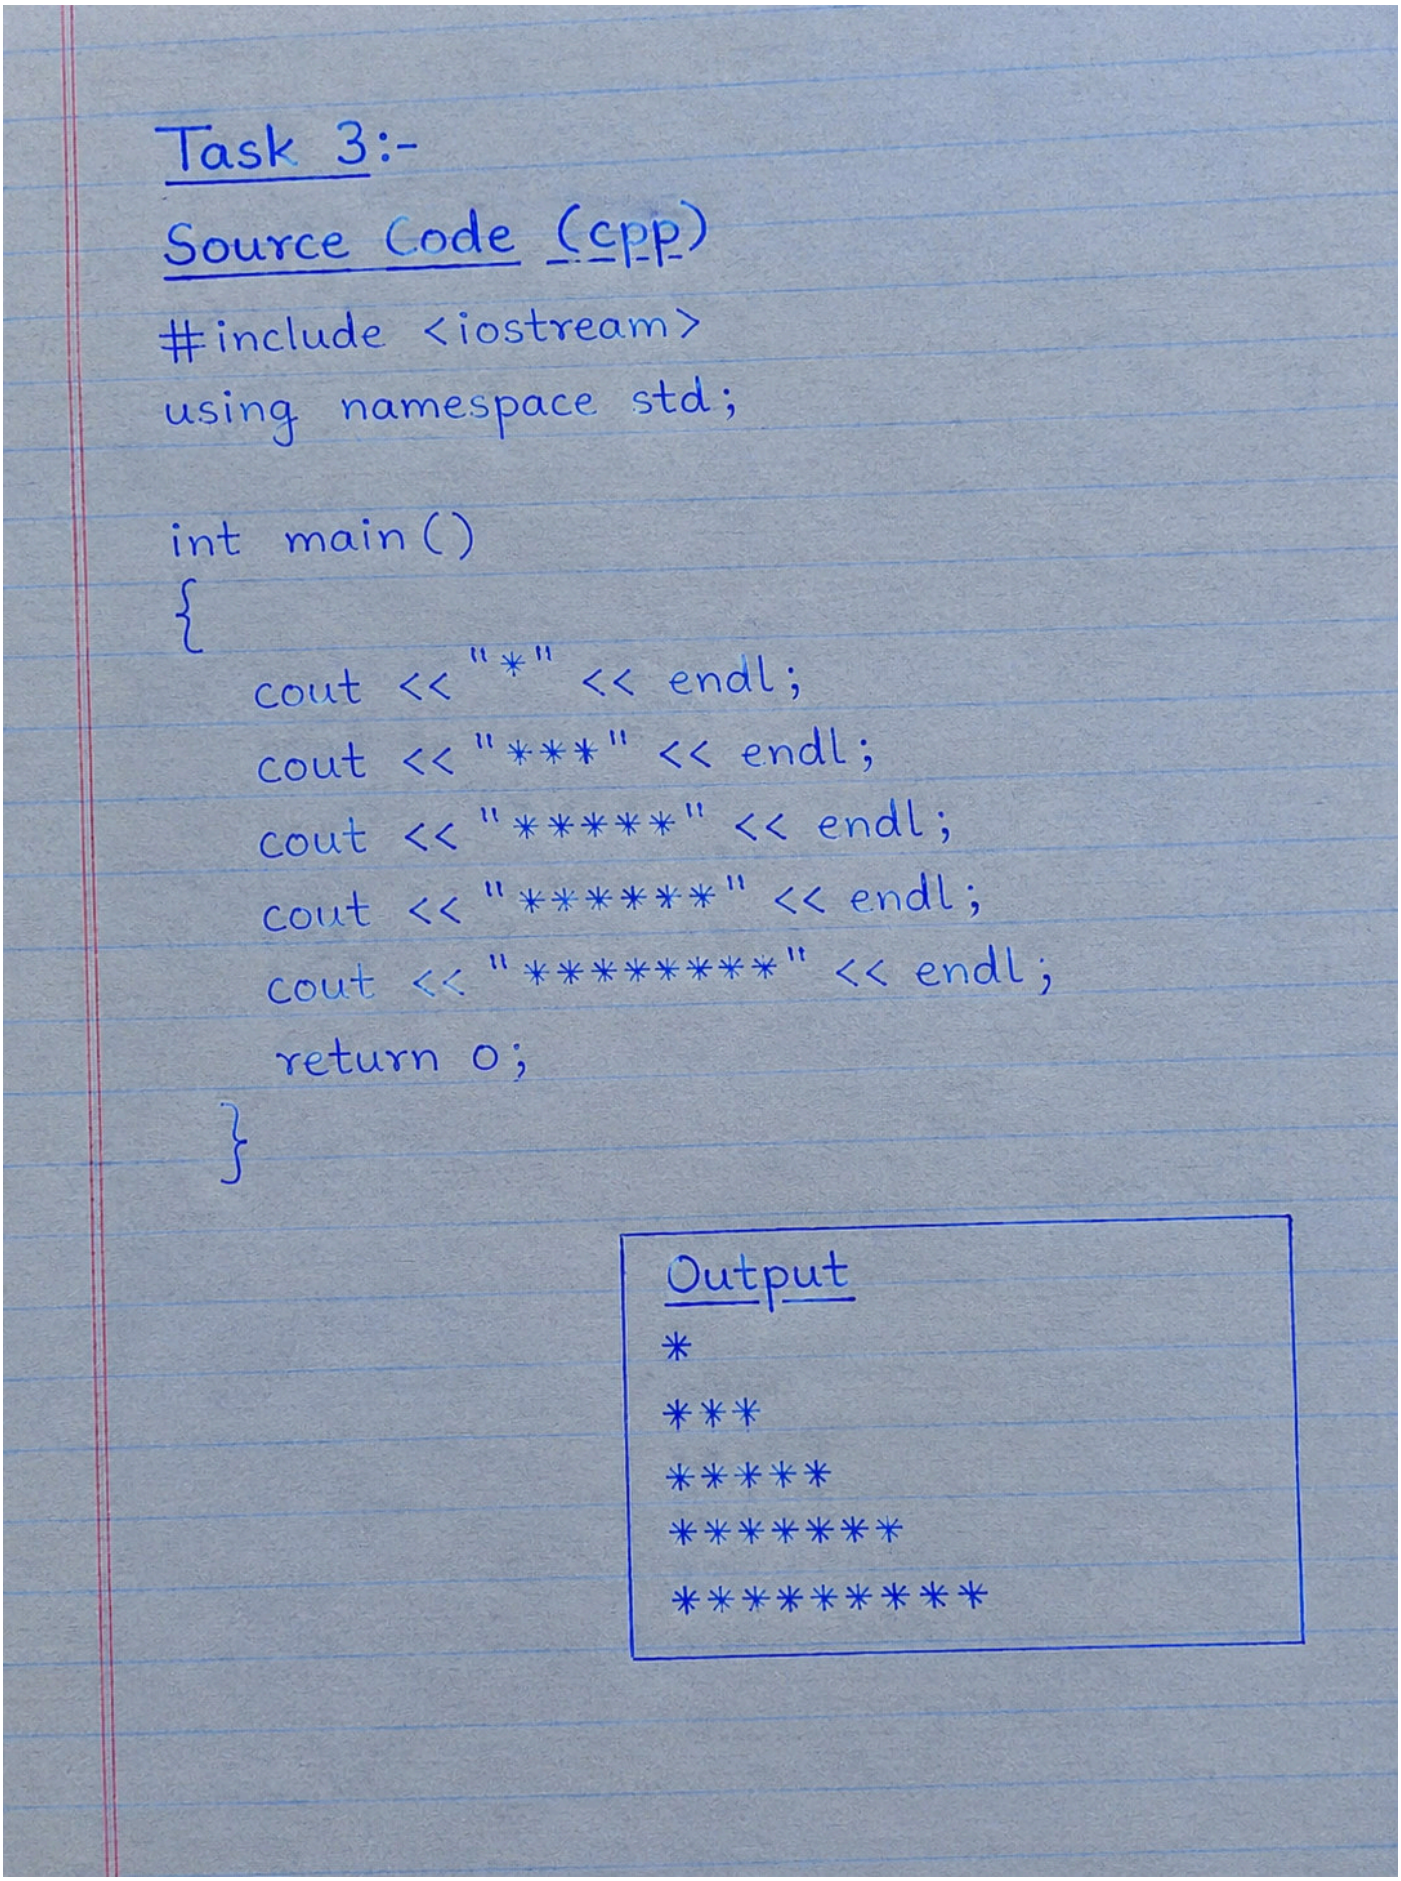

Task 3:-

Source Code (cpp)

```
#include <iostream>
using namespace std;


int main()
{
    cout << "*" << endl;
    cout << "***" << endl;
    cout << "*****" << endl;
    cout << "*******" << endl;
    cout << "*********" << endl;
    return 0;
}
```

Output

```
*
***
*****
*******
*********
```

# Task 3

### Typed code (lab1_task3.cpp)

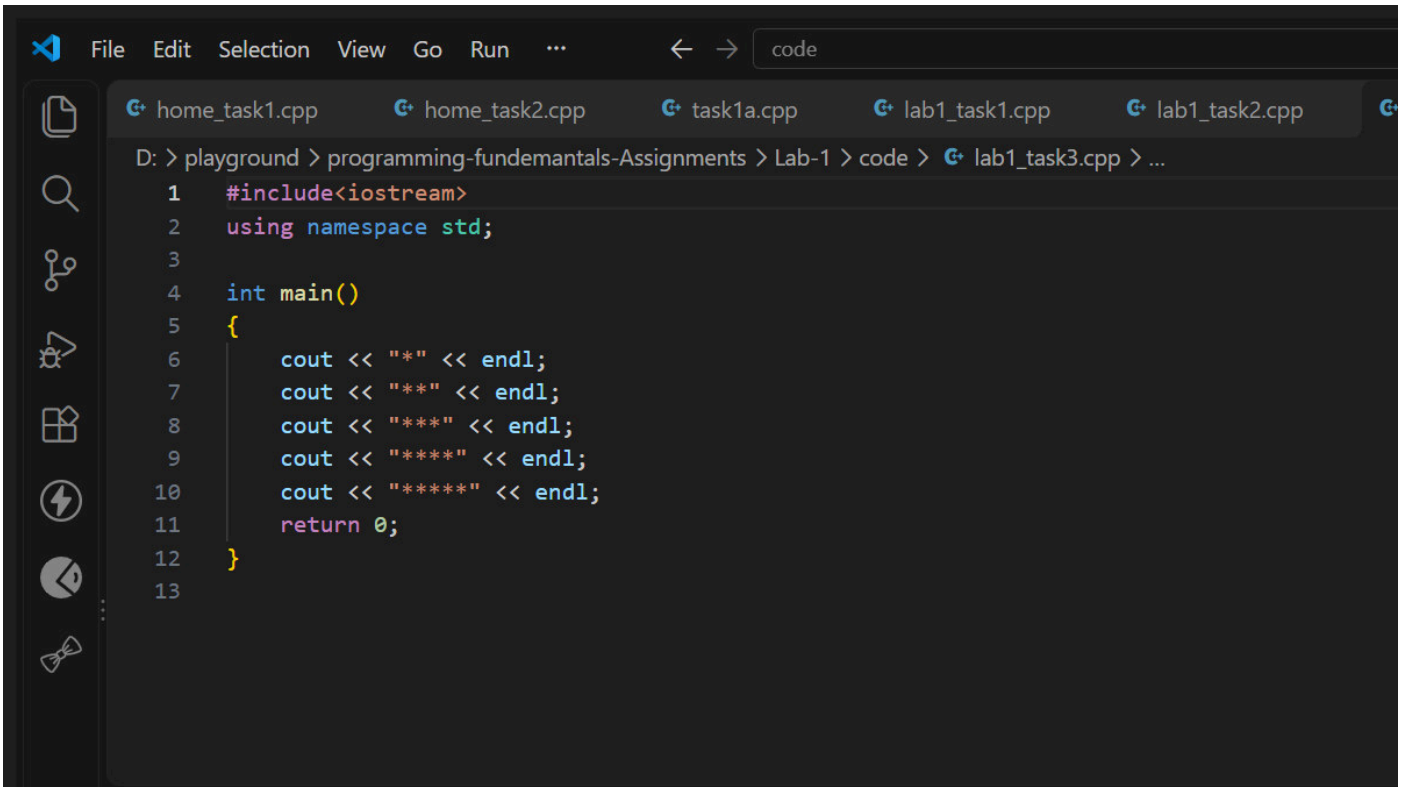


### Output

