A Dedicated Edge System and MCGI-YOLO for Fabric Defect Detection and Closed-Loop Control in Circular Knitting Machines

Kangzhao Tan[#], Jiarui Zhang[#], Junjie Yu, Heng Wu, Jing Lin[*], and Chunhua He[*]

***Abstract*—Defect detection is critical for circular knitting production, where persistent needle or yarn abnormalities lead to repeated fabric defects, resulting in severe material waste and economic losses. Existing methods are rarely tailored to circular knitting machines and tend to be cost-prohibitive, limiting large-scale industrial deployment. To address this issue, we present a low-cost, dedicated defect detection and closed-loop control system for circular knitting machines, which triggers image acquisition from machine rotation, halts the machine upon defect detection to interrupt defect propagation, and alerts the operator for corrective intervention, forming a complete production–detection–control loop. To further improve detection accuracy for diverse fabric defect morphologies and scales, we propose a lightweight detector termed MCGI-YOLO. To model the morphological continuity of elongated defects, MCE augments backbone features with spatially extended context. To accommodate variations in defect morphology and scale, gated interpolation upsampling (GIU) adapts the reconstruction of higher-level context before fusion with local features, using a compact content-aware gate. On a real-world dataset collected from a circular-knitting production line, MCGI-YOLO achieves 97.2% mAP50 and 65.5% mAP50–95, improving on the YOLOv8n baseline by 6.7 and 7.1 percentage points, respectively, with 22 FPS on the edge device. The proposed system provides a cost-effective solution for real-time defect detection in circular-knitting production.**

***Index Terms*—Circular knitting machine, fabric defect detection, edge computing, MCE(morphology-aware context encoding), GIU(gated interpolation upsampling), YOLO.**

I. Introduction

CIRCULAR knitting machines are key production equipment for high-volume weft-knit fabric, which is widely used in everyday clothing such as T-shirts and sportswear [1]–[3]. The International Textile Manufacturers Federation reported approximately 24,500 global shipments of circular knitting machines in 2025 [4]. Globally, approximately 92 million tonnes of textile waste are generated annually, highlighting the importance of reducing avoidable material losses [5]. Conventional quality checks are often performed after knitting is completed. A persistent needle or yarn abnormality can therefore generate repeated defects along the fabric before discovery, accumulating substantial fabric waste and economic losses [6]–[8]. To prevent such losses, real-time detection during knitting is needed to identify these defects early and enable timely intervention before further defective fabric is produced.

Dedicated instruments have been developed to combine task-specific sensing hardware with defect analysis. Mostafa et al. developed a pipe inspection tool that couples a transmitter coil and four sensor coils with a neural network to characterize metal loss on the inner pipe surface [9]. In textile inspection, Zhang et al. designed a multilight-source image acquisition platform with alternating illumination and complementary localization algorithms to measure fabric defect dimensions [10]. These studies demonstrate the value of integrating sensing hardware and processing methods around the characteristics of the inspection target. For circular knitting machines, the acquisition arrangement must additionally accommodate fabric motion and the installation geometry, together with interfaces for machine stopping and operator alerts.

Edge computing offers a practical pathway toward such real-time detection, and has been increasingly adopted for industrial defect detection. In textile applications, Machado et al. deployed YOLO11n on a Jetson Orin Nano to detect solid-color cotton and linen fabrics on a fabric rolling line [11]. Yan et al. deployed an improved YOLOv5s model on a Huawei Ascend 310-based Atlas platform to detect warp-knitted lace on warp-knitting machines [12]. Beyond textile detection, Wang et al. deployed an improved YOLOv5s model on a Jetson Xavier NX for rail surface defect detection [13]. Li et al. deployed LiteYOLO-ID on a Jetson TX2 NX for insulator defect detection [14], and Zhao et al. implemented KAM-Net on a Xilinx ZCU102 FPGA for glass defect segmentation [15]. These studies collectively demonstrate the applicability of edge computing to real-time defect detection in their respective scenarios. However, such platforms are not tailored to the sensing, control, and installation constraints of circular knitting machines. The relatively high cost of general-purpose computing platforms, together with the additional integration effort required for image acquisition and machine control, hinders economically viable deployment across large numbers of machines.

Manuscript received October 12, 2026; revised xxxx xx, 2026; accepted xxxx xx, 2026. ([#]These authors contributed equally: Kangzhao Tan, Jiarui Zhang) ([*]Corresponding authors: Jing Lin and Chunhua He).

Kangzhao Tan, Jiarui Zhang, Junjie Yu, and Chunhua He are with the School of Computer Science, Guangdong University of Technology, Guangzhou 510006, China (e-mail: tankangzhao@mails.gdut.edu.cn; zhangjiarui1@mails.gdut.edu.cn; yujunjie2@mails.gdut.edu.cn; hechunhua@pku.edu.cn). Heng Wu is with the School of Automation, Guangdong University of Technology, Guangzhou 510006, China (e-mail: heng.wu@gdut.edu.cn). Jing Lin is with the Classroom Management Center, Guangdong University of Technology, Guangzhou 510006, China (e-mail: lj@gdut.edu.cn).

In terms of detection algorithms, YOLO-based detectors have been widely explored for industrial defect detection because of their efficient inference and explicit defect localization [16]. FA-YOLO combines receptive-field enhancement, attention, and adaptive spatial feature fusion [17]. DGHR-YOLO integrates deformable convolution for morphology adaptation with a high-level screening feature pyramid and lightweight feature processing [18]. An and Wan proposed JDCBL, combining contextual Transformer features with balanced contrastive learning to address multiscale defect representation and long-tailed class distributions [19]. Wang et al. introduced RRNet, a lightweight rotated fabric defect detector that combines position-guided fusion with multiscale rotation-guided strip coupling to model oriented defect structures [20]. Together, these methods advance contextual representation, morphology adaptation, and the detection of defects with varying scales and class frequencies. Related work on photovoltaic-cell and pipeline-weld detection also explores task-specific feature pyramids, contextual relations, and lightweight rotated representations [21]–[23].

These advances include lightweight architectures and morphology-aware representations. For on-machine circular-knitting inspection, the remaining challenge is to combine defect-specific feature encoding and reconstruction within the computational budget of a dedicated low-cost edge device. Horizontal and vertical elongated defects require spatially extended contextual evidence, while variations in defect shape and size require adaptive reconstruction before multiscale fusion. These requirements motivate compact learned operations that support accurate detection together with real-time machine control.

Motivated by these limitations, we design and implement a low-cost, dedicated defect detection and closed-loop control system for circular knitting machines. The system integrates a power adapter, a global-shutter camera with LED illumination, a coaxial serializer/deserializer (SerDes) image-transmission link, a Hall sensor, and a self-developed edge device. The Hall sensor detects machine rotation to trigger image acquisition and defect detection. When a defect is detected, the edge device stops the circular knitting machine, uploads the defect image and record, and pushes an alert to the operator through the cloud platform for corrective intervention.

For defect detection within this system, we develop MCGI-YOLO, a lightweight detector based on YOLOv8n that incorporates the morphology priors for horizontal and vertical elongated defects. MCE supplies spatially extended morphology-aware context while preserving the original local C2f feature paths. GIU addresses the differing reconstruction needs of elongated defects and holes of varying sizes by adaptively adjusting the interpolation of higher-level context before fusion with local lateral features. Together, the two components connect morphology-aware context encoding with spatial reconstruction within a compact parameter budget.

The main contributions of our work are as follows.

(1) We design and implement a dedicated defect detection and closed-loop system for circular knitting machines, integrating image acquisition, camera transmission, edge inference, and local machine-stop control, and demonstrate its deployment on a real production line.
(2) We develop MCE to explicitly incorporate the morphology priors of horizontal and vertical elongated defects. It embeds spatially extended, morphology-aware context in a partial C2f branch while retaining the original local feature extraction paths with small additional overhead.
(3) We design GIU to accommodate the diverse morphologies and scales of circular-knitting defects, including elongated defects and holes of varying sizes. A compact spatial gate adapts a convex combination of two fixed interpolation paths, balancing response replication and neighborhood smoothing in the top-down path before fusion with local lateral features.

The remainder of this paper is organized as follows. Section II presents the defect detection and closed-loop control system. Section III describes MCGI-YOLO and its two components. Section IV defines the dataset and evaluation protocol. Section V reports detector comparisons, component ablation, and model deployment. Section VI concludes the paper.

II. Defect Detection and Closed-Loop Control System

A. System Overview

We design and implement a dedicated defect detection and closed-loop control system for circular knitting machines, as shown in Fig. 1. The closed-loop workflow begins when the operator starts the machine. The Hall sensor detects machine rotation and triggers the edge device to activate the camera and LED illumination for image acquisition and defect detection. When a defect is detected, the edge device immediately sends a stop command to the machine controller to prevent further defect propagation, uploads the defect image and record to the cloud, and pushes an alert notification to the operator. After the operator inspects the reported defect, resolves the production fault, and restarts the machine, the rotation signal reactivates detection. This sequence forms a complete production–detection–control loop. The system is organized into three functional subsystems: power supply, image acquisition and transmission, and processor. The following subsections describe their designs and hardware implementation.

B. Power Supply Subsystem

To accommodate different industrial supply voltages across countries and regions, we design a power adapter with a 100–500 V AC input range and a 24 V DC output rated at 3 A. The adapter first supplies this output to the device. The device then supplies the LED illumination. By adjusting the current delivered to the LEDs, the device controls the illumination brightness to suit the image-acquisition conditions. This arrangement integrates LED power delivery and brightness control into the device.

C. Image Acquisition and Transmission Subsystem

The rapid rotation of circular knitting machines requires imaging that preserves defect geometry and fine spatial detail.

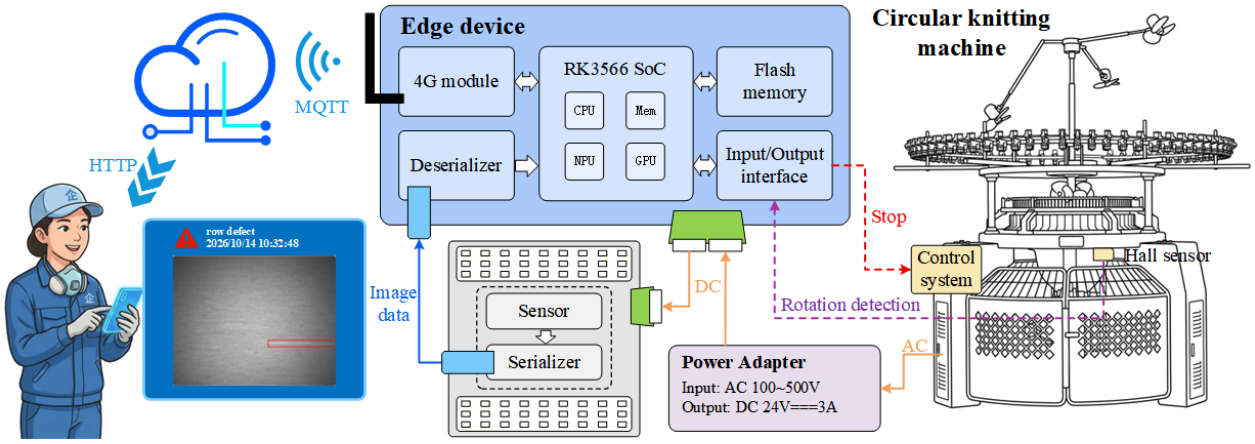


Fig. 1. The device comprises LED illumination control, a coaxial image link to the RK3566, 4G cloud connectivity, and I/O for rotation sensing and machine control.

We therefore select a SmartSens SC130GS global-shutter sensor(SmartSens Technology Co., Ltd., Shanghai, China) at 1280×1024 resolution, which exposes all pixels simultaneously to avoid motion-induced distortion from sequential row exposure. At a camera-to-fabric distance of approximately 10 cm, the field of view is approximately 16×12 cm, with the 16 cm dimension aligned with the horizontal direction of fabric motion.

Factory machinery creates an electromagnetically noisy environment, and installation requires the camera and edge device to be separated by a cable run. We therefore use serializer/deserializer (SerDes) transmission over shielded coaxial cable to accommodate remote camera placement and the interference environment. Specifically, the THCV241A serializer and THCV242A deserializer(THine Electronics, Inc., Tokyo, Japan) bridge the camera-side and processor-side MIPI CSI-2 interfaces. The devices support a maximum serial line rate of 4.0 Gb/s per lane, corresponding to a rated effective rate of 3.2 Gb/s [24], [25].

The camera is configured to transmit 1280×1024 RAW10 images at 30 frames/s. With $b = 10$ bits per pixel, the active-image payload rate is

$$\begin{aligned} R_{\text{img}} &= WHbf_{\text{cam}} \\ &= 1280 \times 1024 \times 10 \times 30 \\ &= 393.216 \text{ Mb/s}, \end{aligned} \tag{1}$$

where W and H denote the image width and height, and f_{cam} is the camera acquisition rate. This corresponds to 49.152 MB/s, accounting for only 12.3% of the rated single-lane effective capacity, which provides a stable image input for the system's defect detection.

D. Processor Subsystem

The processor is selected according to the detection rate required by fabric motion and the camera field of view. Taking a typical large circular knitting machine as an example, with a machine diameter of 40 in ($D = 1.016$ m) and a rotation period of $T = 2$ s, the fabric travels approximately $\pi D = 3.192$ m per revolution. With an effective field-of-view width of $w = 0.16$ m along the direction of motion, the required frame rate is

$$f_{\min} = \frac{\pi D}{Tw} = \frac{\pi \times 1.016}{2 \times 0.16} \approx 9.97 \text{ frames/s}. \tag{2}$$

We set the effective detection-throughput requirement to 10 frames/s. For this throughput target, we select the Rockchip RK3566(Rockchip Electronics Co., Ltd., Fuzhou, China) to balance processing capability, camera connectivity, and hardware cost. It integrates a quad-core Cortex-A55 CPU, an NPU rated at 1 TOPS for INT8 operations [26].

Table I summarizes the hardware specifications of platforms used in related defect detection studies. While high-performance platforms like the NVIDIA Jetson Orin Nano and Xilinx ZCU102 offer substantial computational power, their costs range from hundreds to over 3,000 USD, which can be prohibitive for large-scale deployment. In contrast, the Rockchip RK3566 provides a cost-effective hardware basis for the proposed system at only 60 USD, offering a significant cost advantage over comparable industrial platforms and making it highly suitable for large-scale deployment in textile factories.

E. Hardware Implementation

Based on the design requirements of the subsystems described above, we develop the corresponding hardware shown in Fig. 2. The camera assembly (A) combines the image sensor and LED illumination. We design a camera-side interface board (B) that integrates the serializer and coaxial connector, and a mainboard (C) built around the RK3566. The mainboard integrates memory and flash storage, the camera deserializer and coaxial connector, a 4G module with SIM-card and antenna interface, input/output interface, and power-management circuitry. This board-level integration brings image reception, local inference, network communication, machine control, and illumination control into a dedicated edge device. Fig. 3 shows the system installed on a circular knitting machine in a real production line.

TABLE I
HARDWARE PLATFORMS USED IN RELATED DEFECT DETECTION STUDIES.

Platform	Memory (GB)	Compute capability	Price (USD)
NVIDIA Jetson TX2 NX [14]	4	1.33 TFLOPS (FP16)	249
NVIDIA Jetson Xavier NX [13]	8	21 TOPS (INT8)	399
NVIDIA Jetson Orin Nano [11]	8	40 TOPS (INT8)	499
Huawei Ascend 310 [12]	8	16 TOPS (INT8)	550
AMD Xilinx ZCU102 [15]	4.5†	3.45 TOPS (INT8)‡	3234
Self-developed RK3566 device(Ours)	4	1 TOPS (INT8)	60

†ZCU102 memory is the sum of 4 GB PS DDR4 and 0.5 GB PL DDR4. ‡The 3.45 TOPS value is AMD's reference INT8 peak for three B4096 DPU cores.

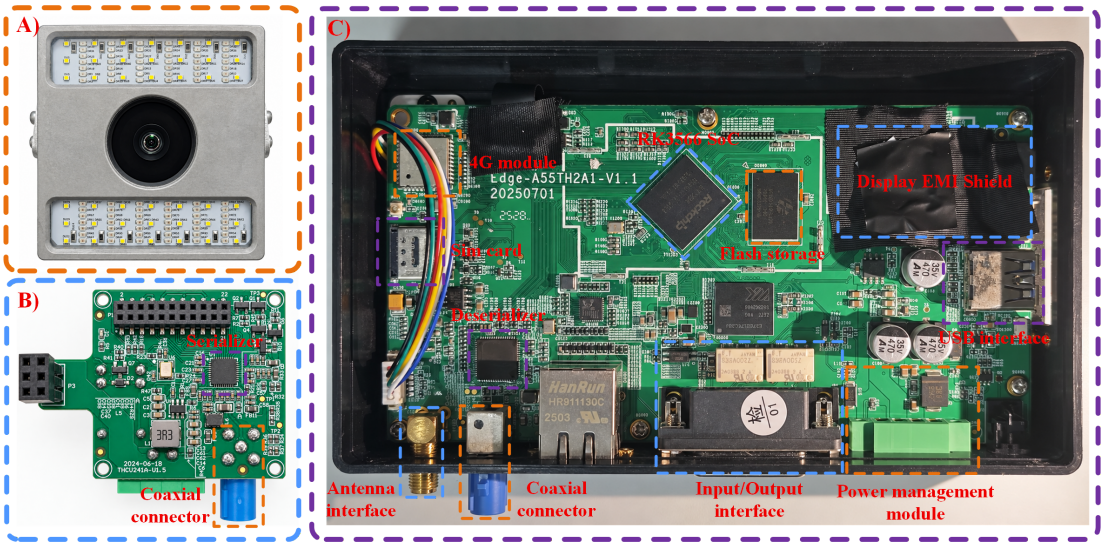


Fig. 2. Hardware of the defect detection system: (A) industrial camera with LED illumination; (B) camera-side interface board with a serializer and coaxial connector; and (C) RK3566 edge board with the 4G communication, flash storage, camera-interface, input/output interface, and power-management components.

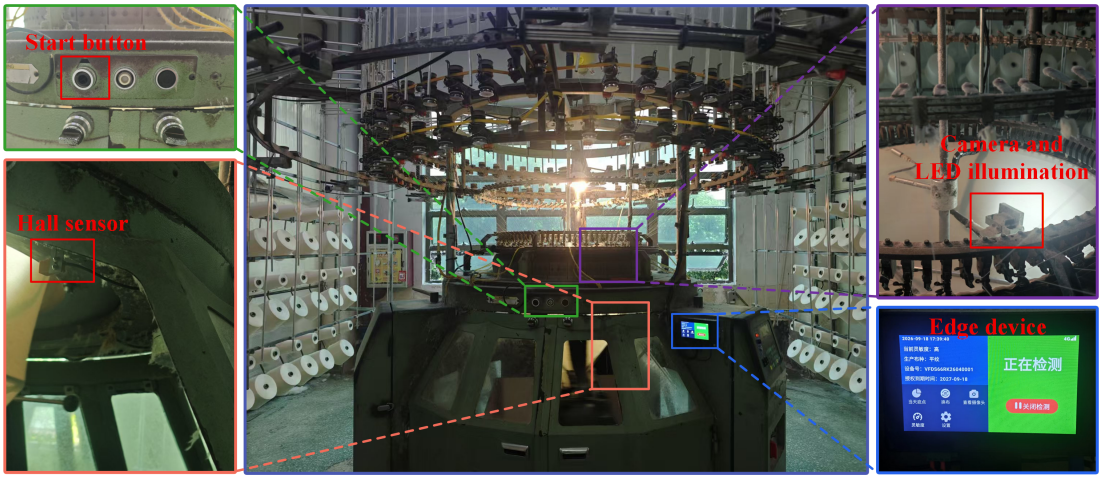


Fig. 3. Actual deployment on the circular knitting machine. The insets highlight the start button, Hall sensor, industrial camera, and RK3566 edge device, respectively.

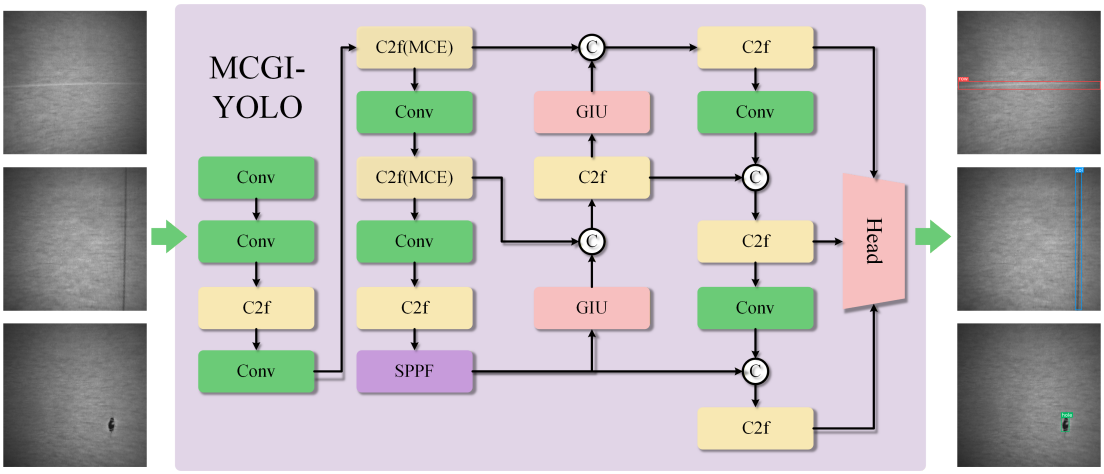


Fig. 4. Architecture of MCGI-YOLO. MCE operates within the stride-8 and stride-16 backbone C2f stages. GIU replaces the two top-down upsampling operations. The local bottlenecks, bottom-up aggregation path, and three-scale detection head are retained from YOLOv8n.

III. Detection Algorithm

A. MCGI-YOLO Architecture

Fig. 4 presents MCGI-YOLO, which is built upon YOLOv8n [27]. Morphology-aware context encoding (MCE) is embedded in the backbone C2f blocks at P3 (stride 8) and P4 (stride 16). It explicitly models the spatial continuity of horizontal and vertical elongated defects by aggregating long-range morphology context to modulate part of the last bottleneck features. This partial-channel design introduces context with limited additional computation while retaining the original local feature paths.

Gated interpolation upsampling (GIU) replaces the two nearest-neighbor upsampling operations in the top-down neck. It adapts the reconstruction of higher-level context to the differing morphologies and scales of elongated defects and holes before fusion with lateral backbone features. A compact spatial weight map shared across channels blends two fixed interpolation paths, balancing response replication and neighborhood smoothing with a small learned computational cost. The remaining backbone stages, bottom-up aggregation path, and three-scale detection head are retained [28], [29].

B. Morphology-Aware Context Encoding

Defects produced by circular knitting machines mainly manifest in two typical morphologies, namely horizontal and vertical elongated patterns. Elongated defects are characterized by a high aspect ratio. Their continuity spans across large spatial regions, making it difficult for local receptive fields to establish long-range dependencies. Local feature extraction alone fails to explicitly associate these spatially separated responses as parts of the same defect. Meanwhile, modeling long-range dependencies through dense channel-wise interactions would introduce substantial redundancy, imposing an impractical computational overhead on the RK3566. We therefore develop MCE to incorporate the morphology prior of elongated defects through spatially extended context within a compact computational budget.

1) Channel Allocation: MCE is inserted after the last bottleneck in the selected C2f blocks, before branch concatenation and fusion [Fig. 5(a)]. The original residual bottleneck is retained [Fig. 5(c)]. As illustrated in Fig. 5(d), its input is $F \in \mathbb{R}^{B\times C\times H\times W}$. The channels are divided into two groups: one quarter of the channels, denoted by U, are used for morphology-aware context aggregation and residual modulation; the remaining three quarters, denoted by V, pass through unchanged. This design intentionally applies morphology-aware context aggregation to only a small channel subset, keeping the computational overhead compact. The two groups are concatenated after modulation, allowing the subsequent fusion to combine morphology-aware and unmodulated features with minimal performance loss. With $q = C/4$, the two groups have sizes $U \in \mathbb{R}^{B\times q\times H\times W}$ and $V \in \mathbb{R}^{B\times(C-q)\times H\times W}$. The split preserves the batch and spatial dimensions.

2) Morphology-Aware Context Aggregation: The one-quarter-channel group U feeds the two pooling paths shown in Fig. 5(d). Here, b, a, h, and w index the batch sample, channel, row, and column, respectively. Inspired by the pooling design of coordinate attention [30], we average independently for each sample and channel:

$$R_h(b,a,h,1) = \frac{1}{W}\sum_{w=1}^{W} U(b,a,h,w), \tag{3}$$

$$R_w(b,a,1,w) = \frac{1}{H}\sum_{h=1}^{H} U(b,a,h,w). \tag{4}$$

Averaging over W aggregates long-range evidence along each row while retaining row positions; averaging over H aggregates long-range evidence along each column while retaining column positions. The resulting descriptors have sizes $B \times q \times H \times 1$ and $B \times q \times 1 \times W$, where the dimension of size 1 corresponds to the spatial direction that was pooled. They pass through 3×1 and 1×3 depthwise convolutions and are added by broadcasting:

$$T = \mathrm{DW}_{3\times1}(R_h) + \mathrm{DW}_{1\times3}(R_w). \tag{5}$$

Pooling along full rows and columns provides long-range context, while the 3×1 and 1×3 convolutions supplement local

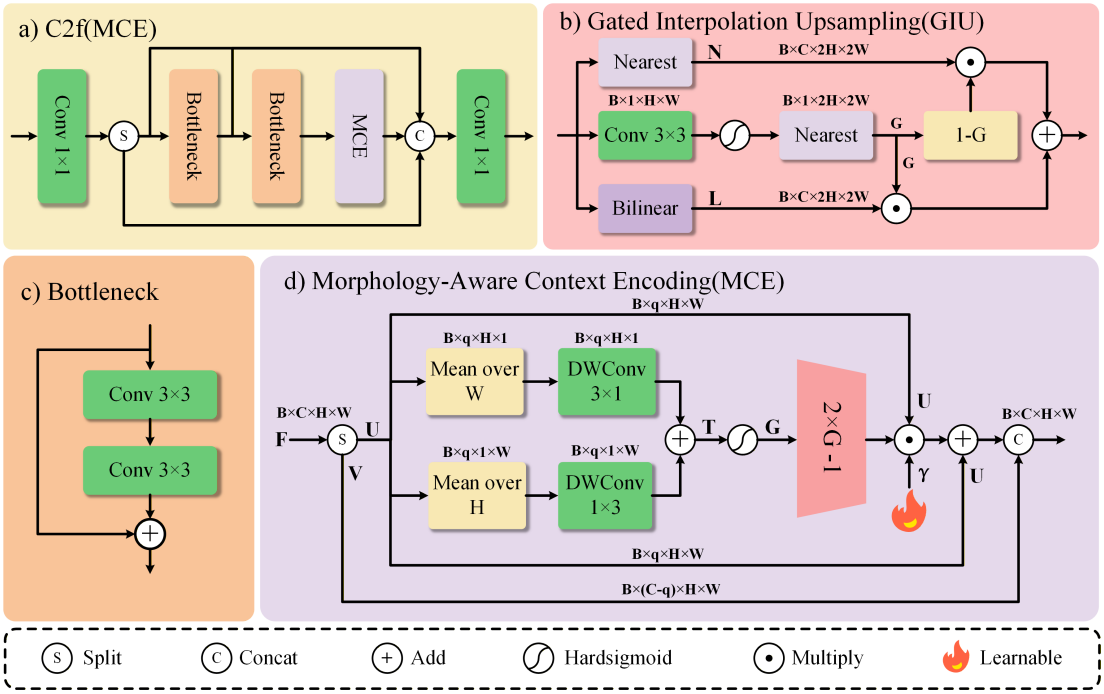


Fig. 5. Structures of the proposed modules: (a) C2f block with MCE; (b) GIU with a spatial weight map shared across channels; (c) residual bottleneck retained in C2f; and (d) MCE with context modulation on one quarter of its input channels and an unchanged bypass for the remaining three quarters.

information between neighboring positions on the compressed descriptors.

3) Residual Context Modulation: As shown in Fig. 5(d), the combined context T is mapped by Hardsigmoid and centered to construct a scaled residual correction:

$$G = \mathrm{HS}(T), \tag{6}$$

$$U' = U + \gamma \odot U \odot (2G - 1), \tag{7}$$

where HS is Hardsigmoid, $\odot$ denotes element-wise multiplication with broadcasting, and $\gamma \in \mathbb{R}^{1\times q\times 1\times 1}$ is a learnable channel-wise parameter. The context response $G \in [0,1]^{B\times q\times H\times W}$ is centered by $2G-1$ to provide signed modulation, with γ controlling its channel-wise strength. The original U is retained through the residual connection, and the corrected one-quarter-channel group U' is concatenated with the unchanged three-quarter-channel group V. The corrected group has size $U' \in \mathbb{R}^{B\times q\times H\times W}$, and channel concatenation produces a $B\times C\times H\times W$ output before the original C2f fusion. Zero-initializing γ makes the module an identity mapping at initialization.

C. Gated Interpolation Upsampling

Circular-knitting defects vary substantially in morphology and scale, from narrow horizontal and vertical patterns to small and large holes. Their feature representations therefore place different demands on spatial continuity, response concentration, and boundary extent. In the top-down feature pyramid, higher-level context must be reconstructed at a finer resolution before fusion with lateral features. Nearest-neighbor interpolation replicates responses within local regions, whereas bilinear interpolation combines neighboring responses to produce smoother spatial transitions. A fixed interpolation rule applies the same reconstruction behavior to all locations, limiting its adaptability to these diverse defect patterns. We develop GIU to adjust the balance between response replication and neighborhood smoothing according to the input features [Fig. 5(b)]. To achieve this adaptation with a small computational overhead, GIU combines two parameter-free interpolation paths using a single spatial weight map predicted at low resolution and shared across channels. It reconstructs the higher-level context before fusion with lateral features F_3 and F_4, which retain local texture and localization cues.

1) Two Fixed Interpolation Paths: For $X \in \mathbb{R}^{B\times C\times H\times W}$, nearest-neighbor and bilinear upsampling produce

$$N = \mathrm{Nearest}_2(X), \quad L = \mathrm{Bilinear}_2(X), \tag{8}$$

where $N, L \in \mathbb{R}^{B\times C\times 2H\times 2W}$, and bilinear interpolation uses fixed interpolation weights without learnable parameters.

2) Shared Spatial Gate: A 3×3 convolution maps the input channels to a single spatial response, followed by Hardsigmoid. The resulting $B\times 1\times H\times W$ weight map is upsampled by nearest-neighbor interpolation:

$$G = \mathrm{Nearest}_2\big(\mathrm{HS}(W_g * X + b_g)\big), \tag{9}$$

where $*$ denotes convolution, $W_g \in \mathbb{R}^{1\times C\times 3\times 3}$, and b_g is a scalar bias. The map $G \in [0,1]^{B\times 1\times 2H\times 2W}$ assigns a content-dependent interpolation weight to each spatial location and is broadcast across feature channels. Predicting this map at $H\times W$ limits the spatial cost of the learned convolution, while channel sharing requires only one output weight per location.

3) Gated Reconstruction: The output $Y \in \mathbb{R}^{B\times C\times 2H\times 2W}$ is a convex combination:

$$Y = (1 - G) \odot N + G \odot L. \tag{10}$$

Small values of G favor response replication, while larger values favor neighborhood smoothing. This spatially varying mixture allows the reconstruction behavior to adapt to local feature content associated with different defect morphologies and scales.

$$G_{\text{init}} = 0.05, \qquad Y_{\text{init}} = 0.95N + 0.05L, \tag{11}$$

so the module starts from a predominantly nearest-neighbor reconstruction, consistent with the baseline top-down pathway.

Each GIU adds $9C + 1$ parameters, with $9CHW$ multiply–accumulate operations per image for the gate convolution. The fixed interpolation paths, low-resolution weight prediction, and channel sharing concentrate the learned computation in a single compact convolution; the remaining reconstruction uses interpolation and element-wise mixing. This design provides content-adaptive upsampling within the computational budget.

IV. Experimental Setup

A. Dataset

The dataset was collected from a real circular-knitting production line and covers three defect categories: horizontal defects(*row*), vertical defects(*col*), and holes(*hole*). It comprises 403 images with 468 annotated defect instances, divided into training, validation, and test sets of 282, 40, and 81 images, respectively, as summarized in Table II.

TABLE II
IMAGE-LEVEL SPLIT AND DEFECT-INSTANCE COUNTS IN THE REAL PRODUCTION-LINE DATASET.

Split	Images	Instances	Row	Col	Hole
Train	282	329	174	75	80
Validation	40	48	24	13	11
Test	81	91	60	12	19

B. Implementation Details

Table III summarizes the training and deployment settings. MCGI-YOLO and its component-ablation variants share the same `yolov8n.pt` initialization as the YOLOv8n baseline, and all component comparisons use a common training protocol with matched random seeds. Other comparison models use available pretrained checkpoints from their respective implementations.

The RT-DETR-R18 entry uses the RT-DETRv2 implementation from the official repository [31].

C. Evaluation Metrics

Intersection over union (IoU) measures the overlap between predicted and ground-truth bounding boxes as the ratio of their intersection area to their union area. Detection accuracy is evaluated using mAP50 and mAP50–95. Let $a_c(t)$ denote the average precision for class c at IoU threshold t. The metrics are computed as

$$\text{mAP}_{50} = \frac{1}{N_c} \sum_{c=1}^{N_c} a_c(0.50), \tag{12}$$

$$\text{mAP}_{50:95} = \frac{1}{10N_c} \sum_{c=1}^{N_c} \sum_{t \in T} a_c(t), \tag{13}$$

where $N_c = 3$ and $T = \{0.50, 0.55, \ldots, 0.95\}$. Both metrics are reported as percentages, with improvements expressed in percentage points.

Model parameters and FLOPs are measured at 640×640 input resolution using each model's respective framework. For FPS comparison, all models are evaluated on an RTX 3090 with FP32 precision, batch size 1, and 640×640 inputs. This measurement is separate from the RK3566 deployment result.

TABLE III
IMPLEMENTATION PROTOCOL COVERING TRAINING (ULTRALYTICS) AND DEPLOYMENT (EDGE DEVICE).

Category	Parameter	Specification
Training setup	Hardware	Intel i7-13700KF; NVIDIA RTX 3090 (24 GB)
	Software	Ubuntu 24.04, Python 3.10.20, PyTorch 2.4.1+cu124, and Ultralytics 8.4.140
Deployment setup	Hardware	Rockchip RK3566
	System	Android 13
	Quantization	INT8
Data protocol	Input resolution	Fixed at 640×640
Training dynamics	Batch	16
	Maximum epochs	300
	Patience	80 epochs
	Optimizer	AdamW

V. Results and Discussion

A. Comparison With Other Detectors

Table IV compares test-set accuracy, model complexity, and inference throughput. MCGI-YOLO achieves the highest mAP50 of 97.2% and the second-highest mAP50–95 of 65.5%, improving over the YOLOv8n baseline by 6.7 and 7.1 percentage points, respectively. This gain comes with only a marginal increase in parameters (3.01 M $\rightarrow$ 3.02 M) and FLOPs (8.1 G $\rightarrow$ 8.2 G), while throughput on the RTX 3090 decreases from 554 to 486 FPS. Among lightweight variants, YOLO11n attains the next-best accuracy (93.3% mAP50, 60.8% mAP50–95); MCGI-YOLO surpasses it by 3.9 and 4.7 points while running faster (486 vs. 463 FPS). Several other variants have fewer parameters or lower FLOPs but underperform on this test set, confirming that task-specific adaptation outperforms generic lightweight detectors. RT-DETR-R18 leads in mAP50–95 (67.7%) but requires 20.09 M parameters and 60.7 G FLOPs at 146 FPS. MCGI-YOLO also outperforms DETR-R50, Deformable DETR-R50, and Faster R-CNN-R50 on both mAP metrics with substantially lower cost, offering the best overall accuracy–efficiency tradeoff. Fig. 6 shows that MCGI-YOLO produces fewer fragmented boxes and tighter localization on

TABLE IV
DETECTOR COMPARISON ON THE TEST SET. FPS DENOTES FP32 MODEL-FORWARD THROUGHPUT ON AN RTX 3090 WITH BATCH SIZE 1 AND A 640×640 INPUT. BOLD AND UNDERLINED VALUES INDICATE THE BEST AND SECOND-BEST RESULTS, RESPECTIVELY.

Model	Params (M)	FLOPs (G)	mAP50 (%)	mAP50–95 (%)	FPS
YOLOv9t [32]	**2.12**	8.5	90.1	53.3	291
YOLOv10n [33]	2.78	8.8	88.2	58.5	<u>524</u>
YOLO11n [27]	2.62	<u>6.7</u>	93.3	60.8	463
YOLO12n [34]	2.60	7.6	89.0	56.8	326
YOLO26n [27]	<u>2.57</u>	**6.2**	90.5	58.2	425
RT-DETR-R18 [35]	20.09	60.7	95.2	**67.7**	146
DETR-R50 [36]	41.28	77.3	96.4	53.6	101
Deformable DETR-R50 [37]	39.8	158.7	<u>96.8</u>	64.3	49
Faster R-CNN-R50 [38]	41.1	181.5	96.1	64.7	66
YOLOv8n (Baseline) [27]	3.01	8.1	90.5	58.4	**554**
MCGI-YOLO	3.02	8.2	**97.2**	<u>65.5</u>	486

TABLE V
COMPONENT ABLATION OF MCE AND GIU.

Variant	MCE	GIU	Params(M)	FLOPs(G)	mAP50	mAP50–95
YOLOv8n	–	–	3.01	8.10	90.5	58.4
+ MCE	✓	–	3.01	8.2	93.9	63.6
+ GIU	–	✓	3.01	8.2	94.4	63.0
MCGI-YOLO	✓	✓	3.02	8.2	97.2	65.5

elongated defects and holes, consistent with the aggregate results.

B. Component Ablation

Table V defines four configurations: the original YOLOv8n baseline, MCE alone, GIU alone, and their combination. The MCE-only model retains nearest-neighbor upsampling, while the GIU-only model retains the original backbone C2f blocks.

Feature visualizations in Fig. 7 complement the numerical analysis by comparing responses at corresponding feature stages on the same images.

C. Model Deployment and On-Device Performance

To deploy MCGI-YOLO on the RK3566 edge device, the trained model is exported to ONNX with a fixed input size of 640×640 and then converted into an INT8 RKNN model using RKNN-Toolkit2 [39]. For 640×640 inputs, the deployed INT8 model achieves a measured inference throughput of 22 FPS on the RK3566. This throughput is 2.2 times the 10 FPS design target derived in Section II-D, meeting the model-inference rate required for the specified machine speed and camera field of view.

VI. CONCLUSION

This paper presents a dedicated defect detection and closed-loop control system for circular knitting machines, integrating image acquisition, SerDes transmission, edge inference, machine stopping, and cloud alerts. The lightweight MCGI-YOLO combines MCE for elongated-defect morphology encoding with GIU for adaptive feature reconstruction. On the self-collected test set, it achieves 97.2% mAP50 and 65.5% mAP50–95, improving over YOLOv8n by 6.7 and 7.1 percentage points. INT8 deployment on the RK3566 achieves 22 FPS, exceeding the 10 FPS design target. Benefiting from the modular hardware architecture and lightweight model design, the proposed system demonstrates strong scalability. It can be further adapted to a wider variety of knitted fabrics and more complex industrial conditions, providing a versatile technical foundation for intelligent upgrades in the textile industry.

REFERENCES

[1] Cotton Incorporated, "Knit basics," CottonWorks, [Online]. Available: https://cottonworks.com/learning-hub/knitting/knit-basics/. Accessed: Oct. 8, 2026.

[2] The Woolmark Company, "Circular knit technology," [Online]. Available: https://www.woolmark.com/industry/product-development/processing-innovations/circular-knitting-technology/. Accessed: Oct. 8, 2026.

[3] Cotton Incorporated, "Single and double knits," CottonWorks, [Online]. Available: https://cottonworks.com/learning-hub/knitting/single-and-double-knits/. Accessed: Oct. 8, 2026.

[4] International Textile Manufacturers Federation, "Global textile machinery shipments shrunk in 2025, except for spinning," Jul. 2026, [Online]. Available: https://www.itmf.org/images/dl/press-releases/2026/2026-07-24-ITMSS-48-2025.pdf. Accessed: Oct. 10, 2026.

[5] United Nations Environment Programme, "Transforming the textile industry: Learning to manage waste, better," United Nations Environment Programme, Tech. Rep., Oct. 2025, [Online]. Available: https://wedocs.unep.org/handle/20.500.11822/48707. Accessed: Oct. 14, 2026.

[6] S. Takeuchi, K. Nishioka, H. Uematsu, and S. Tanoue, "Research into development of the defect detection system for knitted fabric produced by the circular knitting machines by image analysis," *Journal of Textile Engineering*, vol. 64, DOI 10.4188/jte.64.45, no. 2, pp. 45–49, 2018.

[7] M. M. K. Akter, U. N. Haq, M. M. Islam, and M. A. Uddin, "Textile-apparel manufacturing and material waste management in the circular economy: A conceptual model to achieve sustainable development goal (SDG) 12 for bangladesh," *Cleaner Environmental Systems*, vol. 4, DOI 10.1016/j.cesys.2022.100070, p. 100070, 2022.

[8] Z. Xiang, Y. Shen, M. Ma, and M. Qian, "HookNet: Efficient multiscale context aggregation for high-accuracy detection of fabric defects," *IEEE Trans. Instrum. Meas.*, vol. 72, DOI 10.1109/TIM.2023.3280519, pp. 1–11, 2023, art. no. 5016311.

[9] T. M. Mostafa, G. Ooi, M. B. Ozakin, M. Khater, M. L. Zeghlache, H. Bagci, and S. Ahmed, "An innovative pipe inspection tool utilizing electromagnetic resonance coupling and machine learning," *IEEE Trans. Ind. Electron.*, vol. 71, DOI 10.1109/TIE.2023.3285970, no. 5, pp. 5338–5348, 2024.

[10] S. Zhang, J. Zhou, J. Xiang, and R. Pan, "An efficient measurement method for fabric defect size based on multilight-source computer vision," *IEEE Trans. Instrum. Meas.*, vol. 74, DOI 10.1109/TIM.2025.3628419, pp. 1–15, 2025, art. no. 5049115.

[11] R. Machado, L. A. M. Barros, V. Vieira, F. D. da Silva, H. Costa, and V. Carvalho, "Textile defect detection using artificial intelligence and computer vision—a preliminary deep learning approach," *Electronics*, vol. 14, DOI 10.3390/electronics14183692, no. 18, p. 3692, 2025.

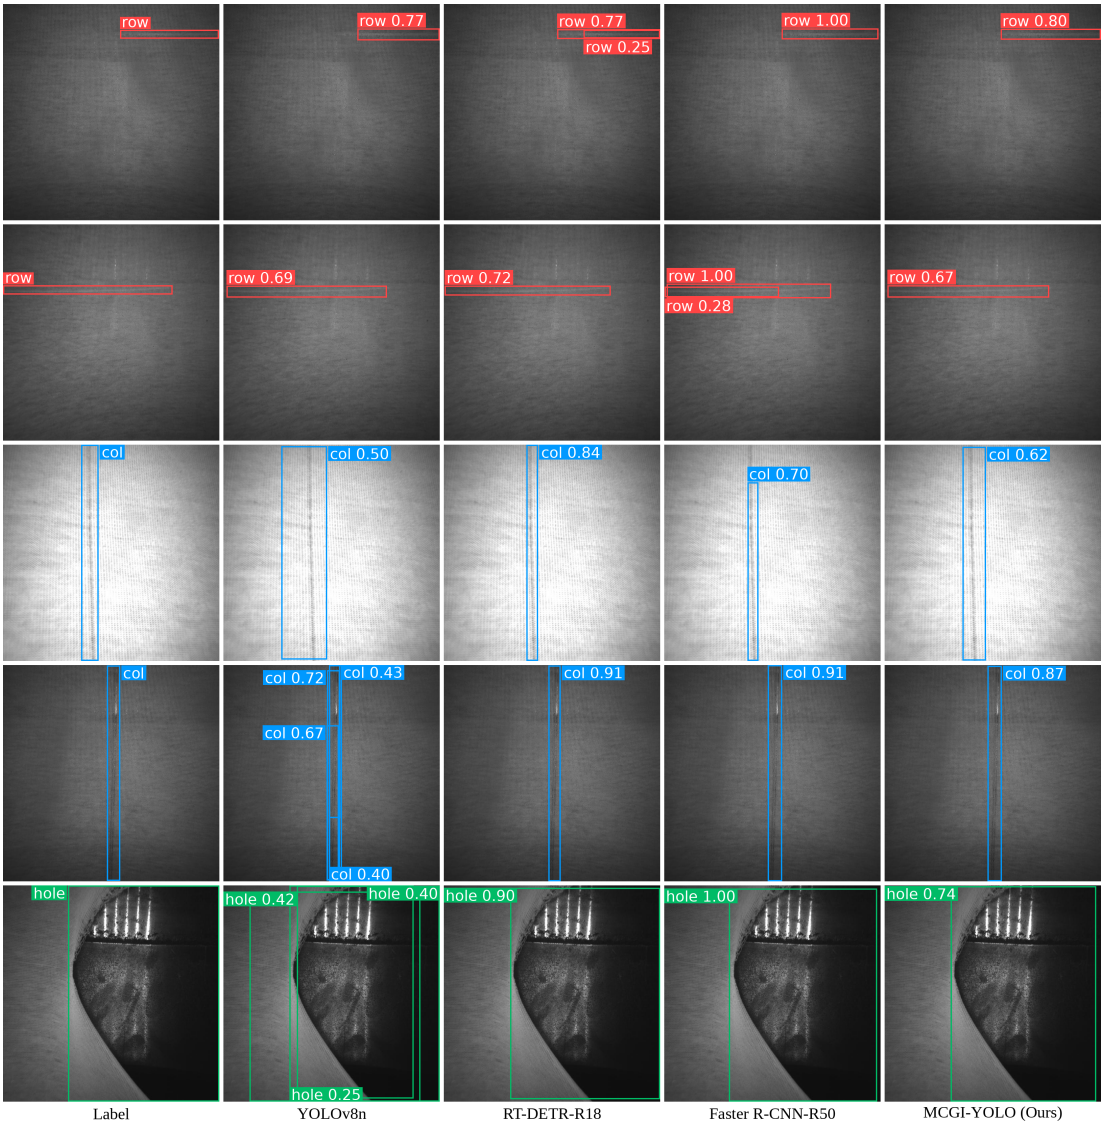


Fig. 6. Qualitative comparison of detection results across different methods. From left to right: ground-truth annotations (Label), YOLOv8n, RT-DETR-R18, Faster R-CNN-R50, and MCGI-YOLO (Ours).

[12] T. Yan, Y. Wu, Y. Shi, C. Lin, and L. Ji, "Development and application of an AI visual defect detection system for warp-knitted lace based on 5G+ technology," *Information*, vol. 17, DOI 10.3390/info17070623, no. 7, p. 623, 2026.

[13] Y. Wang, H. Yu, B. Guo, H. Shi, and Z. Yu, "Research on real-time detection system of rail surface defects based on deep learning," *IEEE Sensors J.*, vol. 24, DOI 10.1109/JSEN.2024.3402730, no. 13, pp. 21 157–21 167, 2024.

[14] D. Li, Y. Lu, Q. Gao, X. Li, X. Yu, and Y. Song, "LiteYOLO-ID: A lightweight object detection network for insulator defect detection," *IEEE Trans. Instrum. Meas.*, vol. 73, DOI 10.1109/TIM.2024.3418082, pp. 1–12, 2024, art. no. 5023812.

[15] B. Zhao, Y. Wang, H. Zhang, J. Liu, and J. Zhang, "KAM-Net: Kilobyte-scale ultralightweight attention-based network for glass defect detection with algorithm/hardware co-design," *IEEE Trans. Instrum. Meas.*, vol. 74, DOI 10.1109/TIM.2025.3593602, pp. 1–10, 2025, art. no. 5041310.

[16] J. Redmon, S. Divvala, R. Girshick, and A. Farhadi, "You only look once: Unified, real-time object detection," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, pp. 779–788, 2016.

[17] K. Yu, W. Lyu, X. Yu, Q. Guo, W. Xu, and L. Zhang, "FA-YOLO: A high-precision and efficient method for fabric defect detection in textile industry," *IEICE Transactions on Fundamentals of Electronics, Communications and Computer Sciences*, vol. E107.A, DOI 10.1587/transfun.2023EAP1030, no. 6, pp. 890–898, 2024.

[18] Z. Zhang, T. Huang, W. Zhang, Y. Yang, and Q. Yu, "DGHR-YOLO: Fabric defect detection based on high-level screening-feature pyramid networks and deformable convolution," *Nondestructive Testing and Evaluation*, vol. 40, DOI 10.1080/10589759.2025.2451768, no. 12, pp. 5919–5944, 2025.

[19] N. An and L. Wan, "JDCBL: A joint dynamic contexts and balanced learning framework for real-world fabric defect detection," *IEEE Trans. Instrum. Meas.*, vol. 74, DOI 10.1109/TIM.2025.3558828, pp. 1–12, 2025, art. no. 5026412.

[20] H. Wang, B. Chen, C. Xie, and W. Ye, "Real-time oriented fabric defect detection via position-guided fusion and multiscale rotation-guided strip coupling," *IEEE Trans. Ind. Informat.*, DOI 10.1109/TII.2026.3717200, pp. 1–12, 2026, early Access, Aug. 12, 2026.

[21] B. Su, H. Chen, and Z. Zhou, "BAF-Detector: An efficient CNN-based detector for photovoltaic cell defect detection," *IEEE Trans. Ind. Electron.*, vol. 69, DOI 10.1109/TIE.2021.3070507, no. 3, pp. 3161–3171, 2022.

[22] X. Shen, J. Liu, L. Jiang, X. Liu, and H. Zhang, "A novel weld defect detection method for intelligent magnetic flux leakage detection system via contextual relation network," *IEEE Trans. Ind. Electron.*, vol. 71, DOI 10.1109/TIE.2023.3294578, no. 6, pp. 6304–6314, 2024.

[23] J. Liu, Z. Wen, X. Shen, F. Zuo, L. Jiang, and H. Zhang, "Online pipeline weld defect detection for magnetic flux leakage inspection system via lightweight rotated network," *IEEE Trans. Ind. Electron.*, vol. 72, DOI 10.1109/TIE.2024.3503635, no. 7, pp. 7573–7584, 2025.

[24] THine Electronics, Inc., "THCV241A: MIPI CSI-2 to V-by-One HS serializer," [Online]. Available: https://www.thine.co.jp/en/products/detail

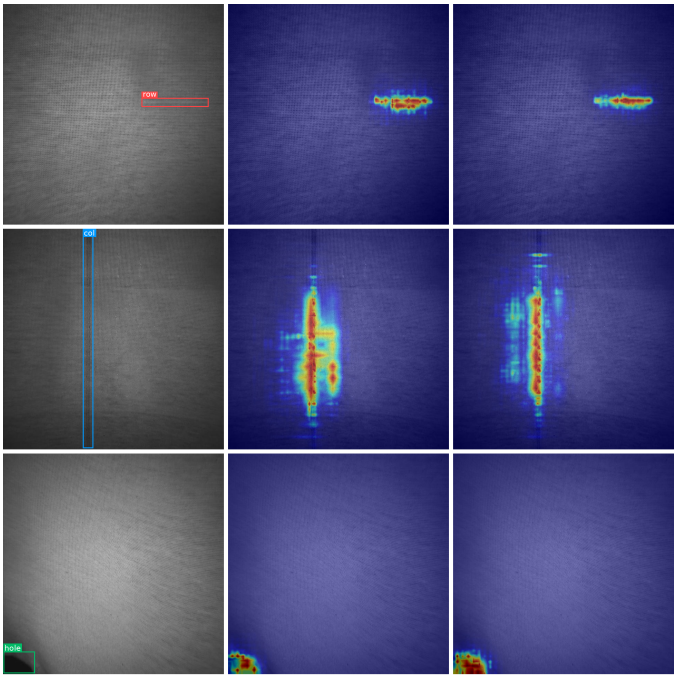


Fig. 7. Feature visualization of YOLOv8n and MCGI-YOLO. From left to right: ground-truth annotations (Label), YOLOv8n, and MCGI-YOLO.

/THCV241A.html. Accessed: Oct. 16, 2026.
[25] THine Electronics, Inc., "THCV242A: V-by-One HS to MIPI CSI-2 deserializer," [Online]. Available: https://www.thine.co.jp/en/products/detail/THCV242A.html. Accessed: Oct. 16, 2026.
[26] Rockchip Electronics, "RK3566 brief datasheet," [Online]. Available: https://www.rock-chips.com/uploads/pdf/2022.8.26/191/RK3566%20Brief%20Datasheet.pdf. Accessed: Oct. 15, 2026.
[27] Ultralytics, "Ultralytics yolo," [Online]. Available: https://github.com/ultralytics/ultralytics, 2023, accessed: 2026-09-24.
[28] T.-Y. Lin, P. Dollar, R. Girshick, K. He, B. Hariharan, and S. Belongie, "Feature pyramid networks for object detection," in *Proc. IEEE Conf. Comput. Vis. Pattern Recognit.*, DOI 10.1109/CVPR.2017.106, pp. 2117–2125, 2017.
[29] S. Liu, L. Qi, H. Qin, J. Shi, and J. Jia, "Path aggregation network for instance segmentation," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit.*, DOI 10.1109/CVPR.2018.00913, pp. 8759–8768, 2018.
[30] Q. Hou, D. Zhou, and J. Feng, "Coordinate attention for efficient mobile network design," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, pp. 13 713–13 722, 2021. [Online]. Available: https://openaccess.thecvf.com/content/CVPR2021/html/Hou_Coordinate_Attention_for_Efficient_Mobile_Network_Design_CVPR_2021_paper.html
[31] W. Lv *et al.*, "RT-DETR: Official repository with RT-DETRv2 implementations," [Online]. Available: https://github.com/lyuwenyu/RT-DETR, accessed: Oct. 20, 2026.
[32] C.-Y. Wang, I.-H. Yeh, and H.-Y. M. Liao, "YOLOv9: Learning what you want to learn using programmable gradient information," in *Proc. Eur. Conf. Comput. Vis.*, DOI 10.1007/978-3-031-72751-1_1, pp. 1–21, 2025.
[33] A. Wang, H. Chen, L. Liu, K. Chen, Z. Lin, J. Han, and G. Ding, "YOLOv10: Real-time end-to-end object detection," in *Adv. Neural Inf. Process. Syst.*, vol. 37, DOI 10.52202/079017-3429, pp. 107 984–108 011, 2024.
[34] Y. Tian, Q. Ye, and D. Doermann, "YOLOv12: Attention-centric real-time object detectors," in *Adv. Neural Inf. Process. Syst.*, vol. 38, DOI 10.52202/085713-2627, 2025.
[35] Y. Zhao, W. Lv, S. Xu, J. Wei, G. Wang, Q. Dang, Y. Liu, and J. Chen, "DETRs beat YOLOs on real-time object detection," in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit.*, DOI 10.1109/CVPR52733.2024.01605, pp. 16 965–16 974, 2024.
[36] N. Carion, F. Massa, G. Synnaeve, N. Usunier, A. Kirillov, and S. Zagoruyko, "End-to-end object detection with transformers," in *Proc. Eur. Conf. Comput. Vis.*, pp. 213–229, 2020.
[37] X. Zhu, W. Su, L. Lu, B. Li, X. Wang, and J. Dai, "Deformable detr: Deformable transformers for end-to-end object detection," in *Proc. Int. Conf. Learn. Representations*, 2021.
[38] S. Ren, K. He, R. Girshick, and J. Sun, "Faster r-cnn: Towards real-time object detection with region proposal networks," in *Adv. Neural Inf. Process. Syst.*, vol. 28, 2015.
[39] Rockchip, "Rknn toolkit2," [Online]. Available: https://github.com/airockchip/rknn-toolkit2, 2026, accessed: 2026-09-27.



Kangzhao Tan received the B.S. degree in computer science and technology from Guangzhou University, Guangzhou, China, in 2022. From 2022 to 2024, he worked as a cloud computing R&D engineer with Sangfor Technologies Inc., Shenzhen, China. He is currently pursuing the M.S. degree in computer technology with the School of Computer Science, Guangdong University of Technology, Guangzhou, China. His research interests include deep learning, computer vision, and industrial defect detection.



Jiarui Zhang received the B.S. degree in electrical engineering and automation from Guangdong Polytechnic Normal University, Guangzhou, China, in 2021. He is currently pursuing the M.S. degree in software engineering with the School of Computer Science, Guangdong University of Technology, Guangzhou, China. His research interests include electronic circuit design and intelligent internet of things.



Junjie Yu received the B.S. degree in computer science and technology from Hunan University of Finance and Economics, Changsha, China, in 2025. He is currently pursuing the M.S. degree in computer technology at Guangdong University of Technology, Guangzhou, China. His current research interests include image processing and edge computing.



Heng Wu received the B.S. degree in electronic and information engineering from Wuhan University of Science and Technology, Wuhan, China, in 2009, and the M.S. degree in optics and the Ph.D. degree in mechanical manufacturing and automation from South China University of Technology, Guangzhou, China, in 2012 and 2017, respectively.

He is currently an associate professor with the School of Automation, Guangdong University of Technology. His research interests include optical imaging, optical measurement, machine vision, and image processing.



Jing Lin received the B.S. degree in computer science and technology and the M.S. degree in software engineering from Guangdong University of Technology, Guangzhou, China, in 2003 and 2006, respectively.

Since graduation, he has served as an assistant engineer, engineer, and senior engineer. He is currently a senior engineer with the Classroom Management Center, Guangdong University of Technology. His current research interests include information system project management, system informatization, and the intelligent Internet of Things.



Chunhua He received the B.S. degree in microelectronics from Sun Yat-sen University, Guangzhou, China, in 2010, and the M.S. and Ph.D. degrees in microelectronics from Peking University, Beijing, China, in 2013 and 2018, respectively.

From 2013 to 2017, he was an engineer with the No. 5 Electronics Research Institute, Ministry of Industry and Information Technology, Guangzhou, China. From 2017 to 2019, he was an engineer with Midea Group, Foshan, China. From 2019 to 2021, he was a senior engineer with Guangzhou 37 Degree Smart Home Co., Ltd., Guangzhou, China. He joined the School of Computer Science, Guangdong University of Technology, Guangzhou, China, in 2021, where he is currently a professor. His current research interests include the design and application of MEMS sensors and artificial intelligence algorithms.