

Data Import :: CHEAT SHEET



R's **tidyverse** is built around **tidy data** stored in **tibbles**, which are enhanced data frames.



The front side of this sheet shows how to read text files into R with **readr**.



The reverse side shows how to create tibbles with **tibble** and to layout tidy data with **tidyr**.

OTHER TYPES OF DATA

Try one of the following packages to import other types of files

- **haven** - SPSS, Stata, and SAS files
- **readxl** - excel files (.xls and .xlsx)
- **DBI** - databases
- **jsonlite** - json
- **xml2** - XML
- **httr** - Web APIs
- **rvest** - HTML (Web Scraping)

Save Data

Save **x**, an R object, to **path**, a file path, as:

Comma delimited file

write_csv(x, path, na = "NA", append = FALSE, col_names = !append)

File with arbitrary delimiter

write_delim(x, path, delim = " ", na = "NA", append = FALSE, col_names = !append)

CSV for excel

write_excel_csv(x, path, na = "NA", append = FALSE, col_names = !append)

String to file

write_file(x, path, append = FALSE)

String vector to file, one element per line

write_lines(x, path, na = "NA", append = FALSE)

Object to RDS file

write_rds(x, path, compress = c("none", "gz", "bz2", "xz"), ...)

Tab delimited files

write_tsv(x, path, na = "NA", append = FALSE, col_names = !append)

Read Tabular Data - These functions share the common arguments:

```
read_*(file, col_names = TRUE, col_types = NULL, locale = default_locale(), na = c("", "NA"),
quoted_na = TRUE, comment = "", trim_ws = TRUE, skip = 0, n_max = Inf, guess_max = min(1000,
n_max), progress = interactive())
```

a,b,c
1,2,3
4,5,NA

A	B	C
1	2	3
4	5	NA

Comma Delimited Files

read_csv("file.csv")

To make file.csv run:

write_file(x = "a,b,c\n1,2,3\n4,5,NA", path = "file.csv")

a;b;c
1;2;3
4;5;NA

A	B	C
1	2	3
4	5	NA

Semi-colon Delimited Files

read_csv2("file2.csv")

write_file(x = "a;b;c\n1;2;3\n4;5;NA", path = "file2.csv")

a|b|c
1|2|3
4|5|NA

A	B	C
1	2	3
4	5	NA

Files with Any Delimiter

read_delim("file.txt", delim = "|")

write_file(x = "a|b|c\n1|2|3\n4|5|NA", path = "file.txt")

a b c
1 2 3
4 5 NA

A	B	C
1	2	3
4	5	NA

Fixed Width Files

read_fwf("file.fwf", col_positions = c(1, 3, 5))

write_file(x = "a b c\n1 2 3\n4 5 NA", path = "file.fwf")

Tab Delimited Files

read_tsv("file.tsv") Also **read_table**().

write_file(x = "a\tb\tc\n1\t2\t3\n4\t5\tNA", path = "file.tsv")

USEFUL ARGUMENTS

a,b,c
1,2,3
4,5,NA

Example file

write_file("a,b,c\n1,2,3\n4,5,NA","file.csv")
f <- "file.csv"

1	2	3
4	5	NA

Skip lines

read_csv(f, **skip** = 1)

A	B	C
1	2	3
4	5	NA

No header

read_csv(f, **col_names** = FALSE)

A	B	C
1	2	3

Read in a subset

read_csv(f, **n_max** = 1)

x	y	z
A	B	C
1	2	3
4	5	NA

Provide header

read_csv(f, **col_names** = c("x", "y", "z"))

A	B	C
NA	2	3
4	5	NA

Missing Values

read_csv(f, **na** = c("1", "!"))

Read Non-Tabular Data

Read a file into a single string

read_file(file, locale = default_locale())

Read each line into its own string

read_lines(file, skip = 0, n_max = -1L, na = character(), locale = default_locale(), progress = interactive())

Read Apache style log files

read_log(file, col_names = FALSE, col_types = NULL, skip = 0, n_max = -1, progress = interactive())

Read a file into a raw vector

read_file_raw(file)

Read each line into a raw vector

read_lines_raw(file, skip = 0, n_max = -1L, progress = interactive())

Data types

readr functions guess the types of each column and convert types when appropriate (but will NOT convert strings to factors automatically).

A message shows the type of each column in the result.

```
## Parsed with column specification:
## cols(
##   age = col_integer(),
##   sex = col_character(),
##   earn = col_double()
## )
```

age is an integer

sex is a character

earn is a double (numeric)

1. Use **problems()** to diagnose problems.

x <- **read_csv**("file.csv"); **problems**(x)

2. Use a **col_** function to guide parsing.

- **col_guess()** - the default
- **col_character()**
- **col_double()**, **col_euro_double()**
- **col_datetime**(format = ""), Also **col_date**(format = ""), **col_time**(format = "")
- **col_factor**(levels, ordered = FALSE)
- **col_integer()**
- **col_logical()**
- **col_number()**, **col_numeric()**
- **col_skip()**

x <- **read_csv**("file.csv", **col_types** = **cols**(
A = **col_double**(),
B = **col_logical**(),
C = **col_factor**()))

3. Else, read in as character vectors then parse with a **parse_** function.

- **parse_guess()**
- **parse_character()**
- **parse_datetime()** Also **parse_date()** and **parse_time()**
- **parse_double()**
- **parse_factor()**
- **parse_integer()**
- **parse_logical()**
- **parse_number()**


x\$A <- **parse_number**(x\$A)

Tibbles - an enhanced data frame



The **tibble** package provides a new S3 class for storing tabular data, the tibble. Tibbles inherit the data frame class, but improve three behaviors:

- **Subsetting** - `[` always returns a new tibble, `[[` and `$` always return a vector.
- **No partial matching** - You must use full column names when subsetting
- **Display** - When you print a tibble, R provides a concise view of the data that fits on one screen

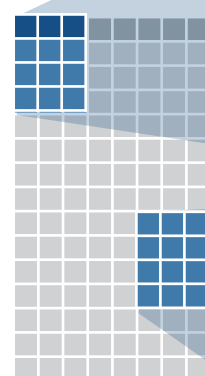

A large table to display

```
# A tibble: 234 x 6
  manufacturer model displ
  <chr> <chr> <dbl>
1 audi a4 1.8
2 audi a4 1.8
3 audi a4 2.0
4 audi a4 2.0
5 audi a4 2.0
6 audi a4 2.0
7 audi a4 2.0
8 audi a4 2.0
9 audi a4 2.0
10 audi a4 2.0
... with 224 more rows, and
# more variables: year <int>,
# cyl <int>, trans <chr>
```

tibble display

```
156 1999 6 auto(l4)
157 1999 6 auto(l4)
158 2008 6 auto(l4)
159 2008 8 auto(s4)
160 1999 4 manual(m5)
161 1999 4 auto(l4)
162 2008 4 manual(m5)
163 2008 4 manual(m5)
164 2008 4 auto(l4)
165 2008 4 auto(l4)
166 1999 4 auto(l4)
[ reached getOption("max.print")
-- omitted 68 rows --]
```

data frame display

- Control the default appearance with options:
`options(tibble.print_max = n, tibble.print_min = m, tibble.width = Inf)`
- View full data set with **View()** or **glimpse()**
- Revert to data frame with **as.data.frame()**

CONSTRUCT A TIBBLE IN TWO WAYS

tibble(...)
Construct by columns.
`tibble(x = 1:3, y = c("a", "b", "c"))`

tribble(...)
Construct by rows.
`tribble(~x, ~y, ~z, ~cyl, ~trans, ~class) %>%`
`tribble(1, "a", "b", "c", "manual", "sedan"),`
`tribble(2, "b", "b", "c", "manual", "sedan"),`
`tribble(3, "c", "b", "c", "manual", "sedan")`

```
A tibble: 3 x 2
  x y
  <int> <chr>
1 1 a
2 2 b
3 3 c
```

Both make this tibble

as_tibble(x, ...) Convert data frame to tibble.


enframe(x, name = "name", value = "value")
Convert named vector to a tibble

is_tibble(x) Test whether x is a tibble.


Tidy Data with tidyr

Tidy data is a way to organize tabular data. It provides a consistent data structure across packages.

A table is tidy if:




Each **variable** is in its own **column**




Each **observation**, or **case**, is in its own **row**

Tidy data:



Makes variables easy to access as vectors



Preserves cases during vectorized operations

Reshape Data - change the layout of values in a table

Use **gather()** and **spread()** to reorganize the values of a table into a new layout.

gather(data, key, value, ..., na.rm = FALSE, convert = FALSE, factor_key = FALSE)

gather() moves column names into a **key** column, gathering the column values into a single **value** column.

table4a			
country	1999	2000	
A	0.7K	2K	
B	37K	80K	
C	212K	213K	

→

country	year	cases
A	1999	0.7K
B	1999	37K
C	1999	212K
A	2000	2K
B	2000	80K
C	2000	213K

key value

`gather(table4a, `1999`, `2000`,
key = "year", value = "cases")`

spread(data, key, value, fill = NA, convert = FALSE, drop = TRUE, sep = NULL)

spread() moves the unique values of a **key** column into the column names, spreading the values of a **value** column across the new columns.

table2			
country	year	type	count
A	1999	cases	0.7K
A	1999	pop	19M
A	2000	cases	2K
A	2000	pop	20M
B	1999	cases	37K
B	1999	pop	172M
B	2000	cases	80K
B	2000	pop	174M
C	1999	cases	212K
C	1999	pop	1T
C	2000	cases	213K
C	2000	pop	1T

key value

`spread(table2, type, count)`

Handle Missing Values

drop_na(data, ...)

Drop rows containing NA's in ... columns.

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

→

x1	x2
A	1
D	3

`drop_na(x, x2)`

fill(data, ..., .direction = c("down", "up"))

Fill in NA's in ... columns with most recent non-NA values.

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

→

x1	x2
A	1
B	1
C	1
D	3
E	3

`fill(x, x2)`

replace_na(data, replace = list(), ...)

Replace NA's by column.

x1	x2
A	1
B	NA
C	NA
D	3
E	NA

→

x1	x2
A	1
B	2
C	2
D	3
E	2

`replace_na(x, list(x2 = 2))`

Expand Tables - quickly create tables with combinations of values

complete(data, ..., fill = list())

Adds to the data missing combinations of the values of the variables listed in ...

`complete(mtcars, cyl, gear, carb)`


expand(data, ...)

Create new tibble with all possible combinations of the values of the variables listed in ...

`expand(mtcars, cyl, gear, carb)`

Split Cells

Use these functions to split or combine cells into individual, isolated values.



separate(data, col, into, sep = "[^:alnum:]]+", remove = TRUE, convert = FALSE, extra = "warn", fill = "warn", ...)

Separate each cell in a column to make several columns.

table3		
country	year	rate
A	1999	0.7K/19M
A	2000	2K/20M
B	1999	37K/172M
B	2000	80K/174M
C	1999	212K/1T
C	2000	213K/1T

→

country	year	cases	pop
A	1999	0.7K	19M
A	2000	2K	20M
B	1999	37K	172
B	2000	80K	174
C	1999	212K	1T
C	2000	213K	1T

`separate(table3, rate, sep = "/",
into = c("cases", "pop"))`

separate_rows(data, ..., sep = "[^:alnum:]."]
+, convert = FALSE)

Separate each cell in a column to make several rows.

table3		
country	year	rate
A	1999	0.7K/19M
A	2000	2K/20M
B	1999	37K/172M
B	2000	80K/174M
C	1999	212K/1T
C	2000	213K/1T

→

country	year	rate
A	1999	0.7K
A	1999	19M
A	2000	2K
A	2000	20M
B	1999	37K
B	1999	172M
B	2000	80K
B	2000	174M
C	1999	212K
C	1999	1T
C	2000	213K
C	2000	1T

`separate_rows(table3, rate, sep = "/")`

unite(data, col, ..., sep = "_", remove = TRUE)

Collapse cells across several columns to make a single column.

table5		
country	century	year
Afghan	19	99
Afghan	20	00
Brazil	19	99
Brazil	20	00
China	19	99
China	20	00

→

country	year
Afghan	1999
Afghan	2000
Brazil	1999
Brazil	2000
China	1999
China	2000

`unite(table5, century, year,
col = "year", sep = "")`