

Scheduling

Main Points

- Scheduling policy: what to do next, when there are multiple threads ready to run
 - Or multiple packets to send, or web requests to serve, or ...
- Definitions
 - response time, throughput, predictability
- Uniprocessor policies
 - FIFO, round robin, optimal
 - multilevel feedback as approximation of optimal
- *Multiprocessor policies*
 - *Affinity scheduling, gang scheduling*
- *Queueing theory*
 - *Can you predict/improve a system's response time?*

Definitions

- Task/Job
 - User request: e.g., mouse click, web request, shell command, ...
- Latency/response time
 - How long does a task take to complete?
- Throughput
 - How many tasks can be done per unit of time?
- Overhead
 - How much extra work is done by the scheduler?
- Fairness
 - How equal is the performance received by different users?
- Predictability
 - How consistent is the performance over time?

More Definitions

- Workload
 - Set of tasks for system to perform
- Preemptive scheduler
 - If we can take resources away from a running task
- Work-conserving
 - Resource is used whenever there is a task to run
- Scheduling algorithm
 - takes a workload as input
 - decides which tasks to do first
 - Performance metric (throughput, latency) as output
 - Only preemptive, work-conserving schedulers to be considered


First In First Out (FIFO)

- Schedule tasks in the order they arrive
 - Continue running them until they complete or give up the processor
- Example: memcached
 - Facebook cache of friend lists, ...
- On what workloads is FIFO particularly bad?

Shortest Job First (SJF)

- Always do the task that has the shortest remaining amount of work to do
 - Often called Shortest Remaining Time First (SRTF)
- Suppose we have five tasks arrive one right after each other, but the first one is much longer than the others
 - Which completes first in FIFO? Next?
 - Which completes first in SJF? Next?

FIFO vs. SJF



Question

- Claim: SJF is optimal for average response time
 - Why?
- Does SJF have any downsides?

Question

- Is FIFO ever optimal?
- Pessimal?

Round Robin

- Each task gets resource for a fixed period of time (time quantum)
 - If task doesn't complete, it goes back in line
- Need to pick a time quantum
 - What if time quantum is too long?
 - Infinite?
 - What if time quantum is too short?
 - One instruction?

Round Robin


Tasks

Round Robin (1 ms time slice)



Tasks

Round Robin (100 ms time slice)


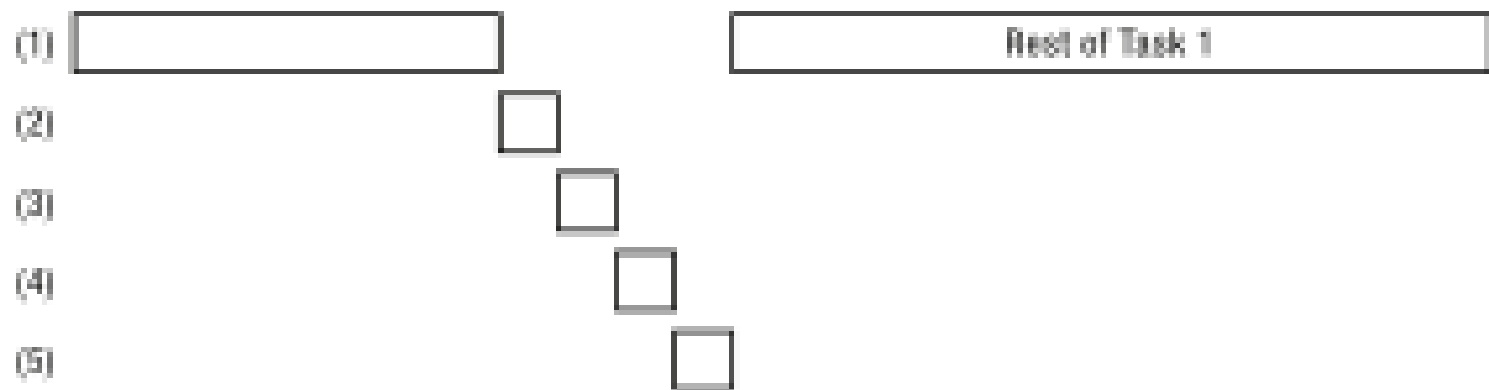


Time

Round Robin vs. FIFO

- Assuming zero-cost time slice, is Round Robin always better than FIFO?


Round Robin vs. FIFO

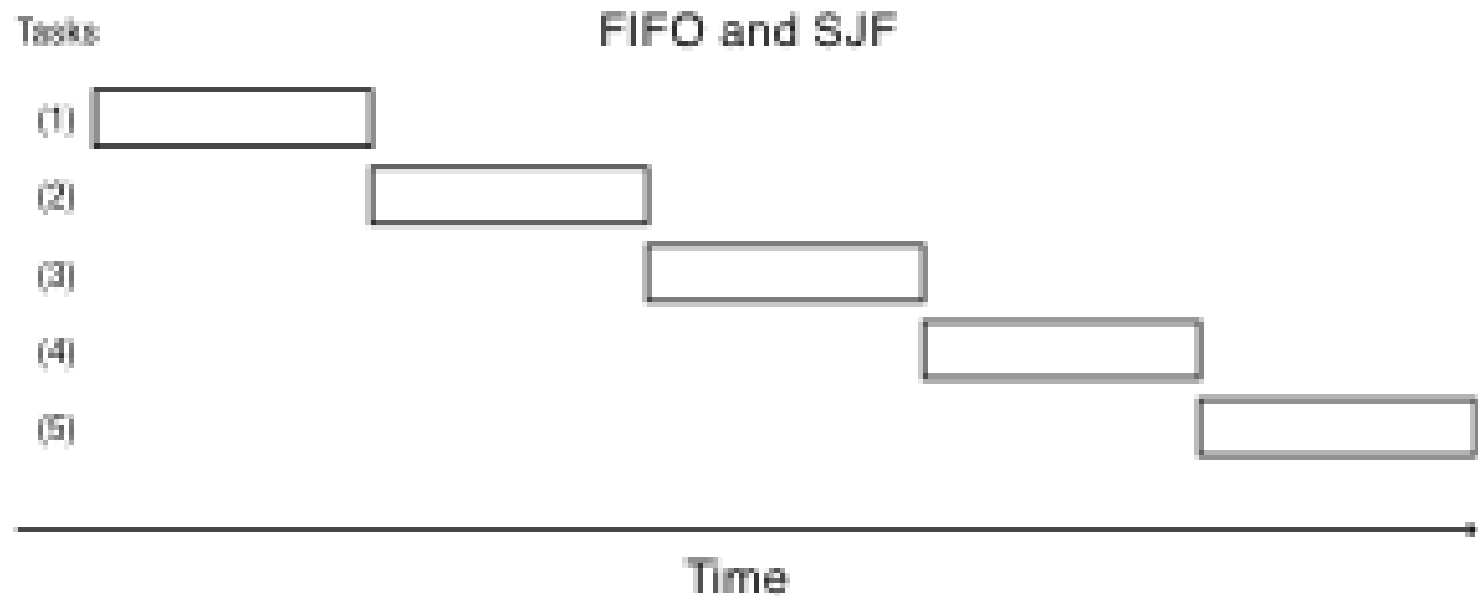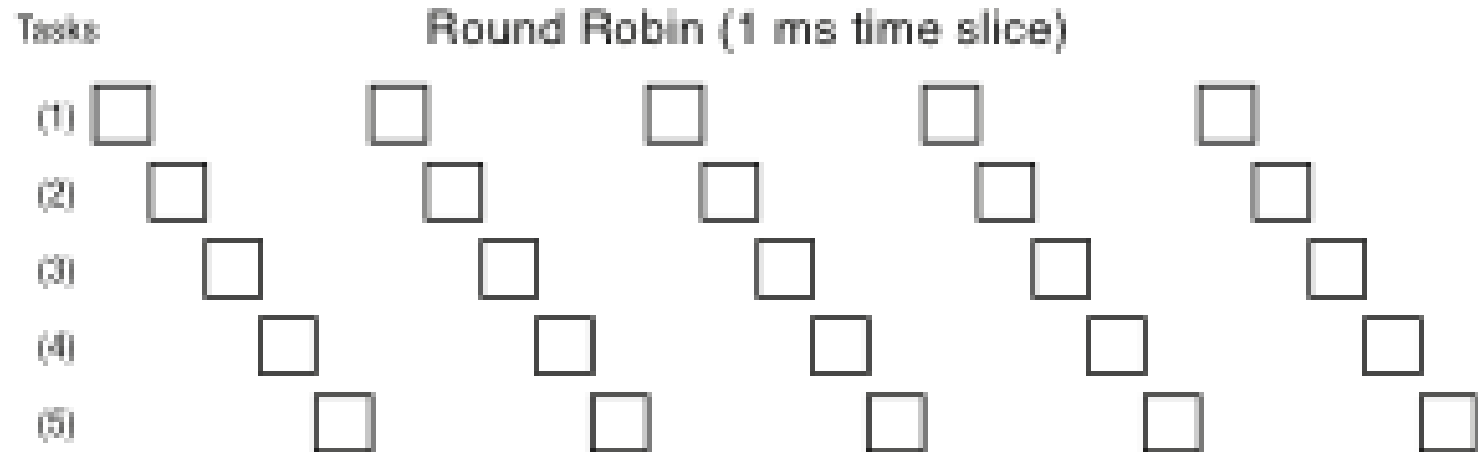

Round Robin = Fairness?

- Is Round Robin always fair?
- What is fair?
 - FIFO?
 - Equal share of the CPU?
 - What if some tasks don't need their full share?
 - Minimize worst case divergence?
 - Time task would take if no one else was running
 - Time task takes under scheduling algorithm

Mixed Workload

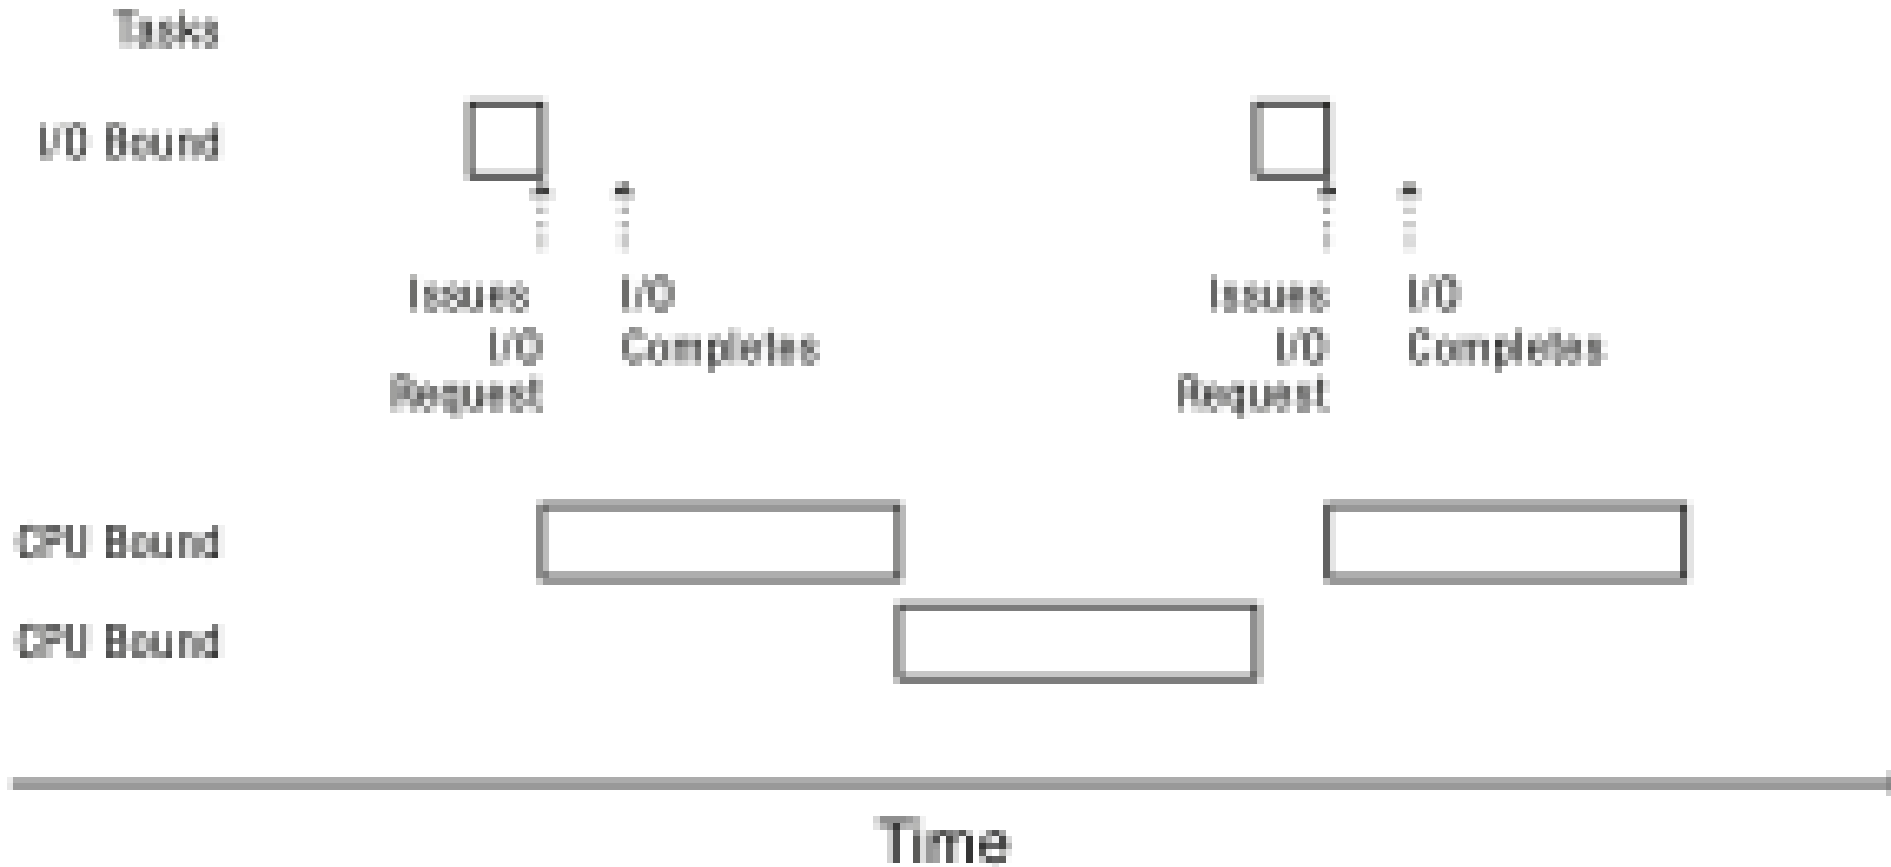

Max-Min Fairness

- How do we balance a mixture of repeating tasks:
 - Some I/O bound, need only a little CPU
 - Some compute bound, can use as much CPU as they are assigned
- One approach: maximize the minimum allocation given to a task
 - If any task needs less than an equal share, schedule the smallest of these first
 - Split the remaining time using max-min
 - If all remaining tasks need at least equal share, split evenly


Multi-level Feedback Queue (MFQ)

- Goals:
 - Responsiveness
 - Low overhead
 - Starvation freedom
 - Some tasks are high/low priority
 - Fairness (among equal priority tasks)
- Not perfect at any of them!
 - Used in Linux (and probably Windows, MacOS)

MFQ

- Set of Round Robin queues
 - Each queue has a separate priority
- High priority queues have short time slices
 - Low priority queues have long time slices
- Scheduler picks first thread in highest priority queue
- Tasks start in highest priority queue
 - If time slice expires, task drops one level

MFQ

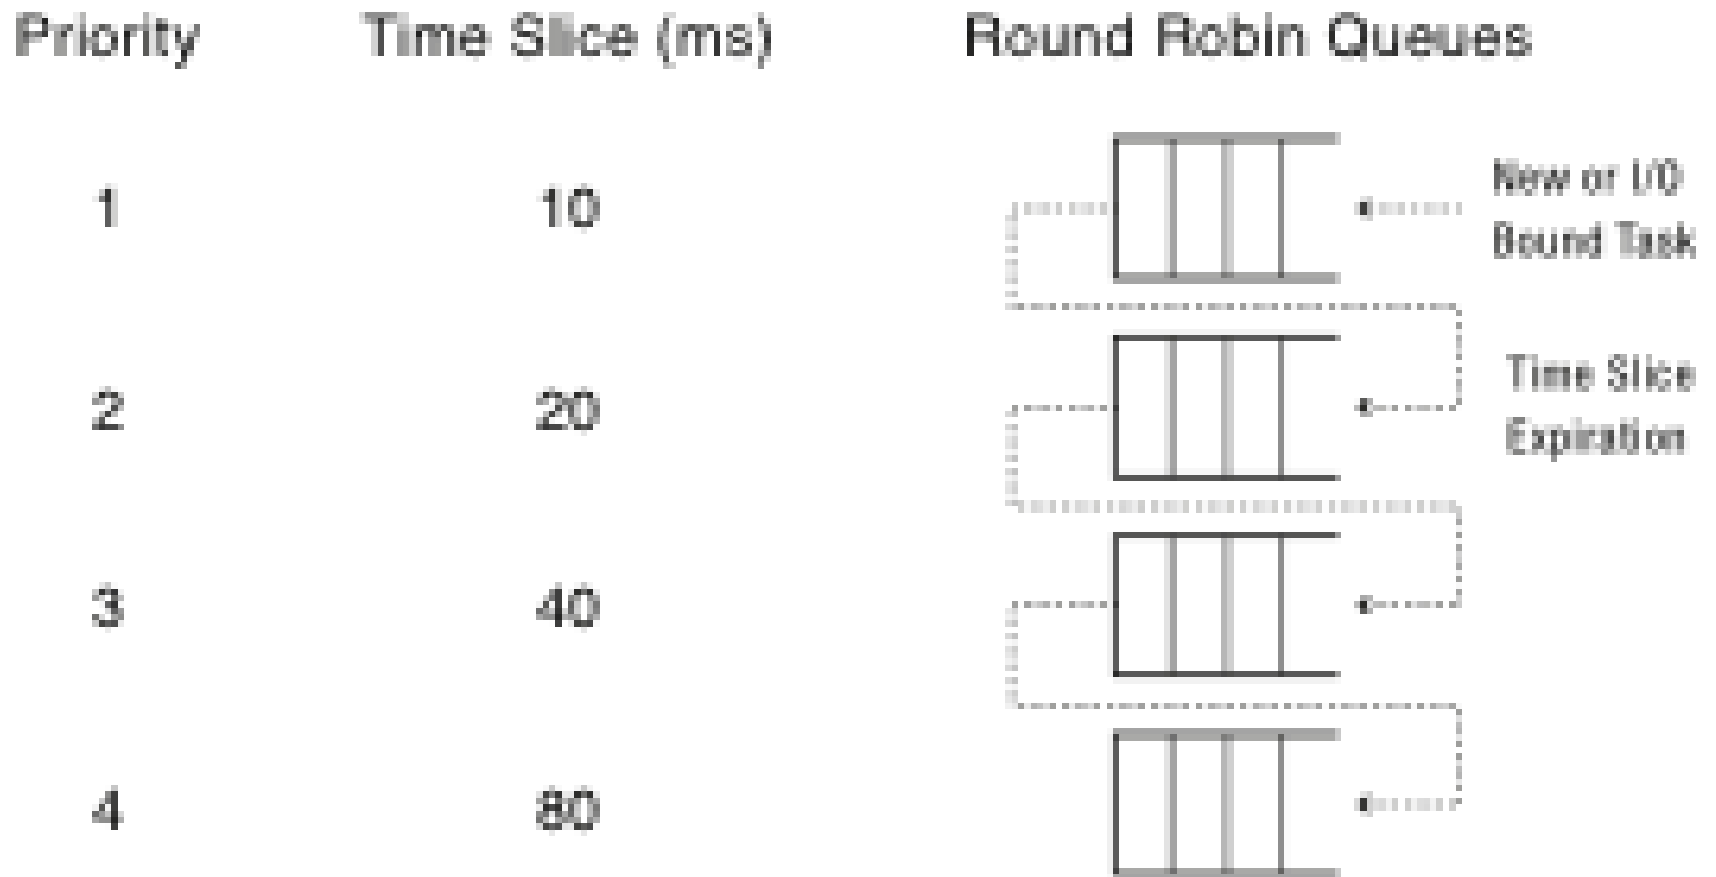

Uniprocessor Summary (1)

- FIFO is simple and minimizes overhead.
- If tasks are variable in size, then FIFO can have very poor average response time.
- If tasks are equal in size, FIFO is optimal in terms of average response time.
- Considering only the processor, SJF is optimal in terms of average response time.
- SJF is pessimal in terms of variance in response time.

Uniprocessor Summary (2)

- If tasks are variable in size, Round Robin approximates SJF.
- If tasks are equal in size, Round Robin will have very poor average response time.
- Tasks that intermix processor and I/O benefit from SJF and can do poorly under Round Robin.

Uniprocessor Summary (3)

- Max-Min fairness can improve response time for I/O-bound tasks.
- Round Robin and Max-Min fairness both avoid starvation.
- By manipulating the assignment of tasks to priority queues, an MFAQ scheduler can achieve a balance between responsiveness, low overhead, and fairness.