

Leveraging Transfer Learning in a Diffusion-Transformer Approach to Brain-to-Phoneme Decoding Task

Alex Fan¹

¹*The University of Chicago*

Abstract

Restoring communication to individuals with severe motor paralysis remains one of the most consequential open problems at the intersection of neuroscience and machine learning. While intracortical speech brain-computer interfaces (BCIs) have achieved remarkable decoding accuracy in recent years, improvements have been driven almost entirely by increasingly sophisticated language model pipelines rather than advances in the neural encoder itself. The dominant encoder architecture—a gated recurrent unit (GRU) trained with connectionist temporal classification (CTC) loss—has remained largely unchanged since its introduction, and phoneme error rates across competitive entries have stagnated above 15%. In this work, I propose a novel approach to the neural decoding stage: a phoneme diffusion prior conditioned on intracortical brain signals via cross-attention. Rather than treating decoding as a discriminative classification problem, I frame it as conditional generative modeling—learning the distribution over phoneme sequences given observed neural activity. The architecture combines a spatially-aware convolutional brain encoder that preserves electrode-grid geometry with a pretrained Diffusion Transformer (DiT) backbone, trained in a staged freeze-and-unfreeze scheme to maximize data efficiency under the severe label scarcity of intracortical BCI datasets. While the approach failed to produce non-degenerate outputs in its current form—primarily due to embedding collapse in the phoneme token space and an insufficient pretraining corpus—the failure is instructive. I provide a detailed diagnosis of the failure modes, situate the design choices relative to the current state of the field, and outline concrete architectural improvements that could make the conditional diffusion paradigm viable for neural speech decoding.

1 Introduction

For my final project, I chose to tackle a unique data task that felt interesting to me. I chose to take on the Brain-to-Text '24 Benchmark that sought to find deep learning solutions to restoring communication to individuals who have lost the ability to speak. It collected brain Electrocorticography (ECoG) data from an individual with amyotrophic lateral sclerosis (ALS) that caused severe dysarthria or anarthria, the inability to produce intelligible speech. Speech brain-computer interfaces (BCIs) offer a potential path to restoring this capacity by decoding neural activity associated with attempted speech directly into text. Although this was relatively distant from much of the topics of the mechanistic interpretability of language models that we explored in class, I hoped to pursue the question of interesting ways to encode—or represent—brain sequence data for stronger phoneme decoding performance.

The dominant paradigm in intracortical speech BCIs is a two-stage deep learning process: first, a neural decoder maps multi-electrode recordings to a sequence of phoneme probabilities over time; second, a language model converts those phoneme logits into words

and sentences. Willett et al. [Wil+23] demonstrated that this approach, using threshold crossings from Utah array microelectrodes and a recurrent neural network (RNN) decoder trained with connectionist temporal classification (CTC) loss, could achieve 9.1% word error rate (WER) on a 50-word vocabulary and, crucially, extend to large-vocabulary decoding—representing the first successful demonstration of unconstrained sentence decoding from intracortical signals. Shortly after, Card et al. [Car+24] showed that a similar system could reach 97.5% word accuracy sustained over 8.4 months, with the participant using it daily for self-paced conversational communication. These results established that the core neural-to-phoneme decoding problem was tractable; the remaining challenge was improving reliability, generalization, and accuracy.

The Brain-to-Text Benchmark '24 was released alongside the Willett et al. [Wil+23] dataset, providing a standardized held-out evaluation against which decoding algorithms could be compared. The associated competition revealed that the largest accuracy improvements came not from changes to the neural encoder, but from ensembling approaches in which multiple independent decoders were merged using fine-tuned large language models—a strategy employed by all three top entrants, reducing WER from the 9.7% baseline to 5.8% [Wil+24]. The subsequent Brain-to-Text '25 Kaggle competition has pushed this further still, with top entries achieving sub-2% WER across 466 participants.

This competitive landscape reveals a structural tension in the field. While WER on the benchmark has improved dramatically, the gains have been concentrated almost entirely in the phoneme-to-text pipeline—through the implementation of n -gram language models, LLM rescoring, and multi-hypothesis ensembling—and not in the quality of neural representations learned by the encoder. Willett et al. [Wil+24] noted that lower phoneme error rates from the RNN do not always translate reliably to lower WER. The neural encoder itself has remained largely unchanged: a GRU-based RNN trained with CTC loss on binned multiunit threshold crossing rates. While the model architecture approaches for the Brain-to-Text '25 Benchmark have not been publicly released, phoneme error rates across competitive entries have hardly improved below 15%.

From a representation learning perspective, this presents an opportunity to contribute a novel approach to the neural decoding task, rather than the phoneme-to-text task. The brain's representation of phonemes is high-dimensional, spatially distributed across the ventral precentral cortex, and embedded in a noisy, non-stationary signal. The spatially intermixed tuning of cortical neurons to speech articulators, and the persistence of detailed articulatory representations of phonemes even years after paralysis [Wil+23], suggest that the neural signal contains rich structure that simple recurrent decoders may not fully exploit. Better learned representations of this structure—capturing the geometry of phoneme space, the temporal dynamics of neural signals, and richer spatial information—could improve both phoneme decoding and downstream word recognition, particularly in lower-data or cross-session regimes where GRU-based models tend to overfit.

In this work, I propose and evaluate a phoneme diffusion prior conditioned on intracortical brain signals as an alternative to standard RNN-based decoders. Rather than training a model to output hard phoneme classifications, I approach neural decoding as a conditional generative problem: learning the distribution over phoneme sequences given the observed neural activity. The core architecture uses a pretrained phoneme diffusion model operating on continuous token embeddings to learn the general phonemic and semantic structure of human speech, then conditions the generative outputs on encoded brain signal representations via cross-attention at the fine-tuning stage. While the approach has failed to produce non-degenerate outputs, I discuss the specific design choices of our spatial brain encoder, the conditioning mechanism, and our training objectives, and situate these choices relative to the current state of the field. Finally, I reflect on possible reasons for the approach's failure and suggest future architectural augmentations that may produce stronger results.

2 Existing Approaches

2.1 RNN Baseline Approach

The standard neural decoding architecture for speech BCIs was established by Willett et al. [Wil+23], whose approach forms the baseline GRU model against which subsequent work is measured, including my own. Neural activity is first extracted as multiunit threshold crossing rates and spike band power from each electrode, binned at 20 ms resolution. These features are then passed to a five-layer gated recurrent unit (GRU) network, which emits at each 80 ms timestep a probability distribution over phonemes, a silence token, and a connectionist temporal classification (CTC) loss blank token. The resulting phoneme probability sequence is then decoded into words via a Viterbi search over a trigram language model. To handle confounding factors in neural activity both within and across recording sessions, the architecture employs day-specific input layers and rolling z-score feature adaptation; without these adaptations, decoding performance degrades substantially.

Applied to a single participant with ALS, this pipeline achieved a 9.1% word error rate on a 50-word vocabulary and 23.8% WER on a 125,000-word vocabulary [Wil+23]. Phoneme error rates on the raw GRU output were approximately 19.7% for vocalized speech prior to any language model rescoring. The primary phoneme errors were substitution errors, which followed an articulatorily structured pattern, with the most commonly confused pairs being phonemes that share place or manner of articulation. The paper demonstrated that decoding accuracy scaled log-linearly with electrode count—doubling the number of electrodes roughly halved WER—and that performance degraded gracefully with reduced same-day training data, suggesting that the representational structure necessary for decoding is stable over timescales of days. This architecture has since become the de facto standard encoder in the field, with subsequent improvements concentrated almost entirely in the language model pipeline rather than in the GRU itself [Wil+24].

3 Proposed Approach

The primary approach that I took for this project was a conditional generative approach. This is opposed to the primarily decoding or regressive approaches used by the existing architectures for the task. I chose to use a diffusion transformer architecture (DiT) with cross-attention conditioning as my generative backbone. Diffusion is a generative approach that has shown unique strength in cross-modal tasks such as image generation, which is why I initially chose diffusion as a likely contender for SOTA performance the brain-to-phoneme neural decoding task. My primarily followed the implementation of the DiT image generator from the Scalable Diffusion Models with Transformers [PX22]. The code was used as a system design reference and modified to fit this specific task,

The design of my brain-to-phoneme decoder is motivated by three key hypotheses regarding the advantages of a generative diffusion framework for this task: (1) diffusion sidesteps the explicit temporal alignment problem that constrains autoregressive and CTC-based decoders, (2) a two-stage pretraining and conditioning process enables effective transfer learning in a low-data regime, and (3) a spatially-aware brain encoder can exploit electrode-grid geometry that existing approaches discard. Each are elaborated below.

3.1 Hypothesis 1: Implicit Temporal Alignment via Diffusion

A fundamental challenge in decoding speech from neural signals is the temporal alignment between the brain’s continuous activity and the discrete phoneme sequence. Human speech exhibits substantial timing variability: the same phoneme can span different durations across speakers, utterances, and even repetitions within a single recording session [Wil+23]. In the phoneme token modality, this temporal variation collapses entirely—each phoneme occupies

exactly one position in the target sequence regardless of how long the corresponding neural activity persists. Any decoder must find a way to reconcile these two fundamentally different temporal schemes.

Autoregressive and recurrent architectures, including the baseline GRU model used in the Brain-to-Text Benchmark [Wil+24], address this mismatch using Connectionist Temporal Classification (CTC) loss [Gra+06]. CTC marginalizes over all monotonic alignments between the input and output sequences. While effective, CTC imposes a structural constraint: it assumes a strictly left-to-right, monotonic correspondence between the neural signal timeline and the phoneme sequence. Furthermore, the CTC blank token mechanism can be difficult to tune, and the independence assumption between output positions limits the model’s ability to capture inter-phoneme dependencies.

Diffusion models offer a qualitatively different solution. Unlike autoregressive decoders, which generate tokens sequentially and must commit to an alignment at each step, a diffusion model denoises all phoneme positions jointly during the iterative reverse process [HJA20]. When conditioned on encoded brain signals through cross-attention, each phoneme position independently attends to the most relevant brain timesteps at every denoising step. This cross-attention mechanism learns a soft, data-driven alignment that is not constrained to be monotonic or one-to-one. In principle, this flexibility could capture complex temporal relationships—such as anticipatory neural activity or overlapping articulatory gestures—that a monotonic alignment model cannot represent.

Concretely, the cross-attention at each transformer block computes:

$$\text{CrossAttn}(Q, K, V) = \text{softmax}\left(\frac{QK^\top}{\sqrt{d_k}}\right)V \quad (3.1)$$

where $Q \in \mathbb{R}^{S_{\text{phoneme}} \times d}$ are projections of the phoneme hidden states, and $K, V \in \mathbb{R}^{S_{\text{brain}} \times d}$ are projections of the brain encoder output Z_{brain} . The resulting attention map of size $S_{\text{phoneme}} \times S_{\text{brain}}$ (e.g., $\sim 80 \times 500$) constitutes a learned, per-layer alignment that the model refines across both the depth of the network and the timesteps of the diffusion process. No auxiliary alignment loss or explicit duration model is required.

3.2 Hypothesis 2: Transfer Learning through Staged Training

A central practical constraint of intracortical BCI research is the scarcity of paired data. The Brain-to-Text Benchmark provides approximately 11,000 (brain signal, phoneme sequence) training pairs [Wil+24]—far fewer than the hundreds of thousands of examples typically used to train sequence-to-sequence models. Training a diffusion-based decoder from scratch on this volume of data would be unlikely to learn both the structure of English phonotactics and the brain-to-phoneme mapping simultaneously.

Diffusion models are uniquely suited to a decoupled training strategy because the same architecture can operate in both unconditional and conditional generation modes. Modern conditional diffusion approaches include classifier-free guidance (CFG) [HS22], which randomly drops the conditioning signal during training and uses a guidance scale at inference, and architectural conditioning via Adaptive Layer Normalization (AdaLN) and cross-attention, as employed in the Diffusion Transformer (DiT) [PX22]. In this work, I chose to condition through cross-attention layers and AdaLN modulation rather than CFG, because the brain signal is a dense, continuous, high-dimensional input for which architectural conditioning provides greater expressivity than guidance-scale tuning.

Our training procedure follows a three-stage scheme:

Stage 0 — Unconditional pretraining. We first train the diffusion transformer as an unconditional phoneme sequence generator. The LibriSpeechASR corpus was used given

its comparative similarity in length and natural language structure to the word distribution found in the Brain-to-Text '24 corpus. This generic language data is converted to phoneme sequences using a grapheme-to-phoneme (G2P) model, and the diffusion model learns to generate valid phoneme sequences by iteratively denoising in embedding space. Cross-attention layers are disabled during this stage. The pretrained model acquires knowledge of English phonotactic constraints—valid onset clusters, vowel patterns, syllable structure—without any brain data.

Stage 1 — Frozen backbone, conditioning warm-start. The pretrained backbone (self-attention, feed-forward, and AdaLN parameters) is frozen, and the newly introduced modules—the brain encoder, cross-attention layers, and their associated layer norms—are trained on paired BCI data. A zero-initialized scalar gate on each cross-attention sublayer ensures that the conditioning pathway begins as a no-op, preserving the pretrained prior and allowing the brain encoder to converge before it influences the generative process. The global brain embedding $z_{\text{global}} = \text{mean}(Z_{\text{brain}})$ is added to the timestep embedding to form the AdaLN conditioning vector $c = t_{\text{emb}} + z_{\text{global}}$; the brain encoder’s final projection layer is zero-initialized so that z_{global} starts as a zero vector and does not perturb the pretrained AdaLN behavior.

Stage 2 — Partial backbone adaptation. The top layers of the pretrained backbone are unfrozen at a reduced learning rate, allowing the diffusion prior to adapt slightly to the distribution of brain-conditioned inputs while the lower layers preserve general phonotactic knowledge. This controlled unfreezing balances adaptation to the downstream task against catastrophic forgetting of the pretrained prior.

This staged approach draws on established practices in transfer learning for low-resource settings: the pretrained prior reduces the effective complexity of what fine-tuning must learn, and the freeze–unfreeze schedule controls the risk of overfitting to the small paired dataset.

3.3 Hypothesis 3: Spatially-Aware Brain Encoding

The neural signals used in this study are recorded from two microelectrode arrays implanted in cortical areas associated with speech motor control, each comprising a 16×8 grid of electrodes [Wil+23]. At each 20 ms time bin, two features are extracted per electrode: threshold crossings (tx1) and spike band power (spikePow), yielding a spatiotemporal tensor of shape $(S_{\text{brain}}, 2, 16, 8)$ per trial.

The baseline GRU decoder [Wil+24] collapses the spatial structure of this tensor by concatenating all electrode channels into a single 256-dimensional vector per timestep. While computationally efficient, this representation discards the geometric relationships between electrodes. Willett et al. [Wil+23] demonstrated that decoder performance improved with larger electrode arrays, suggesting that spatial patterns across the electrode grid carry information relevant to articulatory decoding. Neuroscientific evidence further supports this: speech motor cortex exhibits spatially organized representations of articulatory features, with nearby electrodes often encoding related aspects of vocal tract configuration [Car+24].

To preserve and exploit this spatial structure, we employ a convolutional brain encoder that processes each timestep’s $2 \times 16 \times 8$ electrode map through a stack of 2D convolutional layers before temporal integration. The spatial dimensions are processed independently per timestep—the time axis is folded into the batch dimension during the convolutional pass—so that each timestep’s spatial pattern is encoded without temporal context initially. The resulting per-timestep feature vectors are then available as a temporal sequence $Z_{\text{brain}} \in \mathbb{R}^{B \times S_{\text{brain}} \times d_{\text{model}}}$ for downstream cross-attention.

A potential concern with this design is overparameterization: the convolutional encoder introduces additional learnable parameters that must be trained on only $\sim 11,000$ paired examples. However, I theorized that the transfer learning framework mitigates this risk. Because the pretrained diffusion backbone already encodes phonotactic structure, the brain encoder is not burdened with jointly learning both human phonetic structure *and* the neural-to-phoneme mapping. The encoder’s sole responsibility is to produce representations that, when attended to by the pretrained decoder, enable accurate phoneme reconstruction. This division of labor effectively increases the data efficiency of the brain encoder, as the paired data budget is spent entirely on learning the neural encoding rather than being shared with language modeling. Additionally, Group Normalization [WH18] and dropout regularization within the encoder provide further protection against overfitting in this low-data regime.

4 Preliminary Results

The proposed architecture did not produce viable outputs. The pretraining and validation loss curves appeared promising initially, but their extremely rapid convergence within the first few epochs was an early warning sign. The root cause was an embedding initialization mismatch: the standard deviation of the Gaussian noise added during the diffusion forward process was approximately $\sigma_{\text{noise}} \approx 0.8\text{--}1.0$, while the randomly initialized phoneme token embeddings had a standard deviation of only $\sigma_{\text{embed}} \approx 0.02$, yielding a signal-to-noise ratio of roughly 1:50. At this ratio, the forward process noise completely overwhelmed the ground-truth embedding signal, effectively destroying any structure the model could learn to denoise. After rescaling the embedding initialization to bring the two quantities into a more compatible range, convergence stabilized to a more reasonable pace, and training proceeded to the fine-tuning stage.

However, the fine-tuning step failed to converge. As shown in the loss curves in Appendix C, the fine-tuning loss plateaued at approximately 1.0 and showed no improvement over training. Under an MSE denoising objective, a persistent loss of 1.0 indicates that the model has degenerated to predicting the mean of the noise distribution—equivalent to outputting random noise and providing no useful signal for phoneme recovery.

Further diagnosis identified the pretraining stage itself as the deeper failure point. Applying a static nearest-neighbor decoding layer—using the embedding matrix as an unembedding matrix to project hidden states back into the phoneme vocabulary—to the pretrained model’s sampled outputs revealed fully degenerate sequences. A representative example is shown below:

```
[ 'AH2', 'UW', 'UW2', 'UW', '<pad>', 'UW', 'ER2', 'UW', 'UW', 'UH0',
  'UW', 'ER2', '<pad>', 'ER2', 'AH2', '<pad>', '<pad>', 'UW', 'UW',
  '<pad>', 'UW', 'OY0', '<pad>', 'AW0', 'ER2', '<pad>', 'AW2', 'UW',
  'UW', '<unk>']
```

The output is dominated by a small cluster of back vowels (UW, ER, AH) with frequent padding tokens, consistent with *embedding collapse*: a failure mode in which the learned embedding space collapses such that most tokens map to a small region of the latent space, causing the decoder to repeatedly select the same few high-frequency tokens regardless of input. This suggests that the pretraining stage never learned any meaningful phonemic structure, and that the fine-tuning failure was a downstream consequence rather than an independent problem.

5 Discussion of Future Improvements

5.1 Addressing Embedding Collapse

The most critical failure was embedding collapse in the phoneme token representations. Several approaches could mitigate this in future work.

One promising direction is to expand the token vocabulary from monophones to diphones. The baseline monophone vocabulary contains approximately 75 tokens. Expanding to digraph pairs yields up to $75^2 = 5,625$ possible tokens, dramatically increasing the separation between token representations in the embedding space and reducing the likelihood that all tokens collapse to the same region. This approach has additional precedent as a training objective: using digraph targets as the supervision signal encourages the encoder to learn transitional phoneme dynamics and coarticulatory context, rather than treating each phoneme as independent [Wil+24]. The digrapheme method was one of the biggest contributions by the first place entrant to the Brain-to-Text '24 benchmark, DCoND-LIFT.

Beyond vocabulary expansion, standard techniques for preventing representational collapse could be applied directly to the embedding matrix. These include: (1) cosine similarity penalties on the embedding space, which penalize token embeddings away from becoming too similar; (2) initialization onto a well-separated hypersphere, such that token embeddings are maximally spread at the start of training; and (3) embedding regularization terms that encourage a uniform distribution of token representations across the embedding space.

5.2 Pretraining Corpus Size

A contributing factor to the pretraining failure was almost certainly insufficient corpus size relative to model capacity. Due to compute, memory, and time constraints of this project and the resources on hand, the pretraining corpus consisted of approximately 45,000 generic phoneme sequences generated from the LibriSpeech ASR dataset [Pan+15]. For a model with a 256-dimensional latent space, 6 transformer layers, and 8 attention heads, this is likely far below the data volume required to learn a well-structured phoneme manifold.

The ratio between pretraining and fine-tuning data compounds this problem. The brain signal dataset contains approximately 11,000 sentence-level examples, giving a pretraining-to-fine-tuning ratio of roughly 4:1. This is extremely low for a two-stage transfer learning pipeline, where the pretraining stage is intended to instill broad representational structure that the fine-tuning stage then specializes. As a reference point, prior work on speech diffusion models operates with pretraining corpora orders of magnitude larger than their target fine-tuning sets [She+24]. Future work should prioritize scaling the pretraining corpus—either by using a larger subset of LibriSpeech, incorporating additional phoneme-transcribed corpora such as Common Voice, or generating synthetic phoneme sequences via grapheme-to-phoneme (G2P) conversion over large text datasets.

5.3 CTC Auxiliary Loss on the Brain Encoder

As noted earlier, one design motivation for the diffusion prior was the hypothesis that a generative objective would circumvent the need for explicit frame-level temporal alignment between neural activity and phoneme targets—an alignment that CTC loss implicitly discovers. However, the complete failure of the fine-tuning stage suggests that the brain encoder never learned to produce sufficiently structured latent representations for the cross-attention conditioning to function.

Adding a lightweight CTC auxiliary loss directly on the brain encoder output during fine-tuning would provide a direct gradient signal encouraging the encoder to produce temporally

structured, phonemically separable latent vectors—without fully replacing the generative objective. Specifically, CTC would incentivize the encoder to push the latent representations of distinct phoneme contexts farther apart in the latent space, making the cross-attention conditioning signal more informative. This auxiliary loss could be weighted to decay over the course of fine-tuning, so that the model gradually shifts reliance from the explicit CTC alignment signal to the diffusion-based generative objective.

5.4 Learned Decoding via Auxiliary Cross-Entropy Loss

In the current implementation, inference-time decoding is performed via nearest-neighbor search in the embedding space: the model’s output hidden state is compared to all token embeddings and the closest match is returned. While interpretable, this approach is brittle—particularly under embedding collapse, where many tokens share similar representations—and provides no learned signal to distinguish between similar in latent space but distinct tokens.

A learned decoding head, trained with a cross-entropy classification objective over the phoneme vocabulary, would produce calibrated probability distributions over tokens rather than hard nearest-neighbor assignments. Critically, this learned decoding head can be trained entirely during the pretraining stage on the generic phoneme sequence corpus, meaning it does not consume any of the privileged brain–phoneme paired data budget. This keeps the fine-tuning stage focused on conditioning rather than vocabulary grounding, while producing substantially more informative phoneme probability outputs that could be passed directly to a downstream language model.

References

- [Car+24] N. S. Card, M. Wairagkar, C. Iacobacci, X. Hou, T. Singer-Clark, F. R. Willett, E. M. Kunz, C. Fan, M. Vahdati Nia, D. R. Deo, A. Srinivasan, E. Y. Choi, M. F. Glasser, L. R. Hochberg, J. M. Henderson, K. Shahlaie, S. D. Stavisky, and D. M. Brandman. “An accurate and rapidly calibrating speech neuroprosthesis”. *New England Journal of Medicine* 7 (2024) (cit. on pp. 2, 5).
- [Gra+06] A. Graves, S. Fernández, F. Gomez, and J. Schmidhuber. “Connectionist temporal classification: labelling unsegmented sequence data with recurrent neural networks” (2006) (cit. on p. 4).
- [HJA20] J. Ho, A. Jain, and P. Abbeel. “Denoising diffusion probabilistic models”. In: *Advances in Neural Information Processing Systems*. 2020 (cit. on pp. 4, 10, 11).
- [HS22] J. Ho and T. Salimans. “Classifier-free diffusion guidance”. In: *NeurIPS 2021 Workshop on Deep Generative Models and Downstream Applications*. 2022 (cit. on p. 4).
- [Pan+15] V. Panayotov, G. Chen, D. Povey, and S. Khudanpur. “LibriSpeech: an ASR corpus based on public domain audio books”. In: *Proceedings of the IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. 2015 (cit. on p. 7).
- [PX22] W. Peebles and S. Xie. “Scalable diffusion models with transformers”. *arXiv preprint arXiv:2212.09748* (2022) (cit. on pp. 3, 4).
- [Rom+22] R. Rombach, A. Blattmann, D. Lorenz, P. Esser, and B. Ommer. “High-resolution image synthesis with latent diffusion models”. In: *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*. 2022.
- [RFB15] O. Ronneberger, P. Fischer, and T. Brox. “U-Net: convolutional networks for biomedical image segmentation”. In: *Medical Image Computing and Computer-Assisted Intervention*. 2015 (cit. on p. 11).

- [She+24] K. Shen, Z. Ju, X. Tan, Y. Liu, Y. Leng, L. He, T. Qin, S. Zhao, and J. Bian. “NaturalSpeech 2: latent diffusion models are natural and zero-shot speech and singing synthesizers”. In: *Proceedings of the International Conference on Learning Representations (ICLR)*. 2024 (cit. on p. 7).
- [Wil+23] F. R. Willett, E. M. Kunz, C. Fan, D. T. Avansino, G. H. Wilson, E. Y. Choi, F. Kamdar, M. F. Glasser, L. R. Hochberg, S. Druckmann, K. V. Shenoy, and J. M. Henderson. “A high-performance speech neuroprosthesis”. *Nature* 7976 (2023) (cit. on pp. 2, 3, 5).
- [Wil+24] F. R. Willett, J. Li, T. Le, C. Fan, M. Chen, E. Shlizerman, Y. Chen, X. Zheng, T. S. Okubo, T. Benster, H. D. Lee, M. Kounga, E. K. Buchanan, D. Zoltowski, S. W. Linderman, and J. M. Henderson. “Brain-to-Text Benchmark ’24: lessons learned”. *arXiv preprint arXiv:2412.17227* (2024) (cit. on pp. 2–5, 7).
- [WH18] Y. Wu and K. He. “Group normalization”. In: *European Conference on Computer Vision*. 2018 (cit. on p. 6).

A Denoising Diffusion Probabilistic Models

Denoising Diffusion Probabilistic Models (DDPMs), introduced by Ho et al. [HJA20], are a class of latent variable generative models that learn to synthesize data by reversing a gradual noising process. The framework defines two Markov chains: a fixed *forward process* that progressively corrupts data with Gaussian noise, and a learned *reverse process* that recovers the original data from noise.

A.1 Forward Process

Given a data sample $\mathbf{x}_0 \sim q(\mathbf{x}_0)$, the forward process defines a Markov chain that adds Gaussian noise over T timesteps according to a fixed variance schedule $\beta_1, \beta_2, \dots, \beta_T$:

$$q(\mathbf{x}_t | \mathbf{x}_{t-1}) = \mathcal{N}(\mathbf{x}_t; \sqrt{1 - \beta_t} \mathbf{x}_{t-1}, \beta_t \mathbf{I}) \quad (\text{A.1})$$

A key property of this formulation is that $\mathbf{x}_t$ at any arbitrary timestep t can be sampled directly from $\mathbf{x}_0$ in closed form. Defining $\alpha_t = 1 - \beta_t$ and $\bar{\alpha}_t = \prod_{s=1}^t \alpha_s$, this yields:

$$q(\mathbf{x}_t | \mathbf{x}_0) = \mathcal{N}(\mathbf{x}_t; \sqrt{\bar{\alpha}_t} \mathbf{x}_0, (1 - \bar{\alpha}_t) \mathbf{I}) \quad (\text{A.2})$$

which can be equivalently written using the reparameterization trick as:

$$\mathbf{x}_t = \sqrt{\bar{\alpha}_t} \mathbf{x}_0 + \sqrt{1 - \bar{\alpha}_t} \boldsymbol{\varepsilon}, \quad \boldsymbol{\varepsilon} \sim \mathcal{N}(\mathbf{0}, \mathbf{I}) \quad (\text{A.3})$$

As $T \rightarrow \infty$ and the schedule is chosen appropriately, $\mathbf{x}_T \approx \mathcal{N}(\mathbf{0}, \mathbf{I})$, reducing the data to isotropic Gaussian noise.

A.2 Reverse Process

The reverse process learns to undo the forward noising, recovering $\mathbf{x}_0$ from $\mathbf{x}_T$ by iteratively denoising. Because the true reverse posterior $q(\mathbf{x}_{t-1} | \mathbf{x}_t)$ is intractable, a neural network p_θ is trained to approximate it:

$$p_\theta(\mathbf{x}_{t-1} | \mathbf{x}_t) = \mathcal{N}(\mathbf{x}_{t-1}; \boldsymbol{\mu}_\theta(\mathbf{x}_t, t), \boldsymbol{\Sigma}_\theta(\mathbf{x}_t, t)) \quad (\text{A.4})$$

Ho et al. [HJA20] show that the reverse posterior conditioned on $\mathbf{x}_0$ is in fact tractable:

$$q(\mathbf{x}_{t-1} | \mathbf{x}_t, \mathbf{x}_0) = \mathcal{N}(\mathbf{x}_{t-1}; \tilde{\boldsymbol{\mu}}_t(\mathbf{x}_t, \mathbf{x}_0), \tilde{\beta}_t \mathbf{I}) \quad (\text{A.5})$$

where the posterior mean and variance are given by:

$$\tilde{\boldsymbol{\mu}}_t(\mathbf{x}_t, \mathbf{x}_0) = \frac{\sqrt{\bar{\alpha}_{t-1}} \beta_t}{1 - \bar{\alpha}_t} \mathbf{x}_0 + \frac{\sqrt{\bar{\alpha}_t} (1 - \bar{\alpha}_{t-1})}{1 - \bar{\alpha}_t} \mathbf{x}_t, \quad \tilde{\beta}_t = \frac{1 - \bar{\alpha}_{t-1}}{1 - \bar{\alpha}_t} \beta_t \quad (\text{A.6})$$

A.3 Training Objective

The model is trained by optimizing a variational lower bound on the log-likelihood $\log p_\theta(\mathbf{x}_0)$. Following Ho et al. [HJA20], the network is parameterized to predict the noise $\boldsymbol{\varepsilon}$ added during the forward process rather than directly predicting $\boldsymbol{\mu}_\theta$, yielding a simplified objective:

$$\mathcal{L}_{\text{simple}} = \mathbb{E}_{t, \mathbf{x}_0, \epsilon} \left[\left\| \epsilon - \epsilon_{\theta} \left(\sqrt{\bar{\alpha}_t} \mathbf{x}_0 + \sqrt{1 - \bar{\alpha}_t} \epsilon, t \right) \right\|^2 \right] \quad (\text{A.7})$$

where t is sampled uniformly from $\{1, \dots, T\}$ and ϵ_{θ} is the neural network (typically a U-Net [RFB15]) that predicts the noise component at timestep t . Ho et al. [HJA20] find empirically that this simplified objective, which drops a time-dependent weighting term from the full variational bound, produces superior sample quality.

B Architecture and Hyperparameter Details

This appendix provides a comprehensive description of the model architecture, initialization strategy, and training hyperparameters used in our brain-to-phoneme diffusion decoder.

B.1 Model Overview

Our model, **PhonemeDiT**, adapts the Diffusion Transformer (DiT) architecture [peebles2023dit] from image generation to phoneme sequence generation conditioned on brain signals. The system operates in two stages: (1) unconditional pretraining of a phoneme diffusion prior on text-derived phoneme sequences, and (2) brain-conditioned fine-tuning on paired (brain signal, phoneme) data. Diffusion is performed in continuous embedding space using Gaussian noise, with the model trained to predict the noise added at each timestep (epsilon prediction).

B.2 Phoneme Diffusion Transformer

Table 1: PhonemeDiT architecture hyperparameters.

Hyperparameter	Value
Model dimension (d_{model})	256
Transformer depth (number of blocks)	6
Attention heads per block	8
Head dimension ($d_{\text{model}}/n_{\text{heads}}$)	32
MLP expansion ratio	4.0×
MLP hidden dimension	1024
MLP activation	GELU (tanh approximation)
Vocabulary size	75 (ARPAbet with stress markers)
Maximum sequence length (S_{max})	160
Positional encoding	Learned absolute
Diffusion timestep embedding dimension	256 (sinusoidal $\rightarrow$ MLP)
Final projection layer	Yes (AdaLN-modulated)

Each transformer block follows a Pre-LayerNorm design with Adaptive Layer Normalization (AdaLN-Zero) [peebles2023dit] and consists of:

1. **Self-attention** with AdaLN modulation: $x \leftarrow x + \gamma_{\text{msa}} \odot \text{SelfAttn}(\text{modulate}(\text{LN}(x), \beta_{\text{msa}}, \gamma_{\text{msa}}))$
2. **Cross-attention** to brain embeddings (fine-tuning only): $x \leftarrow x + g_{\text{cross}} \cdot \text{CrossAttn}(\text{LN}(x), Z_{\text{brain}})$
3. **Feed-forward network** with AdaLN modulation: $x \leftarrow x + \gamma_{\text{mlp}} \odot \text{MLP}(\text{modulate}(\text{LN}(x), \beta_{\text{mlp}}, \gamma_{\text{mlp}}))$

The AdaLN modulation function is defined as $\text{modulate}(x, \beta, \gamma) = (1 + \gamma) \odot x + \beta$, where the shift β , scale γ , and gate parameters are produced by a learned projection from the

conditioning vector c :

$$[\beta_{\text{msa}}, \gamma_{\text{msa}}, g_{\text{msa}}, \beta_{\text{mlp}}, \gamma_{\text{mlp}}, g_{\text{mlp}}] = \text{Linear}(\text{SiLU}(c)) \in \mathbb{R}^{6 \times d_{\text{model}}} \quad (\text{B.1})$$

The conditioning vector during pretraining is $c = t_{\text{emb}}$ (timestep embedding only). During fine-tuning, it becomes $c = t_{\text{emb}} + z_{\text{global}}$, where z_{global} is a mean-pooled summary of the brain encoder output.

Embedding scaling. Token embeddings are scaled by $\sqrt{d_{\text{model}}}$ before entering the diffusion process. This ensures the clean signal magnitude (std ≈ 0.32) is commensurate with the unit-variance Gaussian noise used in diffusion, preventing the model from learning a trivial near-zero prediction.

Cross-attention gating. Each cross-attention sublayer includes a scalar gate parameter g_{cross} initialized to zero, ensuring the cross-attention pathway acts as a no-op at the start of fine-tuning and does not perturb the pretrained backbone.

B.3 Brain Convolutional Encoder

The brain encoder processes spatiotemporal neural recordings with shape $(B, S_{\text{brain}}, 2, 16, 8)$, where S_{brain} is the number of 20 ms time bins, 2 channels correspond to threshold crossings (tx1) and spike band power (spikePow), and 16×8 represents the electrode grid geometry.

Table 2: Brain convolutional encoder architecture.

Layer	Configuration	Output Shape
Input	—	$(B \cdot S, 2, 16, 8)$
Conv2d + GroupNorm + ReLU	$2 \rightarrow 16$, kernel 3×3 , stride 2, pad 1	$(B \cdot S, 16, 8, 4)$
Conv2d + GroupNorm + ReLU	$16 \rightarrow 32$, kernel 3×3 , stride 2, pad 1	$(B \cdot S, 32, 4, 2)$
Conv2d + GroupNorm + ReLU	$32 \rightarrow 64$, kernel 3×3 , stride 1, pad 1	$(B \cdot S, 64, 4, 2)$
AdaptiveAvgPool2d	Output size (1, 1)	$(B \cdot S, 64, 1, 1)$
Flatten + Linear + ReLU + Dropout	$64 \rightarrow 128 \rightarrow d_{\text{model}}$	(B, S, d_{model})
LayerNorm	—	(B, S, d_{model})

Spatial dimensions are processed independently per timestep by reshaping the time dimension into the batch axis before the convolutional stack, then reshaped back afterward. GroupNorm with 8 groups is used throughout in place of BatchNorm for stability with small batch sizes. The final linear layer is zero-initialized so that $z_{\text{global}} = \text{mean}(Z_{\text{brain}}, \text{dim} = 1)$ starts as a zero vector, preserving the pretrained AdaLN behavior at the onset of fine-tuning.

B.4 Diffusion Process

The training loss is computed as:

$$\mathcal{L} = \frac{\sum_{b,s} \mathbb{1}[s \in \text{valid}] \cdot \|\hat{\epsilon}_{b,s} - \epsilon_{b,s}\|_2^2 / d_{\text{model}}}{\sum_{b,s} \mathbb{1}[s \in \text{valid}]} \quad (\text{B.2})$$

where the mask $\mathbb{1}[s \in \text{valid}]$ excludes padding positions from both the loss numerator and denominator, preventing the model from expending capacity on denoising meaningless padding embeddings.

Table 3: Diffusion process configuration.

Parameter	Value
Number of diffusion timesteps (T)	1000
Noise schedule	Linear
Prediction target	ε (noise prediction)
Variance type	Fixed small (posterior variance)
Loss function	MSE with padding mask
Inference sampler	DDPM (full 1000 steps)

Table 4: Initialization strategy following DiT conventions.

Module	Initialization
Conv2d layers	Kaiming normal (fan-out, ReLU)
Linear layers	Xavier uniform
LayerNorm / GroupNorm	Weight = 1, bias = 0
Embedding tables	$\mathcal{N}(0, 0.02)$
Timestep MLP	$\mathcal{N}(0, 0.02)$, bias = 0
AdaLN modulation heads	Weight = 0, bias = 0 (AdaLN-Zero)
Final layer linear	Weight = 0, bias = 0
Cross-attention gate	$g_{\text{cross}} = 0$
Brain encoder final projection	Weight = 0, bias = 0

B.5 Weight Initialization

The AdaLN-Zero initialization ensures that all transformer blocks initially behave as identity functions, allowing gradual learning from a stable starting point. The zero-initialization of the cross-attention gate and brain encoder final projection ensures the fine-tuning stage begins with the pretrained prior intact.

B.6 Training Configuration

B.6.1 Stage 0: Unconditional Pretraining

See Table 5.

B.6.2 Stage 1: Brain Encoder Warm-Start

See Table 6.

B.6.3 Stage 2: Partial Backbone Unfreeze

See Table 7.

B.7 Inference and Decoding

At inference time, phoneme sequences are generated by iterative denoising from pure Gaussian noise, conditioned on brain signals via cross-attention and AdaLN. The full 1000-step DDPM reverse process is used. At each step t , the model predicts the noise $\hat{\varepsilon}_t$, from which an estimate of the clean signal $\hat{x}_0$ is recovered:

$$\hat{x}_0 = \frac{1}{\sqrt{\bar{\alpha}_t}} x_t - \frac{\sqrt{1 - \bar{\alpha}_t}}{\sqrt{\bar{\alpha}_t}} \hat{\varepsilon}_t \quad (\text{B.3})$$

Table 5: Pretraining hyperparameters.

Hyperparameter	Value
Dataset	LibriSpeech transcripts $\rightarrow$ G2P conversion
Dataset size	$\sim 45,000$ phoneme sequences
Train/Val split	90% / 10%
Optimizer	AdamW ($\beta_1 = 0.9, \beta_2 = 0.999$)
Learning rate	1×10^{-4} (constant after warmup)
Weight decay	0
Warmup schedule	Linear, 1000 steps
Batch size	256
Epochs	200
EMA decay	0.9999
Gradient clipping	$\ \nabla\ _{\max} = 1.0$
Validation frequency	Every 5 epochs
Checkpoint strategy	Best (by val loss) + latest
Cross-attention	Disabled
Brain encoder	Not instantiated

Table 6: Fine-tuning Stage 1 hyperparameters.

Hyperparameter	Value
Dataset	BCI paired (brain, phoneme) recordings
Dataset size	$\sim 11,000$ pairs
Train/Val/Test split	80% / 10% / 10%
Frozen modules	Self-attention, MLP, AdaLN, embeddings, positional encoding
Trainable modules	Brain encoder, cross-attention, cross-attention gates, LN_{cross}
Optimizer	AdamW
Learning rate	1×10^{-4}
Warmup schedule	Linear, 500 steps
Gradient clipping	$\ \nabla\ _{\max} = 1.0$
Epochs	50
Pretrained weights	Loaded with strict=False; missing keys correspond to new modules

The posterior mean for x_{t-1} is then computed as:

$$\mu_{t-1} = \frac{\beta_t \sqrt{\bar{\alpha}_{t-1}}}{1 - \bar{\alpha}_t} \hat{x}_0 + \frac{(1 - \bar{\alpha}_{t-1}) \sqrt{\alpha_t}}{1 - \bar{\alpha}_t} x_t \quad (\text{B.4})$$

and the sample is drawn as $x_{t-1} = \mu_{t-1} + \sqrt{\tilde{\beta}_t} \varepsilon$ for $t > 0$, where $\tilde{\beta}_t$ is the posterior variance.

After denoising, continuous embedding vectors are decoded to discrete phoneme tokens via nearest-neighbor lookup in the embedding table:

$$\hat{y}_s = \arg \min_{k \in \mathcal{V}} \|x_{0,s} - e_k \sqrt{d_{\text{model}}}\|_2 \quad (\text{B.5})$$

where e_k is the k -th row of the embedding matrix and the $\sqrt{d_{\text{model}}}$ factor accounts for the embedding scaling applied during training.

B.8 Evaluation Metric

Model performance is evaluated using **Phoneme Error Rate (PER)**, defined as the edit distance (Levenshtein distance) between the predicted and reference phoneme sequences,

Table 7: Fine-tuning Stage 2 hyperparameters.

Hyperparameter	Value
Unfrozen backbone blocks	Top 2 (of 6) transformer blocks
Brain encoder / cross-attention LR	1×10^{-4}
Unfrozen backbone LR	1×10^{-5}
Optimizer	AdamW with parameter groups
Warmup schedule	Linear, 500 steps
Gradient clipping	$\ \nabla\ _{\max} = 1.0$
Epochs	30
Initialization	Best checkpoint from Stage 1

normalized by the reference sequence length:

$$\text{PER} = \frac{1}{N} \sum_{i=1}^N \frac{\text{EditDistance}(\hat{y}^{(i)}, y^{(i)})}{|y^{(i)}|} \quad (\text{B.6})$$

Predicted sequences are truncated to the reference length before comparison. Special tokens (<pad>, <s>, </s>) are stripped from both sequences prior to computing the edit distance.

C Loss Curves

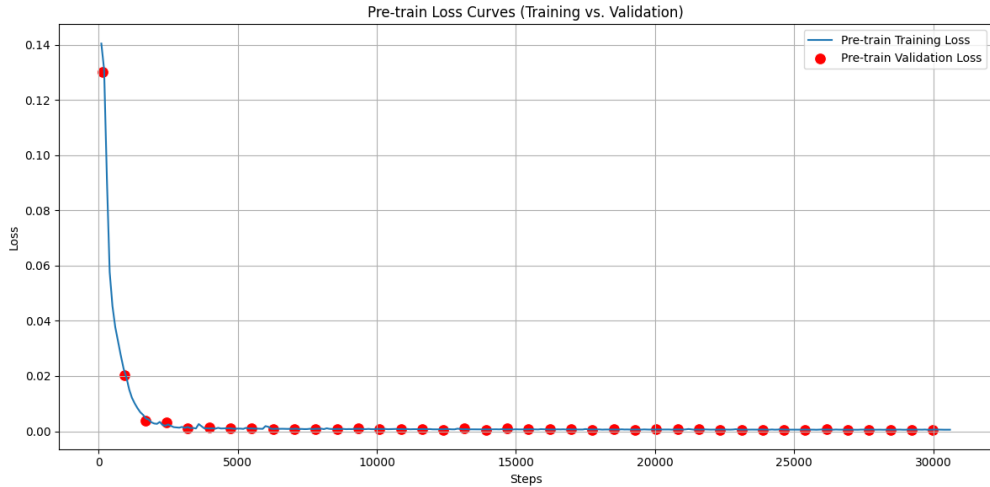


Figure 1: Unconditional pretraining loss curve.

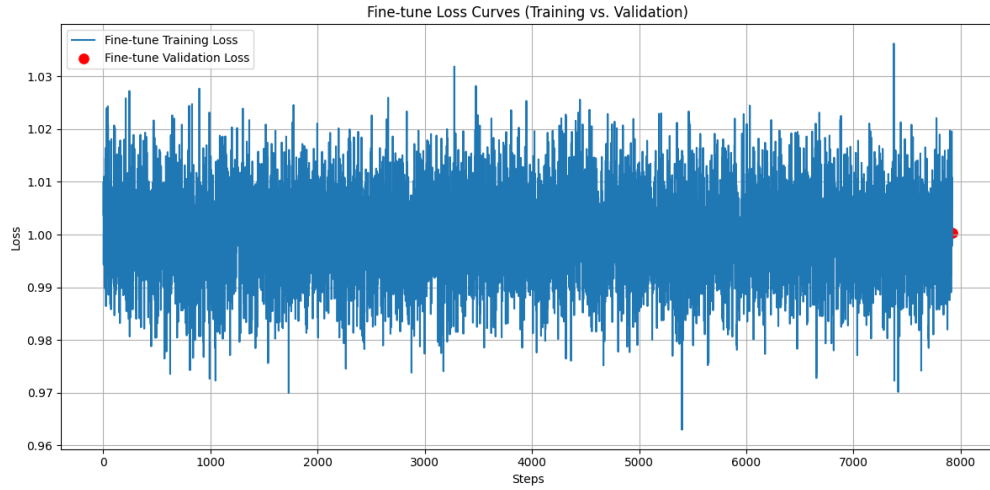


Figure 2: Fine-tuning loss curve.

D Proofs

No additional formal proofs are included in this appendix.