

^zVirtuozzo

Virtuozzo 7

Virtualization SDK: Python API
Reference

April 17, 2017

Parallels International GmbH

Vordergasse 59

8200 Schaffhausen

Switzerland

Tel: + 41 52 632 0411

Fax: + 41 52 672 2010

<http://www.virtuozzo.com>

Copyright ©2016-2017 Parallels International GmbH. All rights reserved.

This product is protected by United States and international copyright laws. The product's underlying technology, patents, and trademarks are listed at <https://virtuozzo.com>.

Microsoft, Windows, Windows Server, Windows NT, Windows Vista, and MS-DOS are registered trademarks of Microsoft Corporation.

Apple, Mac, the Mac logo, Mac OS, iPad, iPhone, iPod touch, FaceTime HD camera and iSight are trademarks of Apple Inc., registered in the US and other countries.

Linux is a registered trademark of Linus Torvalds. All other marks and names mentioned herein may be trademarks of their respective owners.

CHAPTER 1

Introduction

1.1 About This Guide

This guide is a part of the Virtuozzo Virtualization SDK. It contains the Virtuozzo Python API Reference documentation. Please note that this guide does not provide general information on how to use the Virtuozzo Virtualization SDK. To learn the SDK basics, please read the [Virtuozzo Virtualization SDK Programmer's Guide](#), which is a companion book to this one.

1.2 Organization of This Guide

This guide is organized into the following chapters:

- Getting Started. You are reading it now.
- Virtuozzo Python API Reference. The main chapter describing the Virtuozzo Python package and modules. The chapter has the following main sections:
 - Package `prlsdkapi`. Contains the main reference information. Classes and methods are described here.
 - Module `prlsdkapi.prlsdk`. This section describes an internal module. Do not use it in your programs.
 - Module `prlsdkapi.prlsdk.consts`. Describes the API constants. Most of the constants are combined into groups which are used as pseudo enumerations. Constants that belong to the same group have the same prefix in their names. For example, constants with a `PDE_` prefix identify

device types: `PDE_GENERIC_DEVICE`, `PDE_HARD_DISK`, `PDE_GENERIC_NETWORK_ADAPTER`, etc. Other constants are named in a similar manner.

- Module `prlSdkapi.prlSdk.errors`. Describes error code constants. The API has a very large number of error codes, but the majority of them are used internally. The error code constants are named similarly to other constants (i.e. using prefixes for grouping).

1.3 How to Use This Guide

If you are just starting with the Virtuozzo Virtualization SDK, your best source of information is the [Virtuozzo Virtualization SDK Programmer's Guide](#). It explains the Virtuozzo Python API concepts and provides descriptions and step-by-step instructions on how to use the API to perform the most common tasks. Once you are familiar with the basics, you can use this guide as a reference where you can find a particular function syntax or search for a function that provides a functionality that you need.

1.3.1 Searching in This Guide

Please note that when searching this guide for a character with an underscore in its name, the search may not produce the desired results. If you are experiencing this problem, replace an underscore with a whitespace character when typing a character name in the Search box. For example, to search for the `PDE_HARD_DISK` character, type `PDE HARD DISK` (empty spaces between parts of the character name).

1.4 Virtual Machines vs. Containers

With Virtuozzo you have a choice of creating and running two types of virtual servers: Virtual Machines and Containers. While the two server types use different virtualization technologies (Hypervisor and Operating System Virtualization respectively), the Virtuozzo Python API can be used to manage both server types transparently. This means that the same set of classes and methods (with some exceptions) is used to perform operations on both Virtual Machines and Containers.

The following list provides an overview of the specifics and differences when using the API to manage Virtual Machines or Containers:

- When obtaining the list of the available virtual servers with the `Server.get_vm_list` method, the result

1.5. Code Samples: Container Management

set will contain the virtual servers of both types. When iterating through the list and obtaining an individual server configuration data, you can determine the server type using the `VmConfig.get_vm_type` method. The method returns the server type: `consts.PVT_VM` (Virtual Machine) or `consts.PVT_CT` (Container). Once you know the server type, you can perform the desired server management tasks accordingly.

- When creating a virtual server, you have to specify the type of the server you want to create. This is done by using the `Vm.set_vm_type` method passing the `consts.PVT_VM` or the `consts.PVT_CT` constant to it as a parameter.
- The majority of classes and methods operate on both virtual server types. A method and its input/output parameters don't change. Some classes and methods are Virtual Machine specific or Container specific. In the Python API Reference documentation such classes and methods have a `Virtuozzo Virtual Machines only` or `Virtuozzo Containers only` note at the beginning of the description. If a class or a method description doesn't specify the server type, it means that it can operate on both Virtual Machines and Containers.
- When working with a particular server type, the flow of a given programming task may be slightly different. There are not many tasks like that. The most common tasks that have these differences are documented in this guide and the [Virtuozzo Virtualization SDK Programmer's Guide](#).

1.5 Code Samples: Container Management

This section provides a collection of simplified sample code that demonstrates how to use the Virtuozzo Python API to perform the most common Virtuozzo container management tasks. For simplicity, no error checking is implemented in the sample code below. When writing your own program, the error checking should be properly performed. For more complete information and code samples, please read the [Virtuozzo Virtualization SDK Programmer's Guide](#).

```
import os
import select
import prlSdkapi
from prlSdkapi import consts
# Initialize the SDK.
def init():
    print 'init_server_sdk'
    prlSdkapi.init_server_sdk()
# Deinitialize the SDK.
def deinit():
```

```

    print 'deinit_sdk'
    prlsdkapi.deinit_sdk()
# Create a Virtuozzo Container.
def create(srv, name):
    print 'create ct'
    ct = srv.create_vm()
    ct.set_vm_type(consts.PVT_CT)
    ct.set_name(name)
    ct.set_os_template('centos-6-x86_64')
    ct.reg('', True).wait()
    return ct
# Register a Container with
# Virtuozzo
def register(srv, path):
    print 'register ct'
    ct = srv.register_vm(path).wait()
    return ct
# Change a Container name.
def setName(ct, name):
    print 'set_name'
    ct.begin_edit().wait()
    ct.set_name(name)
    ct.commit().wait()
# Set CPU limits for a Container.
def setCpuLimit(ct, limit):
    print 'set_cpu_limit'
    ct.begin_edit().wait()
    ct.set_cpu_limit(limit)
    ct.commit().wait()
# Set RAM size for a Container.
def setRamSize(ct, size):
    print 'set_ram_size'
    ct.begin_edit().wait()
    ct.set_ram_size(size)
    ct.commit().wait()
# Add a hard disk to a Container.
def addHdd(ct, image, size):
    print 'add hdd'
    ct.begin_edit().wait()
    hdd = ct.create_vm_dev(consts.PDE_HARD_DISK)
    hdd.set_emulated_type(consts.PDT_USE_IMAGE_FILE)
    hdd.set_disk_type(consts.PHD_EXPANDING_HARD_DISK)
    hdd.set_disk_size(size)
    hdd.set_enabled(True)
    hdd.create_image(bRecreateIsAllowed = True,
                    bNonInteractiveMode = True).wait()
    ct.commit().wait()
# Execute a program in a Container.
def execute(ct, cmd, args):
    print 'execute command'
    io = prlsdkapi.VmIO()
    io.connect_to_vm(ct, consts.PDCT_HIGH_QUALITY_WITHOUT_COMPRESSION).wait()

```

1.5. Code Samples: Container Management

```
# open guest session
result = ct.login_in_guest('root', '').wait()
guest_session = result.get_param()
# format args and envs
sdkargs = prlSdkapi.StringList()
for arg in args:
    sdkargs.add_item(arg)
sdkargs.add_item("")
sdkenvs = prlSdkapi.StringList()
sdkenvs.add_item("")
# execute
ifd, ofd = os.pipe()
flags = consts.PRPM_RUN_PROGRAM_ENTER|consts.PFD_STDOUT
job = guest_session.run_program(cmd, sdkargs, sdkenvs,
nFlags = flags, nStdout = ofd)
# read output
output = ''
while True:
    rfds, _, _ = select.select([ifd], [], [], 5)
    if not rfds:
        break
    buf = os.read(ifd, 256)
    output += buf
print('output:\n%s--end of output' % output)
# cleanup
os.close(ifd)
job.wait()
guest_session.logout()
io.disconnect_from_vm(ct)
# MAIN PROGRAM
def sample1():
    init()
    srv = prlSdkapi.Server()
    srv.login_local().wait()
    # Create and start a Container.
    ct = create(srv, '101')
    ct.start().wait()
    # Execute the '/bin/cat /proc/cpuinfo' command
    # in a Container.
    execute(ct, '/bin/cat', ['/proc/cpuinfo'])
    ct.stop().wait()
    # Set some parameters and add a hard disk
    # to a Container.
    setCpuLimit(ct, 50)
    setRamSize(ct, 2048)
    addHdd(ct, '/tmp/my_empty_hdd_image', 1024)
    # Clone a Container.
    ct2 = ct.clone('121', '').wait().get_param()
    print('Clone name = %s' % ct2.get_name())
    # Unregister and registers back a Container.
    home_path = ct.get_home_path()
    ct.unreg()
```

```

ct = srv.register_vm(home_path).wait().get_param()
# Delete a Container.
ct.delete()
ct2.delete()
srv.logoff().wait()
deinit()

```

1.6 Code Samples: Virtual Machine Management

This section provides a collection of simplified sample code that demonstrates how to use the Virtuoizzo Python API to perform the most common Virtuoizzo virtual machine management tasks. For simplicity, no error checking is done in the sample code below. When writing your own program, the error checking should be properly implemented. For the complete information and code samples, please read the [Virtuoizzo Virtualization SDK Programmer's Guide](#).

```

# Create a Virtual Machine
def create(server):
    # Get the ServerConfig object.
    result = server.get_srv_config().wait()
    srv_config = result.get_param()
    # Create a Vm object and set the virtual server type
    # to Virtual Machine (PVT_VM).
    vm = server.create_vm()
    vm.set_vm_type(consts.PVT_VM)
    # Set a default configuration for the VM.
    vm.set_default_config(srv_config, consts.PVS_GUEST_VER_WIN_WINDOWS8, True)
    # Set the VM name.
    vm.set_name("Windows8")
    # Modify the default RAM and HDD size.
    vm.set_ram_size(256)
    dev_hdd = vm.get_hard_disk(0)
    dev_hdd.set_disk_size(3000)
    # Register the VM with the Virtuoizzo.
    vm.reg("", True).wait()
# Change VM name.
def setName(vm, name):
    print 'set_name'
    vm.begin_edit().wait()
    vm.set_name(name)
    vm.commit().wait()
# Set boot device priority
def vm_boot_priority(vm):
    # Begin the virtual server editing operation.
    vm.begin_edit().wait()

```


1.6. Code Samples: Virtual Machine Management

```
# Modify boot device priority using the following order:
# CD > HDD > Network > FDD.
# Remove all other devices from the boot priority list (if any).
count = vm.get_boot_dev_count()
for i in range(count):
    boot_dev = vm.get_boot_dev(i)
    # Enable the device.
    boot_dev.set_in_use(True)
    # Set the device sequence index.
    dev_type = boot_dev.get_type()
    if dev_type == consts.PDE_OPTICAL_DISK:
        boot_dev.set_sequence_index(0)
    elif dev_type == consts.PDE_HARD_DISK:
        boot_dev.set_sequence_index(1)
    elif dev_type == consts.PDE_GENERIC_NETWORK_ADAPTER:
        boot_dev.set_sequence_index(2)
    elif dev_type == consts.PDE_FLOPPY_DISK:
        boot_dev.set_sequence_index(3)
    else:
        boot_dev.remove()
# Commit the changes.
vm.commit().wait()
# Execute a program in a VM.
def execute(vm):
    # Log in.
    g_login = "Administrator"
    g_password = "12345"
    # Create a StringList object to hold the
    # program input parameters and populate it.
    hArgsList = prlsdkapi.StringList()
    hArgsList.add_item("cmd.exe")
    hArgsList.add_item("/C")
    hArgsList.add_item("C:\\123.bat")
    # Create an empty StringList object.
    # The object is passed to the VmGuest.run_program method and
    # is used to specify the list of environment variables and
    # their values to add to the program execution environment.
    # In this sample, we are not adding any variables.
    # If you wish to add a variable, add it in the var_name=var_value format.
    hEnvsList = prlsdkapi.StringList()
    hEnvsList.add_item("")
    # Establish a user session.
    vm_guest = vm.login_in_guest(g_login, g_password).wait().get_param()
    # Run the program.
    vm_guest.run_program("cmd.exe", hArgsList, hEnvsList).wait()
    # Log out.
    vm_guest.logout().wait()
```

Virtuozzo Python API Reference

API Documentation

April 17, 2017

Contents

Contents	1
1 Package prlsdkapi	2
1.1 Modules	2
1.2 Functions	2
1.3 Variables	2
1.4 Class PrlSDKError	3
1.4.1 Methods	3
1.4.2 Properties	3
1.5 Class ApiHelper	4
1.5.1 Methods	4
1.6 Class Debug	6
1.6.1 Methods	6
1.7 Class StringList	6
1.7.1 Methods	6
1.7.2 Properties	7
1.8 Class HandleList	7
1.8.1 Methods	8
1.8.2 Properties	8
1.9 Class OpTypeList	9
1.9.1 Methods	9
1.9.2 Properties	10
1.10 Class Result	10
1.10.1 Methods	10
1.10.2 Properties	11
1.11 Class Event	11
1.11.1 Methods	11
1.11.2 Properties	12
1.12 Class EventParam	13
1.12.1 Methods	13
1.12.2 Properties	14
1.13 Class Job	14
1.13.1 Methods	14
1.13.2 Properties	15
1.14 Class Server	15
1.14.1 Methods	16
1.14.2 Properties	27

1.15	Class FsInfo	27
1.15.1	Methods	28
1.15.2	Properties	29
1.16	Class FsEntry	29
1.16.1	Methods	29
1.16.2	Properties	30
1.17	Class ServerConfig	31
1.17.1	Methods	31
1.17.2	Properties	35
1.18	Class HostDevice	35
1.18.1	Methods	36
1.18.2	Properties	36
1.19	Class HostHardDisk	37
1.19.1	Methods	37
1.19.2	Properties	38
1.20	Class HdPartition	38
1.20.1	Methods	38
1.20.2	Properties	39
1.21	Class HostNet	40
1.21.1	Methods	40
1.21.2	Properties	41
1.22	Class HostPciDevice	42
1.22.1	Methods	42
1.22.2	Properties	42
1.23	Class UserConfig	43
1.23.1	Methods	43
1.23.2	Properties	44
1.24	Class UserInfo	44
1.24.1	Methods	44
1.24.2	Properties	45
1.25	Class DispConfig	45
1.25.1	Methods	45
1.25.2	Properties	53
1.26	Class VirtualNet	53
1.26.1	Methods	53
1.26.2	Properties	57
1.27	Class PortForward	57
1.27.1	Methods	58
1.27.2	Properties	59
1.28	Class VmDevice	59
1.28.1	Methods	59
1.28.2	Properties	62
1.29	Class VmHardDisk	63
1.29.1	Methods	63
1.29.2	Properties	65
1.30	Class VmHdPartition	65
1.30.1	Methods	65
1.30.2	Properties	66
1.31	Class VmHdEncryption	66
1.31.1	Methods	66
1.31.2	Properties	66

1.32	Class VmNet	67
1.32.1	Methods	67
1.32.2	Properties	70
1.33	Class VmUsb	71
1.33.1	Methods	71
1.33.2	Properties	71
1.34	Class VmSound	72
1.34.1	Methods	72
1.34.2	Properties	73
1.35	Class VmSerial	73
1.35.1	Methods	73
1.35.2	Properties	74
1.36	Class VmConfig	74
1.36.1	Methods	74
1.36.2	Properties	96
1.37	Class Vm	97
1.37.1	Methods	97
1.37.2	Properties	105
1.38	Class VmGuest	105
1.38.1	Methods	105
1.38.2	Properties	106
1.39	Class Share	106
1.39.1	Methods	106
1.39.2	Properties	108
1.40	Class BootDevice	108
1.40.1	Methods	108
1.40.2	Properties	110
1.41	Class VmInfo	110
1.41.1	Methods	110
1.41.2	Properties	111
1.42	Class FoundVmInfo	111
1.42.1	Methods	111
1.42.2	Properties	112
1.43	Class AccessRights	113
1.43.1	Methods	113
1.43.2	Properties	115
1.44	Class VmToolsInfo	115
1.44.1	Methods	115
1.44.2	Properties	115
1.45	Class Statistics	116
1.45.1	Methods	116
1.45.2	Properties	117
1.46	Class StatCpu	118
1.46.1	Methods	118
1.46.2	Properties	119
1.47	Class License	119
1.47.1	Methods	119
1.47.2	Properties	120
1.48	Class ServerInfo	120
1.48.1	Methods	120
1.48.2	Properties	121

1.49	Class NetService	122
1.49.1	Methods	122
1.49.2	Properties	122
1.50	Class LoginResponse	122
1.50.1	Methods	123
1.50.2	Properties	123
1.51	Class RunningTask	124
1.51.1	Methods	124
1.51.2	Properties	124
1.52	Class OsesMatrix	125
1.52.1	Methods	125
1.52.2	Properties	125
1.53	Class ProblemReport	125
1.53.1	Methods	126
1.53.2	Properties	127
1.54	Class ApplianceConfig	127
1.54.1	Methods	127
1.54.2	Properties	127
1.55	Class OfflineManageService	128
1.55.1	Methods	128
1.55.2	Properties	128
1.56	Class NetworkShapingEntry	129
1.56.1	Methods	129
1.56.2	Properties	130
1.57	Class NetworkShapingConfig	130
1.57.1	Methods	130
1.57.2	Properties	131
1.58	Class NetworkClass	131
1.58.1	Methods	131
1.58.2	Properties	131
1.59	Class NetworkRate	132
1.59.1	Methods	132
1.59.2	Properties	132
1.60	Class CtTemplate	133
1.60.1	Methods	133
1.60.2	Properties	133
1.61	Class UsbIdentity	134
1.61.1	Methods	134
1.61.2	Properties	134
1.62	Class FirewallRule	135
1.62.1	Methods	135
1.62.2	Properties	136
1.63	Class IPPrivNet	136
1.63.1	Methods	136
1.63.2	Properties	137
1.64	Class PluginInfo	137
1.64.1	Methods	137
1.64.2	Properties	138
1.65	Class BackupResult	138
1.65.1	Methods	138
1.65.2	Properties	138

1.66	Class NetworkShapingBandwidthEntry	139
1.66.1	Methods	139
1.66.2	Properties	139
1.67	Class CpuFeatures	140
1.67.1	Methods	140
1.67.2	Properties	140
1.68	Class CPUPool	141
1.68.1	Methods	141
1.68.2	Properties	141
1.69	Class Disk	141
1.69.1	Methods	142
1.69.2	Properties	142
1.70	Class DiskMap	142
1.70.1	Methods	142
1.70.2	Properties	143
1.71	Class VcmmmdConfig	143
1.71.1	Methods	143
1.71.2	Properties	143
1.72	Class IoDisplayScreenSize	144
1.72.1	Methods	144
2	Module prlsdkapi.prlsdk	145
2.1	Modules	145
2.2	Functions	145
2.3	Variables	235
3	Module prlsdkapi.prlsdk.consts	236
3.1	Variables	236
4	Module prlsdkapi.prlsdk.errors	311
4.1	Variables	311

1 Package prlsdkapi

1.1 Modules

- `prlsdk` (Section 2, p. 145)
 - `consts` (Section 3, p. 236)
 - `errors` (Section 4, p. 311)

1.2 Functions

```
conv_error(err)
```

```
sdk_check_result(result, err_obj=None)
```

```
call_sdk_function(func_name, *args)
```

```
set_sdk_library_path(path)
```

```
get_sdk_library_path()
```

```
is_sdk_initialized()
```

```
init_desktop_sdk()
```

```
init_desktop_wl_sdk()
```

```
init_workstation_sdk()
```

```
init_player_sdk()
```

```
init_server_sdk()
```

```
conv_handle_arg(arg)
```

```
handle_to_object(handle)
```


1.3 Variables

Name	Description
<code>prlsdk_module</code>	Value: <code>os.environ['PRLSDK']</code>
<code>sdklib</code>	Value: <code>os.environ['SDKLIB']</code>
<code>err</code>	Value: <code>'Cannot import module "prlsdk" !'</code>
<code>deinit_sdk</code>	Value: <code>__DeinitSDK()</code>

continued on next page

Name	Description
<code>--package--</code>	Value: 'prlsdkapi'

1.4 Class *PrlSDKError*

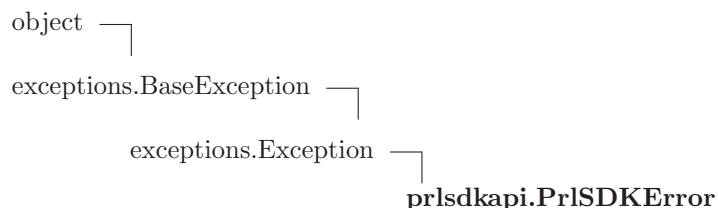

1.4.1 Methods

`--init--`(*self*, *result*, *error_code*, *err_obj*)
x.**`--init--`**(...) initializes *x*; see `help(type(x))` for signature
 Overrides: `object.__init__` `exitit`(inherited documentation)

`get_result`(*self*)

`get_details`(*self*)

Inherited from exceptions.Exception

`--new--`()

Inherited from exceptions.BaseException

`--delattr--`(), `--getattr--`(), `--getitem--`(), `--getslice--`(), `--reduce--`(), `--repr--`(),
`--setattr--`(), `--setstate--`(), `--str--`(), `--unicode--`()

Inherited from object

`--format--`(), `--hash--`(), `--reduce_ex--`(), `--sizeof--`(), `--subclasshook--`()

1.4.2 Properties

Name	Description
<i>Inherited from exceptions.BaseException</i>	
args, message	
<i>Inherited from object</i>	
<code>--class--</code>	

1.5 Class *ApiHelper*

Provides common Virtuozzo Python API system methods.

1.5.1 Methods

init(*self*, *version*)

Initialize the Virtuozzo API library.

init_ex(*self*, *nVersion*, *nAppMode*, *nFlags*=0, *nReserved*=0)

Initialize the Virtuozzo API library (extended version).

deinit(*self*)

De-initializes the library.

get_version(*self*)

Return the Virtuozzo API version number.

get_app_mode(*self*)

Return the Virtuozzo API application mode.

get_result_description(*self*, *nErrCode*, *bIsBriefMessage*=True, *bFormatted*=False)

Evaluate a return code and return a description of the problem.

get_message_type(*self*, *nErrCode*)

Evaluate the specified error code and return its classification (warning, question, info, etc.).

msg_can_be_ignored(*self*, *nErrCode*)

Evaluate an error code and determine if the error is critical.

get_crash_dumps_path(*self*)

Return the name and path of the directory where Virtuozzo crash dumps are stored.

init_crash_handler(*self*, *sCrashDumpFileSuffix*)

Initiate the standard Virtuozzo crash dump handler.

create_strings_list(*self*)

create_handles_list(*self*)

create_op_type_list(*self*, *nTypeSize*)

get_supported_oses_types(*self*, *nHostOsType*)

Determine the supported OS types for the current API mode.

get_supported_oses_versions(*self*, *nHostOsType*, *nGuestOsType*)

get_default_os_version(*self*, *nGuestOsType*)

Return the default guest OS version for the specified guest OS type.

send_problem_report(*self*, *sProblemReport*, *bUseProxy*, *sProxyHost*, *nProxyPort*, *sProxyUserLogin*, *sProxyUserPasswd*, *nProblemSendTimeout*, *nReserved*)

Send a problem report to the Virtuozzo support server.

send_packed_problem_report(*self*, *hProblemReport*, *bUseProxy*, *sProxyHost*, *nProxyPort*, *sProxyUserLogin*, *sProxyUserPasswd*, *nProblemSendTimeout*, *nReserved*)

get_recommend_min_vm_mem(*self*, *nOsVersion*)

Return recommended minimal memory size for guest OS defined in the OS version parameter.

create_problem_report(*self*, *nReportScheme*)

switch_console_logging(*self*, *bSwitchOn*)

guest_to_string(*self*, *nGuestId*)

Return string representation of GuestOS

1.6 Class Debug

Provides common Virtuozzo Python API debug methods.

1.6.1 Methods

get_handles_num (<i>self</i> , <i>type</i>)
--

Determine how many handles were instantiated in the API library.
--

prl_result_to_string (<i>self</i> , <i>value</i>)
--

Return a readable string representation of the Result value.


handle_type_to_string (<i>self</i> , <i>handle_type</i>)

Return a readable string representation of the specified handle type.

event_type_to_string (<i>self</i> , <i>event_type</i>)

Return a readable string representation of the specified event type.
--

1.7 Class StringList

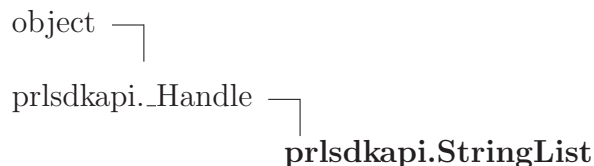

The StringList class is a generic string container.

1.7.1 Methods

__init__ (<i>self</i> , <i>handle</i> =0)

x.__init__(...) initializes x; see help(type(x)) for signature
--

Overrides: object.__init__ extit(inherited documentation)

get_items_count (<i>self</i>)
--

add_item (<i>self</i> , <i>sItem</i>)
--

```
get_item(self, nItemIndex)
```

```
remove_item(self, nItemIndex)
```

```
__len__(self)
```

```
__getitem__(self, index)
```

```
__iter__(self)
```

Inherited from prlsdkapi._Handle

```
__del__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(), get_type(),
reg_event_handler(), unreg_event_handler()
```


Inherited from object

```
__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()
```

1.7.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.8 Class **HandleList**

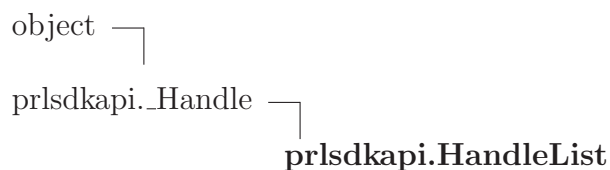

A generic container containing a list of handles (objects).

1.8.1 Methods

```
__init__(self, handle=0)
```

x.**__init__**(...) initializes *x*; see `help(type(x))` for signature

Overrides: `object.__init__` `exitit`(inherited documentation)

```
get_items_count(self)
```

```
add_item(self, hItem)
```

```
get_item(self, nItemIndex)
```

```
remove_item(self, nItemIndex)
```

```
__len__(self)
```

```
__getitem__(self, index)
```

```
__iter__(self)
```

Inherited from prlsdkapi._Handle

`__del__`(), `add_ref`(), `free`(), `from_string`(), `get_handle_type`(), `get_package_id`(), `get_type`(), `reg_event_handler`(), `unreg_event_handler`()


Inherited from object

`__delattr__`(), `__format__`(), `__getattr__`(), `__hash__`(), `__new__`(), `__reduce__`(), `__reduce_ex__`(), `__repr__`(), `__setattr__`(), `__sizeof__`(), `__str__`(), `__subclasshook__`()

1.8.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.9 Class OpTypeList

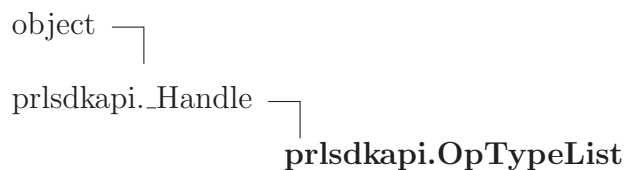

1.9.1 Methods

__init__(*self*, *handle*=0)

x.**__init__**(...) initializes *x*; see help(type(*x*)) for signature

Overrides: object.**__init__** extit(inherited documentation)

get_items_count(*self*)

get_item(*self*, *nItemIndex*)

remove_item(*self*, *nItemIndex*)

get_type_size(*self*)

signed(*self*, *nItemIndex*)

unsigned(*self*, *nItemIndex*)

double(*self*, *nItemIndex*)

__len__(*self*)

__getitem__(*self*, *index*)

__iter__(*self*)

Inherited from prlsdkapi.Handle

__del__(), **add_ref**(), **free**(), **from_string**(), **get_handle_type**(), **get_package_id**(), **get_type**(), **reg_event_handler**(), **unreg_event_handler**()


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.9.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.10 Class Result

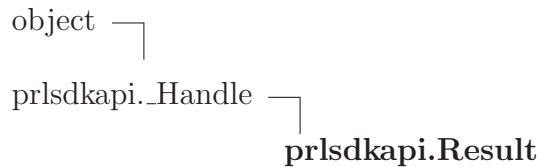

Contains the results of an asynchronous operation.

1.10.1 Methods

<code>get_params_count(self)</code>
Determine the number of items (strings, objects) in the Result object.
<code>get_param_by_index(self, nIndex)</code>
Obtain an object containing the results identified by index.
<code>get_param(self)</code>
Obtain an object containing the results of the corresponding asynchronous operation.
<code>get_param_by_index_as_string(self, nIndex)</code>
Obtain a string result from the Result object identified by index.
<code>get_param_as_string(self)</code>
Obtain a string result from the Result object.
<code>__len__(self)</code>

```
--getitem__(self, index)
```

```
--iter__(self)
```

Inherited from prlsdkapi._Handle

```
--del__(), --init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
get_type(), reg_event_handler(), unreg_event_handler()
```


Inherited from object

```
--delattr__(), --format__(), --getattr__(), --hash__(), --new__(), --reduce__(), --reduce_ex__(),
--repr__(), --setattr__(), --sizeof__(), --str__(), --subclasshook__()
```

1.10.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class__</code>	

1.11 Class Event

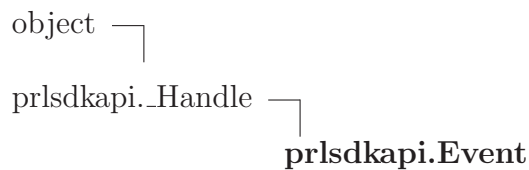

Contains information about a system event or an extended error information in an asynchronous method invocation.

1.11.1 Methods

```
get_type(self)
```

Overrides: prlsdkapi._Handle.get_type

```
get_server(self)
```


```
get_vm(self)
```

```
get_job(self)
```


`get_params_count(self)``get_param(self, nIndex)``get_param_by_name(self, sParamName)``get_err_code(self)``get_err_string(self, bIsBriefMessage, bFormatted)``can_be_ignored(self)``is_answer_required(self)``get_issuer_type(self)``get_issuer_id(self)``create_answer_event(self, nAnswer)``from_string(self, sEvent)`Overrides: `prlsdkapi.Handle.from_string``__len__(self)``__getitem__(self, index)``__iter__(self)`***Inherited from prlsdkapi.Handle***`__del__(), __init__(), add_ref(), free(), get_handle_type(), get_package_id(), reg_event_handler(),
unreg_event_handler()`***Inherited from object***`__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()`**1.11.2 Properties**

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.12 Class EventParam

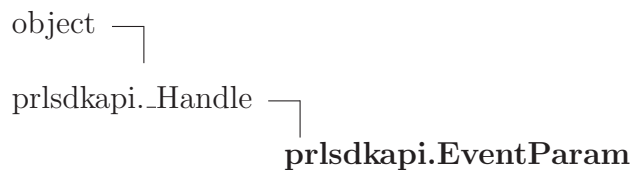

Contains the system event parameter data.

1.12.1 Methods

`get_name(self)`

`get_type(self)`

Overrides: `prlsdkapi.Handle.get_type`

`to_string(self)`

`to_cdata(self)`

`to_uint32(self)`

`to_int32(self)`

`to_uint64(self)`

`to_int64(self)`

`to_boolean(self)`

`to_handle(self)`

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.12.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.13 Class Job

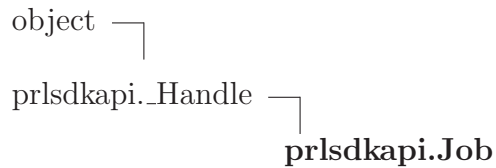

Provides methods for managing asynchronous operations (jobs).

1.13.1 Methods

<code>wait(self, msec=9223372036854775807)</code>
Suspend the main thread and wait for the job to finish.
<code>cancel(self)</code>
Cancel the specified job.
<code>get_status(self)</code>
Obtain the current job status.
<code>get_progress(self)</code>
Obtain the job progress info.

get_ret_code(<i>self</i>)

Obtain the return code from the job object.

get_result(<i>self</i>)

Obtain the Result object containing the results returned by the job.

get_error(<i>self</i>)

Provide additional job error information.

get_op_code(<i>self</i>)

Return the job operation code.

is_request_was_sent(<i>self</i>)

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.13.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.14 Class Server

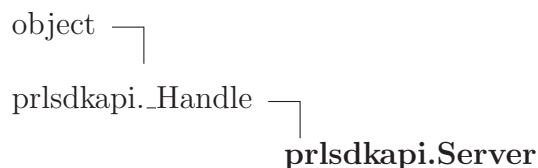

The main class providing methods for accessing Virtuozzo Service. Most of the operations in the Virtuozzo Python API begin with obtaining an instance of this class. The class is used to establish a connection with the Virtuozzo Service. Its other methods can be used

to perform various tasks related to the Virtuozzo Service itself, higher level virtual machine tasks, such as obtaining the virtual machine list or creating a virtual machine, and many others.

1.14.1 Methods

`__init__(self, handle=0)`

`x.__init__(...)` initializes `x`; see `help(type(x))` for signature

Overrides: `object.__init__` extit(inherited documentation)

`create(self)`

Create a new instance of the `Server` class.

Return Value

A new instance of `Server`.

`login(self, host, user, passwd, sPrevSessionUuid='', port_cmd=0, timeout=0, security_level=2)`

Login to a remote Virtuozzo Service.

`login_local(self, sPrevSessionUuid='', port=0, security_level=2)`

Login to the local Virtuozzo Service.

`logout(self)`

Log off the Virtuozzo Service.

`reg_event_handler(self, callback_func, userData)`

Register an event handler.

Overrides: `prlsdkapi._Handle.reg_event_handler`

`unreg_event_handler(self, callback_func, userData)`

Unregister the specified event handler.

Overrides: `prlsdkapi._Handle.unreg_event_handler`

`get_questions(self)`

Allows to synchronously receive questions from Virtuozzo Service.

set_non_interactive_session(*self*, *bNonInteractive*, *nFlags*=0)

Set the session in noninteractive or interactive mode.

is_non_interactive_session(*self*)**disable_confirmation_mode**(*self*, *sUser*, *sPasswd*, *nFlags*=0)

Disable administrator confirmation mode for the session.

enable_confirmation_mode(*self*, *nFlags*=0)

Enable administrator confirmation mode for the session.

is_confirmation_mode_enabled(*self*)

Determine confirmation mode for the session.

get_srv_config(*self*)

Obtain the **ServerConfig** object containing the host configuration information.

Return Value

A **Job** object. The **ServerConfig** object is obtained from the **Result** object.

get_common_prefs(*self*)

Obtain the **DispConfig** object containing the specified Virtuozzo Service preferences info.

Return Value

A **Job** object.

common_prefs_begin_edit(*self*)

Mark the beginning of the Virtuozzo Service preferences modification operation. This method must be called before making any changes to the Virtuozzo Service common preferences through **DispConfig**. When you are done making the changes, call **Server.common_prefs_commit** to commit the changes.

common_prefs_commit(*self*, *hDispCfg*)

Commit the Virtuozzo Server preferences changes.

Parameters

hDispCfg: A instance of **DispConfig** contaning the Virtuozzo Service preferences info.

common_prefs_commit_ex(*self*, *hDispCfg*, *nFlags*)

get_user_profile(*self*)

Obtain the **UserConfig** object containing profile data of the currently logged in user.

Return Value

A Job object.

get_user_info_list(*self*)

Obtain a list of **UserInfo** objects containing information about all known users.

Return Value

A Job object.

get_user_info(*self*, *sUserId*)

Obtain the **UserInfo** object containing information about the specified user.

Parameters

sUserId: UUID of the user to obtain the information for.

Return Value

A Job object.

get_virtual_network_list(*self*, *nFlags*=0)

Obtain the **VirtualNet** object containing information about all existing virtual networks.

add_virtual_network(*self*, *hVirtNet*, *nFlags*=0)

Add a new virtual network to the Virtuozzo Service configuration.

Parameters

hVirtNet: An instance of the **VirtualNet** class containing the virtual network information.

nFlags: Reserved parameter.

update_virtual_network(*self*, *hVirtNet*, *nFlags*=0)

Update parameters of an existing virtual network.

delete_virtual_network(*self*, *hVirtNet*, *nFlags*=0)

Remove an existing virtual network from the Virtuozzo Service configuration.

Parameters

hVirtNet: An instance of **VirtualNet** identifying the virtual network.

nFlags: Reserved parameter.

update_offline_service(*self*, *hOffmgmtService*, *nFlags*)

delete_offline_service(*self*, *hOffmgmtService*, *nFlags*)

get_offline_services_list(*self*, *nFlags*)

update_network_classes_list(*self*, *hNetworkClassesList*, *nFlags*)

get_network_classes_list(*self*, *nFlags*)

update_network_shaping_config(*self*, *hNetworkShapingConfig*, *nFlags*)

get_network_shaping_config(*self*, *nFlags*)

configure_generic_pci(*self*, *hDevList*, *nFlags*=0)

Configure the PCI device assignment.

Parameters

hDevList: A list of **HostPciDevice** objects.

nFlags: Reserved parameter.

get_statistics(*self*)

Obtain the **Statistics** object containing the host resource usage statistics.

Return Value

A **Job** object.

user_profile_begin_edit(*self*)

user_profile_commit(*self*, *hUserProfile*)

Saves (commits) user profile changes to the Virtuozzo Service.

is_connected(*self*)

Determine if the connection to the specified Virtuozzo Service is active.

get_server_info(*self*)

Obtain the **ServerInfo** object containing the host computer information.

Return Value

A **Job** object.

register_vm(*self*, *strVmDirPath*, *bNonInteractiveMode=False*)

Register an existing virtual machine with the Virtuozzo Service. This is an asynchronous method.

Parameters

strVmDirPath: Name and path of the virtual machine directory.

bNonInteractiveMode: Set to **True** to use non-interactive mode.
Set to **False** to use interactive mode.

Return Value

An instance of the **Vm** class containing information about the virtual machine that was registered.

register_vm_ex(*self*, *strVmDirPath*, *nFlags*)

Register an existing virtual machine with Virtuozzo Service (extended version).

register_vm_with_uuid(*self*, *strVmDirPath*, *strVmUuid*, *nFlags*)

register3rd_party_vm(*self*, *strVmConfigPath*, *strVmRootDirPath*, *nFlags*)

create_vm(*self*)

Create a new instance of the **Vm** class.

Return Value

A new instance of **Vm**.

get_vm_list(*self*)

Obtain a list of virtual machines from the host.

Return Value

A Job object. The list of virtual machines can be obtained from the Result object as a list of Vm objects.

get_vm_list_ex(*self*, *nFlags*)**get_default_vm_config(*self*, *nVmType*, *sConfigSample*, *nOsVersion*, *nFlags*)**

create_vm_backup(*self*, *sVmUuid*, *sTargetHost*, *nTargetPort*, *sTargetSessionId*, *strDescription*='', *backup_flags*=2048, *reserved_flags*=0, *force_operation*=True)

Backup an existing virtual machine to a backup server.

Parameters

sVmUuid: The virtual machine UUID
sTargetHost: The name of the target host machine.
nTargetPort: Port number on the target host.
sTargetSessionId: The target Virtuozzo Service session ID.
strDescription: Backup description.
backup_flags: Backup options.
reserved_flags: Reserved backup flags.
force_operation: Ignore all possible questions from the Virtuozzo Service (non-interactive mode).

Return Value

A Job object.

restore_vm_backup(*self*, *sVmUuid*, *sBackupUuid*, *sTargetHost*, *nTargetPort*, *sTargetSessionId*, *sTargetVmHomePath*='', *sTargetVmName*='', *restore_flags*=0, *reserved_flags*=0, *force_operation*=True)

Restore a virtual machine from a backup server.

get_backup_tree(*self*, *sUuid*, *sTargetHost*, *nTargetPort*, *sTargetSessionId*, *backup_flags*=2048, *reserved_flags*=0, *force_operation*=True)

Obtain a backup tree from the backup server.

Parameters

sVmUuid: The target virtual machine UUID. Empty string gets the tree for all virtual machines.

sTargetHost: The name of the target host machine.

nTargetPort: Port number.

sTargetSessionId: The target Virtuozzo Service session ID.

backup_flags: Backup options.

reserved_flags: Reserved flags parameter.

force_operation: Ignore all questions from the Virtuozzo Service (non-interactive mode).

Return Value

A Job object. The backup tree data is obtained as an XML document from the **Result** object.

remove_vm_backup(*self*, *sVmUuid*, *sBackupUuid*, *sTargetHost*, *nTargetPort*, *sTargetSessionId*, *remove_flags*, *reserved_flags*, *force_operation*)

Remove backup of the virtual machine from the backup server.

subscribe_to_host_statistics(*self*)

Subscribe to receive host statistics. This is an asynchronous method.

Return Value

A Job object.

unsubscribe_from_host_statistics(*self*)

Cancel the host statistics subscription. This is an asynchronous method.

Return Value

A Job object.

shutdown(*self*, *bForceShutdown*=False)

Shut down the Virtuozzo Service.

shutdown_ex(*self*, *nFlags*)

fs_get_disk_list(*self*)

Returns a list of root directories on the host computer.

fs_get_dir_entries(*self*, *path*)

Retrieve information about a file system entry on the host.

Parameters

path: Directory name or drive letter for which to get the information.

Return Value

A **Job** object. The directory information is returned as an **FsInfo** object and is obtained from the **Result** object.

fs_create_dir(*self*, *path*)

Create a directory in the specified location on the host.

Parameters

path: Full name and path of the directory to create.

fs_remove_entry(*self*, *path*)

Remove a file system entry from the host computer.

Parameters

path: Name and path of the entry to remove.

fs_can_create_file(*self*, *path*)

Determine if the current user has rights to create a file on the host.

Parameters

path: Full path of the target directory.

Return Value

Boolean. True - the user can create files in the specified directory.
False - otherwise.

fs_rename_entry(*self*, *oldPath*, *newPath*)

Rename a file system entry on the host.

Parameters

oldPath: Name and path of the entry to rename.

newPath: New name and path.

update_license(*self*, *sKey*, *sUser*, *sCompany*)

Installs Virtuozzo license on the specified Virtuozzo Service.

update_license_ex(*self*, *sKey*, *sUser*, *sCompany*, *nFlags*)

get_license_info(*self*)

Obtain the **License** object containing the Virtuozzo license information.

Return Value

A Job object.

send_answer(*self*, *hAnswer*)

Send an answer to the Virtuozzo Service in response to a question.

start_search_vms(*self*, *hStringsList*=0)

Search for unregistered virtual machines at the specified location(s).

net_service_start(*self*)

Start the Virtuozzo network service.

net_service_stop(*self*)

Stop the Virtuozzo network service.

net_service_restart(*self*)

Restarts the Virtuozzo network service.

net_service_restore_defaults(*self*)

Restores the default settings of the Virtuozzo network service.

get_net_service_status(*self*)

Obtain the **NetService** object containing the Virtuozzo network service status information.

Return Value

A Job object.

get_problem_report(*self*)

Obtain a problem report in the event of a virtual machine operation failure.

Return Value

A Job object. The report is returned as a string that is obtained from the **Result** object.

get_packed_problem_report(*self*, *nFlags*)**attach_to_lost_task(*self*, *sTaskId*)**

Obtain a handle to a running task after the connection to the Virtuozzo Service was lost.

Parameters

sTaskId: The ID of the task to attach to. The ID is obtained from the **LoginResponse** object.

get_supported_oses(*self*)**create_unattended_cd(*self*, *nGuestType*, *sUserName*, *sPasswd*, *sFullUserName*, *sOsDistroPath*, *sOutImagePath*)**

Create a bootable ISO-image for unattended Linux installation.

fs_generate_entry_name(*self*, *sDirPath*, *sFilenamePrefix*='', *sFilenameSuffix*='', *sIndexDelimiter*='')

Automatically generate a unique name for a new directory.

Parameters

sDirPath: Full name and path of the target directory.

sFilenamePrefix: A prefix to to use in the directory name. Pass empty string for default.

sFilenameSuffix: A suffix to use in the name. Pass empty string for default.

sIndexDelimiter: A character to use as a delimiter between prefix and index.

Return Value

A Job object.

subscribe_to_perf_stats(*self*, *sFilter*)

Subscribe to receive performance statistics.

unsubscribe_from_perf_stats(*self*)

Cancels the performance statistics subscription.

get_perf_stats(*self*, *sFilter*)

has_restriction(*self*, *nRestrictionKey*)

get_restriction_info(*self*, *nRestrictionKey*)

install_appliance(*self*, *hAppCfg*, *sVmParentPath*, *nFlags*)

cancel_install_appliance(*self*, *hAppCfg*, *nFlags*)

stop_install_appliance(*self*, *hAppCfg*, *nFlags*)

get_ct_template_list(*self*, *nFlags*)

remove_ct_template(*self*, *sName*, *sOsTmplName*, *nFlags*)

copy_ct_template(*self*, *sName*, *sOsTmplName*, *sTargetServerHostname*,
nTargetServerPort, *sTargetServerSessionUuid*, *nFlags*, *nReservedFlags*)

is_feature_supported(*self*, *nFeatureId*)

add_ipprivate_network(*self*, *hPrivNet*, *nFlags*)

remove_ipprivate_network(*self*, *hPrivNet*, *nFlags*)

update_ipprivate_network(*self*, *hPrivNet*, *nFlags*)

get_ipprivate_networks_list(*self*, *nFlags*)

refresh_plugins(*self*, *nFlags*)

get_plugins_list(*self*, *sClassId*, *nFlags*)

login_ex(*self*, *host*, *user*, *passwd*, *sPrevSessionUuid*, *port_cmd*, *timeout*,
security_level, *flags*)

<code>login_local_ex(self, sPrevSessionUuid, port, security_level, flags)</code>
--

<code>get_disk_free_space(self, sPath, nFlags)</code>

<code>get_vm_config(self, sSearchId, nFlags)</code>

<code>get_cpupools_list(self)</code>

<code>move_to_cpupool(self, sCpuPool)</code>
--

<code>recalculate_cpupool(self, sCpuPool)</code>
--

<code>send_problem_report(self, hProblemReport, nFlags)</code>
--

<code>get_vcmmd_config(self, nFlags)</code>

<code>set_vcmmd_config(self, hVcmmdConfig, nFlags)</code>

Inherited from prlsdkapi._Handle

`__del__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.14.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.15 Class FsInfo

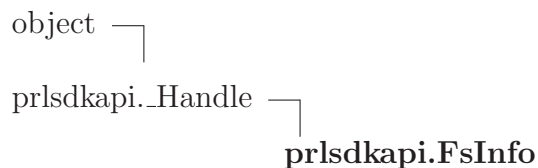

Contains information about a file system entry and its immediate child elements (files and directories) on the host computer.

1.15.1 Methods

get_type(*self*)

Determine the basic type of the file system entry.

Return Value

The file system type. Can be `PFS_WINDOWS_LIKE_FS`, `PFS_UNIX_LIKE_FS`.

Overrides: `prlsdkapi._Handle.get_type`

get_fs_type(*self*)

Determine the file system type of the file system entry.

Return Value

A Boolean value. True - log level is configured.

get_child_entries_count(*self*)

Determine the number of child entries for the specified remote file system entry.

Return Value

Integer. The number of child entries.

get_child_entry(*self*, *nIndex*)

Obtain the `FsEntry` object containing a child entry information.

Parameters

nIndex: Integer. The index of the child entry to get the information for.

Return Value

The `FsEntry` object containing the child entry information.

get_parent_entry(*self*)

Obtain the `FsEntry` object containing the parent file system entry info.

Inherited from `prlsdkapi._Handle`


`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.15.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

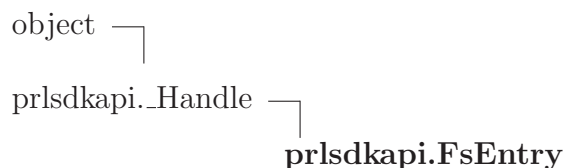1.16 Class *FsEntry*

Contains information about a file system entry (disk, directory, file) on the host computer.

1.16.1 Methods

<code>get_absolute_path(self)</code>
Return the specified file system entry absolute path.
Return Value
A string containing the path.

<code>get_relative_name(self)</code>
Return the file system entry relative name.
Return Value
A string containing the name.

<code>get_last_modified_date(self)</code>
Return the date on which the specified file system entry was last modified.
Return Value
A string containing the date.

get_size(*self*)

Return the file system entry size.

Return Value

A long containing the size (in bytes).

get_permissions(*self*)

Return the specified file system entry permissions (read, write, execute) for the current user.

Return Value

An integer containing the permissions. The permissions are specified as bitmasks.

get_type(*self*)

Return the file system entry type (file, directory, drive).

Return Value

The entry type. Can be PSE_DRIVE, PSE_DIRECTORY, PSE_FILE.

Overrides: prlsdkapi.Handle.get_type

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.16.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.17 Class `ServerConfig`

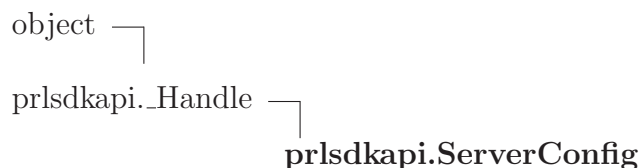

Provides methods for obtaining the host computer configuration information.

1.17.1 Methods

<code>get_host_ram_size(self)</code>

Determine the amount of memory (RAM) available on the host.

<code>get_cpu_model(self)</code>

Determine the model of CPU of the host machine.

<code>get_cpu_count(self)</code>

Determine the number of CPUs in the host machine.

<code>get_cpu_speed(self)</code>

Determine the host machine CPU speed.

<code>get_cpu_mode(self)</code>
--

Determine the CPU mode (32 bit or 64 bit) of the host machine.
--

<code>get_cpu_hvt(self)</code>

Determine the hardware virtualization type of the host CPU.

<code>get_cpu_features_ex(self)</code>

<code>get_cpu_features_masking_capabilities(self)</code>

<code>get_host_os_type(self)</code>
--

Return the host operating system type.
--

get_host_os_major(*self*)

Return the major version number of the host operating system.

get_host_os_minor(*self*)

Return the minor version number of the host operating system.

get_host_os_sub_minor(*self*)

Return the sub-minor version number of the host operating system.

get_host_os_str_presentation(*self*)

Return the full host operating system information as a single string.

is_sound_default_enabled(*self*)

Determine whether a sound device on the host is enabled or disabled.

is_usb_supported(*self*)

Determine if USB is supported on the host.

is_vtd_supported(*self*)

Determine whether VT-d is supported on the host.

get_max_host_net_adapters(*self*)**get_max_vm_net_adapters(*self*)****get_hostname(*self*)**

Return the hostname of the specified host or guest.

get_default_gateway(*self*)

Obtain the global default gateway address of the specified host or guest.

get_default_gateway_ipv6(*self*)**get_dns_servers(*self*)**

Obtain the list of IP addresses of DNS servers for the host or guest.

get_search_domains(*self*)

Obtain the list of search domains for the specified host or guest.

get_floppy_disks_count(*self*)

Determine the number of floppy disk drives on the host.

get_floppy_disk(*self*, *nIndex*)Obtain the **HostDevice** object containing information about a floppy disk drive on the host.**get_optical_disks_count(*self*)**

Determine the number of optical disk drives on the host.

get_optical_disk(*self*, *nIndex*)Obtain the **HostDevice** object containing information about an optical disk drive on the host.**get_serial_ports_count(*self*)**

Determine the number of serial ports available on the host.

get_serial_port(*self*, *nIndex*)Obtain the **HostDevice** object containing information about a serial port on the host.**get_parallel_ports_count(*self*)**

Determine the number of parallel ports on the host.

get_parallel_port(*self*, *nIndex*)Obtain the **HostDevice** object containing information about a parallel port on the host.**get_sound_output_devs_count(*self*)**

Determine the number of sound devices available on the host.

get_sound_output_dev(*self*, *nIndex*)Obtain the **HostDevice** object containing information about a sound device on the host.

get_sound_mixer_devs_count(*self*)

Determine the number of sound mixer devices available on the host.

get_sound_mixer_dev(*self*, *nIndex*)Obtain the `HostDevice` object containing information about a sound mixer device on the host.**get_printers_count**(*self*)

Determine the number of printers installed on the host.

get_printer(*self*, *nIndex*)Obtain the `HostDevice` object containing information about a printer installed on the host.**get_generic_pci_devices_count**(*self*)

Determine the number of PCI devices installed on the host.

get_generic_pci_device(*self*, *nIndex*)Obtain the `HostDevice` object containing information about a PCI device installed on the host.**get_generic_scsi_devices_count**(*self*)

Determine the number of generic SCSI devices installed on the host.

get_generic_scsi_device(*self*, *nIndex*)Obtain the `HostDevice` object containing information about a generic SCSI device.**get_usb_devs_count**(*self*)

Determine the number of USB devices on the host.

get_usb_dev(*self*, *nIndex*)Obtain the `HostDevice` object containing information about a USB device on the host.**get_hard_disks_count**(*self*)

Determine the number of hard disk drives on the host.

get_hard_disk (<i>self</i> , <i>nIndex</i>)
--

Obtain the HostHardDisk object containing information about a hard disks drive on the host.
--

get_net_adapters_count (<i>self</i>)

Determine the number of network adapters available on the server.

get_net_adapter (<i>self</i> , <i>nIndex</i>)
--

Obtain the HostNet object containing information about a network adapter in the host or guest.

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.17.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.18 Class HostDevice

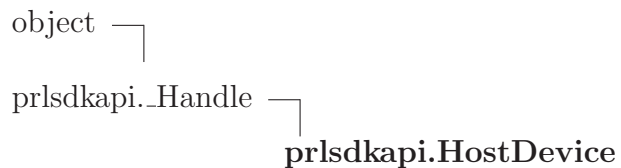

Known Subclasses: `prlsdkapi.HostHardDisk`, `prlsdkapi.HostNet`, `prlsdkapi.HostPciDevice`

A base class providing methods for obtaining information about physical devices on the host computer. The descendants of this class provide additional methods specific to a particular device type.

1.18.1 Methods

get_name(*self*)

Obtain the device name.

get_id(*self*)

Obtain the device ID.

get_type(*self*)

Obtain the device type.

Overrides: prlsdkapi.Handle.get_type

is_connected_to_vm(*self*)

Determine whether the device is connected to a virtual machine.

get_device_state(*self*)

Determine whether a virtual machine can directly use a PCI device through IOMMU technology.

set_device_state(*self*, *nDeviceState*)


Set whether a virtual machine can directly use a PCI device through IOMMU technology.

Inherited from prlsdkapi.Handle`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`***Inherited from object***`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.18.2 Properties

Name	Description
<i>Inherited from object</i> <code>__class__</code>	

1.19 Class **HostHardDisk**

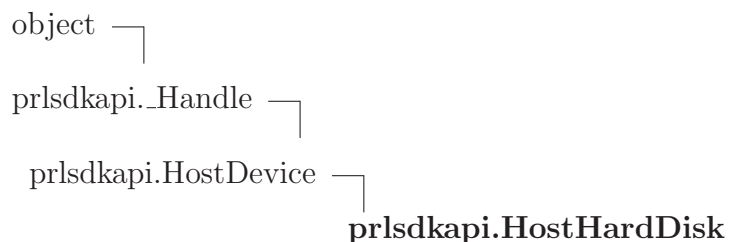

Provides methods for obtaining information about a physical hard disk on the host computer.

1.19.1 Methods

get_dev_name (<i>self</i>)

Return the hard disk device name.

get_dev_id (<i>self</i>)

Return the hard disk device id.

get_dev_size (<i>self</i>)

Return the size of the hard disk device.
--

get_disk_index (<i>self</i>)

Return the index of a hard disk device.

get_parts_count (<i>self</i>)
--

Determine the number of partitions available on a hard drive.

get_part (<i>self</i> , <i>nIndex</i>)

Obtain the HdPartition object identifying the specified hard disk partition.

Inherited from *prlsdkapi.HostDevice* (Section 1.18)

`get_device_state()`, `get_id()`, `get_name()`, `get_type()`, `is_connected_to_vm()`, `set_device_state()`

Inherited from *prlsdkapi._Handle*

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from *object*

`--delattr--()`, `--format--()`, `--getattr--()`, `--hash--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`,
`--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

1.19.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.20 Class HdPartition

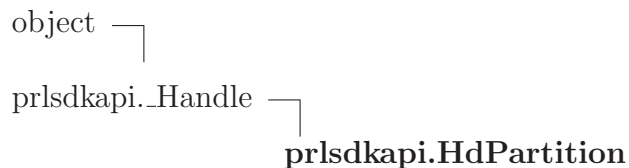

Provides methods for obtaining information about a physical hard disk partition on the host computer.

1.20.1 Methods

<code>get_name(self)</code>
Return the hard disk partition name.
Return Value
String. The partition name.

<code>get_sys_name(self)</code>
Return the hard disk partition system name.
Return Value
String . The partition name.

<code>get_size(self)</code>
Return the hard disk partition size.
Return Value
Long. The partition size (in MB).

get_index(*self*)

Return the index of the hard disk partition.

Return Value

Integer. The partition index.

get_type(*self*)

Return a numerical code identifying the type of the partition.

Return Value

Integer. Partition type.

Overrides: prlsdkapi._Handle.get_type

is_in_use(*self*)

Determines whether the partition is in use (contains valid file system, being used for swap, etc.).

Return Value

Boolean. True - partition is in use. False - partition is not in use.

is_logical(*self*)

Determine whether the specified partition is a logical partition.

Return Value

Boolean. True - partition is logical. False - partition is physical.

is_active(*self*)

Determine whether the disk partition is active or inactive.

Return Value

Boolean. True - partition is active. False - partition is not active.

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.20.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.21 Class HostNet

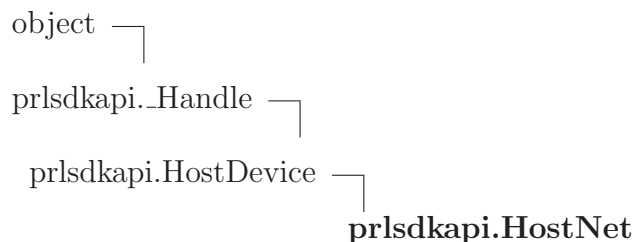

Provides methods for obtaining information about a physical network adapter on the host computer.

1.21.1 Methods

get_net_adapter_type(*self*)

Return the network adapter type.

get_sys_index(*self*)

Return the network adapter system index.

is_enabled(*self*)

Determine whether the adapter is enabled or disabled.

is_configure_with_dhcp(*self*)

Determine whether the adapter network settings are configured through DHCP.

is_configure_with_dhcp_ipv6(*self*)

get_default_gateway(*self*)

Obtain the default gateway address for the specified network adapter.

get_default_gateway_ipv6(*self*)

get_mac_address(<i>self</i>)

Return the MAC address of the specified network adapter.
--

get_vlan_tag(<i>self</i>)

Return the VLAN tag of the network adapter.

get_net_addresses(<i>self</i>)

Obtain the list of network addresses (IP address/Subnet mask pairs) assigned to the network adapter.
--

get_dns_servers(<i>self</i>)

Obtain the list of addresses of DNS servers assigned to the specified network adapter.
--

get_search_domains(<i>self</i>)
--

Obtain a list of search domains assigned to the specified network adapter.
--

Inherited from prlsdkapi.HostDevice(Section 1.18)

get_device_state(), get_id(), get_name(), get_type(), is_connected_to_vm(), set_device_state()

Inherited from prlsdkapi._Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
reg_event_handler(), unreg_event_handler()


Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.21.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.22 Class *HostPciDevice*

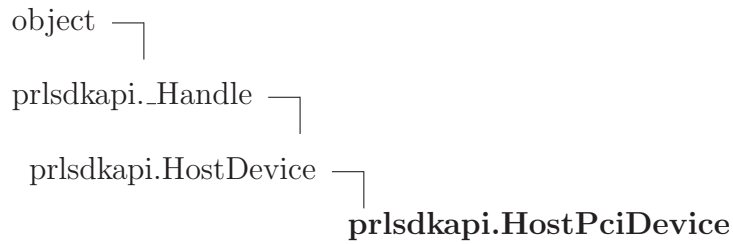

Provides methods for obtaining information about a PCI device on the host computer.

1.22.1 Methods

<code>get_device_class(<i>self</i>)</code>
--

<code>is_primary_device(<i>self</i>)</code>

Inherited from prlsdkapi.HostDevice(Section 1.18)

`get_device_state()`, `get_id()`, `get_name()`, `get_type()`, `is_connected_to_vm()`, `set_device_state()`

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.22.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.23 Class *UserConfig*

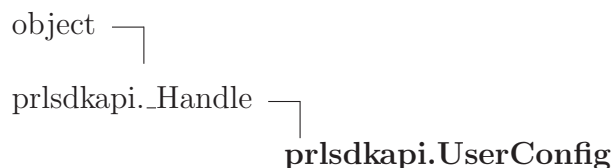

Provides methods for obtaining information about the currently logged in user and for setting the user preferences.

1.23.1 Methods

get_vm_dir_uuid (<i>self</i>)
--

Return name and path of the default virtual machine folder for the Virtuozzo Service.

set_vm_dir_uuid (<i>self</i> , <i>sNewVmDirUuid</i>)

Set the default virtual machine directory name and path for the Virtuozzo Service.
--

get_default_vm_folder (<i>self</i>)
--

Return name and path of the default virtual machine directory for the user.

set_default_vm_folder (<i>self</i> , <i>sNewDefaultVmFolder</i>)

Set the default virtual machine folder for the user.
--

can_use_mng_console (<i>self</i>)
--

Determine if the user is allowed to use the Virtuozzo Service Management Console.

can_change_srv_sets (<i>self</i>)
--

Determine if the current user can modify Virtuozzo Service preferences.

is_local_administrator (<i>self</i>)

Determine if the user is a local administrator on the host where Virtuozzo Service is running.
--

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.23.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.24 Class UserInfo

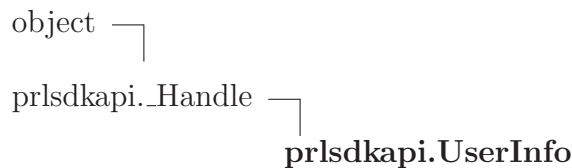

Provides methods for obtaining information about the specified Virtuozzo Service user.

1.24.1 Methods

<code>get_name(self)</code>
Return the user name.
<code>get_uuid(self)</code>
Returns the user Universally Unique Identifier (UUID).
<code>get_session_count(self)</code>
Return the user active session count.
<code>get_default_vm_folder(self)</code>
Return name and path of the default virtual machine directory for the user.

can_change_srv_sets(<i>self</i>)

Determine whether the specified user is allowed to modify Virtuozzo Service preferences.
--

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.24.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.25 Class DispConfig

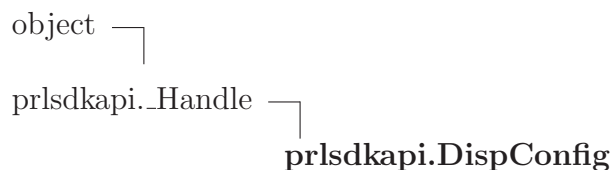

Provides methods for managing Virtuozzo Service preferences.

1.25.1 Methods

get_default_vm_dir(<i>self</i>)
--

Obtain name and path of the directory in which new virtual machines are created by default.

Return Value

A string containing name and path of the default virtual machine directory.

get_default_ct_dir(<i>self</i>)
--

get_reserved_mem_limit(*self*)

Determine the amount of physical memory reserved for Virtuozzo Service operation.

Return Value

Integer. The memory size in megabytes.

set_reserved_mem_limit(*self*, *nMemSize*)

Set the amount of memory that will be allocated for Virtuozzo Service operation.

Parameters

nMemSize: Integer. The memory size in megabytes.

get_min_vm_mem(*self*)

Determine the minimum required memory size that must be allocated to an individual virtual machine.

Return Value

Integer. The memory size in megabytes.

set_min_vm_mem(*self*, *nMemSize*)

Set the minimum required memory size that must be allocated to an individual virtual machine.

Parameters

nMemSize: Integer. The memory size in megabytes.

get_max_vm_mem(*self*)

Determine the maximum memory size that can be allocated to an individual virtual machine.

Return Value

Integer. The memory size in megabytes.

set_max_vm_mem(*self*, *nMemSize*)

Set the maximum memory size that can be allocated to an individual virtual machine.

Parameters

nMemSize: Integer. The memory size in megabytes.

get_recommend_max_vm_mem(*self*)

Determine the recommended memory size for an individual virtual machine.

Return Value

Integer. The memory size in megabytes.

set_recommend_max_vm_mem(*self*, *nMemSize*)

Set recommended memory size for an individual virtual machine.

Parameters

nMemSize: Integer. The memory size in megabytes.

get_max_reserv_mem_limit(*self*)

Return the maximum amount of memory that can be reserved for Virtuozzo Service operation.

Return Value

Integer. The memory size, in megabytes.

set_max_reserv_mem_limit(*self*, *nMemSize*)

Set the upper limit of the memory size that can be reserved for Virtuozzo Service operation.

Parameters

nMemSize: Integer. The memory size in megabytes.

get_min_reserv_mem_limit(*self*)

Return the minimum amount of physical memory that must be reserved for Virtuozzo Service operation.

Return Value

Integer. The memory size in megabytes.

set_min_reserv_mem_limit(*self*, *nMemSize*)

Set the lower limit of the memory size that must be reserved for Virtuozzo Service operation.

Parameters

nMemSize: Integer. The memory size in megabytes.

is_adjust_mem_auto(*self*)

Determine whether memory allocation for Virtuoizzo Service is performed automatically or manually.

Return Value

Boolean. True – automatic memory allocation. False – manual allocation.

set_adjust_mem_auto(*self*, *bAdjustMemAuto*)

Set the Virtuoizzo Service memory allocation mode (automatic or manual).

Parameters

bAdjustMemAuto: Boolean. Set to True for automatic mode. Set to False for manual mode.

is_send_statistic_report(*self*)

Determine whether the statistics reports (CEP) mechanism is activated.

Return Value

A Boolean value. True - CEP is activated. False - deactivated.

set_send_statistic_report(*self*, *bSendStatisticReport*)

Turn on/off the mechanism of sending statistics reports (CEP).

Parameters

bSendStatisticReport: Boolean. Set to True to turn the CEP on. Set to False to turn it off.

get_default_vnchost_name(*self*)

Return the default VNC host name for the Virtuoizzo Service.

Return Value

A string containing the VNC host name.

set_default_vnchost_name(*self*, *sNewHostName*)

Set the base VNC host name.

Parameters

sNewHostName: String. The VNC host name to set.

get_vncbase_port(*self*)

Obtain the currently set base VNC port number.

Return Value

Integer. The port number.

set_vncbase_port(*self*, *nPort*)

Set the base VNC port number.

Parameters

nPort: Integer. Port number.

can_change_default_settings(*self*)

Determine if new users have the right to modify Virtuozzo Service preferences.

Return Value

Boolean. True indicates that new users can modify preferences.
False indicates otherwise.

set_can_change_default_settings(*self*, *bDefaultChangeSettings*)

Grant or deny a permission to new users to modify Virtuozzo Service preferences.

Parameters

bDefaultChangeSettings: Boolean. Set to True to grant the permission. Set to False to deny it.

get_min_security_level(*self*)

Determine the lowest allowable security level that can be used to connect to the Virtuozzo Service.

Return Value

One of the following constants: PSL_LOW_SECURITY – Plain TCP/IP (no encryption). PSL_NORMAL_SECURITY – important data is sent and received using SSL. PSL_HIGH_SECURITY – all data is sent and received using SSL.

set_min_security_level(*self*, *nMinSecurityLevel*)

Set the lowest allowable security level that can be used to connect to the Virtuozzo Service.

Parameters

nMinSecurityLevel: Security level to set. Can be one of the following constants: PSL_LOW_SECURITY – Plain TCP/IP (no encryption). PSL_NORMAL_SECURITY – important data is sent and received using SSL. PSL_HIGH_SECURITY – all data is sent and received using SSL.

get_confirmations_list(*self*)

Obtain a list of operations that require administrator confirmation.

set_confirmations_list(*self*, *hConfirmList*)

Set the list of operations that require administrator confirmation.

get_default_backup_server(*self*)

Return the default backup server host name or IP address.

Return Value

A string containing the backup server host name or IP address.

set_default_backup_server(*self*, *sBackupServer*)

Set the default backup server host name or IP address.

Parameters

sBackupServer: String. The default backup server host name or IP address.

get_backup_user_login(*self*)

Return the backup user login name.

Return Value

A string containing the name.

set_backup_user_login(*self*, *sUserLogin*)

Set the backup user login.

Parameters

sUserLogin: String. The backup user login name to set.

set_backup_user_password(*self*, *sUserPassword*)

Set the backup user password.

Parameters

sUserPassword: String. The backup user password to set.

is_backup_user_password_enabled(*self*)

Determine if the backup user password is enabled.

Return Value

A Boolean value. True - backup user password is enabled. False - password is disabled.

set_backup_user_password_enabled(*self*, *bUserPasswordEnabled*)

Enable or disable the backup user password.

Parameters

bUserPasswordEnabled: Boolean. Set to True to enable the password. Set to False to diable it.

get_default_backup_directory(*self*)

Return the name and path of the default backup directory.

Return Value

A string containing the directory name and path.

set_default_backup_directory(*self*, *sBackupDirectory*)

Set name and path of the default backup directory.

get_backup_timeout(*self*)**set_backup_timeout**(*self*, *nTimeout*)**are_plugins_enabled**(*self*)**enable_plugins**(*self*, *bEnablePluginsSupport*)**get_vm_cpu_limit_type**(*self*)**set_vm_cpu_limit_type**(*self*, *nVmCpuLimitType*)

is_verbose_log_enabled(*self*)

Determine whether the verbose log level is configured for dispatcher and virtual machines processes.

Return Value

A Boolean value. True - log level is configured. False - log level is not configured.

set_verbose_log_enabled(*self*, *bEnabled*)

Enable or disable the verbose log level for dispatcher and virtual machines processes.

is_allow_multiple_pmc(*self*)

set_allow_multiple_pmc(*self*, *bEnabled*)

is_log_rotation_enabled(*self*)

set_log_rotation_enabled(*self*, *bEnabled*)

get_cpu_features_mask_ex(*self*)

set_cpu_features_mask_ex(*self*, *hCpuFeatures*)

get_usb_identity_count(*self*)

get_usb_identity(*self*, *nUsbIdentIndex*)

set_usb_ident_association(*self*, *sSystemName*, *sVmUuid*, *nFlags*)

get_cpu_pool(*self*)

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.25.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.26 Class *VirtualNet*

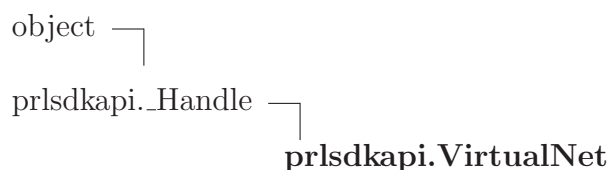

Provides methods for managing Virtuozzo virtual networks.

1.26.1 Methods

`__init__(self, handle=0)`

`x.__init__(...)` initializes `x`; see `help(type(x))` for signature

Overrides: `object.__init__` `exitit`(inherited documentation)

`create(self)`

Creates a new instance of *VirtualNet*.

`get_network_id(self)`

Return the ID of the specified virtual network.

`set_network_id(self, sNetworkId)`

Set the virtual network ID.

`get_description(self)`

Return the description of the specified virtual network.

`set_description(self, sDescription)`

Sets the virtual network description.

get_network_type(*self*)

Return the virtual network type.

set_network_type(*self*, *nNetworkType*)

Set the virtual network type.

get_bound_card_mac(*self*)

Return the bound card MAC address of the specified virtual network.

set_bound_card_mac(*self*, *sBoundCardMac*)

Sets the specified virtual network bound card MAC address.

get_adapter_name(*self*)

Return the name of the network adapter in the specified virtual network.

set_adapter_name(*self*, *sAdapterName*)

Sets the specified virtual network adapter name.

get_adapter_index(*self*)

Return a numeric index assigned to the network adapter in the specified virtual network.

set_adapter_index(*self*, *nAdapterIndex*)

Sets the specified adapter index.

get_host_ipaddress(*self*)

Return the host IP address of the specified virtual network.

set_host_ipaddress(*self*, *sHostIPAddress*)

Set the virtual network host IP address.

get_host_ip6address(*self*)**set_host_ip6address**(*self*, *sHostIPAddress*)

get_dhcp_ipaddress(*self*)

Return the DHCP IP address of the specified virtual network.

set_dhcp_ipaddress(*self*, *sDhcpIPAddress*)

Set the virtual network DHCP IP address.

get_dhcp_ip6address(*self*)**set_dhcp_ip6address**(*self*, *sDhcpIPAddress*)**get_ipnet_mask**(*self*)

Return the IP net mask of the specified virtual network.

set_ipnet_mask(*self*, *sIPNetMask*)

Set the virtual network IP net mask.

get_ip6net_mask(*self*)**set_ip6net_mask**(*self*, *sIPNetMask*)**get_vlan_tag**(*self*)

Return the VLAN tag of the specified virtual network.

set_vlan_tag(*self*, *nVlanTag*)

Set the VLAN tag for the virtual network.

get_ipscope_start(*self*)

Returns the DHCP starting IP address of the specified virtual network.

set_ipscope_start(*self*, *sIPScopeStart*)

Set the virtual network DHCP starting IP address.

get_ipscope_end(*self*)

Return the DHCP ending IP address of the specified virtual network.

set_ipscope_end(*self*, *sIPScopeEnd*)

Set the virtual network DHCP ending IP address

get_ip6scope_start (<i>self</i>)

set_ip6scope_start (<i>self</i> , <i>sIPScopeStart</i>)
--

get_ip6scope_end (<i>self</i>)

set_ip6scope_end (<i>self</i> , <i>sIPScopeEnd</i>)
--

is_enabled (<i>self</i>)

Determine whether the virtual network is enabled or disabled.

set_enabled (<i>self</i> , <i>bEnabled</i>)
--

Enable or disable the virtual network.
--

is_adapter_enabled (<i>self</i>)

Determine whether the virtual network adapter is enabled or disabled.

set_adapter_enabled (<i>self</i> , <i>bEnabled</i>)
--

Enable or disable a virtual network adapter.
--

is_dhcpserver_enabled (<i>self</i>)
--

Determine whether the virtual network DHCP server is enabled or disabled.

set_dhcpserver_enabled (<i>self</i> , <i>bEnabled</i>)

Enable or disable the virtual network DHCP server.
--

is_dhcp6server_enabled (<i>self</i>)

set_dhcp6server_enabled (<i>self</i> , <i>bEnabled</i>)
--

is_natserver_enabled (<i>self</i>)

Determine whether the specified virtual network NAT server is enabled or disabled.
--

set_natserver_enabled (<i>self</i> , <i>bEnabled</i>)
--

Enable or disable the virtual network NAT server.

get_port_forward_list (<i>self</i> , <i>nPortFwdType</i>)
--

Return the port forward entries list.

set_port_forward_list (<i>self</i> , <i>nPortFwdType</i> , <i>hPortFwdList</i>)
--

Set the port forward entries list.

get_bound_adapter_info (<i>self</i> , <i>hSrvConfig</i>)

Obtain info about a physical adapter, which is bound to the virtual network object.

Inherited from prlsdkapi._Handle

`__del__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.26.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.27 Class PortForward

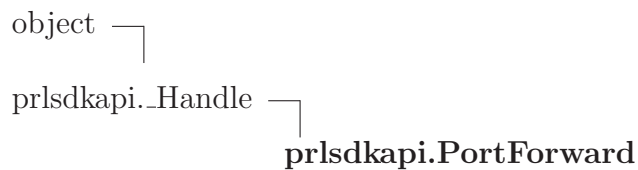

Provides access to the Port Forwarding functionality. Using this functionality, you can redirect all incoming data from a specific TCP port on the host computer to a specified port in a specified virtual machine.

1.27.1 Methods

__init__(*self*, *handle*=0)

x.**__init__**(...) initializes *x*; see `help(type(x))` for signature

Overrides: `object.__init__` `exitit`(inherited documentation)

create(*self*)

Create a new instance of the `PortForward` class.

get_rule_name(*self*)

set_rule_name(*self*, *sRuleName*)

get_incoming_port(*self*)

Return the incoming port.

set_incoming_port(*self*, *nIncomingPort*)

Set the specified incoming port.

get_redirect_ipaddress(*self*)

Return the redirect IP address of the specified port forward entry.

set_redirect_ipaddress(*self*, *sRedirectIPAddress*)

Set the specified port forward entry redirect IP address.

get_redirect_port(*self*)

Return the redirect port.

set_redirect_port(*self*, *nRedirectPort*)

Set the specified redirect port.

get_redirect_vm(*self*)

set_redirect_vm(*self*, *sRedirectVm*)

Inherited from prlsdkapi._Handle

`__del__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`,

reg_event_handler(), unreg_event_handler()


Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.27.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.28 Class VmDevice

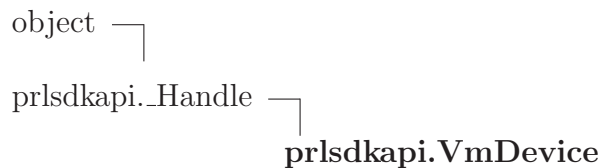

Known Subclasses: prlsdkapi.VmHardDisk, prlsdkapi.VmNet, prlsdkapi.VmSerial, prlsdkapi.VmSound, prlsdkapi.VmUsb

A base class providing methods for virtual device management.

1.28.1 Methods

create (<i>self</i> , <i>nDeviceType</i>)
Create a new virtual device object not bound to any virtual machine.
connect (<i>self</i>)
Connect a virtual device to a running virtual machine.
disconnect (<i>self</i>)
Disconnect a device from a running virtual machine.
create_image (<i>self</i> , <i>bRecreateIsAllowed=False</i> , <i>bNonInteractiveMode=True</i>)
Physically create a virtual device image on the host.

copy_image (<i>self</i> , <i>sNewImageName</i> , <i>sTargetPath</i> , <i>nFlags</i>)

resize_image (<i>self</i> , <i>nNewSize</i> , <i>nFlags</i>)

Resize the virtual device image.

get_index (<i>self</i>)

Return the index identifying the virtual device.
--

set_index (<i>self</i> , <i>nIndex</i>)
--

Set the index identifying the virtual device.

remove (<i>self</i>)

Remove the virtual device object from the parent virtual machine list.
--

get_type (<i>self</i>)

Return the virtual device type.

Overrides: prlsdkapi.Handle.get_type

is_connected (<i>self</i>)

Determine if the virtual device is connected.

set_connected (<i>self</i> , <i>bConnected</i>)
--

Connect the virtual device.

is_enabled (<i>self</i>)

Determine if the device is enabled.

set_enabled (<i>self</i> , <i>bEnabled</i>)
--

Enable the specified virtual device.

is_remote (<i>self</i>)

Determine if the virtual device is a remote device.

set_remote (<i>self</i> , <i>bRemote</i>)
--

Change the 'remote' flag for the specified device.
--

get_emulated_type(*self*)

Return the virtual device emulation type.

set_emulated_type(*self*, *nEmulatedType*)

Sets the virtual device emulation type.

get_image_path(*self*)

Return virtual device image path.

set_image_path(*self*, *sNewImagePath*)

Set the virtual device image path.

get_sys_name(*self*)

Return the virtual device system name.

set_sys_name(*self*, *sNewSysName*)

Set the virtual device system name.

get_friendly_name(*self*)

Return the virtual device user-friendly name.

set_friendly_name(*self*, *sNewFriendlyName*)

Set the virtual device user-friendly name.

get_description(*self*)

Return the description of a virtual device.

set_description(*self*, *sNewDescription*)

Set the device description.

get_iface_type(*self*)

Return the virtual device interface type (IDE or SCSI).

set_iface_type(*self*, *nIfaceType*)

Set the virtual device interface type (IDE or SCSI).

get_sub_type(*self*)

set_sub_type(*self*, *nSubType*)

get_stack_index(*self*)

Return the virtual device stack index (position at the IDE/SCSI controller bus).

set_stack_index(*self*, *nStackIndex*)

Set the virtual device stack index (position at the IDE or SCSI controller bus).

set_default_stack_index(*self*)

Generates a stack index for the device (the device interface, IDE or SCSI, must be set in advance).

get_output_file(*self*)

Return the virtual device output file.

set_output_file(*self*, *sNewOutputFile*)

Set the virtual device output file.

is_passthrough(*self*)

Determine if the passthrough mode is enabled for the mass storage device.

set_passthrough(*self*, *bPassthrough*)

Enable the passthrough mode for the mass storage device (optical or hard disk).

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.28.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.29 Class VmHardDisk

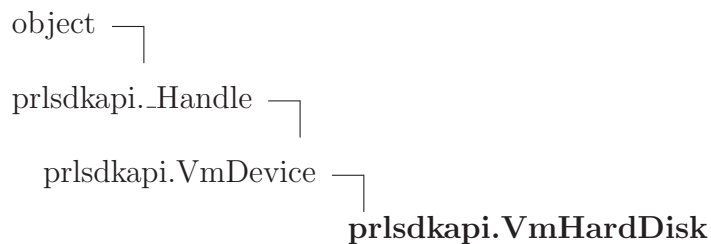

Provides methods for managing virtual hard disks in a virtual machine.

1.29.1 Methods

get_disk_type (<i>self</i>)
Return the hard disk type.

set_disk_type (<i>self</i> , <i>nDiskType</i>)
Set the type of the virtual hard disk.

isSplitted (<i>self</i>)
Determine if the virtual hard disk is split into multiple files.

setSplitted (<i>self</i> , <i>bSplitted</i>)
Set whether the hard disk should be split into multiple files.

get_disk_size (<i>self</i>)
Return the hard disk size.

set_disk_size (<i>self</i> , <i>nDiskSize</i>)
Set the size of the virtual hard disk.

get_size_on_disk (<i>self</i>)

Return the size of the occupied space on the hard disk.

add_partition (<i>self</i>)

Assign a boot camp partition to the virtual hard disk.
--

get_partitions_count (<i>self</i>)

Determine the number of partitions on the virtual hard disk.
--

get_partition (<i>self</i> , <i>nIndex</i>)
--

Obtain the <i>VmHdPartition</i> object containing a hard disk partition info.

set_mount_point (<i>self</i> , <i>sMountPoint</i>)

get_mount_point (<i>self</i>)
--

set_auto_compress_enabled (<i>self</i> , <i>bEnabled</i>)
--

is_auto_compress_enabled (<i>self</i>)

set_storage_url (<i>self</i> , <i>sURL</i>)
--

get_storage_url (<i>self</i>)
--

get_encryption (<i>self</i>)

set_encryption (<i>self</i> , <i>hEncryption</i>)
--

get_serial_number (<i>self</i>)
--

Return serial number of the virtual hard disk.
--

set_serial_number (<i>self</i> , <i>sSerialNumber</i>)

Set serial number of the virtual hard disk.

Inherited from prlsdkapi.VmDevice(Section 1.28)

connect(), copy_image(), create(), create_image(), disconnect(), get_description(),
 get_emulated_type(), get_friendly_name(), get_iface_type(), get_image_path(), get_index(),
 get_output_file(), get_stack_index(), get_sub_type(), get_sys_name(), get_type(), is_connected(),

is_enabled(), is_passthrough(), is_remote(), remove(), resize_image(), set_connected(),
 set_default_stack_index(), set_description(), set_emulated_type(), set_enabled(), set_friendly_name(),
 set_iface_type(), set_image_path(), set_index(), set_output_file(), set_passthrough(),
 set_remote(), set_stack_index(), set_sub_type(), set_sys_name()

Inherited from prlsdkapi._Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
 reg_event_handler(), unreg_event_handler()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
 __repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.29.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.30 Class VmHdPartition



Provides methods for managing partitions of a virtual hard disk in a virtual machine.

1.30.1 Methods

remove(<i>self</i>)
Remove the specified partition object from the virtual hard disk list.
get_sys_name(<i>self</i>)
Return the hard disk partition system name.
set_sys_name(<i>self</i>, <i>sSysName</i>)
Set system name for the disk partition.

Inherited from prlsdkapi._Handle


`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.30.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

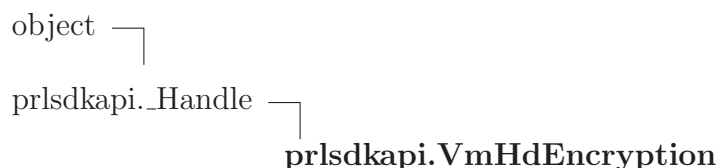1.31 Class VmHdEncryption**1.31.1 Methods**

<code>get_key_id(self)</code>
<code>set_key_id(self, sKeyId)</code>

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.31.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.32 Class VmNet

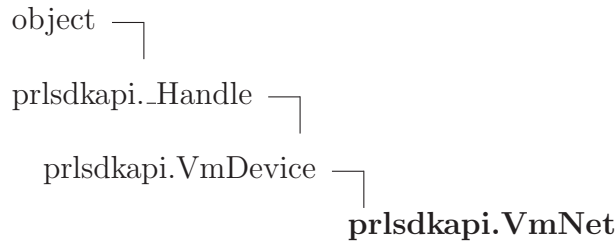

Provides methods for managing network adapters in a virtual machine.

1.32.1 Methods

get_bound_adapter_index(*self*)

Return the index of the adapter to which this virtual adapter is bound.

set_bound_adapter_index(*self*, *nIndex*)

Set the index of the adapter to which this virtual adapter should be bound.

get_bound_adapter_name(*self*)

Return the name of the adapter to which this virtual adapter is bound.

set_bound_adapter_name(*self*, *sNewBoundAdapterName*)

Set the name of the network adapter to which this virtual adapter will bind.

get_mac_address(*self*)

Return the MAC address of the virtual network adapter.

get_mac_address_canonical(*self*)

set_mac_address(*self*, *sNewMacAddress*)

Set MAC address to the network adapter.

generate_mac_addr(*self*)

Generate a unique MAC address for the virtual network adapter.

is_auto_apply(*self*)

Determine if the network adapter is configured to automatically apply network settings inside guest.

set_auto_apply(*self*, *bAutoApply*)

Set whether the network adapter should be automatically configured.

get_net_addresses(*self*)

Obtain the list of IP address/subnet_mask pairs which are assigned to the virtual network adapter.

set_net_addresses(*self*, *hNetAddressesList*)

Set IP addresses/subnet masks to the network adapter.

get_dns_servers(*self*)

Obtain the list of DNS servers which are assigned to the virtual network adapter.

set_dns_servers(*self*, *hDnsServersList*)

Assign DNS servers to the network adapter.

get_search_domains(*self*)

Obtain the lists of search domains assigned to the virtual network adapter.

set_search_domains(*self*, *hSearchDomainsList*)

Assign search domains to the network adapter.

is_configure_with_dhcp(*self*)

Determine if the network adapter is configured through DHCP on the guest OS side.

set_configure_with_dhcp(*self*, *bConfigureWithDhcp*)

Set whether the network adapter should be configured through DHCP or manually.

is_configure_with_dhcp_ipv6(*self*)

set_configure_with_dhcp_ipv6(*self*, *bConfigureWithDhcp*)

get_default_gateway(*self*)

Obtain the default gateway assigned to the virtual network adapter.

set_default_gateway(*self*, *sNewDefaultGateway*)

Set the default gateway address for the network adapter.

get_default_gateway_ipv6(*self*)

set_default_gateway_ipv6(*self*, *sNewDefaultGateway*)

get_virtual_network_id(*self*)

Obtain the virtual network ID assigned to the virtual network adapter.

set_virtual_network_id(*self*, *sNewVirtualNetworkId*)

Set the virtual network ID for the network adapter.

get_adapter_type(*self*)

set_adapter_type(*self*, *nAdapterType*)

is_pkt_filter_prevent_mac_spoof(*self*)

set_pkt_filter_prevent_mac_spoof(*self*, *bPktFilterPreventMacSpoof*)

is_pkt_filter_prevent_promisc(*self*)

set_pkt_filter_prevent_promisc(*self*, *bPktFilterPreventPromisc*)

is_pkt_filter_prevent_ip_spoof(*self*)

set_pkt_filter_prevent_ip_spoof(*self*, *bPktFilterPreventIpSpoof*)

is_firewall_enabled(*self*)

<code>set_firewall_enabled(self, bEnabled)</code>

<code>get_firewall_default_policy(self, nDirection)</code>
--

<code>set_firewall_default_policy(self, nDirection, nPolicy)</code>

<code>get_firewall_rule_list(self, nDirection)</code>

<code>set_firewall_rule_list(self, nDirection, hRuleList)</code>
--

<code>get_host_interface_name(self)</code>
--

<code>set_host_interface_name(self, sNewHostInterfaceName)</code>

Inherited from prlsdkapi.VmDevice(Section 1.28)

connect(), copy_image(), create(), create_image(), disconnect(), get_description(),
 get_emulated_type(), get_friendly_name(), get_iface_type(), get_image_path(), get_index(),
 get_output_file(), get_stack_index(), get_sub_type(), get_sys_name(), get_type(), is_connected(),
 is_enabled(), is_passthrough(), is_remote(), remove(), resize_image(), set_connected(),
 set_default_stack_index(), set_description(), set_emulated_type(), set_enabled(), set_friendly_name(),
 set_iface_type(), set_image_path(), set_index(), set_output_file(), set_passthrough(),
 set_remote(), set_stack_index(), set_sub_type(), set_sys_name()

Inherited from prlsdkapi.Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
 reg_event_handler(), unreg_event_handler()


Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
 __repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.32.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.33 Class VmUSB

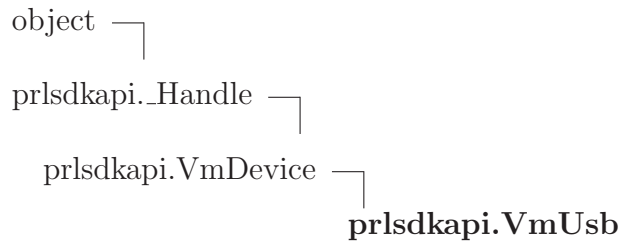

Provides methods for managing USB devices in a virtual machine.

1.33.1 Methods

get_autoconnect_option (<i>self</i>)

Obtain the USB controller autoconnect device option.
--

set_autoconnect_option (<i>self</i> , <i>nAutoconnectOption</i>)

Set the USB controller autoconnect device option.

Inherited from prlsdkapi.VmDevice(Section 1.28)

connect(), copy_image(), create(), create_image(), disconnect(), get_description(),
 get_emulated_type(), get_friendly_name(), get_iface_type(), get_image_path(), get_index(),
 get_output_file(), get_stack_index(), get_sub_type(), get_sys_name(), get_type(), is_connected(),
 is_enabled(), is_passthrough(), is_remote(), remove(), resize_image(), set_connected(),
 set_default_stack_index(), set_description(), set_emulated_type(), set_enabled(), set_friendly_name(),
 set_iface_type(), set_image_path(), set_index(), set_output_file(), set_passthrough(),
 set_remote(), set_stack_index(), set_sub_type(), set_sys_name()

Inherited from prlsdkapi.Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
 reg_event_handler(), unreg_event_handler()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
 __repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()


1.33.2 Properties

Name	Description
<i>Inherited from object</i>	

continued on next page

Name	Description
__class__	

1.34 Class VmSound

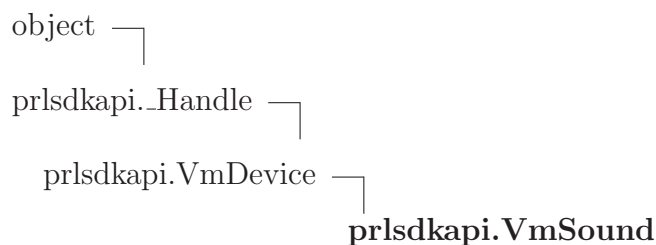

Provides methods for managing sound devices in a virtual machine.

1.34.1 Methods

get_output_dev(*self*)

Return the output device string for the sound device.

set_output_dev(*self*, *sNewOutputDev*)

Set the output device string for the sound device.

get_mixer_dev(*self*)

Return the mixer device string for the sound device.

set_mixer_dev(*self*, *sNewMixerDev*)

Set the mixer device string for the sound device.

Inherited from prlsdkapi.VmDevice(Section 1.28)

connect(), copy_image(), create(), create_image(), disconnect(), get_description(),
 get_emulated_type(), get_friendly_name(), get_iface_type(), get_image_path(), get_index(),
 get_output_file(), get_stack_index(), get_sub_type(), get_sys_name(), get_type(), is_connected(),
 is_enabled(), is_passthrough(), is_remote(), remove(), resize_image(), set_connected(),
 set_default_stack_index(), set_description(), set_emulated_type(), set_enabled(), set_friendly_name(),
 set_iface_type(), set_image_path(), set_index(), set_output_file(), set_passthrough(),
 set_remote(), set_stack_index(), set_sub_type(), set_sys_name()

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.34.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.35 Class VmSerial

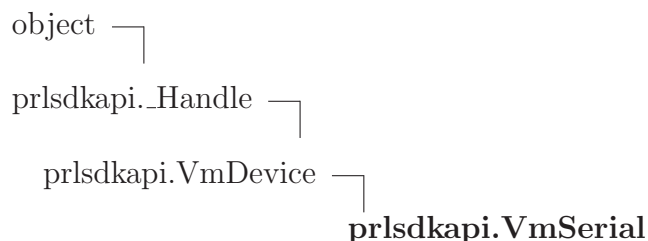

Provides methods for managing serial ports in a virtual machine.

1.35.1 Methods

<code>get_socket_mode(self)</code>
Return the socket mode of the virtual serial port.
<code>set_socket_mode(self, nSocketMode)</code>
Set the socket mode for the virtual serial port.

Inherited from prlsdkapi.VmDevice(Section 1.28)

`connect()`, `copy_image()`, `create()`, `create_image()`, `disconnect()`, `get_description()`, `get_emulated_type()`, `get_friendly_name()`, `get_iface_type()`, `get_image_path()`, `get_index()`, `get_output_file()`, `get_stack_index()`, `get_sub_type()`, `get_sys_name()`, `get_type()`, `is_connected()`, `is_enabled()`, `is_passthrough()`, `is_remote()`, `remove()`, `resize_image()`, `set_connected()`, `set_default_stack_index()`, `set_description()`, `set_emulated_type()`, `set_enabled()`, `set_friendly_name()`,

set_iface_type(), set_image_path(), set_index(), set_output_file(), set_passthrough(),
set_remote(), set_stack_index(), set_sub_type(), set_sys_name()

Inherited from prlsdkapi._Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
reg_event_handler(), unreg_event_handler()


Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.35.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.36 Class VmConfig

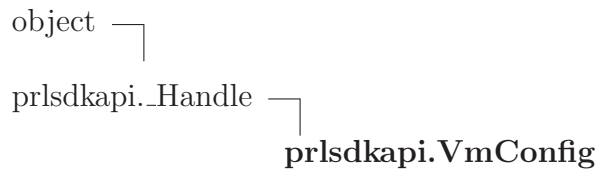

Known Subclasses: prlsdkapi.Vm

Provides methods for managing the configuration of a virtual machine.

1.36.1 Methods

set_network_rate_list(*self*, *hNetworkRateList*)

get_network_rate_list(*self*)

is_rate_bound(*self*)

set_rate_bound(*self*, *bEnabled*)

set_os_template(*self*, *sOsTemplate*)

get_os_template(*self*)

apply_config_sample(*self*, *sConfigSample*)

get_app_template_list(*self*)

set_app_template_list(*self*, *hAppList*)

set_default_config(*self*, *hSrvConfig*, *guestOsVersion*, *needCreateDevices*)

Set the default configuration for a new virtual machine based on the guest OS type.

is_config_invalid(*self*, *nErrCode*)

get_config_validity(*self*)

Return a constant indicating the virtual machine configuration validity.

add_default_device(*self*, *hSrvConfig*, *deviceType*)

Automates the task of setting devices in a virtual machine.

add_default_device_ex(*self*, *hSrvConfig*, *deviceType*)

is_default_device_needed(*self*, *guestOsVersion*, *deviceType*)

Determine whether a default virtual device is needed for running the OS of the specified type.

get_default_mem_size(*self*, *guestOsVersion*, *hostRam*)

Return the default RAM size for to the specified OS type and version.

get_default_hdd_size(*self*, *guestOsVersion*)

Return the default hard disk size for to the specified OS type and version.

get_default_video_ram_size(*self*, *guestOsVersion*, *hSrvConfig*, *bIs3DSupportEnabled*)

Return the default video RAM size for the specified OS type and version.

create_vm_dev(*self*, *nDeviceType*)

Create a new virtual device handle of the specified type.

get_access_rights(*self*)Obtain the `AccessRights` object.**get_devs_count**(*self*)

Determine the total number of devices of all types installed in the virtual machine.

get_all_devices(*self*)

Obtains objects for all virtual devices in a virtual machine.

get_devs_count_by_type(*self*, *vmDeviceType*)

Obtain the number of virtual devices of the specified type.

get_dev_by_type(*self*, *vmDeviceType*, *nIndex*)

Obtains a virtual device object according to the specified device type and index.

get_floppy_disks_count(*self*)

Determine the number of floppy disk drives in a virtual machine.

get_floppy_disk(*self*, *nIndex*)Obtain the `VmDevice` object containing information about a floppy disk drive in a virtual machine.**get_hard_disks_count**(*self*)

Determines the number of virtual hard disks in a virtual machine.

get_hard_disk(*self*, *nIndex*)Obtain the `VmHardDisk` object containing the specified virtual hard disk information.**get_optical_disks_count**(*self*)

Determine the number of optical disks in the specified virtual machine.

get_optical_disk(*self*, *nIndex*)

Obtain the **VmDevice** object containing information about a virtual optical disk.

get_parallel_ports_count(*self*)

Determine the number of virtual parallel ports in the virtual machine.

get_parallel_port(*self*, *nIndex*)

Obtains the **VmDevice** object containing information about a virtual parallel port.

get_serial_ports_count(*self*)

Determine the number of serial ports in a virtual machine.

get_serial_port(*self*, *nIndex*)

Obtain the **VmSerial** object containing information about a serial port in a virtual machine.

get_sound_devs_count(*self*)

Determine the number of sound devices in a virtual machine.

get_sound_dev(*self*, *nIndex*)

Obtain the **VmSound** object containing information about a sound device in a virtual machine.

get_usb_devices_count(*self*)

Determine the number of USB devices in a virtual machine.

get_usb_device(*self*, *nIndex*)

Obtain the **VmUsb** object containing information about a USB device in the virtual machine.

get_net_adapters_count(*self*)

Determine the number of network adapters in a virtual machine.

get_net_adapter(*self*, *nIndex*)

Obtain the **VmNet** object containing information about a virtual network adapter.

get_generic_pci_devs_count(*self*)

Determines the number of generic PCI devices in a virtual machine.

get_generic_pci_dev(*self*, *nIndex*)

Obtain the VmDevice object containing information about a generic PCI device.

get_generic_scsi_devs_count(*self*)

Determines the number of generic SCSI devices in a virtual machine.

get_generic_scsi_dev(*self*, *nIndex*)

Obtain the VmDevice object containing information about a SCSI device in a virtual machine.

get_display_devs_count(*self*)

Determine the number of display devices in a virtual machine.

get_display_dev(*self*, *nIndex*)

Obtains the VmDevice containing information about a display device in a virtual machine.

create_share(*self*)

Create a new instance of Share and add it to the virtual machine list of shares.

get_shares_count(*self*)

Determine the number of shared folders in a virtual machine.

get_share(*self*, *nShareIndex*)

Obtain the Share object containing information about a shared folder.

is_smart_guard_enabled(*self*)

Determine whether the SmartGuard feature is enabled in the virtual machine.

set_smart_guard_enabled(*self*, *bEnabled*)

Enable the SmartGuard feature in the virtual machine.

is_smart_guard_notify_before_creation(*self*)

Determine whether the user will be notified on automatic snapshot creation by SmartGaurd.

set_smart_guard_notify_before_creation(*self*, *bNotifyBeforeCreation*)

Enable or disable notification of automatic snapshot creation, a SmartGuard feature.

get_smart_guard_interval(*self*)

Determines the interval at which snapshots are taken by SmartGuard.

set_smart_guard_interval(*self*, *nInterval*)

Set the time interval at which snapshots are taken by SmartGuard.

get_smart_guard_max_snapshots_count(*self*)

Determines the maximum snapshot count, a SmartGuard setting.

set_smart_guard_max_snapshots_count(*self*, *nMaxSnapshotsCount*)

Set the maximum snapshot count, a SmartGuard feature.

is_user_defined_shared_folders_enabled(*self*)

Determine whether the user-defined shared folders are enabled or not.

set_user_defined_shared_folders_enabled(*self*, *bEnabled*)

Enables or disables user-defined shared folders.

is_smart_mount_enabled(*self*)**set_smart_mount_enabled(*self*, *bEnabled*)****is_smart_mount_removable_drives_enabled(*self*)****set_smart_mount_removable_drives_enabled(*self*, *bEnabled*)****is_smart_mount_dvds_enabled(*self*)****set_smart_mount_dvds_enabled(*self*, *bEnabled*)**

is_smart_mount_network_shares_enabled(*self*)

set_smart_mount_network_shares_enabled(*self*, *bEnabled*)

is_shared_profile_enabled(*self*)

Determine whether the Shared Profile feature is enabled in the virtual machine.

set_shared_profile_enabled(*self*, *bEnabled*)

Enable or disable the Shared Profile feature in the virtual machine.

is_use_desktop(*self*)

Determine whether the 'use desktop in share profile' feature is enabled or not.

set_use_desktop(*self*, *bEnabled*)

Enable or disable the 'undo-desktop' feature in the shared profile.

is_use_documents(*self*)

Determine whether 'use documents in shared profile' feature is enabled or not.

set_use_documents(*self*, *bEnabled*)

Enable or disable the 'use documents in shared profile' feature.

is_use_pictures(*self*)

Determine whether the 'used pictures in shared profile' feature is enabled or not.

set_use_pictures(*self*, *bEnabled*)

Enables or disables the 'use pictures in shared profile' feature.

is_use_music(*self*)

Determine whether the 'use music in shared profile' feature is enabled or not.

set_use_music(*self*, *bEnabled*)

Enables or disables the 'use music in shared profile' feature.

is_use_downloads(*self*)

set_use_downloads(*self*, *bEnabled*)

is_use_movies(*self*)

set_use_movies(*self*, *bEnabled*)

get_optimize_modifiers_mode(*self*)

set_optimize_modifiers_mode(*self*, *nMode*)

is_share_clipboard(*self*)

Determine whether the clipboard sharing feature is enabled in the virtual machine.

set_share_clipboard(*self*, *bEnabled*)

Enable or disable the clipboard sharing feature.

is_offline_management_enabled(*self*)

Determine whether the offline management feature is enabled for the virtual machine.

set_offline_management_enabled(*self*, *bEnabled*)

Enables or disables the offline management feature for the virtual machine.

is_tools_auto_update_enabled(*self*)

Enables or disables the Virtuozzo Tools AutoUpdate feature for the virtual machine.

set_tools_auto_update_enabled(*self*, *bEnabled*)

Enable or disable the Virtuozzo Tools AutoUpdate feature for the virtual machine.

is_time_synchronization_enabled(*self*)

Determine whether the time synchronization feature is enabled in the virtual machine.

set_time_synchronization_enabled(*self*, *bEnabled*)

Enable or disable the time synchronization feature in a virtual machine.

is_time_sync_smart_mode_enabled(*self*)

Determine whether the smart time synchronization is enabled in a virtual machine.

set_time_sync_smart_mode_enabled(*self*, *bEnabled*)

Enable or disable the smart time-synchronization mode in the virtual machine.

get_time_sync_interval(*self*)

Obtain the time synchronization interval between the host and the guest OS.

set_time_sync_interval(*self*, *nTimeSyncInterval*)

Set the time interval at which time in the virtual machine will be synchronized with the host OS.

is_allow_select_boot_device(*self*)

Determine whether the 'select boot device' option is shown on virtual machine startup.

set_allow_select_boot_device(*self*, *bAllowed*)

Switch on/off the 'select boot device' dialog on virtual machine startup.

create_boot_dev(*self*)

Create a new instance of `BootDevice` and add it to the virtual machine boot device list.

get_boot_dev_count(*self*)

Determine the number of devices in the virtual machine boot device priority list.

get_boot_dev(*self*, *nBootDevIndex*)

Obtain the `BootDevice` object containing information about a specified boot device.

get_name(*self*)

Return the virtual machine name.

set_name(*self*, *sNewVmName*)

Set the virtual machine name.

get_hostname(*self*)

Obtain the hostname of the specified virtual machine.

set_hostname(*self*, *sNewVmHostname*)

Set the virtual machine hostname.

get_dns_servers(*self*)**set_dns_servers(*self*, *hDnsServersList*)****get_uuid(*self*)**

Return the UUID (universally unique ID) of the virtual machine.

set_uuid(*self*, *sNewVmUuid*)

Set the virtual machine UUID (universally unique ID).

get_ct_id(*self*)**get_linked_vm_uuid(*self*)****get_os_type(*self*)**

Return the type of the operating system that the specified virtual machine is running.

get_os_version(*self*)

Return the version of the operating system that the specified virtual machine is running.

set_os_version(*self*, *nVmOsVersion*)

Set the virtual machine guest OS version.

get_ram_size(*self*)

Return the virtual machine memory (RAM) size, in megabytes.

set_ram_size(*self*, *nVmRamSize*)

Sets the virtual machine memory (RAM) size.

get_video_ram_size(*self*)

Return the video memory size of the virtual machine.

set_video_ram_size(*self*, *nVmVideoRamSize*)

Set the virtual machine video memory size.

get_mem_guarantee_size(*self*)**set_mem_guarantee_size**(*self*, *nType*, *nValue*)**get_cpu_count**(*self*)

Determine the number of CPUs in the virtual machine.

set_cpu_count(*self*, *nVmCpuCount*)

Set the number of CPUs for the virtual machine (the CPUs should be present in the machine).

get_cpu_mode(*self*)

Determine the specified virtual machine CPU mode (32 bit or 64 bit).

set_cpu_mode(*self*, *nVmCpuMode*)

Set CPU mode (32 bit or 64 bit) for the virtual machine.

get_cpu_accel_level(*self*)

Determine the virtual machine CPU acceleration level.

set_cpu_accel_level(*self*, *nVmCpuAccelLevel*)

Set CPU acceleration level for the virtual machine.

is_cpu_vtx_enabled(*self*)

Determine whether the x86 virtualization (such as Vt-x) is available in the virtual machine CPU.

is_cpu_hotplug_enabled(*self*)**set_cpu_hotplug_enabled**(*self*, *bVmCpuHotplugEnabled*)

```
get3dacceleration_mode(self)
```

```
set3dacceleration_mode(self, n3DAccelerationMode)
```

```
is_vertical_synchronization_enabled(self)
```

```
set_vertical_synchronization_enabled(self, bEnabled)
```

```
is_high_resolution_enabled(self)
```

```
set_high_resolution_enabled(self, bEnabled)
```

```
is_adaptive_hypervisor_enabled(self)
```

```
set_adaptive_hypervisor_enabled(self, bEnable)
```

```
is_switch_off_windows_logo_enabled(self)
```

```
set_switch_off_windows_logo_enabled(self, bEnable)
```

```
is_longer_battery_life_enabled(self)
```

```
set_longer_battery_life_enabled(self, bEnable)
```

```
is_battery_status_enabled(self)
```

```
set_battery_status_enabled(self, bEnable)
```

```
is_nested_virtualization_enabled(self)
```

```
set_nested_virtualization_enabled(self, bEnable)
```

```
is_pmuvirtualization_enabled(self)
```

```
set_pmuvirtualization_enabled(self, bEnable)
```

```
is_lock_guest_on_suspend_enabled(self)
```

```
set_lock_guest_on_suspend_enabled(self, bEnable)
```

is_isolated_vm_enabled (<i>self</i>)

set_isolated_vm_enabled (<i>self</i> , <i>bEnable</i>)

set_cpu_units (<i>self</i> , <i>nVmCpuUnits</i>)

Set the number of CPU units that will be allocated to a virtual machine.
--

get_cpu_units (<i>self</i>)

Determine the number of CPU units allocated to a virtual machine.

set_cpu_limit (<i>self</i> , <i>nVmCpuLimit</i>)

Set the CPU usage limit (in percent) for a virtual machine.

get_cpu_limit (<i>self</i>)

Determine the CPU usage limit of a virtual machine, in percent.

get_cpu_mask (<i>self</i>)

set_cpu_mask (<i>self</i> , <i>sMask</i>)
--

get_node_mask (<i>self</i>)

set_node_mask (<i>self</i> , <i>sMask</i>)

get_io_priority (<i>self</i>)
--

Determines the specified virtual machine I/O priority.
--

set_io_priority (<i>self</i> , <i>nVmIoPriority</i>)

Set the virtual machine I/O priority.

get_io_limit (<i>self</i>)

set_io_limit (<i>self</i> , <i>nValue</i>)

get_iops_limit (<i>self</i>)

set_iops_limit (<i>self</i> , <i>nVmIopsLimit</i>)

get_server_uuid(*self*)

Returns the UUID of the machine hosting the specified virtual machine.

get_server_host(*self*)

Return the hostname of the machine hosting the specified virtual machine.

get_home_path(*self*)

Return the virtual machine home directory name and path.

get_location(*self*)**get_icon**(*self*)

Return the name of the icon file used by the specified virtual machine.

set_icon(*self*, *sNewVmIcon*)

Set the virtual machine icon.

get_description(*self*)

Return the virtual machine description.

set_description(*self*, *sNewVmDescription*)

Set the virtual machine description.

is_template(*self*)

Determine whether the virtual machine is a real machine or a template.

set_template_sign(*self*, *bVmIsTemplate*)

Modify a regular virtual machine to become a template, and vise versa.

get_custom_property(*self*)

Return the virtual machine custom property information.

set_custom_property(*self*, *sNewVmCustomProperty*)

Set the virtual machine custom property information.

get_auto_start(*self*)

Determine if the specified virtual machine is set to start automatically on Virtuozzo Service start.

set_auto_start(*self*, *nVmAutoStart*)

Set the automatic startup option for the virtual machine.

get_auto_start_delay(*self*)

Returns the time delay used during the virtual machine automatic startup.

set_auto_start_delay(*self*, *nVmAutoStartDelay*)

Set the time delay that will be used during the virtual machine automatic startup.

get_start_login_mode(*self*)

Return the automatic startup login mode for the virtual machine.

set_start_login_mode(*self*, *nVmStartLoginMode*)

Set the automatic startup login mode for the specified virtual machine.

get_start_user_login(*self*)

Return the user name used during the virtual machine automatic startup.

set_start_user_creds(*self*, *sStartUserLogin*, *sPassword*)

Set the automatic startup user login and password for the virtual machine.

get_auto_stop(*self*)

Determine the mode of the automatic shutdown for the specified virtual machine.

set_auto_stop(*self*, *nVmAutoStop*)

Set the automatic shutdown mode for the virtual machine.

get_action_on_window_close(*self*)

Determine the action on Virtuozzo Application window close for the specified virtual machine.

set_action_on_window_close(*self*, *nActionOnWindowClose*)

Set the action to perform on the Virtuozzo console window closing.

get_action_on_stop_mode(*self*)

set_action_on_stop_mode(*self*, *nMode*)

get_window_mode(*self*)

Return the current window mode the virtual machine is in.

set_window_mode(*self*, *nVmWindowMode*)

Sets the virtual machine window mode.

is_start_in_detached_window_enabled(*self*)

set_start_in_detached_window_enabled(*self*, *bEnable*)

is_lock_in_full_screen_mode(*self*)

Determine whether the 'lock in screen mode' flag is set in the virtual machine configuration.

set_lock_in_full_screen_mode(*self*, *bValue*)

Enable or disable the lock in screen mode feature in the virtual machine configuration.

get_last_modified_date(*self*)

Return the date and time when the specified virtual machine was last modified.

get_last_modifier_name(*self*)

Return the name of the user who last modified the specified virtual machine.

get_uptime_start_date(*self*)

Return the date and time when the uptime counter was started for the specified virtual machine. The date is returned using the yyyy-mm-dd hh:mi:ss format. The date is automatically converted to the local time zone.

Return Value

A string containing the date and time of the virtual machine uptime counter activation.

get_uptime(*self*)**is_guest_sharing_enabled(*self*)**

Determine if guest sharing is enabled (the guest OS disk drives are visible in the host OS).

set_guest_sharing_enabled(*self*, *bVmGuestSharingEnabled*)

Enables the guest sharing feature.

is_guest_sharing_auto_mount(*self*)

Determine if host shared folders are mounted automatically in the virtual machine.

set_guest_sharing_auto_mount(*self*, *bVmGuestSharingAutoMount*)

Set the guest OS sharing auto-mount option.

is_guest_sharing_enable_spotlight(*self*)

Determine if the virtual disks will be added to Spotlight search subsystem (Mac OS X feature).

set_guest_sharing_enable_spotlight(*self*, *bVmGuestSharingEnableSpotlight*)

Set whether the virtual disks are added to Spotlight search subsystem.

is_host_sharing_enabled(*self*)

Determine if host sharing is enabled (host shared folders are visible in the guest OS).

set_host_sharing_enabled(*self*, *bVmHostSharingEnabled*)

Enable host sharing for the virtual machine.

is_share_all_host_disks(*self*)

Determine whether all host disks will be present in the guest OS as shares.

set_share_all_host_disks(*self*, *bShareAllHostDisks*)

Enable sharing of all host disks for the virtual machine.

is_share_user_home_dir(*self*)

Determine whether the host user home directory will be available in the guest OS as a share.

set_share_user_home_dir(*self*, *bShareUserHomeDir*)

Enable or disable sharing of the host user home directory in the specified virtual machine.

is_map_shared_folders_on_letters(*self*)

Determine whether host disks shared with the guest Windows OS will be mapped to drive letters.

set_map_shared_folders_on_letters(*self*, *bMapSharedFoldersOnLetters*)

Enable mapping of shared host disks to drive letters for the virtual machine.

get_vncmode(*self*)

Return the VNC mode of the virtual machine.

set_vncmode(*self*, *nVmRemoteDisplayMode*)

Set the virtual machine VNC mode.

get_vncpassword(*self*)

Return the VNC password for the virtual machine.

set_vncpassword(*self*, *sNewVmRemoteDisplayPassword*)

Set the virtual machine VNC password.

get_vnchost_name(*self*)

Return the VNC hostname of the virtual machine.

set_vnchost_name(*self*, *sNewVmRemoteDisplayHostName*)

Set the virtual machine VNC host name.

get_vncport(*self*)

Return the VNC port number for the virtual machine

set_vncport(*self*, *nVmRemoteDisplayPort*)

Set the virtual machine VNC port number.

get_vncweb_socket_port(*self*)

is_vncencryption_enabled(*self*)

is_scr_res_enabled(*self*)

Determine if additional screen resolution support is enabled in the virtual machine.

set_scr_res_enabled(*self*, *bVmScrResEnabled*)

Enable or disable the additional screen resolution support in the virtual machine.

is_disk_cache_write_back(*self*)

Determine if disk cache write-back is enabled in the virtual machine.

set_disk_cache_write_back(*self*, *bVmDiskCacheWriteBack*)

Set the virtual machine disk cache write-back option.

is_os_res_in_full_scr_mode(*self*)

Determines whether the virtual machine OS resolution is in full screen mode.

set_os_res_in_full_scr_mode(*self*, *bVmOsResInFullScrMode*)

Turn on/off the virtual machine OS resolution in full screen mode option.

is_close_app_on_shutdown(*self*)

Determine whether the Virtuozzo console app is automatically closed on the virtual machine shutdown.

set_close_app_on_shutdown(*self*, *bVmCloseAppOnShutdown*)

Set whether the Virtuozzo console app will be closed on the virtual machine shutdown.

get_system_flags(*self*)

Return the virtual machine system flags.

set_system_flags(*self*, *sNewVmSystemFlags*)

Set the virtual machine system flags.

is_disable_apic(*self*)

Determine whether the APIC is enabled during the virtual machine runtime.

set_disable_apicsign(*self*, *bDisableAPIC*)

Set whether the virtual machine should be using APIC during runtime.

is_disable_speaker(*self*)**set_disable_speaker_sign**(*self*, *bDisableSpeaker*)**get_undo_disks_mode**(*self*)

Determine the current undo-disks mode for the virtual machine.

set_undo_disks_mode(*self*, *nUndoDisksMode*)

Set the undo-disks mode for the virtual machine.

get_foreground_priority(*self*)

Return foreground processes priority for the specified virtual machine.

set_foreground_priority(*self*, *nVmForegroundPriority*)

Set the virtual machine foreground processes priority.

get_background_priority(*self*)

Determine the specified virtual machine background process priority type.

set_background_priority(*self*, *nVmBackgroundPriority*)

Set the virtual machine background processes priority.

is_use_default_answers(*self*)

Determine whether the use default answers mechanism is active in the virtual machine.

set_use_default_answers(*self*, *bUseDefaultAnswers*)

Enable the use default answers mechanism in a virtual machine.

get_search_domains(*self*)

Obtain the list of search domains that will be assigned to the guest OS.

set_search_domains(*self*, *hSearchDomainsList*)

Set the global search domain list that will be assigned to the guest OS.

get_offline_services(*self*)

Obtain the list of services available in the virtual machine offline management.

set_offline_services(*self*, *hOfflineServicesList*)

Set offline services that will be available in the virtual machine offline management.

get_confirmations_list(*self*)

Obtain a list of operations with virtual machine which requires administrator confirmation.

set_confirmations_list(*self*, *hConfirmList*)

Obtain the list of virtual machine operations that require administrator confirmation.

is_auto_compress_enabled(*self*)

Determine whether the Automatic HDD compression feature is enabled in the virtual machine.

set_auto_compress_enabled(*self*, *bEnabled*)

Enables or disables the Automatic HDD compression feature in the virtual machine.

get_auto_compress_interval(*self*)

Determine the interval at which compacting virtual disks is performed by Automatic HDD compression.

set_auto_compress_interval(*self*, *nInterval*)

Set the time interval at which compacting virtual disks is done by Automatic HDD compression.

get_free_disk_space_ratio(*self*)

Determine free disk space ratio at which disk compacting is done by Automatic HDD compression.

set_free_disk_space_ratio(*self*, *dFreeDiskSpaceRatio*)

Set the free disk space ratio at which compacting virtual disks is done by Automatic HDD compress.

get_vm_info(*self*)

get_vm_type(*self*)

set_vm_type(*self*, *nType*)

is_efi_enabled(*self*)

set_efi_enabled(*self*, *bEfiEnabled*)

get_external_boot_device(*self*)

set_external_boot_device(*self*, *sNewSysName*)

is_ram_hotplug_enabled(*self*)

set_ram_hotplug_enabled(*self*, *bVmRamHotplugEnabled*)

get_resource(*self*, *nResourceId*)

set_resource(*self*, *nResourceId*, *nBarriker*, *nLimit*)

is_auto_apply_ip_only(*self*)

set_auto_apply_ip_only(*self*, *bAutoApplyIpOnly*)

get_capabilities_mask(*self*)

set_capabilities_mask(*self*, *nCapMask*)

<code>get_netfilter_mode(self)</code>

<code>set_netfilter_mode(self, nMode)</code>
--

<code>get_features_mask(self)</code>

<code>set_features_mask(self, nOn, nOff)</code>

<code>set_high_availability_enabled(self, bEnabled)</code>
--

<code>is_high_availability_enabled(self)</code>

<code>set_high_availability_priority(self, nPriority)</code>
--

<code>get_high_availability_priority(self)</code>

<code>get_action_on_guest_crash(self)</code>
--

<code>set_action_on_guest_crash(self, nAction)</code>

<code>get_options_on_guest_crash(self)</code>

<code>set_options_on_guest_crash(self, nOptions)</code>

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.36.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.37 Class Vm

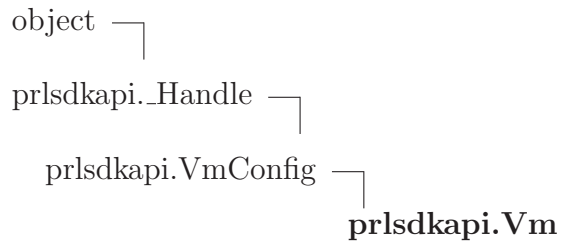

The Vm class provides methods for managing virtual machines. When you want to get the information about, modify, or create a virtual machine, you have to obtain an instance of this class. The instance is obtained using methods of other classes. The most commonly used methods are `Server.create_vm` and the `Server.get_vm_list`.

1.37.1 Methods

start (<i>self</i>)
Start the virtual machine.
start_ex (<i>self</i> , <i>nStartMode</i> =2048, <i>nReserved</i> =0)
Start the virtual machine using the specified mode.
restart (<i>self</i>)
Restart the virtual machine.
stop (<i>self</i> , <i>bGraceful</i> =False)
Stop the virtual machine.
stop_ex (<i>self</i> , <i>nStopMode</i> , <i>nFlags</i>)
pause (<i>self</i> , <i>bAcpi</i> =False)
Pause the virtual machine.
reset (<i>self</i>)
Reset the virtual machine.
suspend (<i>self</i>)
Suspend the virtual machine.

change_sid(*self*, *nFlags*)

reset_uptime(*self*, *nFlags*=0)

get_suspended_screen(*self*)

Obtain the virtual machine screen state before it was suspending.

resume(*self*)

Resume a suspended virtual machine.

drop_suspended_state(*self*)

Resets a suspended virtual machine.

create_snapshot(*self*, *sName*, *sDescription*='')

Create a snapshot of a virtual machine.

switch_to_snapshot(*self*, *sSnapshotUuid*)

Revert the specified virtual machine to the specified snapshot.

switch_to_snapshot_ex(*self*, *sSnapshotUuid*, *nFlags*)

delete_snapshot(*self*, *sSnapshotUuid*, *bChild*=False)

Delete the specified virtual machine snapshot.

get_snapshots_tree(*self*)

Obtain snapshot information for the specified virtual machine.

get_snapshots_tree_ex(*self*, *nFlags*)

lock(*self*, *nReserved*)

Exclusively locks the virtual machine for current session.

unlock(*self*, *nReserved*)

Unlocks a previously locked virtual machine.

```
update_snapshot_data(self, sSnapshotUuid, sNewName,  
sNewDescription='')
```

Modify the virtual machine snapshot name and description.

```
clone(self, new_vm_name, new_vm_root_path, bCreateTemplate=False)
```

Clone an existing virtual machine.

```
clone_ex(self, new_vm_name, new_vm_root_path, nFlags)
```

Clone an existing virtual machine (extended version).

```
clone_with_uuid(self, new_vm_name, new_vm_uuid, new_vm_root_path,  
nFlags)
```

```
migrate(self, hTargetServer, target_home_path='', migration_flags=0,  
reserved_flags=0, force_operation=True)
```

Migrate an existing virtual machine to another host.

```
migrate_ex(self, target_host, target_port, target_session_id,  
target_home_path='', migration_flags=0, reserved_flags=0,  
force_operation=True)
```

Migrate an existing virtual machine to another host (extended version).

```
migrate_with_rename(self, hTargetServer, target_name, target_home_path,  
migration_flags, reserved_flags, force_operation)
```

```
migrate_with_rename_ex(self, target_host, target_port, target_session_id,  
target_name, target_home_path, migration_flags, reserved_flags, force_operation)
```

```
migrate_cancel(self)
```

Cancel the virtual machine migration operation.

```
generate_vm_dev_filename(self, sFilenamePrefix='', sFilenameSuffix='',  
sIndexDelimiter='')
```

Generate a unique name for a virtual device.

```
delete(self, hDevicesList=0)
```

Delete the specified virtual machine from the host.

get_problem_report(*self*)

Obtain a problem report on abnormal virtual machine termination.

get_packed_problem_report(*self*, *nFlags*)**get_state**(*self*)

Obtain the **VmInfo** object containing the specified virtual machine information.

refresh_config(*self*)

Refresh the virtual machine configuration information.

refresh_config_ex(*self*, *nFlags*)**login_in_guest**(*self*, *sUserName*, *sUserPassword*, *nFlags*=0)

Create a new console session or binds to an existing GUI session in a virtual machine.

start_vnc_server(*self*, *nReserved*=0)

Start a VNC server for the specified virtual machine.

stop_vnc_server(*self*, *nReserved*=0)

Stops the VNC server in a virtual machine

set_user_passwd(*self*, *sUserName*, *sUserPasswd*, *nFlags*=0)

Change the password of a guest operating system user.

set_config(*self*, *hVmCfg*)

This is a reserved method.

get_config(*self*)

Obtain a handle of type **VmConfig**

get_statistics(*self*)

Obtain the **Statistics** object containing the virtual machine resource usage statistics.

get_statistics_ex(*self*, *nFlags*)

subscribe_to_guest_statistics(*self*)

Subscribe to receive the virtual machine performance statistics.

unsubscribe_from_guest_statistics(*self*)

Cancels the performance statistics subscription.

reg(*self*, *sVmParentPath*, *bNonInteractiveMode=False*)

Create a new virtual machine and register it with the Virtuoizzo Service.

reg_ex(*self*, *sVmParentPath*, *nFlags*)**unreg**(*self*)

Unregisters the virtual machine from the Virtuoizzo Service.

restore(*self*)

Restores the registered virtual machine.

begin_edit(*self*)

Mark the beginning of the virtual machine configuration changes operation.

commit(*self*)

Commit the virtual machine configuration changes.

commit_ex(*self*, *nFlags*)**reg_event_handler**(*self*, *callback_func*, *userData*)

Overrides: prlsdkapi.Handle.reg_event_handler

unreg_event_handler(*self*, *callback_func*, *userData*)

Unregister an event handler.

Overrides: prlsdkapi.Handle.unreg_event_handler

get_questions(*self*)

Synchronously receive questions from the Virtuoizzo Service.

create_event(*self*)

Creates an event bound to the virtual machine.

create_unattended_floppy(*self*, *nGuestDistroType*, *sUsername*,
sCompanyName, *sSerialKey*)

Create a floppy disk image for unattended Windows installation.

initiate_dev_state_notifications(*self*)

Initiate the device states notification service.

validate_config(*self*, *nSection*=1)

Validate the specified section of a virtual machine configuration.

update_security(*self*, *hAccessRights*)

Updates the security access level for the virtual machine.

install_tools(*self*)

Install Virtuozzo Tools in the virtual machine.

get_tools_state(*self*)

Determine whether Virtuozzo Tools is installed in the virtual machine.

subscribe_to_perf_stats(*self*, *sFilter*)**unsubscribe_from_perf_stats**(*self*)

Cancels the Virtuozzo Service performance statistics subscription .

get_perf_stats(*self*, *sFilter*)**auth_with_guest_security_db**(*self*, *sUserName*, *sUserPassword*, *nFlags*=0)

Authenticate the user through the guest OS security database.

compact(*self*, *uMask*, *nFlags*=0)

Start the process of a virtual hard disk optimization.

cancel_compact(*self*)

Finishes process of optimization of virtual hard disk.

```
convert_disks(self, uMask, nFlags)
```

```
cancel_convert_disks(self, nFlags)
```

```
mount(self, sMntPath, nFlags)
```

```
umount(self, nFlags)
```

```
move(self, sNewHomePath, nFlags)
```

```
connect(self, nFlags)
```

```
disconnect(self)
```

```
capture_screen(self, nWidth, nHeight, nFlags)
```

```
commit_encryption(self, nFlags, hPolicyList, hReserved)
```

```
reinstall(self, sOsTemplate, nFlags)
```

Inherited from prlsdkapi.VmConfig(Section 1.36)

add_default_device(), add_default_device_ex(), apply_config_sample(), create_boot_dev(), create_share(), create_vm_dev(), get3dacceleration_mode(), get_access_rights(), get_action_on_guest_crash(), get_action_on_stop_mode(), get_action_on_window_close(), get_all_devices(), get_app_template_list(), get_auto_compress_interval(), get_auto_start(), get_auto_start_delay(), get_auto_stop(), get_background_priority(), get_boot_dev(), get_boot_dev_count(), get_capabilities_mask(), get_config_validity(), get_confirmations_list(), get_cpu_accel_level(), get_cpu_count(), get_cpu_limit(), get_cpu_mask(), get_cpu_mode(), get_cpu_units(), get_ct_id(), get_custom_property(), get_default_hdd_size(), get_default_mem_size(), get_default_video_ram_size(), get_description(), get_dev_by_type(), get_devs_count(), get_devs_count_by_type(), get_display_dev(), get_display_devs_count(), get_dns_servers(), get_external_boot_device(), get_features_mask(), get_floppy_disk(), get_floppy_disks_count(), get_foreground_priority(), get_free_disk_space_ratio(), get_generic_pci_dev(), get_generic_pci_devs_count(), get_generic_scsi_dev(), get_generic_scsi_devs_count(), get_hard_disk(), get_hard_disks_count(), get_high_availability_priority(), get_home_path(), get_hostname(), get_icon(), get_io_limit(), get_io_priority(), get_iops_limit(), get_last_modified_date(), get_last_modifier_name(), get_linked_vm_uuid(), get_location(), get_mem_guarantee_size(), get_name(), get_net_adapter(), get_net_adapters_count(), get_netfilter_mode(), get_network_rate_list(), get_node_mask(), get_offline_services(), get_optical_disk(), get_optical_disks_count(), get_optimize_modifiers_mode(), get_options_on_guest_crash(), get_os_template(), get_os_type(), get_os_version(), get_parallel_port(), get_parallel_ports_count(), get_ram_size(), get_resource(), get_search_domains(), get_serial_port(), get_serial_ports_count(), get_server_host(),

get_server_uuid(), get_share(), get_shares_count(), get_smart_guard_interval(), get_smart_guard_max_s
 get_sound_dev(), get_sound_devs_count(), get_start_login_mode(), get_start_user_login(),
 get_system_flags(), get_time_sync_interval(), get_undo_disks_mode(), get_uptime(),
 get_uptime_start_date(), get_usb_device(), get_usb_devices_count(), get_uuid(), get_video_ram_size(),
 get_vm_info(), get_vm_type(), get_vnchost_name(), get_vncmode(), get_vncpassword(),
 get_vncport(), get_vncweb_socket_port(), get_window_mode(), is_adaptive_hypervisor_enabled(),
 is_allow_select_boot_device(), is_auto_apply_ip_only(), is_auto_compress_enabled(),
 is_battery_status_enabled(), is_close_app_on_shutdown(), is_config_invalid(), is_cpu_hotplug_enabled(),
 is_cpu_vtx_enabled(), is_default_device_needed(), is_disable_apic(), is_disable_speaker(),
 is_disk_cache_write_back(), is_efi_enabled(), is_guest_sharing_auto_mount(), is_guest_sharing_enable_spo
 is_guest_sharing_enabled(), is_high_availability_enabled(), is_high_resolution_enabled(),
 is_host_sharing_enabled(), is_isolated_vm_enabled(), is_lock_guest_on_suspend_enabled(),
 is_lock_in_full_screen_mode(), is_longer_battery_life_enabled(), is_map_shared_folders_on_letters(),
 is_nested_virtualization_enabled(), is_offline_management_enabled(), is_os_res_in_full_scr_mode(),
 is_pmuvirtualization_enabled(), is_ram_hotplug_enabled(), is_rate_bound(), is_scr_res_enabled(),
 is_share_all_host_disks(), is_share_clipboard(), is_share_user_home_dir(), is_shared_profile_enabled(),
 is_smart_guard_enabled(), is_smart_guard_notify_before_creation(), is_smart_mount_dvds_enabled(),
 is_smart_mount_enabled(), is_smart_mount_network_shares_enabled(), is_smart_mount_removable_drive
 is_start_in_detached_window_enabled(), is_switch_off_windows_logo_enabled(), is_template(),
 is_time_sync_smart_mode_enabled(), is_time_synchronization_enabled(), is_tools_auto_update_enabled(),
 is_use_default_answers(), is_use_desktop(), is_use_documents(), is_use_downloads(),
 is_use_movies(), is_use_music(), is_use_pictures(), is_user_defined_shared_folders_enabled(),
 is_vertical_synchronization_enabled(), is_vncencryption_enabled(), set3dacceleration_mode(),
 set_action_on_guest_crash(), set_action_on_stop_mode(), set_action_on_window_close(),
 set_adaptive_hypervisor_enabled(), set_allow_select_boot_device(), set_app_template_list(),
 set_auto_apply_ip_only(), set_auto_compress_enabled(), set_auto_compress_interval(),
 set_auto_start(), set_auto_start_delay(), set_auto_stop(), set_background_priority(),
 set_battery_status_enabled(), set_capabilities_mask(), set_close_app_on_shutdown(),
 set_confirmations_list(), set_cpu_accel_level(), set_cpu_count(), set_cpu_hotplug_enabled(),
 set_cpu_limit(), set_cpu_mask(), set_cpu_mode(), set_cpu_units(), set_custom_property(),
 set_default_config(), set_description(), set_disable_apicsign(), set_disable_speaker_sign(),
 set_disk_cache_write_back(), set_dns_servers(), set_efi_enabled(), set_external_boot_device(),
 set_features_mask(), set_foreground_priority(), set_free_disk_space_ratio(), set_guest_sharing_auto_moun
 set_guest_sharing_enable_spotlight(), set_guest_sharing_enabled(), set_high_availability_enabled(),
 set_high_availability_priority(), set_high_resolution_enabled(), set_host_sharing_enabled(),
 set_hostname(), set_icon(), set_io_limit(), set_io_priority(), set_iops_limit(), set_isolated_vm_enabled(),
 set_lock_guest_on_suspend_enabled(), set_lock_in_full_screen_mode(), set_longer_battery_life_enabled(),
 set_map_shared_folders_on_letters(), set_mem_guarantee_size(), set_name(), set_nested_virtualization_en
 set_netfilter_mode(), set_network_rate_list(), set_node_mask(), set_offline_management_enabled(),
 set_offline_services(), set_optimize_modifiers_mode(), set_options_on_guest_crash(),
 set_os_res_in_full_scr_mode(), set_os_template(), set_os_version(), set_pmuvirtualization_enabled(),
 set_ram_hotplug_enabled(), set_ram_size(), set_rate_bound(), set_resource(), set_scr_res_enabled(),
 set_search_domains(), set_share_all_host_disks(), set_share_clipboard(), set_share_user_home_dir(),
 set_shared_profile_enabled(), set_smart_guard_enabled(), set_smart_guard_interval(),

```

set_smart_guard_max_snapshots_count(), set_smart_guard_notify_before_creation(),
set_smart_mount_dvds_enabled(), set_smart_mount_enabled(), set_smart_mount_network_shares_enabled(),
set_smart_mount_removable_drives_enabled(), set_start_in_detached_window_enabled(),
set_start_login_mode(), set_start_user_creds(), set_switch_off_windows_logo_enabled(),
set_system_flags(), set_template_sign(), set_time_sync_interval(), set_time_sync_smart_mode_enabled(),
set_time_synchronization_enabled(), set_tools_auto_update_enabled(), set_undo_disks_mode(),
set_use_default_answers(), set_use_desktop(), set_use_documents(), set_use_downloads(),
set_use_movies(), set_use_music(), set_use_pictures(), set_user_defined_shared_folders_enabled(),
set_uuid(), set_vertical_synchronization_enabled(), set_video_ram_size(), set_vm_type(),
set_vnchost_name(), set_vncmode(), set_vncpassword(), set_vncport(), set_window_mode()

```

Inherited from prlsdkapi._Handle

```

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
get_type()

```

Inherited from object

```


__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

```

1.37.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.38 Class VmGuest

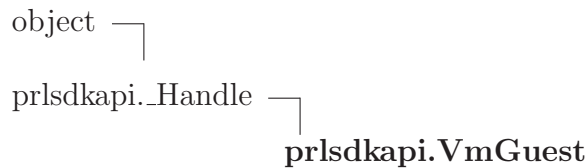

The VmGuest class is used to run programs and execute administrative tasks in a virtual machine.

1.38.1 Methods

logout (<i>self</i> , <i>nReserved</i> =0)
Closes a session (or unbinds from a pre-existing session) in a virtual machine.

run_program (<i>self</i> , <i>sAppName</i> , <i>hArgsList</i> , <i>hEnvsList</i> , <i>nFlags</i> =16384, <i>nStdin</i> =-1, <i>nStdout</i> =-1, <i>nStderr</i> =-1)

Execute a program in a virtual machine.

get_network_settings (<i>self</i> , <i>nReserved</i> =0)
--

Obtain network settings of the guest operating system running in a virtual machine.

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.38.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.39 Class Share

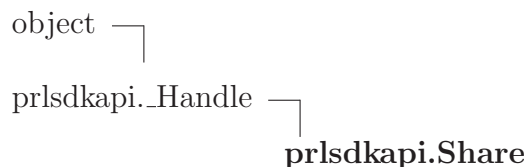

Provides methods for managing host shares. Using this class, you can make a host OS directory visible and accessible in a virtual machine.

1.39.1 Methods

remove (<i>self</i>)

Remove the share from the virtual machine configuration.
--

get_name (<i>self</i>)

Return the shared folder name (as it appears in the guest OS).
--

set_name (<i>self</i> , <i>sNewShareName</i>)
--

Set the share name (as it will appear in the guest OS).

get_path (<i>self</i>)

Return the shared folder path.

set_path (<i>self</i> , <i>sNewSharePath</i>)
--

Set the shared folder path.

get_description (<i>self</i>)
--

Return the shared folder description.

set_description (<i>self</i> , <i>sNewShareDescription</i>)
--

Set the shared folder description.

is_enabled (<i>self</i>)

Determine whether the share is enabled or not.
--

set_enabled (<i>self</i> , <i>bEnabled</i>)
--

Enable the specified share.

is_read_only (<i>self</i>)

Determine if the share is read-only.

set_read_only (<i>self</i> , <i>bReadOnly</i>)

Make the shared folder read-only.

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.39.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.40 Class *BootDevice*

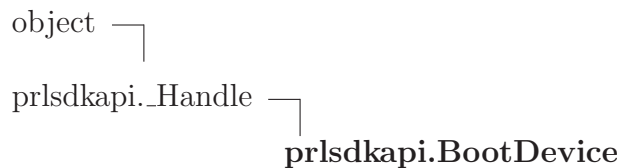

Provides methods for managing boot device in a virtual machine. An object contains information about an individual boot device.

1.40.1 Methods

remove(*self*)

Remove the boot device from the boot priority list.

get_type(*self*)

Return the boot device type. Device type is a property that, together with device index, is used to uniquely identify a device in the virtual machine boot priority list.

Return Value

The device type - one of the constants with the PDE_ prefix, such as: PDE_FLOPPY_DISK, PDE_OPTICAL_DISK, PDE_HARD_DISK.

Overrides: `prlsdkapi.Handle.get_type`

set_type(*self*, *nDevType*)

Set the boot device type. Use this function when adding a device to the boot device priority list. Device type is a property that, together with device index, is used to uniquely identify a device in a virtual machine

Parameters

nDevType: The device type to set. Can be one of the constants with the PDE_ prefix, such as: PDE_FLOPPY_DISK, PDE_OPTICAL_DISK, PDE_HARD_DISK.

get_index(*self*)

Obtain the boot device index.

Return Value

Integer. The boot device index.

set_index(*self*, *nDevIndex*)

Set the boot device index. Device index is a property that, together with device type, is used to uniquely identify a device in the virtual machine boot priority list. The index must be the same index the device has in the main virtual machine configuration or it will not be recognized during boot.

Parameters

nDevIndex: Integer. The device index to set.

get_sequence_index(*self*)

Obtain the sequence index of the boot device in the boot priority list.

Return Value

Integer. The boot device sequence index.

set_sequence_index(*self*, *nSequenceIndex*)

Assign a sequence index to a boot device in the boot priority list.

Parameters

nSequenceIndex: Integer. The sequence index to set (begins with 0).

is_in_use(*self*)

Determine whether the boot device is enabled or disabled.

Return Value

Boolean. True indicates that the device is enabled. False indicates otherwise.

set_in_use(*self*, *bInUse*)

Enable or disable the boot device in the boot priority list.

Parameters

bInUse: Boolean. Set to True to enable the device. Set to False to disable it.

Inherited from prlsdkapi._Handle

`--del--()`, `--init--()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`,

reg_event_handler(), unreg_event_handler()


Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.40.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.41 Class VmInfo

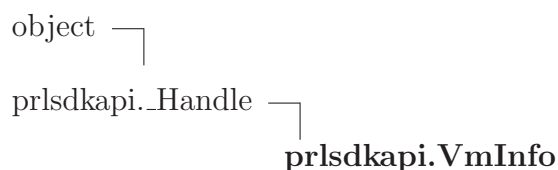

Contains the virtual machine state, access rights, and some other information.

1.41.1 Methods

get_state(self)
Return the virtual machine state information.
get_access_rights(self)
Obtains the AccessRights object containing information about the virtual machine access rights.
is_invalid(self)
Determine if the specified virtual machine is invalid.
is_vm_waiting_for_answer(self)
Determine if the specified virtual machine is waiting for an answer to a question that it asked.

is_vnc_server_started (<i>self</i>)
--

Determine whether a VNC server is running for the specified virtual machine.
--

get_addition_state (<i>self</i>)

Return the virtual machine addition state information.
--

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.41.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.42 Class FoundVmInfo



Contains summary information about a virtual machine that was found as a result of a virtual machine search operation.

1.42.1 Methods

get_name (<i>self</i>)

Obtains the virtual machine name.

Return Value

A string containing the virtual machine name.

is_old_config(*self*)

Determines whether the virtual machine configuration is an older version. This method allows to determine whether the virtual machine was created with an older or the current version of the Virtuozzo virtualization product that you are using.

Return Value

Boolean. True indicates that the virtual machine was created with an older version of the product. False indicates that the virtual machine was created with the version that you are running.

get_osversion(*self*)

Obtains the guest OS version information.

Return Value

A string containing the guest OS version.

get_config_path(*self*)

Obtains the name and path of the directory containing the virtual machine files.

Return Value

A string containing the name and path of the virtual machine directory.

is_template(*self*)

Determines if the virtual machine is a template. A virtual machine can be a regular virtual machine that you can run or it can be a template used to create new virtual machines.

Return Value

Boolean. True indicates that the virtual machine is a template. False indicates that it is a regular virtual machine.

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.42.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.43 Class **AccessRights**

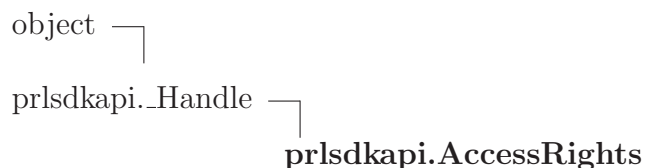

Contains info about access rights that the users other than the owner have in respect to the virtual machine.

1.43.1 Methods

is_allowed(*self*, *nPermission*)

Determine if the current user is authorized to perform a specified task on the virtual machine.

Parameters

nPermission: The task type. Can be one of constants with the PAR_ prefix, such as: PAR_VM_START_ACCESS, PAR_VM_STOP_ACCESS, PAR_VM_PAUSE_ACCESS, PAR_VM_RESET_ACCESS, PAR_VM_SUSPEND_ACCESS, PAR_VM_RESUME_ACCESS, PAR_VM_DELETE_ACCESS, and others.

Return Value

A Boolean value indicating whether the user is authorized to perform the task. True - authorized; False - not authorized.

get_access_for_others(*self*)

Obtain the virtual machine access rights information.

Return Value

One of the following access rights constants:

PAO_VM_NOT_SHARED - only the owner of the virtual machine has access to it. PAO_VM_SHARED_ON_VIEW - other users can view but not run the virtual machine.

PAO_VM_SHARED_ON_VIEW_AND_RUN - other users can view and run the virtual machine.

PAO_VM_SHARED_ON_FULL_ACCESS - all users have full access to a virtual machine.

set_access_for_others(*self*, *nAccessForOthers*)

Set access rights on a virtual machine.

Parameters

nAccessForOthers: The access rights level to set. Can be one of the following constants: PAO_VM_NOT_SHARED - only the owner of the virtual machine has access to it. PAO_VM_SHARED_ON_VIEW - other users can view the virtual machine. PAO_VM_SHARED_ON_VIEW_AND_RUN - other users can view and run the virtual machine. PAO_VM_SHARED_ON_FULL_ACCESS - all users have full access to the virtual machine.

get_owner_name(*self*)

Determine the virtual machine owner name.

Return Value

A string containing the owner name.

is_current_session_owner(*self*)

Determine if the current user is the owner of the virtual machine.

Return Value

A Boolean value. True - the current user is the owner. False - the user is not the owner.

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.43.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.44 Class VmToolsInfo

Provides methods for determining whether the Virtuozzo Tools package is installed in a virtual machine and for obtaining its status and version information.

1.44.1 Methods

<code>get_state(self)</code>
<code>get_version(self)</code>

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`


1.44.2 Properties

Name	Description
<i>Inherited from object</i>	

continued on next page

Name	Description
<code>--class--</code>	

1.45 Class Statistics

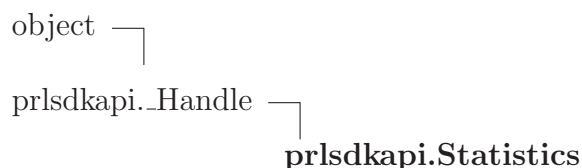

Provides methods for obtaining performance statistics for the host computer or an individual virtual machine. To obtain the **Statistics** object for the host computer, use the **Server.get_statistics** method. To obtain the **Statistics** object for a virtual machine, use the **Vm.get_statistics** method.

1.45.1 Methods

get_total_ram_size(*self*)

Return total RAM size in bytes.

Return Value

An integer containing the total RAM size in bytes.

get_usage_ram_size(*self*)

Return the size of RAM currently in use, in bytes.

Return Value

An integer containing the RAM size currently in use.

get_free_ram_size(*self*)

Return free RAM size in bytes.

Return Value

An integer specifying free RAM size in bytes.

get_real_ram_size(*self*)

get_os_uptime(*self*)

Return the virtual machine uptime in seconds. The virtual machine uptime is counted from the date the counter was started. The date can be determined using the `VmConfig.get_uptime_start_date` method.

Return Value

A string containing the virtual machine uptime in seconds.

get_cpus_stats_count(*self*)

Return the number of `StatCpu` objects contained in this `Statistics` object. Each `StatCpu` object contains statistics for an individual CPU. Use the number returned to iterate through the object list and obtain individual objects using the `Statistics.get_cpu_stat` method.

Return Value

Integer. The number of `StatCpu` objects contained in this `Statistics` object.

get_cpu_stat(*self*, *nIndex*)

Return a `StatCpu` object specified by an index. To obtain the total number of object in the list, use the `Statistics.get_cpus_stats_count` method.

Parameters

nIndex: Integer. An index of an object in the list (begins with 0).

Return Value

A `StatCpu` object containing statistis for a given CPU.

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattribute__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.45.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.46 Class StatCpu

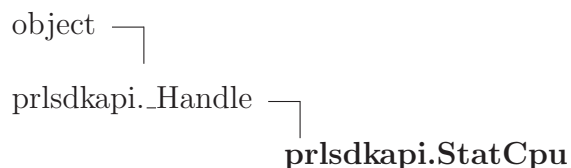

Provides methods for obtaining CPU statistics for the host computer or a virtual machine. To obtain the object, use the `Statistics.get_cpu_stat` method.

1.46.1 Methods

`get_cpu_usage(self)`

Return the CPU usage, in percents.

Return Value

An integer containing the CPU usage in percent.

`get_total_time(self)`

Return the CPU total time, in seconds.

Return Value

An integer containing the CPU total time, in seconds.

`get_user_time(self)`

Return the CPU user time in seconds

Return Value

An integer containing the CPU user time, in seconds.

`get_system_time(self)`

Return the CPU time, in seconds.

Return Value

An integer containing the CPU time in seconds.

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object


`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`,

`__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.46.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.47 Class License

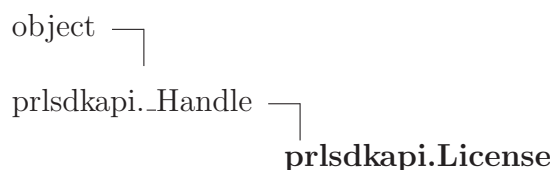

1.47.1 Methods

<code>is_valid(self)</code>
Determines whether the license is valid or not.
Return Value
Boolean. True indicates that the license is valid. False indicates otherwise.

<code>get_status(self)</code>
Determines the license status.
Return Value
A integer containing the license status code.

<code>get_license_key(self)</code>
Obtains the license key.
Return Value
A string containing the license key.

get_user_name(<i>self</i>)

Obtains the name of the user on the license.
--

Return Value

A string containing the name of the user.

get_company_name(<i>self</i>)

Obtains the name of the company on the license.

Return Value

A string containing the company name.

Inherited from prlsdkapi._Handle


`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.47.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

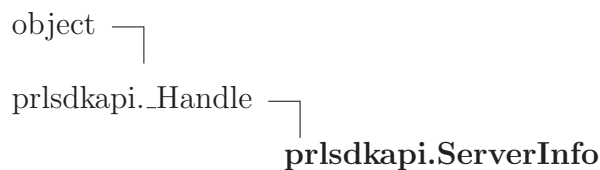1.48 Class *ServerInfo*

Provides methods for obtaining the Virtuozzo Service information.

1.48.1 Methods

get_host_name(<i>self</i>)

Return the name of the machine hosting the specified Virtuozzo Service.

get_os_version(<i>self</i>)

Returns the version of the host operating system.

get_product_version(<i>self</i>)

Return the Virtuozzo product version number.
--

get_cmd_port(<i>self</i>)

Return the port number at which the Virtuozzo Service is listening for requests.
--

get_application_mode(<i>self</i>)
--

get_server_uuid(<i>self</i>)

Return the host machine UUID (universally unique ID).

get_start_time(<i>self</i>)

get_start_time_monotonic(<i>self</i>)
--

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.48.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.49 Class NetService

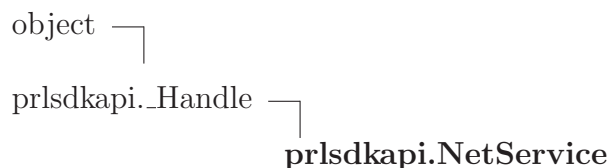

Provides methods for obtaining the Virtuozzo Service network status information.

1.49.1 Methods

<code>get_status(self)</code>

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.49.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.50 Class LoginResponse



Contains information returned as a result of a successful Virtuozzo Service login operation.

1.50.1 Methods

get_session_uuid(<i>self</i>)

Returns the session UUID string (used to restore a session).
--

get_running_task_count(<i>self</i>)
--

Return the total number of running tasks.

get_running_task_by_index(<i>self</i>, <i>nIndex</i>)
--

Obtain the RunningTask object containing information about a running task.
--

get_server_uuid(<i>self</i>)

Return the host machine UUID.

get_host_os_version(<i>self</i>)

Return the host OS version.

get_product_version(<i>self</i>)

Return the Virtuozzo product version number.
--

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.50.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.51 Class **RunningTask**

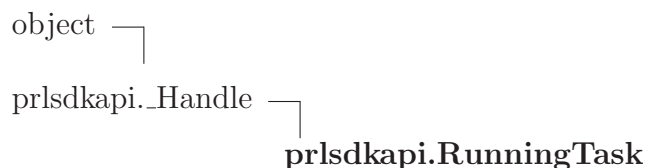

The `RunningTask` class is used to recover from a lost Virtuozzo Service connection. It allows to attach to an existing task that was started in the previous session and is still running inside the Virtuozzo Service.

1.51.1 Methods

<code>get_task_uuid(self)</code>

Return the task UUID (universally unique ID).

<code>get_task_type(self)</code>

Determine the task type.

<code>get_task_parameters_as_string(self)</code>

Return task parameters as a string.

Inherited from `prlsdkapi.Handle`

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from `object`

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.51.2 Properties

Name	Description
<i>Inherited from <code>object</code></i>	
<code>__class__</code>	

1.52 Class OsesMatrix

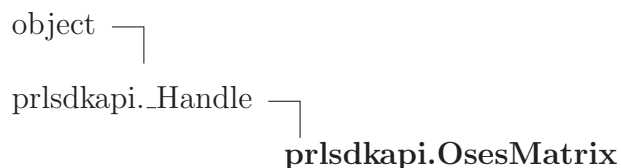

1.52.1 Methods

get_supported_oses_types(*self*)

get_supported_oses_versions(*self*, *nGuestOsType*)

get_default_os_version(*self*, *nGuestOsType*)

get_support_type(*self*, *nGuestOsType*, *nGuestOSVersion*)

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.52.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.53 Class ProblemReport



1.53.1 Methods

```
set_user_name(self, sNewUserName)
```

```
get_user_name(self)
```

```
set_user_email(self, sNewUserEmail)
```

```
get_user_email(self)
```

```
set_description(self, sNewDescription)
```

```
get_description(self)
```

```
set_type(self, nReportType)
```

```
get_type(self)
```

Overrides: prlsdkapi._Handle.get_type

```
set_reason(self, nReportReason)
```

```
get_reason(self)
```

```
get_scheme(self)
```

```
get_archive_file_name(self)
```

```
get_data(self)
```

```
as_string(self)
```

```
assembly(self, nFlags)
```

```
send(self, bUseProxy, sProxyHost, nProxyPort, sProxyUserLogin,  
sProxyUserPasswd, nProblemSendTimeout, nReserved)
```

Inherited from prlsdkapi._Handle

```
__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),  
reg_event_handler(), unreg_event_handler()
```

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`,
`__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.53.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.54 Class *ApplianceConfig***1.54.1 Methods**

`__init__(self, handle=0)`
`x.__init__(...)` initializes `x`; see `help(type(x))` for signature
 Overrides: `object.__init__` `exitit` (inherited documentation)

`create(self)`

Inherited from prlsdkapi.Handle

`__del__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`,
`reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`,
`__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.54.2 Properties

continued on next page

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.55 Class *OfflineManageService*



1.55.1 Methods

`create(self)`

`get_name(self)`

`set_name(self, sName)`

`get_port(self)`

`set_port(self, nPort)`

`is_used_by_default(self)`

`set_used_by_default(self, bDefault)`

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.55.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.56 Class *NetworkShapingEntry*



1.56.1 Methods

<code>create(self, nClassId, nTotalRate)</code>

<code>get_class_id(self)</code>

<code>set_class_id(self, nClassId)</code>

<code>get_total_rate(self)</code>

<code>set_total_rate(self, nTotalRate)</code>

<code>set_device(self, sDev)</code>

<code>get_device(self)</code>

<code>set_rate(self, nRate)</code>

<code>get_rate(self)</code>

<code>set_rate_mpu(self, nRateMPU)</code>

<code>get_rate_mpu(self)</code>

Inherited from prlsdkapi._Handle

`--del--()`, `--init--()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`,

get_type(), reg_event_handler(), unreg_event_handler()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.56.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.57 Class NetworkShapingConfig



1.57.1 Methods

<code>is_enabled(self)</code>
<code>set_enabled(self, bEnabled)</code>
<code>get_network_shaping_list(self)</code>
<code>set_network_shaping_list(self, hList)</code>
<code>get_network_device_bandwidth_list(self)</code>
<code>set_network_device_bandwidth_list(self, hList)</code>

Inherited from prlsdkapi.Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
get_type(), reg_event_handler(), unreg_event_handler()


Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--hash--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`,
`--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

1.57.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class--</code>	

1.58 Class NetworkClass

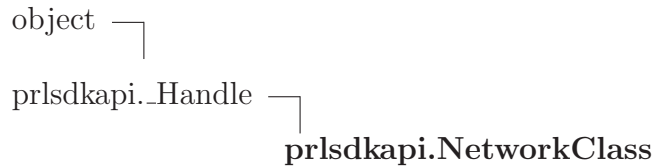

1.58.1 Methods

`create(self, nClassId)`

`get_class_id(self)`

`set_class_id(self, nClassId)`

`get_network_list(self)`

`set_network_list(self, hNetworkList)`

Inherited from prlsdkapi._Handle

`--del--()`, `--init--()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`,
`get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`--delattr--()`, `--format--()`, `--getattribute--()`, `--hash--()`, `--new--()`, `--reduce--()`, `--reduce_ex--()`,
`--repr--()`, `--setattr--()`, `--sizeof--()`, `--str--()`, `--subclasshook--()`

1.58.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.59 Class *NetworkRate*

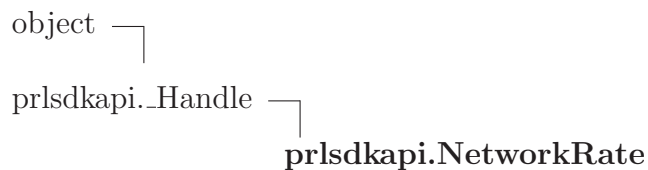

1.59.1 Methods

create (<i>self</i> , <i>nClassId</i> , <i>nRate</i>)
--

get_class_id (<i>self</i>)

get_rate (<i>self</i>)

Inherited from prlsdkapi.Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
get_type(), reg_event_handler(), unreg_event_handler()


Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.59.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.60 Class CtTemplate

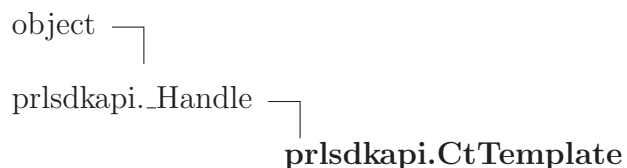

1.60.1 Methods

<code>get_name(<i>self</i>)</code>

<code>get_type(<i>self</i>)</code>

Overrides: <code>prlsdkapi.Handle.get_type</code>

<code>get_description(<i>self</i>)</code>

<code>get_version(<i>self</i>)</code>

<code>get_os_type(<i>self</i>)</code>

<code>get_os_version(<i>self</i>)</code>
--

<code>get_os_template(<i>self</i>)</code>

<code>get_cpu_mode(<i>self</i>)</code>
--

<code>is_cached(<i>self</i>)</code>

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.60.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.61 Class *UsbIdentity*

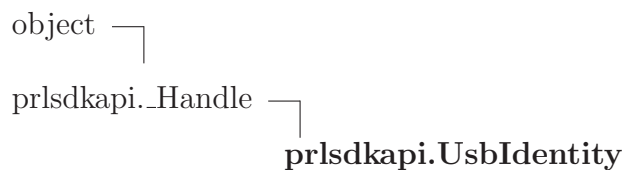

1.61.1 Methods

<code>get_system_name(<i>self</i>)</code>

<code>get_friendly_name(<i>self</i>)</code>

<code>get_vm_uuid_association(<i>self</i>)</code>

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.61.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.62 Class FirewallRule

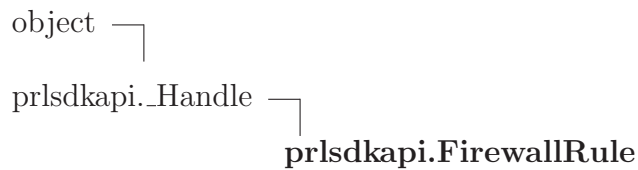

1.62.1 Methods

```
__init__(self, handle=0)
```

x.**__init__**(...) initializes *x*; see help(type(*x*)) for signature

Overrides: object.**__init__** extit(inherited documentation)

```
create(self)
```

```
get_local_port(self)
```

```
set_local_port(self, nPort)
```

```
get_remote_port(self)
```

```
set_remote_port(self, nPort)
```

```
get_protocol(self)
```

```
set_protocol(self, sProtocol)
```

```
get_local_net_address(self)
```

```
set_local_net_address(self, sAddr)
```

```
get_remote_net_address(self)
```

```
set_remote_net_address(self, sAddr)
```

Inherited from prlsdkapi.Handle


__del__(), **add_ref**(), **free**(), **from_string**(), **get_handle_type**(), **get_package_id**(), **get_type**(), **reg_event_handler**(), **unreg_event_handler**()

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.62.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

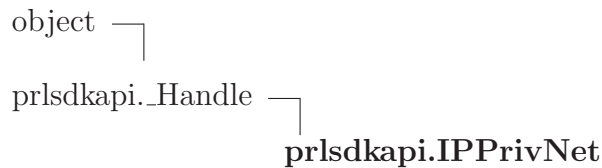1.63 Class IPPrivNet**1.63.1 Methods**

<code>create(<i>self</i>)</code>

<code>get_name(<i>self</i>)</code>

<code>set_net_addresses(<i>self</i>, <i>NetAddresses</i>)</code>
--

<code>get_net_addresses(<i>self</i>)</code>

<code>set_name(<i>self</i>, <i>sName</i>)</code>
--

<code>is_global(<i>self</i>)</code>

<code>set_global(<i>self</i>, <i>bGlobal</i>)</code>
--

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`--delattr__()`, `--format__()`, `--getattribute__()`, `--hash__()`, `--new__()`, `--reduce__()`, `--reduce_ex__()`,
`--repr__()`, `--setattr__()`, `--sizeof__()`, `--str__()`, `--subclasshook__()`

1.63.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>--class__</code>	

1.64 Class *PluginInfo*

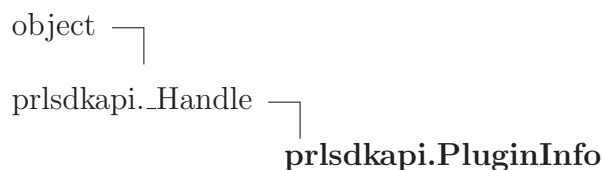

1.64.1 Methods

<code>get_vendor(<i>self</i>)</code>
<code>get_copyright(<i>self</i>)</code>
<code>get_short_description(<i>self</i>)</code>
<code>get_long_description(<i>self</i>)</code>
<code>get_version(<i>self</i>)</code>
<code>get_id(<i>self</i>)</code>

Inherited from prlsdkapi.Handle

`--del__()`, `--init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`,
`get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`--delattr__()`, `--format__()`, `--getattribute__()`, `--hash__()`, `--new__()`, `--reduce__()`, `--reduce_ex__()`,
`--repr__()`, `--setattr__()`, `--sizeof__()`, `--str__()`, `--subclasshook__()`

1.64.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.65 Class BackupResult



1.65.1 Methods

get_backup_uuid(<i>self</i>)

Inherited from prlsdkapi._Handle

__del__(), __init__(), add_ref(), free(), from_string(), get_handle_type(), get_package_id(),
get_type(), reg_event_handler(), unreg_event_handler()

Inherited from object

__delattr__(), __format__(), __getattr__(), __hash__(), __new__(), __reduce__(), __reduce_ex__(),
__repr__(), __setattr__(), __sizeof__(), __str__(), __subclasshook__()

1.65.2 Properties

Name	Description
<i>Inherited from object</i>	
__class__	

1.66 Class NetworkShapingBandwidthEntry



1.66.1 Methods

create (<i>self</i> , <i>sDev</i> , <i>nBandwidth</i>)

set_device (<i>self</i> , <i>sDev</i>)

get_device (<i>self</i>)

set_bandwidth (<i>self</i> , <i>nBandwidth</i>)
--

get_bandwidth (<i>self</i>)

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.66.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.67 Class CpuFeatures

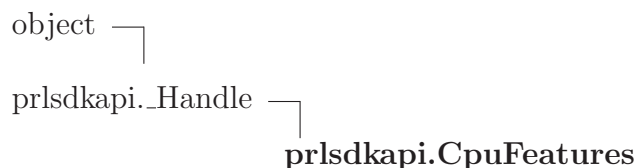

1.67.1 Methods

```
__init__(self, handle=0)
```

x.**__init__**(...) initializes *x*; see `help(type(x))` for signature

Overrides: `object.__init__` `exitit`(inherited documentation)

```
create(self)
```

```
get_value(self, nId)
```

```
set_value(self, nId, nValue)
```

Inherited from prlsdkapi.Handle

`__del__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattribute__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.67.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.68 Class CPUPool

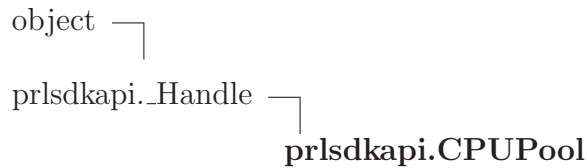

1.68.1 Methods

`get_vendor(self)`

`get_name(self)`

`get_cpu_features_mask(self)`

Inherited from prlsdkapi.Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.68.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.69 Class Disk

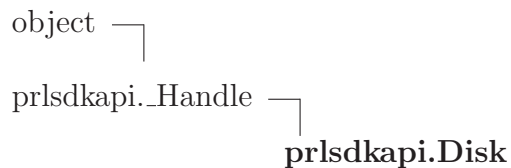

Provides methods for creating, configuring, and maintaining Virtuozzo virtual disks.

1.69.1 Methods

`open_disk_local(self, pDiskName, OpenFlags, hPolicyList)`

`wait_for_completion(self)`

`get_disk_info(self, pDiskParameters)`

Inherited from prlsdkapi._Handle


`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattr__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.69.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

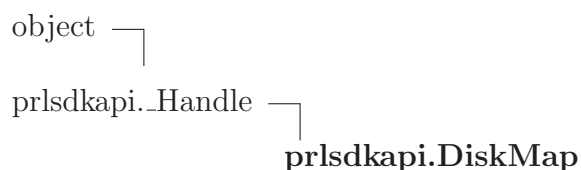1.70 Class *DiskMap***1.70.1 Methods**

`get_size(self)`

`get_granularity(self)`

`read(self)`

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`


Inherited from object

`__delattr__()`, `__format__()`, `__getattribute__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.70.2 Properties

Name	Description
<i>Inherited from object</i>	
<code>__class__</code>	

1.71 Class VcmmdConfig

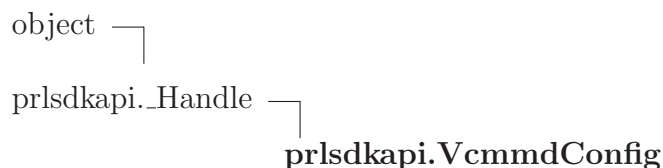

1.71.1 Methods

<code>set_policy(self, sPolicy)</code>
--

<code>get_policy(self)</code>

Inherited from prlsdkapi._Handle

`__del__()`, `__init__()`, `add_ref()`, `free()`, `from_string()`, `get_handle_type()`, `get_package_id()`, `get_type()`, `reg_event_handler()`, `unreg_event_handler()`

Inherited from object

`__delattr__()`, `__format__()`, `__getattribute__()`, `__hash__()`, `__new__()`, `__reduce__()`, `__reduce_ex__()`, `__repr__()`, `__setattr__()`, `__sizeof__()`, `__str__()`, `__subclasshook__()`

1.71.2 Properties

Name	Description
<i>Inherited from object</i>	

continued on next page

Name	Description
__class__	

1.72 Class IoDisplayScreenSize

1.72.1 Methods

<code>__init__(self)</code>

<code>to_list(self)</code>

<code>send_key_event(self, hVm, key_list, ev=255, delay=250)</code>

<code>send_key_event_ex(self, hVm, key, ev=255, delay=250)</code>

<code>display_set_configuration(self, hVm, config_list)</code>
--

2 Module prlsdkapi.prlsdk

2.1 Modules

- **consts** (*Section 3, p. 236*)
- **errors** (*Section 4, p. 311*)

2.2 Functions

DeinitializeSDK(...)
DeinitializeSDK
GetSDKLibraryPath(...)
GetSDKLibraryPath
InitializeSDK(...)
InitializeSDK
InitializeSDKEx(...)
InitializeSDKEx
IsSDKInitialized(...)
IsSDKInitialized
PrlAcl_GetAccessForOthers(...)
Obtain the virtual machine access rights information.
PrlAcl_GetOwnerName(...)
Determine the virtual machine owner name.
PrlAcl_IsAllowed(...)
Determine if the current user is authorized to perform a specified task on the virtual machine.
PrlAcl_IsCurrentSessionOwner(...)
Determine if the current user is the owner of the virtual machine.

PrlAcl_SetAccessForOthers(...)

Set access rights on a virtual machine.

PrlApi_CreateHandlesList(...)**PrlApi_CreateOpTypeList(...)****PrlApi_CreateProblemReport(...)**

PrlApi_CreateProblemReport

PrlApi_CreateStringsList(...)**PrlApi_Deinit(...)**

De-initializes the library.

PrlApi_GetAppMode(...)

Return the Parallels API application mode.

PrlApi_GetCrashDumpsPath(...)

Return the name and path of the directory where Parallels crash dumps are stored.

PrlApi_GetDefaultOsVersion(...)

Return the default guest OS version for the specified guest OS type.

PrlApi_GetMessageType(...)

Evaluate the specified error code and return its classification (warning, question, info, etc.).

PrlApi_GetRecommendMinVmMem(...)

Return recommended minimal memory size for guest OS defined in the OS version parameter.

PrlApi_GetResultDescription(...)

Evaluate a return code and return a description of the problem.

PrlApi_GetSupportedOsesTypes(...)

Determine the supported OS types for the current API mode.

PrlApi_GetSupportedOsesVersions(...)

PrlApi_GetSupportedOsesVersions

PrlApi_GetVersion(...)

Return the Parallels API version number.

PrlApi_GuestToString(...)

Return string representation of GuestOS

PrlApi_Init(...)

Initialize the Parallels API library.

PrlApi_InitCrashHandler(...)

Initiate the standard Parallels crash dump handler.

PrlApi_InitEx(...)

Initialize the Parallels API library (extended version).

PrlApi_MsgCanBeIgnored(...)

Evaluate an error code and determine if the error is critical.

PrlApi_SendPackedProblemReport(...)

PrlApi_SendPackedProblemReport

PrlApi_SendProblemReport(...)

Send a problem report to the Parallels support server.

PrlApi_SwitchConsoleLogging(...)

PrlApi_SwitchConsoleLogging

PrlAppliance_Create(...)

PrlAppliance_Create

PrlBackupResult_GetBackupUuid(...)

PrlBackupResult_GetBackupUuid

PrlBootDev_GetIndex(...)

Obtain the boot device index.

PrlBootDev_GetSequenceIndex(...)

Obtain the sequence index of the boot device in the boot priority list.

PrlBootDev_GetType(...)

Return the boot device type.

PrlBootDev_IsInUse(...)

Determine whether the boot device is enabled or disabled.

PrlBootDev_Remove(...)

Remove the boot device from the boot priority list.

PrlBootDev_SetInUse(...)

Enable or disable the boot device in the boot priority list.

PrlBootDev_SetIndex(...)

Set the boot device index.

PrlBootDev_SetSequenceIndex(...)

Assign a sequence index to a boot device in the boot priority list.

PrlBootDev_SetType(...)

Set the boot device type.

PrlCPUPool_GetCpuFeaturesMask(...)

PrlCPUPool_GetCpuFeaturesMask

PrlCPUPool_GetName(...)

PrlCPUPool_GetName

PrlCPUPool_GetVendor(...)

PrlCPUPool_GetVendor

PrlCpuFeatures_Create(...)

PrlCpuFeatures_Create

PrlCpuFeatures_GetValue(...)

PrlCpuFeatures_GetValue

PrlCpuFeatures_SetValue(...)

PrlCpuFeatures_SetValue

PrlCtTemplate_GetCpuMode(...)

PrlCtTemplate_GetCpuMode

PrlCtTemplate_GetDescription(...)

PrlCtTemplate_GetDescription

PrlCtTemplate_GetName(...)

PrlCtTemplate_GetName

PrlCtTemplate_GetOsTemplate(...)

PrlCtTemplate_GetOsTemplate

PrlCtTemplate_GetOsType(...)

PrlCtTemplate_GetOsType

PrlCtTemplate_GetOsVersion(...)

PrlCtTemplate_GetOsVersion

PrlCtTemplate_GetType(...)

PrlCtTemplate_GetType

PrlCtTemplate_GetVersion(...)

PrlCtTemplate_GetVersion

PrlCtTemplate_IsCached(...)

PrlCtTemplate_IsCached

PrlCt_Reinstall(...)

PrlCt_Reinstall

PrlDbg_EventTypeToString(...)

Return a readable string representation of the specified event type.

PrlDbg_GetHandlesNum(...)

Determine how many handles were instantiated in the API library.

PrlDbg_HandleTypeToString(...)

Return a readable string representation of the specified handle type.

PrlDbg_PrlResultToString(...)Return a readable string representation of the **Result** value.**PrlDiskMap_GetGranularity(...)**

PrlDiskMap_GetGranularity

PrlDiskMap_GetSize(...)

PrlDiskMap_GetSize

PrlDiskMap_Read(...)

PrlDiskMap_Read

PrlDisk_GetDiskInfo(...)

PrlDisk_GetDiskInfo

PrlDisk_OpenDisk_Local(...)

PrlDisk_OpenDisk_Local

PrlDisk_WaitForCompletion(...)

PrlDisk_WaitForCompletion

PrlDispCfg_ArePluginsEnabled(...)

PrlDispCfg_ArePluginsEnabled

PrlDispCfg_CanChangeDefaultSettings(...)

Determine if new users have the right to modify Parallels Service preferences.

PrlDispCfg_EnablePlugins(...)

PrlDispCfg_EnablePlugins

PrlDispCfg_GetBackupTimeout(...)

PrlDispCfg_GetBackupTimeout

PrlDispCfg_GetBackupUserLogin(...)

Return the backup user login name.

PrlDispCfg_GetConfirmationsList(...)

Obtain a list of operations that require administrator confirmation.

PrlDispCfg_GetCpuFeaturesMaskEx(...)

PrlDispCfg_GetCpuFeaturesMaskEx

PrlDispCfg_GetCpuPool(...)

PrlDispCfg_GetCpuPool

PrlDispCfg_GetDefaultBackupDirectory(...)

Return the name and path of the default backup directory.

PrlDispCfg_GetDefaultBackupServer(...)

Return the default backup server host name or IP address.

PrlDispCfg_GetDefaultCtDir(...)

PrlDispCfg_GetDefaultCtDir

PrlDispCfg_GetDefaultVNCHostName(...)

Return the default VNC host name for the Parallels Service.

PrlDispCfg_GetDefaultVmDir(...)

Obtain name and path of the directory in which new virtual machines are created by default.

PrlDispCfg_GetMaxReservMemLimit(...)

Return the maximum amount of memory that can be reserved for Parallels Service operation.

PrlDispCfg_GetMaxVmMem(...)

Determine the maximum memory size that can be allocated to an individual virtual machine.

PrlDispCfg_GetMinReservMemLimit(...)

Return the minimum amount of physical memory that must be reserved for Parallels Service operation.

PrlDispCfg_GetMinSecurityLevel(...)

Determine the lowest allowable security level that can be used to connect to the Parallels Service.

PrlDispCfg_GetMinVmMem(...)

Determine the minimum required memory size that must be allocated to an individual virtual machine.

PrlDispCfg_GetRecommendMaxVmMem(...)

Determine the recommended memory size for an individual virtual machine.

PrlDispCfg_GetReservedMemLimit(...)

Determine the amount of physical memory reserved for Parallels Service operation.

PrlDispCfg_GetUsbIdentity(...)

PrlDispCfg_GetUsbIdentity

PrlDispCfg_GetUsbIdentityCount(...)

PrlDispCfg_GetUsbIdentityCount

PrlDispCfg_GetVNCBasePort(...)

Obtain the currently set base VNC port number.

PrlDispCfg_GetVmCpuLimitType(...)

PrlDispCfg_GetVmCpuLimitType

PrlDispCfg_IsAdjustMemAuto(...)

Determine whether memory allocation for Parallels Service is performed automatically or manually.

PrlDispCfg_IsAllowMultiplePMC(...)

PrlDispCfg_IsAllowMultiplePMC

PrlDispCfg_IsBackupUserPasswordEnabled(...)

Determine if the backup user password is enabled.

PrlDispCfg_IsLogRotationEnabled(...)

PrlDispCfg_IsLogRotationEnabled

PrlDispCfg_IsSendStatisticReport(...)

Determine whether the statistics reports (CEP) mechanism is activated.

PrlDispCfg_IsVerboseLogEnabled(...)

Determine whether the verbose log level is configured for dispatcher and virtual machines processes.

PrlDispCfg_SetAdjustMemAuto(...)

Set the Parallels Service memory allocation mode (automatic or manual).

PrlDispCfg_SetAllowMultiplePMC(...)

PrlDispCfg_SetAllowMultiplePMC

PrlDispCfg_SetBackupTimeout(...)

PrlDispCfg_SetBackupTimeout

PrlDispCfg_SetBackupUserLogin(...)

Set the backup user login.

PrlDispCfg_SetBackupUserPassword(...)

Set the backup user password.

PrlDispCfg_SetBackupUserPasswordEnabled(...)

Enable or disable the backup user password.

PrlDispCfg_SetCanChangeDefaultSettings(...)

Grant or deny a permission to new users to modify Parallels Service preferences.

PrlDispCfg_SetConfirmationsList(...)

Set the list of operations that require administrator confirmation.

PrlDispCfg_SetCpuFeaturesMaskEx(...)

PrlDispCfg_SetCpuFeaturesMaskEx

PrlDispCfg_SetDefaultBackupDirectory(...)

Set name and path of the default backup directory.

PrlDispCfg_SetDefaultBackupServer(...)

Set the default backup server host name or IP address.

PrlDispCfg_SetDefaultVNCHostName(...)

Set the base VNC host name.

PrlDispCfg_SetLogRotationEnabled(...)

PrlDispCfg_SetLogRotationEnabled

PrlDispCfg_SetMaxReservMemLimit(...)

Set the upper limit of the memory size that can be reserved for Parallels Service operation.

PrlDispCfg_SetMaxVmMem(...)

Set the maximum memory size that can be allocated to an individual virtual machine.

PrlDispCfg_SetMinReservMemLimit(...)

Set the lower limit of the memory size that must be reserved for Parallels Service operation.

PrlDispCfg_SetMinSecurityLevel(...)

Set the lowest allowable security level that can be used to connect to the Parallels Service.

PrlDispCfg_SetMinVmMem(...)

Set the minimum required memory size that must be allocated to an individual virtual machine.

PrlDispCfg_SetRecommendMaxVmMem(...)

Set recommended memory size for an individual virtual machine.

PrlDispCfg_SetReservedMemLimit(...)

Set the amount of memory that will be allocated for Parallels Service operation.

PrlDispCfg_SetSendStatisticReport(...)

Turn on/off the mechanism of sending statistics reports (CEP).

PrlDispCfg_SetUsbIdentAssociation(...)

PrlDispCfg_SetUsbIdentAssociation

PrlDispCfg_SetVNCBasePort(...)

Set the base VNC port number.

PrlDispCfg_SetVerboseLogEnabled(...)

Enable or disable the verbose log level for dispatcher and virtual machines processes.

PrlDispCfg_SetVmCpuLimitType(...)
--

PrlDispCfg_SetVmCpuLimitType

PrlEvent_CanBeIgnored(...)

PrlEvent_CreateAnswerEvent(...)
--

PrlEvent_FromString(...)

PrlEvent_FromString

PrlEvent_GetErrCode(...)

PrlEvent_GetErrString(...)

PrlEvent_GetIssuerId(...)

PrlEvent_GetIssuerType(...)

PrlEvent_GetJob(...)

PrlEvent_GetParam(...)

PrlEvent_GetParamByName(...)

PrlEvent_GetParamsCount(...)

PrlEvent_GetServer(...)

PrlEvent_GetType(...)

PrlEvent_GetVm(...)

PrlEvent_IsAnswerRequired(...)

PrlEvtPrm_GetName(...)

PrlEvtPrm_GetType(...)

PrlEvtPrm_ToBoolean(...)

PrlEvtPrm_ToCData(...)

PrlEvtPrm_ToHandle(...)

PrlEvtPrm_ToInt32(...)

PrlEvtPrm_ToInt64(...)

PrlEvtPrm_ToInt64

PrlEvtPrm_ToString(...)

PrlEvtPrm_ToUint32(...)

PrlEvtPrm_ToUint64(...)

PrlEvtPrm_ToUint64

PrlFirewallRule_Create(...)

PrlFirewallRule_Create

PrlFirewallRule_GetLocalNetAddress(...)
--

PrlFirewallRule_GetLocalNetAddress

PrlFirewallRule_GetLocalPort(...)
--

PrlFirewallRule_GetLocalPort

PrlFirewallRule_GetProtocol(...)

PrlFirewallRule_GetProtocol

PrlFirewallRule_GetRemoteNetAddress(...)

PrlFirewallRule_GetRemoteNetAddress

PrlFirewallRule_GetRemotePort(...)

PrlFirewallRule_GetRemotePort

PrlFirewallRule_SetLocalNetAddress(...)
--

PrlFirewallRule_SetLocalNetAddress

PrlFirewallRule_SetLocalPort(...)
--

PrlFirewallRule_SetLocalPort

PrlFirewallRule_SetProtocol(...)

PrlFirewallRule_SetProtocol

PrlFirewallRule_SetRemoteNetAddress(...)

PrlFirewallRule_SetRemoteNetAddress

PrlFirewallRule_SetRemotePort(...)

PrlFirewallRule_SetRemotePort

PrlFoundVmInfo_GetConfigPath(...)
--

Obtains the name and path of the directory containing the virtual machine files.
--

PrlFoundVmInfo_GetName(...)

Obtains the virtual machine name.

PrlFoundVmInfo_GetOSVersion(...)

Obtains the guest OS version information.

PrlFoundVmInfo_IsOldConfig(...)
--

Determines whether the virtual machine configuration is an older version.

PrlFoundVmInfo_IsTemplate(...)

Determines if the virtual machine is a template.
--

PrlFsEntry_GetAbsolutePath(...)
--

Return the specified file system entry absolute path.

PrlFsEntry_GetLastModifiedDate(...)
--

Return the date on which the specified file system entry was last modified.

PrlFsEntry_GetPermissions(...)

Return the specified file system entry permissions (read, write, execute) for the current user.

PrlFsEntry_GetRelativeName(...)

Return the file system entry relative name.

PrlFsEntry_GetSize(...)

Return the file system entry size.

PrlFsEntry_GetType(...)

Return the file system entry type (file, directory, drive).

PrlFsInfo_GetChildEntriesCount(...)

Determine the number of child entries for the specified remote file system entry.

PrlFsInfo_GetChildEntry(...)

Obtain the FsEntry object containing a child entry information.

PrlFsInfo_GetFsType(...)

Determine the file system type of the file system entry.

PrlFsInfo_GetParentEntry(...)

Obtain the FsEntry object containing the parent file system entry info.

PrlFsInfo_GetType(...)

Determine the basic type of the file system entry.

PrlHandle_AddRef(...)**PrlHandle_Free(...)****PrlHandle_FromString(...)**

PrlHandle_FromString

PrlHandle_GetPackageId(...)

PrlHandle_GetPackageId

PrlHandle_GetType(...)

PrlHandle_RegEventHandler(...)

PrlHandle_RegEventHandler

PrlHandle_UnregEventHandler(...)

PrlHandle_UnregEventHandler

PrlHndlList_AddItem(...)**PrlHndlList_GetItem(...)****PrlHndlList_GetItemsCount(...)****PrlHndlList_RemoveItem(...)****PrlIPPrivNet_Create(...)**

PrlIPPrivNet_Create

PrlIPPrivNet_GetName(...)

PrlIPPrivNet_GetName

PrlIPPrivNet_GetNetAddresses(...)

PrlIPPrivNet_GetNetAddresses

PrlIPPrivNet_IsGlobal(...)

PrlIPPrivNet_IsGlobal

PrlIPPrivNet_SetGlobal(...)

PrlIPPrivNet_SetGlobal

PrlIPPrivNet_SetName(...)

PrlIPPrivNet_SetName

PrlIPPrivNet_SetNetAddresses(...)

PrlIPPrivNet_SetNetAddresses

PrlJob_Cancel(...)

Cancel the specified job.

PrlJob_GetError(...)

Provide additional job error information.

PrlJob_GetOpCode(...)

Return the job operation code.

PrlJob_GetProgress(...)

Obtain the job progress info.

PrlJob_GetResult(...)

Obtain the **Result** object containing the results returned by the job.

PrlJob_GetRetCode(...)

Obtain the return code from the job object.

PrlJob_GetStatus(...)

Obtain the current job status.

PrlJob_IsRequestWasSent(...)

PrlJob_IsRequestWasSent

PrlJob_Wait(...)

Suspend the main thread and wait for the job to finish.

PrlLic_GetCompanyName(...)

Obtains the name of the company on the license.

PrlLic_GetLicenseKey(...)

Obtains the liecense key.

PrlLic_GetStatus(...)

Determines the license status.

PrlLic_GetUserName(...)

Obtains the name of the user on the license.

PrLic_IsValid(...)

Determines whether the license is valid or not.

PrLoginResponse_GetHostOsVersion(...)

Return the host OS version.

PrLoginResponse_GetProductVersion(...)

Return the Parallels product version number.

PrLoginResponse_GetRunningTaskByIndex(...)

Obtain the `RunningTask` object containing information about a running task.

PrLoginResponse_GetRunningTaskCount(...)

Return the total number of running tasks.

PrLoginResponse_GetServerUuid(...)

Return the host machine UUID.

PrLoginResponse_GetSessionUuid(...)

Returns the session UUID string (used to restore a session).

PrNetSvc_GetStatus(...)**PrNetworkClass_Create(...)**

`PrNetworkClass_Create`

PrNetworkClass_GetClassId(...)

`PrNetworkClass_GetClassId`

PrNetworkClass_GetNetworkList(...)

`PrNetworkClass_GetNetworkList`

PrNetworkClass_SetClassId(...)

`PrNetworkClass_SetClassId`

PrNetworkClass_SetNetworkList(...)

`PrNetworkClass_SetNetworkList`

PrlNetworkRate_Create(...)

PrlNetworkRate_Create

PrlNetworkRate_GetClassId(...)

PrlNetworkRate_GetClassId

PrlNetworkRate_GetRate(...)

PrlNetworkRate_GetRate

PrlNetworkShapingBandwidthEntry_Create(...)

PrlNetworkShapingBandwidthEntry_Create

PrlNetworkShapingBandwidthEntry_GetBandwidth(...)

PrlNetworkShapingBandwidthEntry_GetBandwidth

PrlNetworkShapingBandwidthEntry_GetDevice(...)

PrlNetworkShapingBandwidthEntry_GetDevice

PrlNetworkShapingBandwidthEntry_SetBandwidth(...)

PrlNetworkShapingBandwidthEntry_SetBandwidth

PrlNetworkShapingBandwidthEntry_SetDevice(...)

PrlNetworkShapingBandwidthEntry_SetDevice

PrlNetworkShapingConfig_GetNetworkDeviceBandwidthList(...)

PrlNetworkShapingConfig_GetNetworkDeviceBandwidthList

PrlNetworkShapingConfig_GetNetworkShapingList(...)

PrlNetworkShapingConfig_GetNetworkShapingList

PrlNetworkShapingConfig_IsEnabled(...)

PrlNetworkShapingConfig_IsEnabled

PrlNetworkShapingConfig_SetEnabled(...)

PrlNetworkShapingConfig_SetEnabled

PrlNetworkShapingConfig_SetNetworkDeviceBandwidthList(...)

PrlNetworkShapingConfig_SetNetworkDeviceBandwidthList

PrlNetworkShapingConfig_SetNetworkShapingList(...)

PrlNetworkShapingConfig_SetNetworkShapingList

PrlNetworkShapingEntry_Create(...)

PrlNetworkShapingEntry_Create

PrlNetworkShapingEntry_GetClassId(...)

PrlNetworkShapingEntry_GetClassId

PrlNetworkShapingEntry_GetDevice(...)
--

PrlNetworkShapingEntry_GetDevice

PrlNetworkShapingEntry_GetRate(...)
--

PrlNetworkShapingEntry_GetRate

PrlNetworkShapingEntry_GetRateMPU(...)

PrlNetworkShapingEntry_GetRateMPU

PrlNetworkShapingEntry_GetTotalRate(...)

PrlNetworkShapingEntry_GetTotalRate

PrlNetworkShapingEntry_SetClassId(...)

PrlNetworkShapingEntry_SetClassId

PrlNetworkShapingEntry_SetDevice(...)
--

PrlNetworkShapingEntry_SetDevice

PrlNetworkShapingEntry_SetRate(...)
--

PrlNetworkShapingEntry_SetRate

PrlNetworkShapingEntry_SetRateMPU(...)

PrlNetworkShapingEntry_SetRateMPU

PrlNetworkShapingEntry_SetTotalRate(...)

PrlNetworkShapingEntry_SetTotalRate

PrlOffmgmtService_Create(...)

PrlOffmgmtService_Create

PrlOffmgmtService_GetName(...)

PrlOffmgmtService_GetName

PrlOffmgmtService_GetPort(...)

PrlOffmgmtService_GetPort

PrlOffmgmtService_IsUsedByDefault(...)

PrlOffmgmtService_IsUsedByDefault

PrlOffmgmtService_SetName(...)

PrlOffmgmtService_SetName

PrlOffmgmtService_SetPort(...)

PrlOffmgmtService_SetPort

PrlOffmgmtService_SetUsedByDefault(...)

PrlOffmgmtService_SetUsedByDefault

PrlOpTypeList_GetItem(...)

PrlOpTypeList_GetItem

PrlOpTypeList_GetItemsCount(...)

PrlOpTypeList_GetItemsCount

PrlOpTypeList_GetTypeSize(...)

PrlOpTypeList_GetTypeSize

PrlOpTypeList_RemoveItem(...)

PrlOpTypeList_RemoveItem

PrlOsesMatrix_GetDefaultOsVersion(...)

PrlOsesMatrix_GetDefaultOsVersion

PrlOsesMatrix_GetSupportType(...)

PrlOsesMatrix_GetSupportType

PrlOsesMatrix_GetSupportedOsesTypes(...)

PrlOsesMatrix_GetSupportedOsesTypes

PrlOsesMatrix_GetSupportedOsesVersions(...)

PrlOsesMatrix_GetSupportedOsesVersions

PrlPluginInfo_GetCopyright(...)

PrlPluginInfo_GetCopyright

PrlPluginInfo_GetId(...)

PrlPluginInfo_GetId

PrlPluginInfo_GetLongDescription(...)

PrlPluginInfo_GetLongDescription

PrlPluginInfo_GetShortDescription(...)

PrlPluginInfo_GetShortDescription

PrlPluginInfo_GetVendor(...)

PrlPluginInfo_GetVendor

PrlPluginInfo_GetVersion(...)

PrlPluginInfo_GetVersion

PrlPortFwd_Create(...)

Create a new instance of the PortForward class.

PrlPortFwd_GetIncomingPort(...)

Return the incoming port.

PrlPortFwd_GetRedirectIPAddress(...)

Return the redirect IP address of the specified port forward entry.

PrlPortFwd_GetRedirectPort(...)

Return the redirect port.

PrlPortFwd_GetRedirectVm(...)

PrlPortFwd_GetRedirectVm

PrlPortFwd_GetRuleName(...)

PrlPortFwd_GetRuleName

PrlPortFwd_SetIncomingPort(...)

Set the specified incoming port.

PrlPortFwd_SetRedirectIPAddress(...)

Set the specified port forward entry redirect IP address.

PrlPortFwd_SetRedirectPort(...)

Set the specified redirect port.

PrlPortFwd_SetRedirectVm(...)

PrlPortFwd_SetRedirectVm

PrlPortFwd_SetRuleName(...)

PrlPortFwd_SetRuleName

PrlReport_AsString(...)

PrlReport_AsString

PrlReport_Assembly(...)

PrlReport_Assembly

PrlReport_GetArchiveFileName(...)

PrlReport_GetArchiveFileName

PrlReport_GetData(...)

PrlReport_GetData

PrlReport_GetDescription(...)

PrlReport_GetDescription

PrlReport_GetReason(...)

PrlReport_GetReason

PrlReport_GetScheme(...)

PrlReport_GetScheme

PrlReport_GetType(...)

PrlReport_GetType

PrlReport_GetUserEmail(...)

PrlReport_GetUserEmail

PrlReport_GetUserName(...)

PrlReport_GetUserName

PrlReport_Send(...)

PrlReport_Send

PrlReport_SetDescription(...)

PrlReport_SetDescription

PrlReport_SetReason(...)

PrlReport_SetReason

PrlReport_SetType(...)

PrlReport_SetType

PrlReport_SetUserEmail(...)

PrlReport_SetUserEmail

PrlReport_SetUserName(...)

PrlReport_SetUserName

PrlResult_GetParam(...)

Obtain an object containing the results of the corresponding asynchronous operation.

PrlResult_GetParamAsString(...)

Obtain a string result from the Result object.

PrlResult_GetParamByIndex(...)

Obtain an object containing the results identified by index.

PrlResult_GetParamByIndexAsString(...)

Obtain a string result from the Result object identified by index.

PrlResult_GetParamsCount(...)

Determine the number of items (strings, objects) in the Result object.

PrlRunningTask_GetTaskParametersAsString(...)

Return task parameters as a string.

PrlRunningTask_GetTaskType(...)

Determine the task type.

PrlRunningTask_GetTaskUuid(...)

Return the task UUID (universally unique ID).

PrlShare_GetDescription(...)

Return the shared folder description.

PrlShare_GetName(...)

Return the shared folder name (as it appears in the guest OS).

PrlShare_GetPath(...)

Return the shared folder path.

PrlShare_IsEnabled(...)

Determine whether the share is enabled or not.

PrlShare_IsReadOnly(...)

Determine if the share is read-only.

PrlShare_Remove(...)

Remove the share from the virtual machine configuration.

PrlShare_SetDescription(...)

Set the shared folder description.

PrlShare_SetEnabled(...)

Enable the specified share.

PrlShare_SetName(...)

Set the share name (as it will appear in the guest OS).

PrlShare_SetPath(...)

Set the shared folder path.

PrlShare_SetReadOnly(...)

Make the shared folder read-only.

PrlSrvCfgDev_GetDeviceState(...)

Determine whether a virtual machine can directly use a PCI device through IOMMU technology.

PrlSrvCfgDev_GetId(...)

Obtain the device ID.

PrlSrvCfgDev_GetName(...)

Obtain the device name.

PrlSrvCfgDev_GetType(...)

Obtain the device type.

PrlSrvCfgDev_IsConnectedToVm(...)

Determine whether the device is connected to a virtual machine.

PrlSrvCfgDev_SetDeviceState(...)

Set whether a virtual machine can directly use a PCI device through IOMMU technology.

PrlSrvCfgHddPart_GetIndex(...)

Return the index of the hard disk partition.

PrlSrvCfgHddPart_GetName(...)

Return the hard disk partition name.

PrlSrvCfgHddPart_GetSize(...)

Return the hard disk partition size.

PrlSrvCfgHddPart_GetSysName(...)

Return the hard disk partition system name.

PrlSrvCfgHddPart_GetType(...)

Return a numerical code identifying the type of the partition.

PrlSrvCfgHddPart_IsActive(...)

Determine whether the disk partition is active or inactive.

PrlSrvCfgHddPart_IsInUse(...)

Determines whether the partition is in use (contains valid file system, being used for swap, etc.).

PrlSrvCfgHddPart_IsLogical(...)

Determine whether the specified partition is a logical partition.

PrlSrvCfgHdd_GetDevId(...)

Return the hard disk device id.

PrlSrvCfgHdd_GetDevName(...)

Return the hard disk device name.

PrlSrvCfgHdd_GetDevSize(...)

Return the size of the hard disk device.

PrlSrvCfgHdd_GetDiskIndex(...)

Return the index of a hard disk device.

PrlSrvCfgHdd_GetPart(...)

Obtain the HdPartition object identifying the specified hard disk partition.

PrlSrvCfgHdd_GetPartsCount(...)

Determine the number of partitions available on a hard drive.

PrlSrvCfgNet_GetDefaultGateway(...)

Obtain the default gateway address for the specified network adapter.

PrlSrvCfgNet_GetDefaultGatewayIPv6(...)

PrlSrvCfgNet_GetDefaultGatewayIPv6

PrlSrvCfgNet_GetDnsServers(...)

Obtain the list of addresses of DNS servers assigned to the specified network adapter.

PrlSrvCfgNet_GetMacAddress(...)

Return the MAC address of the specified network adapter.

PrlSrvCfgNet_GetNetAdapterType(...)

Return the network adapter type.

PrlSrvCfgNet_GetNetAddresses(...)

Obtain the list of network addresses (IP address/Subnet mask pairs) assigned to the network adapter.

PrlSrvCfgNet_GetSearchDomains(...)

Obtain a list of search domains assigned to the specified network adapter.

PrlSrvCfgNet_GetSysIndex(...)

Return the network adapter system index.

PrlSrvCfgNet_GetVlanTag(...)

Return the VLAN tag of the network adapter.

PrlSrvCfgNet_IsConfigureWithDhcp(...)

Determine whether the adapter network settings are configured through DHCP.

PrlSrvCfgNet_IsConfigureWithDhcpIPv6(...)

PrlSrvCfgNet_IsConfigureWithDhcpIPv6

PrlSrvCfgNet_IsEnabled(...)

Determine whether the adapter is enabled or disabled.

PrlSrvCfgPci_GetDeviceClass(...)**PrlSrvCfgPci_IsPrimaryDevice(...)**

PrlSrvCfgPci_IsPrimaryDevice

PrlSrvCfg_GetCpuCount(...)

Determine the number of CPUs in the host machine.

PrlSrvCfg_GetCpuFeaturesEx(...)

PrlSrvCfg_GetCpuFeaturesEx

PrlSrvCfg_GetCpuFeaturesMaskingCapabilities(...)

PrlSrvCfg_GetCpuFeaturesMaskingCapabilities

PrlSrvCfg_GetCpuHvt(...)

Determine the hardware virtualization type of the host CPU.

PrlSrvCfg_GetCpuMode(...)

Determine the CPU mode (32 bit or 64 bit) of the host machine.

PrlSrvCfg_GetCpuModel(...)

Determine the model of CPU of the host machine.

PrlSrvCfg_GetCpuSpeed(...)

Determine the host machine CPU speed.

PrlSrvCfg_GetDefaultGateway(...)

Obtain the global default gateway address of the specified host or guest.

PrlSrvCfg_GetDefaultGatewayIPv6(...)

PrlSrvCfg_GetDefaultGatewayIPv6

PrlSrvCfg_GetDnsServers(...)

Obtain the list of IP addresses of DNS servers for the host or guest.

PrlSrvCfg_GetFloppyDisk(...)

Obtain the `HostDevice` object containing information about a floppy disk drive on the host.

PrlSrvCfg_GetFloppyDisksCount(...)

Determine the number of floppy disk drives on the host.

PrlSrvCfg_GetGenericPciDevice(...)

Obtain the `HostDevice` object containing information about a PCI device installed on the host.

PrlSrvCfg_GetGenericPciDevicesCount(...)

Determine the number of PCI devices installed on the host.

PrlSrvCfg_GetGenericScsiDevice(...)

Obtain the `HostDevice` object containing information about a generic SCSI device.

PrlSrvCfg_GetGenericScsiDevicesCount(...)

Determine the number of generic SCSI devices installed on the host.

PrlSrvCfg_GetHardDisk(...)

Obtain the `HostHardDisk` object containing information about a hard disks drive on the host.

PrlSrvCfg_GetHardDisksCount(...)

Determine the number of hard disk drives on the host.

PrlSrvCfg_GetHostOsMajor(...)

Return the major version number of the host operating system.

PrlSrvCfg_GetHostOsMinor(...)

Return the minor version number of the host operating system.

PrlSrvCfg_GetHostOsStrPresentation(...)

Return the full host operating system information as a single string.

PrlSrvCfg_GetHostOsSubMinor(...)

Return the sub-minor version number of the host operating system.

PrlSrvCfg_GetHostOsType(...)

Return the host operating system type.

PrlSrvCfg_GetHostRamSize(...)

Determine the amount of memory (RAM) available on the host.

PrlSrvCfg_GetHostname(...)

Return the hostname of the specified host or guest.

PrlSrvCfg_GetMaxHostNetAdapters(...)

`PrlSrvCfg_GetMaxHostNetAdapters`

PrlSrvCfg_GetMaxVmNetAdapters(...)

`PrlSrvCfg_GetMaxVmNetAdapters`

PrlSrvCfg_GetNetAdapter(...)

Obtain the `HostNet` object containing information about a network adapter in the host or guest.

PrlSrvCfg_GetNetAdaptersCount(...)

Determine the number of network adapters available on the server.

PrlSrvCfg_GetOpticalDisk(...)

Obtain the `HostDevice` object containing information about an optical disk drive on the host.

PrlSrvCfg_GetOpticalDisksCount(...)

Determine the number of optical disk drives on the host.

PrlSrvCfg_GetParallelPort(...)

Obtain the `HostDevice` object containing information about a parallel port on the host.

PrlSrvCfg_GetParallelPortsCount(...)

Determine the number of parallel ports on the host.

PrlSrvCfg_GetPrinter(...)

Obtain the `HostDevice` object containing information about a printer installed on the host.

PrlSrvCfg_GetPrintersCount(...)

Determine the number of printers installed on the host.

PrlSrvCfg_GetSearchDomains(...)

Obtain the list of search domains for the specified host or guest.

PrlSrvCfg_GetSerialPort(...)

Obtain the `HostDevice` object containing information about a serial port on the host.

PrlSrvCfg_GetSerialPortsCount(...)

Determine the number of serial ports available on the host.

PrlSrvCfg_GetSoundMixerDev(...)

Obtain the `HostDevice` object containing information about a sound mixer device on the host.

PrlSrvCfg_GetSoundMixerDevsCount(...)

Determine the number of sound mixer devices available on the host.

PrlSrvCfg_GetSoundOutputDev(...)

Obtain the `HostDevice` object containing information about a sound device on the host.

PrlSrvCfg_GetSoundOutputDevsCount(...)

Determine the number of sound devices available on the host.

PrlSrvCfg_GetUsbDev(...)

Obtain the `HostDevice` object containing information about a USB device on the host.

PrlSrvCfg_GetUsbDevsCount(...)

Determine the number of USB devices on the host.

PrlSrvCfg_IsSoundDefaultEnabled(...)

Determine whether a sound device on the host is enabled or disabled.

PrlSrvCfg_IsUsbSupported(...)

Determine if USB is supported on the host.

PrlSrvCfg_IsVtdSupported(...)

Determine whether VT-d is supported on the host.

PrlSrvInfo_GetApplicationMode(...)

`PrlSrvInfo_GetApplicationMode`

PrlSrvInfo_GetCmdPort(...)

Return the port number at which the Parallels Service is listening for requests.

PrlSrvInfo_GetHostName(...)

Return the name of the machine hosting the specified Parallels Service.

PrlSrvInfo_GetOsVersion(...)

Returns the version of the host operating system.

PrlSrvInfo_GetProductVersion(...)

Return the Parallels product version number.

PrlSrvInfo_GetServerUuid(...)

Return the host machine UUID (universally unique ID).

PrlSrvInfo_GetStartTime(...)

PrlSrvInfo_GetStartTime

PrlSrvInfo_GetStartTimeMonotonic(...)

PrlSrvInfo_GetStartTimeMonotonic

PrlSrv_AddIPPrivateNetwork(...)

PrlSrv_AddIPPrivateNetwork

PrlSrv_AddVirtualNetwork(...)

Add a new virtual network to the Parallels Service configuration.

PrlSrv_AttachToLostTask(...)

Obtain a handle to a running task after the connection to the Parallels Service was lost.

PrlSrv_CancelInstallAppliance(...)

PrlSrv_CancelInstallAppliance

PrlSrv_CommonPrefsBeginEdit(...)

Mark the beginning of the Parallels Service preferences modification operation.

PrlSrv_CommonPrefsCommit(...)

Commit the Parallels Server preferences changes.

PrlSrv_CommonPrefsCommitEx(...)

PrlSrv_CommonPrefsCommitEx

PrlSrv_ConfigureGenericPci(...)

Configure the PCI device assignment.

PrlSrv_CopyCtTemplate(...)

PrlSrv_CopyCtTemplate

PrlSrv_Create(...)Create a new instance of the `Server` class.**PrlSrv_CreateUnattendedCd(...)**

Create a bootable ISO-image for unattended Linux installation.

PrlSrv_CreateVm(...)Create a new instance of the `Vm` class.**PrlSrv_CreateVmBackup(...)**

Backup an existing virtual machine to a backup server.

PrlSrv_DeleteOfflineService(...)

PrlSrv_DeleteOfflineService

PrlSrv_DeleteVirtualNetwork(...)

Remove an existing virtual network from the Parallels Service configuration.

PrlSrv_DisableConfirmationMode(...)

Disable administrator confirmation mode for the session.

PrlSrv_EnableConfirmationMode(...)

Enable administrator confirmation mode for the session.

PrlSrv_FsCanCreateFile(...)

Determine if the current user has rights to create a file on the host.

PrlSrv_FsCreateDir(...)

Create a directory in the specified location on the host.

PrlSrv_FsGenerateEntryName(...)

Automatically generate a unique name for a new directory.

PrlSrv_FsGetDirEntries(...)

Retrieve information about a file system entry on the host.

PrlSrv_FsGetDiskList(...)

Returns a list of root directories on the host computer.

PrlSrv_FsRemoveEntry(...)

Remove a file system entry from the host computer.

PrlSrv_FsRenameEntry(...)

Rename a file system entry on the host.

PrlSrv_GetBackupTree(...)

Obtain a backup tree from the backup server.

PrlSrv_GetCPUPoolsList(...)

PrlSrv_GetCPUPoolsList

PrlSrv_GetCommonPrefs(...)

Obtain the `DispConfig` object containing the specified Parallels Service preferences info.

PrlSrv_GetCtTemplateList(...)

PrlSrv_GetCtTemplateList

PrlSrv_GetDefaultVmConfig(...)

PrlSrv_GetDefaultVmConfig

PrlSrv_GetDiskFreeSpace(...)

PrlSrv_GetDiskFreeSpace

PrlSrv_GetIPPrivateNetworksList(...)

PrlSrv_GetIPPrivateNetworksList

PrlSrv_GetLicenseInfo(...)Obtain the `License` object containing the Parallels license information.**PrlSrv_GetNetServiceStatus(...)**Obtain the `NetService` object containing the Parallels network service status information.**PrlSrv_GetNetworkClassesList(...)**

PrlSrv_GetNetworkClassesList

PrlSrv_GetNetworkShapingConfig(...)

PrlSrv_GetNetworkShapingConfig

PrlSrv_GetOfflineServicesList(...)

PrlSrv_GetOfflineServicesList

PrlSrv_GetPackedProblemReport(...)

PrlSrv_GetPackedProblemReport

PrlSrv_GetPerfStats(...)

PrlSrv_GetPerfStats

PrlSrv_GetPluginsList(...)

PrlSrv_GetPluginsList

PrlSrv_GetProblemReport(...)

Obtain a problem report in the event of a virtual machine operation failure.

PrlSrv_GetQuestions(...)

Allows to synchronously receive questions from Parallels Service.

PrlSrv_GetRestrictionInfo(...)

PrlSrv_GetRestrictionInfo

PrlSrv_GetServerInfo(...)

Obtain the **ServerInfo** object containing the host computer information.

PrlSrv_GetSrvConfig(...)

Obtain the **ServerConfig** object containing the host configuration information.

PrlSrv_GetStatistics(...)

Obtain the **Statistics** object containing the host resource usage statistics.

PrlSrv_GetSupportedOses(...)

PrlSrv_GetSupportedOses

PrlSrv_GetUserInfo(...)

Obtain the **UserInfo** object containing information about the specified user.

PrlSrv_GetUserInfoList(...)

Obtain a list of **UserInfo** objects containing information about all known users.

PrlSrv_GetUserProfile(...)

Obtain the **UserConfig** object containing profile data of the currently logged in user.

PrlSrv_GetVcmmdConfig(...)

PrlSrv_GetVcmmdConfig

PrlSrv_GetVirtualNetworkList(...)

Obtain the **VirtualNet** object containing information about all existing virtual networks.

PrlSrv_GetVmConfig(...)

PrlSrv_GetVmConfig

PrlSrv_GetVmList(...)

Obtain a list of virtual machines from the host.

PrlSrv_GetVmListEx(...)
PrlSrv_GetVmListEx
PrlSrv_HasRestriction(...)
PrlSrv_HasRestriction
PrlSrv_InstallAppliance(...)
PrlSrv_InstallAppliance
PrlSrv_IsConfirmationModeEnabled(...)
Determine confirmation mode for the session.
PrlSrv_IsConnected(...)
Determine if the connection to the specified Parallels Service is active.
PrlSrv_IsFeatureSupported(...)
PrlSrv_IsFeatureSupported
PrlSrv_IsNonInteractiveSession(...)
PrlSrv_IsNonInteractiveSession
PrlSrv_Login(...)
Login to a remote Parallels Service.
PrlSrv_LoginEx(...)
PrlSrv_LoginEx
PrlSrv_LoginLocal(...)
Login to the local Parallels Service.
PrlSrv_LoginLocalEx(...)
PrlSrv_LoginLocalEx
PrlSrv_Logoff(...)
Log off the Parallels Service.

PrlSrv_MoveToCPUPool(...)

PrlSrv_MoveToCPUPool

PrlSrv_NetServiceRestart(...)

Restarts the Parallels network service.

PrlSrv_NetServiceRestoreDefaults(...)

Restores the default settings of the Parallels network service.

PrlSrv_NetServiceStart(...)

Start the Parallels network service.

PrlSrv_NetServiceStop(...)

Stop the Parallels network service.

PrlSrv_RecalculateCPUPool(...)

PrlSrv_RecalculateCPUPool

PrlSrv_RefreshPlugins(...)

PrlSrv_RefreshPlugins

PrlSrv_RegEventHandler(...)

Register an event handler.

PrlSrv_Register3rdPartyVm(...)

PrlSrv_Register3rdPartyVm

PrlSrv_RegisterVm(...)

Register an existing virtual machine with the Parallels Service.

PrlSrv_RegisterVmEx(...)

Register an existing virtual machine with Parallels Service (extended version).

PrlSrv_RegisterVmWithUuid(...)

PrlSrv_RegisterVmWithUuid

PrlSrv_RemoveCtTemplate(...)

PrlSrv_RemoveCtTemplate

PrlSrv_RemoveIPPrivateNetwork(...)

PrlSrv_RemoveIPPrivateNetwork

PrlSrv_RemoveVmBackup(...)

Remove backup of the virtual machine from the backup server.

PrlSrv_RestoreVmBackup(...)

Restore a virtual machine from a backup server.

PrlSrv_SendAnswer(...)

Send an answer to the Parallels Service in response to a question.

PrlSrv_SendProblemReport(...)

PrlSrv_SendProblemReport

PrlSrv_SetNonInteractiveSession(...)

Set the session in noninteractive or interactive mode.

PrlSrv_SetVcmmdConfig(...)

PrlSrv_SetVcmmdConfig

PrlSrv_Shutdown(...)

Shut down the Parallels Service.

PrlSrv_ShutdownEx(...)

PrlSrv_ShutdownEx

PrlSrv_StartSearchVms(...)

Search for unregistered virtual machines at the specified location(s).

PrlSrv_StopInstallAppliance(...)

PrlSrv_StopInstallAppliance

PrlSrv_SubscribeToHostStatistics(...)

Subscribe to receive host statistics.

PrlSrv_SubscribeToPerfStats(...)

Subscribe to receive performance statistics.

PrlSrv_UnregEventHandler(...)

Unregister the specified event handler.

PrlSrv_UnsubscribeFromHostStatistics(...)

Cancel the host statistics subscription.

PrlSrv_UnsubscribeFromPerfStats(...)

Cancels the performance statistics subscription.

PrlSrv_UpdateIPPrivateNetwork(...)

PrlSrv_UpdateIPPrivateNetwork

PrlSrv_UpdateLicense(...)

Installs Parallels license on the specified Parallels Service.

PrlSrv_UpdateLicenseEx(...)

PrlSrv_UpdateLicenseEx

PrlSrv_UpdateNetworkClassesList(...)

PrlSrv_UpdateNetworkClassesList

PrlSrv_UpdateNetworkShapingConfig(...)

PrlSrv_UpdateNetworkShapingConfig

PrlSrv_UpdateOfflineService(...)

PrlSrv_UpdateOfflineService

PrlSrv_UpdateVirtualNetwork(...)

Update parameters of an existing virtual network.

PrlSrv_UserProfileBeginEdit(...)

PrlSrv_UserProfileBeginEdit

PrlSrv_UserProfileCommit(...)

Saves (commits) user profile changes to the Parallels Service.

PrlStatCpu_GetCpuUsage(...)

Return the CPU usage, in percents.

PrlStatCpu_GetSystemTime(...)

Return the CPU time, in seconds.

PrlStatCpu_GetTotalTime(...)

Return the CPU total time, in seconds.

PrlStatCpu_GetUserTime(...)

Return the CPU user time in seconds

PrlStat_GetCpuStat(...)Return a **StatCpu** object specified by an index.**PrlStat_GetCpusStatsCount(...)**Return the number of **StatCpu** objects contained in this **Statistics** object. Each **StatCpu** object contains statistics for an individual CPU.**PrlStat_GetFreeRamSize(...)**

Return free RAM size in bytes.

PrlStat_GetOsUptime(...)

Return the virtual machine uptime in seconds.

PrlStat_GetRealRamSize(...)

PrlStat_GetRealRamSize

PrlStat_GetTotalRamSize(...)

Return total RAM size in bytes.

PrlStat_GetUsageRamSize(...)

Return the size of RAM currently in use, in bytes.

PrlStrList_AddItem(...)

PrlStrList_GetItem(...)

PrlStrList_GetItemsCount(...)

PrlStrList_RemoveItem(...)

PrlUsbIdent_GetFriendlyName(...)

PrlUsbIdent_GetFriendlyName

PrlUsbIdent_GetSystemName(...)

PrlUsbIdent_GetSystemName

PrlUsbIdent_GetVmUuidAssociation(...)

PrlUsbIdent_GetVmUuidAssociation

PrlUsrCfg_CanChangeSrvSets(...)

Determine if the current user can modify Parallels Service preferences.

PrlUsrCfg_CanUseMngConsole(...)

Determine if the user is allowed to use the Parallels Service Management Console.

PrlUsrCfg_GetDefaultVmFolder(...)

Return name and path of the default virtual machine directory for the user.

PrlUsrCfg_GetVmDirUuid(...)

Return name and path of the default virtual machine folder for the Parallels Service.

PrlUsrCfg_IsLocalAdministrator(...)

Determine if the user is a local administrator on the host where Parallels Service is running.

PrlUsrCfg_SetDefaultVmFolder(...)

Set the default virtual machine folder for the user.

PrlUsrCfg_SetVmDirUuid(...)

Set the default virtual machine directory name and path for the Parallels Service.

PrlUsrInfo_CanChangeSrvSets(...)

Determine whether the specified user is allowed to modify Parallels Service preferences.

PrlUsrInfo_GetDefaultVmFolder(...)

Return name and path of the default virtual machine directory for the user.

PrlUsrInfo_GetName(...)

Return the user name.

PrlUsrInfo_GetSessionCount(...)

Return the user active session count.

PrlUsrInfo_GetUuid(...)

Returns the user Universally Unique Identifier (UUID).

PrlVcmmdConfig_GetPolicy(...)

PrlVcmmdConfig_GetPolicy

PrlVcmmdConfig_SetPolicy(...)

PrlVcmmdConfig_SetPolicy

PrlVirtNet_Create(...)

Creates a new instance of `VirtualNet`.

PrlVirtNet_GetAdapterIndex(...)

Return a numeric index assigned to the network adapter in the specified virtual network.

PrlVirtNet_GetAdapterName(...)

Return the name of the network adapter in the specified virtual network.

PrlVirtNet_GetBoundAdapterInfo(...)

Obtain info about a physical adapter, which is bound to the virtual network object.

PrlVirtNet_GetBoundCardMac(...)

Return the bound card MAC address of the specified virtual network.

PrlVirtNet_GetDescription(...)

Return the description of the specified virtual network.

PrlVirtNet_GetDhcpIP6Address(...)

PrlVirtNet_GetDhcpIP6Address

PrlVirtNet_GetDhcpIPAddress(...)

Return the DHCP IP address of the specified virtual network.

PrlVirtNet_GetHostIP6Address(...)

PrlVirtNet_GetHostIP6Address

PrlVirtNet_GetHostIPAddress(...)

Return the host IP address of the specified virtual network.

PrlVirtNet_GetIP6NetMask(...)

PrlVirtNet_GetIP6NetMask

PrlVirtNet_GetIP6ScopeEnd(...)

PrlVirtNet_GetIP6ScopeEnd

PrlVirtNet_GetIP6ScopeStart(...)

PrlVirtNet_GetIP6ScopeStart

PrlVirtNet_GetIPNetMask(...)

Return the IP net mask of the specified virtual network.

PrlVirtNet_GetIPScopeEnd(...)

Return the DHCP ending IP address of the specified virtual network.

PrlVirtNet_GetIPScopeStart(...)

Returns the DHCP starting IP address of the specified virtual network.

PrlVirtNet_GetNetworkId(...)

Return the ID of the specified virtual network.

PrlVirtNet_GetNetworkType(...)

Return the virtual network type.

PrlVirtNet_GetPortForwardList(...)

Return the port forward entries list.

PrlVirtNet_GetVlanTag(...)

Return the VLAN tag of the specified virtual network.

PrlVirtNet_IsAdapterEnabled(...)

Determine whether the virtual network adapter is enabled or disabled.

PrlVirtNet_IsDHCP6ServerEnabled(...)

PrlVirtNet_IsDHCP6ServerEnabled

PrlVirtNet_IsDHCPServerEnabled(...)

Determine whether the virtual network DHCP server is enabled or disabled.

PrlVirtNet_IsEnabled(...)

Determine whether the virtual network is enabled or disabled.

PrlVirtNet_IsNATServerEnabled(...)

Determine whether the specified virtual network NAT server is enabled or disabled.

PrlVirtNet_SetAdapterEnabled(...)

Enable or disable a virtual network adapter.

PrlVirtNet_SetAdapterIndex(...)

Sets the specified adapter index.

PrlVirtNet_SetAdapterName(...)

Sets the specified virtual network adapter name.

PrlVirtNet_SetBoundCardMac(...)

Sets the specified virtual network bound card MAC address.

PrlVirtNet_SetDHCP6ServerEnabled(...)

PrlVirtNet_SetDHCP6ServerEnabled

PrlVirtNet_SetDHCPServerEnabled(...)

Enable or disable the virtual network DHCP server.

PrlVirtNet_SetDescription(...)

Sets the virtual network description.

PrlVirtNet_SetDhcpIP6Address(...)

PrlVirtNet_SetDhcpIP6Address

PrlVirtNet_SetDhcpIPAddress(...)

Set the virtual network DHCP IP address.

PrlVirtNet_SetEnabled(...)

Enable or disable the virtual network.

PrlVirtNet_SetHostIP6Address(...)

PrlVirtNet_SetHostIP6Address

PrlVirtNet_SetHostIPAddress(...)

Set the virtual network host IP address.

PrlVirtNet_SetIP6NetMask(...)

PrlVirtNet_SetIP6NetMask

PrlVirtNet_SetIP6ScopeEnd(...)

PrlVirtNet_SetIP6ScopeEnd

PrlVirtNet_SetIP6ScopeStart(...)

PrlVirtNet_SetIP6ScopeStart

PrlVirtNet_SetIPNetMask(...)

Set the virtual network IP net mask.

PrlVirtNet_SetIPScopeEnd(...)

Set the virtual network DHCP ending IP address

PrlVirtNet_SetIPScopeStart(...)

Set the virtual network DHCP starting IP address.

PrlVirtNet_SetNATServerEnabled(...)

Enable or disable the virtual network NAT server.

PrlVirtNet_SetNetworkId(...)

Set the virtual network ID.

PrlVirtNet_SetNetworkType(...)

Set the virtual network type.

PrlVirtNet_SetPortForwardList(...)

Set the port forward entries list.

PrlVirtNet_SetVlanTag(...)

Set the VLAN tag for the virtual network.

PrlVmCfg_AddDefaultDevice(...)

Automates the task of setting devices in a virtual machine.

PrlVmCfg_AddDefaultDeviceEx(...)

PrlVmCfg_AddDefaultDeviceEx

PrIVmCfg_ApplyConfigSample(...)
--

PrIVmCfg_ApplyConfigSample

PrIVmCfg_CreateBootDev(...)

Create a new instance of BootDevice and add it to the virtual machine boot device list.
--

PrIVmCfg_CreateShare(...)

Create a new instance of Share and add it to the virtual machine list of shares.

PrIVmCfg_CreateVmDev(...)

Create a new virtual device handle of the specified type.

PrIVmCfg_Get3DAccelerationMode(...)
--

PrIVmCfg_Get3DAccelerationMode

PrIVmCfg_GetAccessRights(...)

Obtain the AccessRights object.
--

PrIVmCfg_GetActionOnGuestCrash(...)
--

PrIVmCfg_GetActionOnGuestCrash

PrIVmCfg_GetActionOnStopMode(...)
--

PrIVmCfg_GetActionOnStopMode

PrIVmCfg_GetActionOnWindowClose(...)

Determine the action on Parallels Application window close for the specified virtual machine.

PrIVmCfg_GetAllDevices(...)

Obtains objects for all virtual devices in a virtual machine.

PrIVmCfg_GetAppTemplateList(...)

PrIVmCfg_GetAppTemplateList

PrIVmCfg_GetAutoCompressInterval(...)

Determine the interval at which compacting virtual disks is performed by Automatic HDD compression.

PrIVmCfg_GetAutoStart(...)

Determine if the specified virtual machine is set to start automatically on Parallels Service start.

PrIVmCfg_GetAutoStartDelay(...)

Returns the time delay used during the virtual machine automatic startup.

PrIVmCfg_GetAutoStop(...)

Determine the mode of the automatic shutdown for the specified virtual machine.

PrIVmCfg_GetBackgroundPriority(...)

Determine the specified virtual machine background process priority type.

PrIVmCfg_GetBootDev(...)

Obtain the `BootDevice` object containing information about a specified boot device.

PrIVmCfg_GetBootDevCount(...)

Determine the number of devices in the virtual machine boot device priority list.

PrIVmCfg_GetCapabilitiesMask(...)

PrIVmCfg_GetCapabilitiesMask

PrIVmCfg_GetConfigValidity(...)

Return a constant indicating the virtual machine configuration validity.

PrIVmCfg_GetConfirmationsList(...)

Obtain a list of operations with virtual machine which requires administrator confirmation.

PrIVmCfg_GetCpuAccelLevel(...)

Determine the virtual machine CPU acceleration level.

PrIVmCfg_GetCpuCount(...)

Determine the number of CPUs in the virtual machine.

PrIVmCfg_GetCpuLimit(...)

Determine the CPU usage limit of a virtual machine, in percent.

PrIVmCfg_GetCpuMask(...)

PrIVmCfg_GetCpuMask

PrIVmCfg_GetCpuMode(...)

Determine the specified virtual machine CPU mode (32 bit or 64 bit).

PrIVmCfg_GetCpuUnits(...)

Determine the number of CPU units allocated to a virtual machine.

PrIVmCfg_GetCtId(...)

PrIVmCfg_GetCtId

PrIVmCfg_GetCustomProperty(...)

Return the virtual machine custom property information.

PrIVmCfg_GetDefaultHddSize(...)

Return the default hard disk size for to the specified OS type and version.

PrIVmCfg_GetDefaultMemSize(...)

Return the default RAM size for to the specified OS type and version.

PrIVmCfg_GetDefaultVideoRamSize(...)

Return the default video RAM size for the specified OS type and version.

PrIVmCfg_GetDescription(...)

Return the virtual machine description.

PrIVmCfg_GetDevByType(...)

Obtains a virtual device object according to the specified device type and index.

PrIVmCfg_GetDevsCount(...)

Determine the total number of devices of all types installed in the virtual machine.

PrIVmCfg_GetDevsCountByType(...)

Obtain the number of virtual devices of the specified type.

PrIVmCfg_GetDisplayDev(...)

Obtains the `VmDevice` containing information about a display device in a virtual machine.

PrIVmCfg_GetDisplayDevsCount(...)

Determine the number of display devices in a virtual machine.

PrIVmCfg_GetDnsServers(...)

`PrIVmCfg_GetDnsServers`

PrIVmCfg_GetExternalBootDevice(...)

`PrIVmCfg_GetExternalBootDevice`

PrIVmCfg_GetFeaturesMask(...)

`PrIVmCfg_GetFeaturesMask`

PrIVmCfg_GetFloppyDisk(...)

Obtain the `VmDevice` object containing information about a floppy disk drive in a virtual machine.

PrIVmCfg_GetFloppyDisksCount(...)

Determine the number of floppy disk drives in a virtual machine.

PrIVmCfg_GetForegroundPriority(...)

Return foreground processes priority for the specified virtual machine.

PrIVmCfg_GetFreeDiskSpaceRatio(...)

Determine free disk space ratio at which disk compacting is done by Automatic HDD compression.

PrIVmCfg_GetGenericPciDev(...)

Obtain the `VmDevice` object containing information about a generic PCI device.

PrIVmCfg_GetGenericPciDevsCount(...)

Determines the number of generic PCI devices in a virtual machine.

PrIVmCfg_GetGenericScsiDev(...)

Obtain the `VmDevice` object containing information about a SCSI device in a virtual machine.

PrIVmCfg_GetGenericScsiDevsCount(...)

Determines the number of generic SCSI devices in a virtual machine.

PrIVmCfg_GetHardDisk(...)

Obtain the `VmHardDisk` object containing the specified virtual hard disk information.

PrIVmCfg_GetHardDisksCount(...)

Determines the number of virtual hard disks in a virtual machine.

PrIVmCfg_GetHighAvailabilityPriority(...)

`PrIVmCfg_GetHighAvailabilityPriority`

PrIVmCfg_GetHomePath(...)

Return the virtual machine home directory name and path.

PrIVmCfg_GetHostname(...)

Obtain the hostname of the specified virtual machine.

PrIVmCfg_GetIcon(...)

Return the name of the icon file used by the specified virtual machine.

PrIVmCfg_GetIoLimit(...)

`PrIVmCfg_GetIoLimit`

PrlVmCfg_GetIoPriority(...)

Determines the specified virtual machine I/O priority.

PrlVmCfg_GetIopsLimit(...)

PrlVmCfg_GetIopsLimit

PrlVmCfg_GetLastModifiedDate(...)

Return the date and time when the specified virtual machine was last modified.

PrlVmCfg_GetLastModifierName(...)

Return the name of the user who last modified the specified virtual machine.

PrlVmCfg_GetLinkedVmUuid(...)

PrlVmCfg_GetLinkedVmUuid

PrlVmCfg_GetLocation(...)

PrlVmCfg_GetLocation

PrlVmCfg_GetMemGuaranteeSize(...)

PrlVmCfg_GetMemGuaranteeSize

PrlVmCfg_GetName(...)

Return the virtual machine name.

PrlVmCfg_GetNetAdapter(...)

Obtain the `VmNet` object containing information about a virtual network adapter.

PrlVmCfg_GetNetAdaptersCount(...)

Determine the number of network adapters in a virtual machine.

PrlVmCfg_GetNetfilterMode(...)

PrlVmCfg_GetNetfilterMode

PrlVmCfg_GetNetworkRateList(...)

PrlVmCfg_GetNetworkRateList

PrlVmCfg_GetNodeMask(...)
PrlVmCfg_GetNodeMask

PrlVmCfg_GetOfflineServices(...)
Obtain the list of services available in the virtual machine offline management.

PrlVmCfg_GetOpticalDisk(...)
Obtain the <code>VmDevice</code> object containing information about a virtual optical disk.

PrlVmCfg_GetOpticalDisksCount(...)
Determine the number of optical disks in the specified virtual machine.

PrlVmCfg_GetOptimizeModifiersMode(...)
PrlVmCfg_GetOptimizeModifiersMode

PrlVmCfg_GetOptionsOnGuestCrash(...)
PrlVmCfg_GetOptionsOnGuestCrash

PrlVmCfg_GetOsTemplate(...)
PrlVmCfg_GetOsTemplate

PrlVmCfg_GetOsType(...)
Return the type of the operating system that the specified virtual machine is running.

PrlVmCfg_GetOsVersion(...)
Return the version of the operating system that the specified virtual machine is running.

PrlVmCfg_GetParallelPort(...)
Obtains the <code>VmDevice</code> object containing information about a virtual parallel port.

PrlVmCfg_GetParallelPortsCount(...)
Determine the number of virtual parallel ports in the virtual machine.

PrIVmCfg_GetRamSize(...)

Return the virtual machine memory (RAM) size, in megabytes.

PrIVmCfg_GetResource(...)

PrIVmCfg_GetResource

PrIVmCfg_GetSearchDomains(...)

Obtain the list of search domains that will be assigned to the guest OS.

PrIVmCfg_GetSerialPort(...)

Obtain the `VmSerial` object containing information about a serial port in a virtual machine.

PrIVmCfg_GetSerialPortsCount(...)

Determine the number of serial ports in a virtual machine.

PrIVmCfg_GetServerHost(...)

Return the hostname of the machine hosting the specified virtual machine.

PrIVmCfg_GetServerUuid(...)

Returns the UUID of the machine hosting the specified virtual machine.

PrIVmCfg_GetShare(...)

Obtain the `Share` object containing information about a shared folder.

PrIVmCfg_GetSharesCount(...)

Determine the number of shared folders in a virtual machine.

PrIVmCfg_GetSmartGuardInterval(...)

Determines the interval at which snapshots are taken by SmartGuard.

PrIVmCfg_GetSmartGuardMaxSnapshotsCount(...)

Determines the maximum snapshot count, a SmartGuard setting.

PrIVmCfg_GetSoundDev(...)

Obtain the `VmSound` object containing information about a sound device in a virtual machine.

PrIVmCfg_GetSoundDevsCount(...)

Determine the number of sound devices in a virtual machine.

PrIVmCfg_GetStartLoginMode(...)

Return the automatic startup login mode for the virtual machine.

PrIVmCfg_GetStartUserLogin(...)

Return the user name used during the virtual machine automatic startup.

PrIVmCfg_GetSystemFlags(...)

Return the virtual machine system flags.

PrIVmCfg_GetTimeSyncInterval(...)

Obtain the time synchronization interval between the host and the guest OS.

PrIVmCfg_GetUndoDisksMode(...)

Determine the current undo-disks mode for the virtual machine.

PrIVmCfg_GetUptime(...)

`PrIVmCfg_GetUptime`

PrIVmCfg_GetUptimeStartDate(...)

Return the date and time when the uptime counter was started for the specified virtual machine.

PrIVmCfg_GetUsbDevice(...)

Obtain the `VmUsb` object containing information about a USB device in the virtual machine.

PrIVmCfg_GetUsbDevicesCount(...)

Determine the number of USB devices in a virtual machine.

PrlVmCfg_GetUuid(...)

Return the UUID (universally unique ID) of the virtual machine.

PrlVmCfg_GetVNCHostName(...)

Return the VNC hostname of the virtual machine.

PrlVmCfg_GetVNCMode(...)

Return the VNC mode of the virtual machine.

PrlVmCfg_GetVNCPassword(...)

Return the VNC password for the virtual machine.

PrlVmCfg_GetVNCPort(...)

Return the VNC port number for the virtual machine

PrlVmCfg_GetVNCWebSocketPort(...)

PrlVmCfg_GetVNCWebSocketPort

PrlVmCfg_GetVideoRamSize(...)

Return the video memory size of the virtual machine.

PrlVmCfg_GetVmInfo(...)

PrlVmCfg_GetVmInfo

PrlVmCfg_GetVmType(...)

PrlVmCfg_GetVmType

PrlVmCfg_GetWindowMode(...)

Return the current window mode the virtual machine is in.

PrlVmCfg_IsAdaptiveHypervisorEnabled(...)

PrlVmCfg_IsAdaptiveHypervisorEnabled

PrlVmCfg_IsAllowSelectBootDevice(...)

Determine whether the 'select boot device' option is shown on virtual machine startup.

PrIVmCfg_IsAutoApplyIpOnly(...)
PrIVmCfg_IsAutoApplyIpOnly

PrIVmCfg_IsAutoCompressEnabled(...)
Determine whether the Automatic HDD compression feature is enabled in the virtual machine.

PrIVmCfg_IsBatteryStatusEnabled(...)
PrIVmCfg_IsBatteryStatusEnabled

PrIVmCfg_IsCloseAppOnShutdown(...)
Determine whether the Parallels console app is automatically closed on the virtual machine shutdown.

PrIVmCfg_IsConfigInvalid(...)
PrIVmCfg_IsConfigInvalid

PrIVmCfg_IsCpuHotplugEnabled(...)
PrIVmCfg_IsCpuHotplugEnabled

PrIVmCfg_IsCpuVtxEnabled(...)
Determine whether the x86 virtualization (such as Vt-x) is available in the virtual machine CPU.

PrIVmCfg_IsDefaultDeviceNeeded(...)
Determine whether a default virtual device is needed for running the OS of the specified type.

PrIVmCfg_IsDisableAPIC(...)
Determine whether the APIC is enabled during the virtual machine runtime.

PrIVmCfg_IsDisableSpeaker(...)
PrIVmCfg_IsDisableSpeaker

PrIVmCfg_IsDiskCacheWriteBack(...)
Determine if disk cache write-back is enabled in the virtual machine.

PrlVmCfg_IsEfiEnabled(...)
PrlVmCfg_IsEfiEnabled

PrlVmCfg_IsGuestSharingAutoMount(...)
Determine if host shared folders are mounted automatically in the virtual machine.

PrlVmCfg_IsGuestSharingEnableSpotlight(...)
Determine if the virtual disks will be added to Spotlight search subsystem (Mac OS X feature).

PrlVmCfg_IsGuestSharingEnabled(...)
Determine if guest sharing is enabled (the guest OS disk drives are visible in the host OS).

PrlVmCfg_IsHighAvailabilityEnabled(...)
PrlVmCfg_IsHighAvailabilityEnabled

PrlVmCfg_IsHighResolutionEnabled(...)
PrlVmCfg_IsHighResolutionEnabled

PrlVmCfg_IsHostSharingEnabled(...)
Determine if host sharing is enabled (host shared folders are visible in the guest OS).

PrlVmCfg_IsIsolatedVmEnabled(...)
PrlVmCfg_IsIsolatedVmEnabled

PrlVmCfg_IsLockGuestOnSuspendEnabled(...)
PrlVmCfg_IsLockGuestOnSuspendEnabled

PrlVmCfg_IsLockInFullScreenMode(...)
Determine whether the 'lock in screen mode' flag is set in the virtual machine configuration.

PrlVmCfg_IsLongerBatteryLifeEnabled(...)
PrlVmCfg_IsLongerBatteryLifeEnabled

PrIVmCfg_IsMapSharedFoldersOnLetters(...)

Determine whether host disks shared with the guest Windows OS will be mapped to drive letters.

PrIVmCfg_IsNestedVirtualizationEnabled(...)

PrIVmCfg_IsNestedVirtualizationEnabled

PrIVmCfg_IsOfflineManagementEnabled(...)

Determine whether the offline management feature is enabled for the virtual machine.

PrIVmCfg_IsOsResInFullScrMode(...)

Determines whether the virtual machine OS resolution is in full screen mode.

PrIVmCfg_IsPMUVirtualizationEnabled(...)

PrIVmCfg_IsPMUVirtualizationEnabled

PrIVmCfg_IsRamHotplugEnabled(...)

PrIVmCfg_IsRamHotplugEnabled

PrIVmCfg_IsRateBound(...)

PrIVmCfg_IsRateBound

PrIVmCfg_IsScrResEnabled(...)

Determine if additional screen resolution support is enabled in the virtual machine.

PrIVmCfg_IsShareAllHostDisks(...)

Determine whether all host disks will be present in the guest OS as shares.

PrIVmCfg_IsShareClipboard(...)

Determine whether the clipboard sharing feature is enabled in the virtual machine.

PrIVmCfg_IsShareUserHomeDir(...)

Determine whether the host user home directory will be available in the guest OS as a share.

PrIVmCfg_IsSharedProfileEnabled(...)

Determine whether the Shared Profile feature is enabled in the virtual machine.

PrIVmCfg_IsSmartGuardEnabled(...)

Determine whether the SmartGuard feature is enabled in the virtual machine.

PrIVmCfg_IsSmartGuardNotifyBeforeCreation(...)

Determine whether the user will be notified on automatic snapshot creation by SmartGaurd.

PrIVmCfg_IsSmartMountDVDsEnabled(...)

PrIVmCfg_IsSmartMountDVDsEnabled

PrIVmCfg_IsSmartMountEnabled(...)

PrIVmCfg_IsSmartMountEnabled

PrIVmCfg_IsSmartMountNetworkSharesEnabled(...)

PrIVmCfg_IsSmartMountNetworkSharesEnabled

PrIVmCfg_IsSmartMountRemovableDrivesEnabled(...)

PrIVmCfg_IsSmartMountRemovableDrivesEnabled

PrIVmCfg_IsStartInDetachedWindowEnabled(...)

PrIVmCfg_IsStartInDetachedWindowEnabled

PrIVmCfg_IsSwitchOffWindowsLogoEnabled(...)

PrIVmCfg_IsSwitchOffWindowsLogoEnabled

PrIVmCfg_IsTemplate(...)

Determine whether the virtual machine is a real machine or a template.

PrIVmCfg_IsTimeSyncSmartModeEnabled(...)

Determine whether the smart time synchronization is enabled in a virtual machine.

PrIVmCfg_IsTimeSynchronizationEnabled(...)

Determine whether the time synchronization feature is enabled in the virtual machine.

PrIVmCfg_IsToolsAutoUpdateEnabled(...)

Enables or disables the Parallels Tools AutoUpdate feature for the virtual machine.

PrIVmCfg_IsUseDefaultAnswers(...)

Determine whether the use default answers mechanism is active in the virtual machine.

PrIVmCfg_IsUseDesktop(...)

Determine whether the 'use desktop in share profile' feature is enabled or not.

PrIVmCfg_IsUseDocuments(...)

Determine whether 'use documents in shared profile' feature is enabled or not.

PrIVmCfg_IsUseDownloads(...)

PrIVmCfg_IsUseDownloads

PrIVmCfg_IsUseMovies(...)

PrIVmCfg_IsUseMovies

PrIVmCfg_IsUseMusic(...)

Determine whether the 'use music in shared profile' feature is enabled or not.

PrIVmCfg_IsUsePictures(...)

Determine whether the 'used pictures in shared profile' feature is enabled or not.

PrIVmCfg_IsUserDefinedSharedFoldersEnabled(...)

Determine whether the user-defined shared folders are enabled or not.

PrIVmCfg_IsVNCEncryptionEnabled(...)

PrIVmCfg_IsVNCEncryptionEnabled

PrIVmCfg_IsVerticalSynchronizationEnabled(...)

PrIVmCfg_IsVerticalSynchronizationEnabled

PrIVmCfg_Set3DAccelerationMode(...)
--

PrIVmCfg_Set3DAccelerationMode

PrIVmCfg_SetActionOnGuestCrash(...)
--

PrIVmCfg_SetActionOnGuestCrash

PrIVmCfg_SetActionOnStopMode(...)
--

PrIVmCfg_SetActionOnStopMode

PrIVmCfg_SetActionOnWindowClose(...)

Set the action to perform on the Parallels console window closing.
--

PrIVmCfg_SetAdaptiveHypervisorEnabled(...)

PrIVmCfg_SetAdaptiveHypervisorEnabled

PrIVmCfg_SetAllowSelectBootDevice(...)

Switch on/off the 'select boot device' dialog on virtual machine startup.

PrIVmCfg_SetAppTemplateList(...)

PrIVmCfg_SetAppTemplateList

PrIVmCfg_SetAutoApplyIpOnly(...)

PrIVmCfg_SetAutoApplyIpOnly

PrIVmCfg_SetAutoCompressEnabled(...)

Enables or disables the Automatic HDD compression feature in the virtual machine.

PrIVmCfg_SetAutoCompressInterval(...)
--

Set the time interval at which compacting virtual disks is done by Automatic HDD compression.

PrIVmCfg_SetAutoStart(...)

Set the automatic startup option for the virtual machine.

PrIVmCfg_SetAutoStartDelay(...)

Set the time delay that will be used during the virtual machine automatic startup.

PrIVmCfg_SetAutoStop(...)

Set the automatic shutdown mode for the virtual machine.

PrIVmCfg_SetBackgroundPriority(...)

Set the virtual machine background processes priority.

PrIVmCfg_SetBatteryStatusEnabled(...)

PrIVmCfg_SetBatteryStatusEnabled

PrIVmCfg_SetCapabilitiesMask(...)

PrIVmCfg_SetCapabilitiesMask

PrIVmCfg_SetCloseAppOnShutdown(...)

Set whether the Parallels console app will be closed on the virtual machine shutdown.

PrIVmCfg_SetConfirmationsList(...)

Obtain the list of virtual machine operations that require administrator confirmation.

PrIVmCfg_SetCpuAccelLevel(...)

Set CPU acceleration level for the virtual machine.

PrIVmCfg_SetCpuCount(...)

Set the number of CPUs for the virtual machine (the CPUs should be present in the machine).

PrIVmCfg_SetCpuHotplugEnabled(...)

PrIVmCfg_SetCpuHotplugEnabled

PrIVmCfg_SetCpuLimit(...)

Set the CPU usage limit (in percent) for a virtual machine.

PrIVmCfg_SetCpuMask(...)

PrIVmCfg_SetCpuMask

PrIVmCfg_SetCpuMode(...)

Set CPU mode (32 bit or 64 bit) for the virtual machine.

PrIVmCfg_SetCpuUnits(...)

Set the number of CPU units that will be allocated to a virtual machine.

PrIVmCfg_SetCustomProperty(...)

Set the virtual machine custom property information.

PrIVmCfg_SetDefaultConfig(...)

Set the default configuration for a new virtual machine based on the guest OS type.

PrIVmCfg_SetDescription(...)

Set the virtual machine description.

PrIVmCfg_SetDisableAPICSign(...)

Set whether the virtual machine should be using APIC during runtime.

PrIVmCfg_SetDisableSpeakerSign(...)

PrIVmCfg_SetDisableSpeakerSign

PrIVmCfg_SetDiskCacheWriteBack(...)

Set the virtual machine disk cache write-back option.

PrIVmCfg_SetDnsServers(...)

PrIVmCfg_SetDnsServers

PrIVmCfg_SetEfiEnabled(...)

PrIVmCfg_SetEfiEnabled

PrIVmCfg_SetExternalBootDevice(...)
--

PrIVmCfg_SetExternalBootDevice

PrIVmCfg_SetFeaturesMask(...)

PrIVmCfg_SetFeaturesMask

PrIVmCfg_SetForegroundPriority(...)
--

Set the virtual machine foreground processes priority.
--

PrIVmCfg_SetFreeDiskSpaceRatio(...)
--

Set the free disk space ratio at which compacting virtual disks is done by Automatic HDD compress.
--

PrIVmCfg_SetGuestSharingAutoMount(...)

Set the guest OS sharing auto-mount option.

PrIVmCfg_SetGuestSharingEnableSpotlight(...)

Set whether the virtual disks are added to Spotlight search subsystem.
--

PrIVmCfg_SetGuestSharingEnabled(...)

Enables the guest sharing feature.

PrIVmCfg_SetHighAvailabilityEnabled(...)

PrIVmCfg_SetHighAvailabilityEnabled

PrIVmCfg_SetHighAvailabilityPriority(...)
--

PrIVmCfg_SetHighAvailabilityPriority

PrIVmCfg_SetHighResolutionEnabled(...)

PrIVmCfg_SetHighResolutionEnabled

PrIVmCfg_SetHostSharingEnabled(...)
--

Enable host sharing for the virtual machine.
--

PrIVmCfg_SetHostname(...)

Set the virtual machine hostname.

PrlVmCfg_SetIcon(...)

Set the virtual machine icon.

PrlVmCfg_SetIoLimit(...)

PrlVmCfg_SetIoLimit

PrlVmCfg_SetIoPriority(...)

Set the virtual machine I/O priority.

PrlVmCfg_SetIopsLimit(...)

PrlVmCfg_SetIopsLimit

PrlVmCfg_SetIsolatedVmEnabled(...)

PrlVmCfg_SetIsolatedVmEnabled

PrlVmCfg_SetLockGuestOnSuspendEnabled(...)

PrlVmCfg_SetLockGuestOnSuspendEnabled

PrlVmCfg_SetLockInFullScreenMode(...)

Enable or disable the lock in screen mode feature in the virtual machine configuration.

PrlVmCfg_SetLongerBatteryLifeEnabled(...)

PrlVmCfg_SetLongerBatteryLifeEnabled

PrlVmCfg_SetMapSharedFoldersOnLetters(...)

Enable mapping of shared host disks to drive letters for the virtual machine.

PrlVmCfg_SetMemGuaranteeSize(...)

PrlVmCfg_SetMemGuaranteeSize

PrlVmCfg_SetName(...)

Set the virtual machine name.

PrlVmCfg_SetNestedVirtualizationEnabled(...)

PrlVmCfg_SetNestedVirtualizationEnabled

PrIVmCfg_SetNetfilterMode(...)
PrIVmCfg_SetNetfilterMode

PrIVmCfg_SetNetworkRateList(...)
PrIVmCfg_SetNetworkRateList

PrIVmCfg_SetNodeMask(...)
PrIVmCfg_SetNodeMask

PrIVmCfg_SetOfflineManagementEnabled(...)
Enables or disables the offline management feature for the virtual machine.

PrIVmCfg_SetOfflineServices(...)
Set offline services that will be available in the virtual machine offline management.

PrIVmCfg_SetOptimizeModifiersMode(...)
PrIVmCfg_SetOptimizeModifiersMode

PrIVmCfg_SetOptionsOnGuestCrash(...)
PrIVmCfg_SetOptionsOnGuestCrash

PrIVmCfg_SetOsResInFullScrMode(...)
Turn on/off the virtual machine OS resolution in full screen mode option.

PrIVmCfg_SetOsTemplate(...)
PrIVmCfg_SetOsTemplate

PrIVmCfg_SetOsVersion(...)
Set the virtual machine guest OS version.

PrIVmCfg_SetPMUVirtualizationEnabled(...)
PrIVmCfg_SetPMUVirtualizationEnabled

PrIVmCfg_SetRamHotplugEnabled(...)
PrIVmCfg_SetRamHotplugEnabled

PrIVmCfg_SetRamSize(...)

Sets the virtual machine memory (RAM) size.

PrIVmCfg_SetRateBound(...)

PrIVmCfg_SetRateBound

PrIVmCfg_SetResource(...)

PrIVmCfg_SetResource

PrIVmCfg_SetScrResEnabled(...)

Enable or disable the additional screen resolution support in the virtual machine.

PrIVmCfg_SetSearchDomains(...)

Set the global search domain list that will be assigned to the guest OS.

PrIVmCfg_SetShareAllHostDisks(...)

Enable sharing of all host disks for the virtual machine.

PrIVmCfg_SetShareClipboard(...)

Enable or disable the clipboard sharing feature.

PrIVmCfg_SetShareUserHomeDir(...)

Enable or disable sharing of the host user home directory in the specified virtual machine.

PrIVmCfg_SetSharedProfileEnabled(...)

Enable or disable the Shared Profile feature in the virtual machine.

PrIVmCfg_SetSmartGuardEnabled(...)

Enable the SmartGuard feature in the virtual machine.

PrIVmCfg_SetSmartGuardInterval(...)

Set the time interval at which snapshots are taken by SmartGuard.

PrIVmCfg_SetSmartGuardMaxSnapshotsCount(...)

Set the maximum snapshot count, a SmartGuard feature.

PrIVmCfg_SetSmartGuardNotifyBeforeCreation(...)

Enable or disable notification of automatic snapshot creation, a SmartGuard feature.

PrIVmCfg_SetSmartMountDVDsEnabled(...)

PrIVmCfg_SetSmartMountDVDsEnabled

PrIVmCfg_SetSmartMountEnabled(...)

PrIVmCfg_SetSmartMountEnabled

PrIVmCfg_SetSmartMountNetworkSharesEnabled(...)

PrIVmCfg_SetSmartMountNetworkSharesEnabled

PrIVmCfg_SetSmartMountRemovableDrivesEnabled(...)

PrIVmCfg_SetSmartMountRemovableDrivesEnabled

PrIVmCfg_SetStartInDetachedWindowEnabled(...)

PrIVmCfg_SetStartInDetachedWindowEnabled

PrIVmCfg_SetStartLoginMode(...)

Set the automatic startup login mode for the specified virtual machine.

PrIVmCfg_SetStartUserCreds(...)

Set the automatic startup user login and password for the virtual machine.

PrIVmCfg_SetSwitchOffWindowsLogoEnabled(...)

PrIVmCfg_SetSwitchOffWindowsLogoEnabled

PrIVmCfg_SetSystemFlags(...)

Set the virtual machine system flags.

PrIVmCfg_SetTemplateSign(...)

Modify a regular virtual machine to become a template, and vice versa.

PrIVmCfg_SetTimeSyncInterval(...)

Set the time interval at which time in the virtual machine will be synchronized with the host OS.

PrIVmCfg_SetTimeSyncSmartModeEnabled(...)

Enable or disable the smart time-synchronization mode in the virtual machine.

PrIVmCfg_SetTimeSynchronizationEnabled(...)

Enable or disable the time synchronization feature in a virtual machine.

PrIVmCfg_SetToolsAutoUpdateEnabled(...)

Enable or disable the Parallels Tools AutoUpdate feature for the virtual machine.

PrIVmCfg_SetUndoDisksMode(...)

Set the undo-disks mode for the virtual machine.

PrIVmCfg_SetUseDefaultAnswers(...)

Enable the use default answers mechanism in a virtual machine.

PrIVmCfg_SetUseDesktop(...)

Enable or disable the 'undo-desktop' feature in the shared profile.

PrIVmCfg_SetUseDocuments(...)

Enable or disable the 'use documents in shared profile' feature.

PrIVmCfg_SetUseDownloads(...)

PrIVmCfg_SetUseDownloads

PrIVmCfg_SetUseMovies(...)

PrIVmCfg_SetUseMovies

PrIVmCfg_SetUseMusic(...)

Enables or disables the 'use music in shared profile' feature.

PrIVmCfg_SetUsePictures(...)

Enables or disables the 'use pictures in shared profile' feature.

PrIVmCfg_SetUserDefinedSharedFoldersEnabled(...)

Enables or disables user-defined shared folders.

PrIVmCfg_SetUuid(...)

Set the virtual machine UUID (universally unique ID).

PrIVmCfg_SetVNCHostName(...)

Set the virtual machine VNC host name.

PrIVmCfg_SetVNCMode(...)

Set the virtual machine VNC mode.

PrIVmCfg_SetVNCPassword(...)

Set the virtual machine VNC password.

PrIVmCfg_SetVNCPort(...)

Set the virtual machine VNC port number.

PrIVmCfg_SetVerticalSynchronizationEnabled(...)

PrIVmCfg_SetVerticalSynchronizationEnabled

PrIVmCfg_SetVideoRamSize(...)

Set the virtual machine video memory size.

PrIVmCfg_SetVmType(...)

PrIVmCfg_SetVmType

PrIVmCfg_SetWindowMode(...)

Sets the virtual machine window mode.

PrIVmDevHdEncryption_GetKeyId(...)

PrIVmDevHdEncryption_GetKeyId

PrIVmDevHdEncryption_SetKeyId(...)

PrIVmDevHdEncryption_SetKeyId

PrlVmDevHdPart_GetSysName(...)

Return the hard disk partition system name.

PrlVmDevHdPart_Remove(...)

Remove the specified partition object from the virtual hard disk list.

PrlVmDevHdPart_SetSysName(...)

Set system name for the disk partition.

PrlVmDevHd_AddPartition(...)

Assign a boot camp partition to the virtual hard disk.

PrlVmDevHd_GetDiskSize(...)

Return the hard disk size.

PrlVmDevHd_GetDiskType(...)

Return the hard disk type.

PrlVmDevHd_GetEncryption(...)

PrlVmDevHd_GetEncryption

PrlVmDevHd_GetMountPoint(...)

PrlVmDevHd_GetMountPoint

PrlVmDevHd_GetPartition(...)Obtain the `VmHdPartition` object containing a hard disk partition info.**PrlVmDevHd_GetPartitionsCount(...)**

Determine the number of partitions on the virtual hard disk.

PrlVmDevHd_GetSerialNumber(...)

Return serial number of the virtual hard disk.

PrlVmDevHd_GetSizeOnDisk(...)

Return the size of the occupied space on the hard disk.

PrlVmDevHd_GetStorageURL(...)

PrlVmDevHd_GetStorageURL

PrlVmDevHd_IsAutoCompressEnabled(...)

PrlVmDevHd_IsAutoCompressEnabled

PrlVmDevHd_IsSplitted(...)

Determine if the virtual hard disk is split into multiple files.

PrlVmDevHd_SetAutoCompressEnabled(...)

PrlVmDevHd_SetAutoCompressEnabled

PrlVmDevHd_SetDiskSize(...)

Set the size of the virtual hard disk.

PrlVmDevHd_SetDiskType(...)

Set the type of the virtual hard disk.

PrlVmDevHd_SetEncryption(...)

PrlVmDevHd_SetEncryption

PrlVmDevHd_SetMountPoint(...)

PrlVmDevHd_SetMountPoint

PrlVmDevHd_SetSerialNumber(...)

Set serial number of the virtual hard disk.

PrlVmDevHd_SetSplitted(...)

Set whether the hard disk should be split into multiple files.

PrlVmDevHd_SetStorageURL(...)

PrlVmDevHd_SetStorageURL

PrlVmDevNet_GenerateMacAddr(...)

Generate a unique MAC address for the virtual network adapter.

PrIVmDevNet_GetAdapterType(...)

PrIVmDevNet_GetAdapterType

PrIVmDevNet_GetBoundAdapterIndex(...)

Return the index of the adapter to which this virtual adapter is bound.

PrIVmDevNet_GetBoundAdapterName(...)

Return the name of the adapter to which this virtual adapter is bound.

PrIVmDevNet_GetDefaultGateway(...)

Obtain the default gateway assigned to the virtual network adapter.

PrIVmDevNet_GetDefaultGatewayIPv6(...)

PrIVmDevNet_GetDefaultGatewayIPv6

PrIVmDevNet_GetDnsServers(...)

Obtain the list of DNS servers which are assigned to the virtual network adapter.

PrIVmDevNet_GetFirewallDefaultPolicy(...)

PrIVmDevNet_GetFirewallDefaultPolicy

PrIVmDevNet_GetFirewallRuleList(...)

PrIVmDevNet_GetFirewallRuleList

PrIVmDevNet_GetHostInterfaceName(...)

PrIVmDevNet_GetHostInterfaceName

PrIVmDevNet_GetMacAddress(...)

Return the MAC address of the virtual network adapter.

PrIVmDevNet_GetMacAddressCanonical(...)

PrIVmDevNet_GetMacAddressCanonical

PrIVmDevNet_GetNetAddresses(...)

Obtain the list of IP address/subnet_mask pairs which are assigned to the virtual network adapter.

PrlVmDevNet_GetSearchDomains(...)

Obtain the lists of search domains assigned to the virtual network adapter.

PrlVmDevNet_GetVirtualNetworkId(...)

Obtain the virtual network ID assigned to the virtual network adapter.

PrlVmDevNet_IsAutoApply(...)

Determine if the network adapter is configured to automatically apply network settings inside guest.

PrlVmDevNet_IsConfigureWithDhcp(...)

Determine if the network adapter is configured through DHCP on the guest OS side.

PrlVmDevNet_IsConfigureWithDhcpIPv6(...)

PrlVmDevNet_IsConfigureWithDhcpIPv6

PrlVmDevNet_IsFirewallEnabled(...)

PrlVmDevNet_IsFirewallEnabled

PrlVmDevNet_IsPktFilterPreventIpSpoof(...)

PrlVmDevNet_IsPktFilterPreventIpSpoof

PrlVmDevNet_IsPktFilterPreventMacSpoof(...)

PrlVmDevNet_IsPktFilterPreventMacSpoof

PrlVmDevNet_IsPktFilterPreventPromisc(...)

PrlVmDevNet_IsPktFilterPreventPromisc

PrlVmDevNet_SetAdapterType(...)

PrlVmDevNet_SetAdapterType

PrlVmDevNet_SetAutoApply(...)

Set whether the network adapter should be automatically configured.

PrlVmDevNet_SetBoundAdapterIndex(...)

Set the index of the adapter to which this virtual adapter should be bound.

PrIVmDevNet_SetBoundAdapterName(...)

Set the name of the network adapter to which this virtual adapter will bind.

PrIVmDevNet_SetConfigureWithDhcp(...)

Set whether the network adapter should be configured through DHCP or manually.

PrIVmDevNet_SetConfigureWithDhcpIPv6(...)

PrIVmDevNet_SetConfigureWithDhcpIPv6

PrIVmDevNet_SetDefaultGateway(...)

Set the default gateway address for the network adapter.

PrIVmDevNet_SetDefaultGatewayIPv6(...)

PrIVmDevNet_SetDefaultGatewayIPv6

PrIVmDevNet_SetDnsServers(...)

Assign DNS servers to the network adapter.

PrIVmDevNet_SetFirewallDefaultPolicy(...)

PrIVmDevNet_SetFirewallDefaultPolicy

PrIVmDevNet_SetFirewallEnabled(...)

PrIVmDevNet_SetFirewallEnabled

PrIVmDevNet_SetFirewallRuleList(...)

PrIVmDevNet_SetFirewallRuleList

PrIVmDevNet_SetHostInterfaceName(...)

PrIVmDevNet_SetHostInterfaceName

PrIVmDevNet_SetMacAddress(...)

Set MAC address to the network adapter.

PrIVmDevNet_SetNetAddresses(...)

Set IP addresses/subnet masks to the network adapter.

PrlVmDevNet_SetPktFilterPreventIpSpoof(...)

PrlVmDevNet_SetPktFilterPreventIpSpoof

PrlVmDevNet_SetPktFilterPreventMacSpoof(...)

PrlVmDevNet_SetPktFilterPreventMacSpoof

PrlVmDevNet_SetPktFilterPreventPromisc(...)

PrlVmDevNet_SetPktFilterPreventPromisc

PrlVmDevNet_SetSearchDomains(...)

Assign search domains to the network adapter.

PrlVmDevNet_SetVirtualNetworkId(...)

Set the virtual network ID for the network adapter.

PrlVmDevSerial_GetSocketMode(...)

Return the socket mode of the virtual serial port.

PrlVmDevSerial_SetSocketMode(...)

Set the socket mode for the virtual serial port.

PrlVmDevSound_GetMixerDev(...)

Return the mixer device string for the sound device.

PrlVmDevSound_GetOutputDev(...)

Return the output device string for the sound device.

PrlVmDevSound_SetMixerDev(...)

Set the mixer device string for the sound device.

PrlVmDevSound_SetOutputDev(...)

Set the output device string for the sound device.

PrlVmDevUsb_GetAutoconnectOption(...)

Obtain the USB controller autoconnect device option.

PrlVmDevUsb_SetAutoconnectOption(...)

Set the USB controller autoconnect device option.

PrlVmDev_Connect(...)

Connect a virtual device to a running virtual machine.

PrlVmDev_CopyImage(...)

PrlVmDev_CopyImage

PrlVmDev_Create(...)

Create a new virtual device object not bound to any virtual machine.

PrlVmDev_CreateImage(...)

Physically create a virtual device image on the host.

PrlVmDev_Disconnect(...)

Disconnect a device from a running virtual machine.

PrlVmDev_GetDescription(...)

Return the description of a virtual device.

PrlVmDev_GetEmulatedType(...)

Return the virtual device emulation type.

PrlVmDev_GetFriendlyName(...)

Return the virtual device user-friendly name.

PrlVmDev_GetIfaceType(...)

Return the virtual device interface type (IDE or SCSI).

PrlVmDev_GetImagePath(...)

Return virtual device image path.

PrlVmDev_GetIndex(...)

Return the index identifying the virtual device.

PrlVmDev_GetOutputFile(...)

Return the virtual device output file.

PrlVmDev_GetStackIndex(...)

Return the virtual device stack index (position at the IDE/SCSI controller bus).

PrlVmDev_GetSubType(...)

PrlVmDev_GetSubType

PrlVmDev_GetSysName(...)

Return the virtual device system name.

PrlVmDev_GetType(...)

Return the virtual device type.

PrlVmDev_IsConnected(...)

Determine if the virtual device is connected.

PrlVmDev_IsEnabled(...)

Determine if the device is enabled.

PrlVmDev_IsPassthrough(...)

Determine if the passthrough mode is enabled for the mass storage device.

PrlVmDev_IsRemote(...)

Determine if the virtual device is a remote device.

PrlVmDev_Remove(...)

Remove the virtual device object from the parent virtual machine list.

PrlVmDev_ResizeImage(...)

Resize the virtual device image.

PrlVmDev_SetConnected(...)

Connect the virtual device.

PrIVmDev_SetDefaultStackIndex(...)

Generates a stack index for the device (the device interface, IDE or SCSI, must be set in advance).

PrIVmDev_SetDescription(...)

Set the device description.

PrIVmDev_SetEmulatedType(...)

Sets the virtual device emulation type.

PrIVmDev_SetEnabled(...)

Enable the specified virtual device.

PrIVmDev_SetFriendlyName(...)

Set the virtual device user-friendly name.

PrIVmDev_SetIfaceType(...)

Set the virtual device interface type (IDE or SCSI).

PrIVmDev_SetImagePath(...)

Set the virtual device image path.

PrIVmDev_SetIndex(...)

Set the index identifying the virtual device.

PrIVmDev_SetOutputFile(...)

Set the virtual device output file.

PrIVmDev_SetPassthrough(...)

Enable the passthrough mode for the mass storage device (optical or hard disk).

PrIVmDev_SetRemote(...)

Change the 'remote' flag for the specified device.

PrIVmDev_SetStackIndex(...)

Set the virtual device stack index (position at the IDE or SCSI controller bus).

PrIVmDev_SetSubType(...)

PrIVmDev_SetSubType

PrIVmDev_SetSysName(...)

Set the virtual device system name.

PrIVmGuest_GetNetworkSettings(...)

Obtain network settings of the guest operating system running in a virtual machine.

PrIVmGuest_Logout(...)

Closes a session (or unbinds from a pre-existing session) in a virtual machine.

PrIVmGuest_RunProgram(...)

Execute a program in a virtual machine.

PrIVmInfo_GetAccessRights(...)

Obtains the `AccessRights` object containing information about the virtual machine access rights.

PrIVmInfo_GetAdditionState(...)

Return the virtual machine addition state information.

PrIVmInfo_GetState(...)

Return the virtual machine state information.

PrIVmInfo_IsInvalid(...)

Determine if the specified virtual machine is invalid.

PrIVmInfo_IsVmWaitingForAnswer(...)

Determine if the specified virtual machine is waiting for an answer to a question that it asked.

PrlVmInfo_IsVncServerStarted(...)

Determine whether a VNC server is running for the specified virtual machine.

PrlVmToolsInfo_GetState(...)**PrlVmToolsInfo_GetVersion(...)****PrlVm_AuthWithGuestSecurityDb(...)**

Authenticate the user through the guest OS security database.

PrlVm_BeginEdit(...)

Mark the beginning of the virtual machine configuration changes operation.

PrlVm_CancelCompact(...)

Finishes process of optimization of virtual hard disk.

PrlVm_CancelConvertDisks(...)

PrlVm_CancelConvertDisks

PrlVm_CaptureScreen(...)

PrlVm_CaptureScreen

PrlVm_ChangeSid(...)

PrlVm_ChangeSid

PrlVm_Clone(...)

Clone an existing virtual machine.

PrlVm_CloneEx(...)

Clone an existing virtual machine (extended version).

PrlVm_CloneWithUuid(...)

PrlVm_CloneWithUuid

PrlVm_Commit(...)

Commit the virtual machine configuration changes.

PrlVm_CommitEncryption(...)

PrlVm_CommitEncryption

PrlVm_CommitEx(...)

PrlVm_CommitEx

PrlVm_Compact(...)

Start the process of a virtual hard disk optimization.

PrlVm_Connect(...)

PrlVm_Connect

PrlVm_ConvertDisks(...)

PrlVm_ConvertDisks

PrlVm_CreateEvent(...)

Creates an event bound to the virtual machine.

PrlVm_CreateSnapshot(...)

Create a snapshot of a virtual machine.

PrlVm_CreateUnattendedFloppy(...)

Create a floppy disk image for unattended Windows installation.

PrlVm_Delete(...)

Delete the specified virtual machine from the host.

PrlVm_DeleteSnapshot(...)

Delete the specified virtual machine snapshot.

PrlVm_Disconnect(...)

PrlVm_Disconnect

PrlVm_DropSuspendedState(...)

Resets a suspended virtual machine.

PrIVm_GenerateVmDevFilename(...)

Generate a unique name for a virtual device.

PrIVm_GetConfig(...)

Obtain a handle of type `VmConfig`

PrIVm_GetPackedProblemReport(...)

`PrIVm_GetPackedProblemReport`

PrIVm_GetPerfStats(...)

`PrIVm_GetPerfStats`

PrIVm_GetProblemReport(...)

Obtain a problem report on abnormal virtual machine termination.

PrIVm_GetQuestions(...)

Synchronously receive questions from the Parallels Service.

PrIVm_GetSnapshotsTree(...)

Obtain snapshot information for the specified virtual machine.

PrIVm_GetSnapshotsTreeEx(...)

`PrIVm_GetSnapshotsTreeEx`

PrIVm_GetState(...)

Obtain the `VmInfo` object containing the specified virtual machine information.

PrIVm_GetStatistics(...)

Obtain the `Statistics` object containing the virtual machine resource usage statistics.

PrIVm_GetStatisticsEx(...)

`PrIVm_GetStatisticsEx`

PrIVm_GetSuspendedScreen(...)

Obtain the virtual machine screen state before it was suspending.

PrIVm_GetToolsState(...)

Determine whether Parallels Tools is installed in the virtual machine.

PrIVm_InitiateDevStateNotifications(...)

Initiate the device states notification service.

PrIVm_InstallTools(...)

Install Parallels Tools in the virtual machine.

PrIVm_Lock(...)

Exclusively locks the virtual machine for current session.

PrIVm_LoginInGuest(...)

Create a new console session or binds to an existing GUI session in a virtual machine.

PrIVm_Migrate(...)

Migrate an existing virtual machine to another host.

PrIVm_MigrateCancel(...)

Cancel the virtual machine migration operation.

PrIVm_MigrateEx(...)

Migrate an existing virtual machine to another host (extended version).

PrIVm_MigrateWithRename(...)

PrIVm_MigrateWithRename

PrIVm_MigrateWithRenameEx(...)

PrIVm_MigrateWithRenameEx

PrIVm_Mount(...)

PrIVm_Mount

PrIVm_Move(...)

PrIVm_Move

PrIVm_Pause(...)

Pause the virtual machine.

PrIVm_RefreshConfig(...)

Refresh the virtual machine configuration information.

PrIVm_RefreshConfigEx(...)

PrIVm_RefreshConfigEx

PrIVm_Reg(...)

Create a new virtual machine and register it with the Parallels Service.

PrIVm_RegEventHandler(...)**PrIVm_RegEx(...)**

PrIVm_RegEx

PrIVm_Reset(...)

Reset the virtual machine.

PrIVm_ResetUptime(...)

PrIVm_ResetUptime

PrIVm_Restart(...)

Restart the virtual machine.

PrIVm_Restore(...)

Restores the registered virtual machine.

PrIVm_Resume(...)

Resume a suspended virtual machine.

PrIVm_SetConfig(...)

This is a reserved method.

PrlVm_SetUserPasswd(...)

Change the password of a guest operating system user.

PrlVm_Start(...)

Start the virtual machine.

PrlVm_StartEx(...)

Start the virtual machine using the specified mode.

PrlVm_StartVncServer(...)

Start a VNC server for the specified virtual machine.

PrlVm_Stop(...)

Stop the virtual machine.

PrlVm_StopEx(...)

PrlVm_StopEx

PrlVm_StopVncServer(...)

Stops the VNC server in a virtual machine

PrlVm_SubscribeToGuestStatistics(...)

Subscribe to receive the virtual machine performance statistics.

PrlVm_SubscribeToPerfStats(...)

PrlVm_SubscribeToPerfStats

PrlVm_Suspend(...)

Suspend the virtual machine.

PrlVm_SwitchToSnapshot(...)

Revert the specified virtual machine to the specified snapshot.

PrlVm_SwitchToSnapshotEx(...)

PrlVm_SwitchToSnapshotEx

PrIVm_Umount(...)
PrIVm_Umount
PrIVm_Unlock(...)
Unlocks a previously locked virtual machine.
PrIVm_Unreg(...)
Unregisters the virtual machine from the Parallels Service.
PrIVm_UnregEventHandler(...)
Unregister an event handler.
PrIVm_UnsubscribeFromGuestStatistics(...)
Cancels the performance statistics subscription.
PrIVm_UnsubscribeFromPerfStats(...)
Cancels the Parallels Service performance statistics subscription .
PrIVm_UpdateSecurity(...)
Updates the security access level for the virtual machine.
PrIVm_UpdateSnapshotData(...)
Modify the virtual machine snapshot name and description.
PrIVm_ValidateConfig(...)
Validate the specified section of a virtual machine configuration.
SetSDKLibraryPath(...)
SetSDKLibraryPath

2.3 Variables

Name	Description
<code>--package--</code>	Value: None

3 Module prlsdkapi.prlsdk.consts

3.1 Variables

Name	Description
DEPRECATED.PET_IO_- CLI_AUDIO_OUTPUT_S- ET_ENCODING	Value: 200130
DEPRECATED.PET_IO_- CLI_AUDIO_OUTPUT_S- STREAM_START	Value: 200128
DEPRECATED.PET_IO_- CLI_AUDIO_OUTPUT_S- STREAM_STOP	Value: 200129
DMT_DISTRO	Value: 0
DMT_LIVE_CD	Value: 1
DMT_MBR	Value: 2
IOS_AUTH_FAILED	Value: 5
IOS_CONNECTION_TIM- EOUT	Value: 4
IOS_DISABLED	Value: 0
IOS_STARTED	Value: 1
IOS_STOPPED	Value: 2
IOS_UNKNOWN_VM_UU- ID	Value: 3
NIC_TYPE_BRIDGE	Value: 1
NIC_TYPE_PHYSICAL	Value: 0
NIC_TYPE_VETH	Value: 3
NIC_TYPE_VLAN	Value: 2
NRM_DISABLED	Value: -1
NRM_ENABLED	Value: 0
P3D_DISABLED	Value: 0
P3D_ENABLED_DX9	Value: 2
P3D_ENABLED_HIGHER	Value: 1
PACF_CANCEL_TASK_- ON_END_SESSION	Value: 8
PACF_HIGH_SECURITY	Value: 2
PACF_LAST	Value: 1024
PACF_MAX	Value: 10
PACF_NON_INTERACTI- VE_MODE	Value: 4
PACF_NORMAL_SECURITY	Value: 1

continued on next page

Name	Description
PADS_CANCELED	Value: 8
PADS_DOWNLOADED	Value: 4
PADS_DOWNLOADING	Value: 3
PADS_MOVED	Value: 6
PADS_NOT_STARTED	Value: 1
PADS_REGISTERED	Value: 7
PADS_STOPPED	Value: 2
PADS_UNPACKED	Value: 5
PAIF_INIT_AS_APPSTORE_CLIENT	Value: 4096
PAIF_USE_GRAPHIC_MODE	Value: 2048
PAI_GENERATE_INDEX	Value: -2
PAI_INVALID_ADAPTER	Value: -1
PAM_LAST	Value: 0
PAM_SERVER	Value: 0
PAM_UNKNOWN	Value: 65535
PAO_VM_NOT_SHARED	Value: 0
PAO_VM_SHARED_ON_FULL_ACCESS	Value: 3
PAO_VM_SHARED_ON_VIEW	Value: 1
PAO_VM_SHARED_ON_VIEW_AND_RUN	Value: 2
PAO_VM_SHUTDOWN	Value: 2
PAO_VM_START_MANUAL	Value: 0
PAO_VM_START_ON_GUI_APP_STARTUP	Value: 3
PAO_VM_START_ON_GUI_VM_WINDOW_OPEN	Value: 4
PAO_VM_START_ON_GUI_WINDOW_LOAD	Value: 3
PAO_VM_START_ON_LOAD	Value: 1
PAO_VM_START_ON_RELOAD	Value: 2
PAO_VM_STOP	Value: 0
PAO_VM_SUSPEND	Value: 1
PARALLELS_API_VER	Value: 458752
PAR_MAX	Value: 66

continued on next page

Name	Description
PAR_SRV_SENDRPROBLEMREPORT_ACCESS	Value: 65
PAR_SRV_SERVER_PROFILE_BEGINEDIT_ACCESS	Value: 47
PAR_SRV_SERVER_PROFILE_COMMIT_ACCESS	Value: 48
PAR_SRV_USER_PROFILE_BEGINEDIT_ACCESS	Value: 45
PAR_SRV_USER_PROFILE_COMMIT_ACCESS	Value: 46
PAR_VMDEV_CONNECT_ACCESS	Value: 15
PAR_VMDEV_COPY_IMAGE_ACCESS	Value: 61
PAR_VMDEV_CREATEIMAGE_ACCESS	Value: 17
PAR_VMDEV_DISCONNECT_ACCESS	Value: 16
PAR_VM_AUTHORISE_ACCESS	Value: 60
PAR_VM_BEGINEDIT_ACCESS	Value: 50
PAR_VM_CANCEL_COMPACT_ACCESS	Value: 23
PAR_VM_CANCEL_COMPRESSOR_ACCESS	Value: 32
PAR_VM_CHANGE_GUEST_OS_PASSWORD_ACCESS	Value: 64
PAR_VM_CHANGE_PASSWORD_ACCESS	Value: 59
PAR_VM_CHANGE_SID_ACCESS	Value: 53
PAR_VM_CLONE_ACCESS	Value: 7
PAR_VM_COMMIT_ACCESS	Value: 14
PAR_VM_COMPACT_ACCESS	Value: 52
PAR_VM_CONVERT_DISKS_ACCESS	Value: 58

continued on next page

Name	Description
PAR_VM_CREATE_ACCESS	Value: 44
PAR_VM_CREATE_BACKUP_ACCESS	Value: 42
PAR_VM_CREATE_SNAPSHOT_ACCESS	Value: 33
PAR_VM_DECRYPT_ACCESS	Value: 59
PAR_VM_DELETE_ACCESS	Value: 8
PAR_VM_DELETE_SNAPSHOT_ACCESS	Value: 35
PAR_VM_DROPSUSPENDEDSTATE_ACCESS	Value: 6
PAR_VM_EDITING_ACCESS	Value: 14
PAR_VM_ENCRYPT_ACCESS	Value: 59
PAR_VM_ENCRYPT_OPERATION_ACCESS	Value: 59
PAR_VM_GETCONFIG_ACCESS	Value: 10
PAR_VM_GETPROBLEMREPORT_ACCESS	Value: 9
PAR_VM_GETSTATISTICS_ACCESS	Value: 11
PAR_VM_GET_SUSPENDED_SCREEN_ACCESS	Value: 27
PAR_VM_GET_TOOLS_INFO	Value: 57
PAR_VM_GET_VIRT_DEV_INFO	Value: 56
PAR_VM_GET_VMINFO_ACCESS	Value: 19
PAR_VM_GUI_VIEW_MODE_CHANGE_ACCESS	Value: 49
PAR_VM_INITIATE_DEV_STATE_NOTIFICATIONS_ACCESS	Value: 21
PAR_VM_INSTALL_TOOLS_ACCESS	Value: 20

continued on next page

Name	Description
PAR_VM_INSTALL_UTILITY_ACCESS	Value: 39
PAR_VM_INTERNAL_CMD_ACCESS	Value: 55
PAR_VM_LOCK_ACCESS	Value: 29
PAR_VM_MIGRATE_ACCESS	Value: 25
PAR_VM_MIGRATE_CANCEL_ACCESS	Value: 25
PAR_VM_MOUNT_ACCESS	Value: 62
PAR_VM_MOVE_ACCESS	Value: 63
PAR_VM_PAUSE_ACCESS	Value: 2
PAR_VM_PERFSTAT_ACCESS	Value: 28
PAR_VM_REGISTER_ACCESS	Value: 24
PAR_VM_REMOVE_PROTECTION_ACCESS	Value: 59
PAR_VM_RESET_ACCESS	Value: 3
PAR_VM_RESET_UPTIME_ACCESS	Value: 54
PAR_VM_RESIZE_DISK_ACCESS	Value: 43
PAR_VM_RESTART_GUEST_ACCESS	Value: 38
PAR_VM_RESTORE_ACCESS	Value: 41
PAR_VM_RESTORE_BACKUP_ACCESS	Value: 51
PAR_VM_RESUME_ACCESS	Value: 5
PAR_VM_RUN_COMPRESSOR_ACCESS	Value: 31
PAR_VM_SEND_ANSWER_ACCESS	Value: 18
PAR_VM_SET_PROTECTION_ACCESS	Value: 59

continued on next page

Name	Description
PAR_VM_START_ACCESS	Value: 0
PAR_VM_START_EX_ACCESS	Value: 36
PAR_VM_START_STOP_VNC_SERVER	Value: 26
PAR_VM_STATISTICS_SUBSCRIPTION_ACCESS	Value: 12
PAR_VM_STOP_ACCESS	Value: 1
PAR_VM_SUBSCRIBETOGUESTSTATISTICS_ACCESS	Value: 12
PAR_VM_SUSPEND_ACCESS	Value: 4
PAR_VM_SWITCH_TO_SNAPSHOT_ACCESS	Value: 34
PAR_VM_UNLOCK_ACCESS	Value: 37
PAR_VM_UNREG_ACCESS	Value: 13
PAR_VM_UNSUBSCRIBEFROMGUESTSTATISTICS_ACCESS	Value: 12
PAR_VM_UPDATE_SECURITY_ACCESS	Value: 22
PAR_VM_UPDATE_TOOLS_SECTION	Value: 40
PAS_CLOSE_VM_WINDOW	Value: 1
PAS_KEEP_VM_WINDOW_OPEN	Value: 0
PAS_QUIT_APPLICATION	Value: 2
PBMBF_CREATE_MAP	Value: 2048
PBO_CD_HDD_FLOPPY	Value: 2
PBO_FLOPPY_HDD_CD	Value: 1
PBO_HDD_CD_FLOPPY	Value: 0
PBSL_HIGH_SECURITY	Value: 2
PBSL_LOW_SECURITY	Value: 0
PBSL_NORMAL_SECURITY	Value: 1
PBT_BACKUP_ID	Value: 524288

continued on next page

Name	Description
PBT_CHAIN	Value: 1048576
PBT_CT	Value: 262144
PBT_DIFFERENTIAL	Value: 8192
PBT_DIRECT_DATA_CONNECTION	Value: 4194304
PBT_EFI	Value: 1
PBT_FULL	Value: 2048
PBT_IGNORE_NOT_EXISTS	Value: 32768
PBT_INCREMENTAL	Value: 4096
PBT_KEEP_CHAIN	Value: 2097152
PBT_LEGACY	Value: 0
PBT_RESTORE_TO_COPY	Value: 16384
PBT_UNCOMPRESSED	Value: 65536
PBT_VM	Value: 131072
PCA_COHERENCE	Value: 2
PCA_CRYSTAL	Value: 7
PCA_HIDE_APPLICATION	Value: 5
PCA_MODALITY	Value: 4
PCA_NO_ACTION	Value: 0
PCA_SEAMLESS	Value: 3
PCA_UNGRAB_INPUT	Value: 6
PCA_WINDOWED	Value: 1
PCC_AUDIT_WRITE	Value: 536870912
PCC_CHOWN	Value: 1
PCC_DAC_OVERRIDE	Value: 2
PCC_DAC_READ_SEARCH	Value: 4
PCC_FOWNER	Value: 8
PCC_FSETID	Value: 16
PCC_FS_MASK	Value: 1
PCC_IPC_LOCK	Value: 16384
PCC_IPC_OWNER	Value: 32768
PCC_KILL	Value: 32
PCC_LEASE	Value: 268435456
PCC_LINUX_IMMUTABLE	Value: 512
PCC_MKNOD	Value: 134217728
PCC_NET_ADMIN	Value: 4096
PCC_NET_BIND_SERVICE	Value: 1024

continued on next page

Name	Description
PCC_NET_BROADCAST	Value: 2048
PCC_NET_RAW	Value: 8192
PCC_SETFCAP	Value: -2147483648
PCC_SETGID	Value: 64
PCC_SETPCAP	Value: 256
PCC_SETUID	Value: 128
PCC_SYS_ADMIN	Value: 2097152
PCC_SYS_BOOT	Value: 4194304
PCC_SYS_CHROOT	Value: 262144
PCC_SYS_MODULE	Value: 65536
PCC_SYS_NICE	Value: 8388608
PCC_SYS_PACCT	Value: 1048576
PCC_SYS_PTRACE	Value: 524288
PCC_SYS_RAWIO	Value: 131072
PCC_SYS_RESOURCE	Value: 16777216
PCC_SYS_TIME	Value: 33554432
PCC_SYS_TTY_CONFIG	Value: 67108864
PCC_VE_ADMIN	Value: 1073741824
PCDIF_CREATE_FROM_LION_RECOVERY_PARTITION	Value: 2048
PCD_BUSLOGIC	Value: 0
PCD_LSL_SAS	Value: 2
PCD_LSL_SPI	Value: 1
PCD_UNKNOWN_DEVICE	Value: 255
PCD_VIRTIO_SCSI	Value: 3
PCEF_CHANGE_MASTER_KEY	Value: 2048
PCEF_DONT_SHRED_PLAIN_DATA	Value: 4096
PCFE_EXT_00000007_EBX	Value: 2
PCFE_EXT_0000000D_EAX	Value: 7
PCFE_EXT_80000001_ECX	Value: 3
PCFE_EXT_80000001_EDX	Value: 4
PCFE_EXT_80000007_EDX	Value: 5

continued on next page

Name	Description
PCFE_EXT_80000008_EA-X	Value: 6
PCFE_EXT_FEATURES	Value: 1
PCFE_FEATURES	Value: 0
PCFE_MAX	Value: 8
PCF_FEATURE_BRIDGE	Value: 128
PCF_FEATURE_DEF_PERM	Value: 4
PCF_FEATURE_IPGRE	Value: 64
PCF_FEATURE_IPIP	Value: 16
PCF_FEATURE_NFS	Value: 2
PCF_FEATURE_NFSD	Value: 256
PCF_FEATURE_PPP	Value: 32
PCF_FEATURE_SIT	Value: 8
PCF_FEATURE_SYSFS	Value: 1
PCF_LIGHTWEIGHT_CLIENT	Value: 4096
PCF_ORIGINAL_CLIENT	Value: 2048
PCF_TRUSTED_CHANNEL	Value: 8192
PCM_COMPACT_WITH_HARD_DISKS_INFO	Value: 2048
PCM_CPU_AMD_V	Value: 2
PCM_CPU_INTEL_VT_X	Value: 1
PCM_CPU_MODE_32	Value: 0
PCM_CPU_MODE_64	Value: 1
PCM_CPU_NONE_HV	Value: 0
PCM_FULL_CLEAN_UP_VM	Value: 8192
PCM_HARD_DISKS_INFO	Value: 4096
PCNM_DISABLED	Value: 1
PCNM_FULL	Value: 4
PCNM_NOT_SET	Value: 0
PCNM_STATEFUL	Value: 3
PCNM_STATELESS	Value: 2
PCR_DCACHESIZE	Value: 18
PCR_DGRAMRCVBUF	Value: 16
PCR_KMEMSIZE	Value: 1
PCR_LAST	Value: 22

continued on next page

Name	Description
PCR_LOCKEDPAGES	Value: 2
PCR_NUMFILE	Value: 19
PCR_NUMFLOCK	Value: 10
PCR_NUMIPTENT	Value: 20
PCR_NUMOTHERSOCK	Value: 17
PCR_NUMPROC	Value: 5
PCR_NUMPTY	Value: 11
PCR_NUMSIGINFO	Value: 12
PCR_NUMTCPSOCK	Value: 9
PCR_OOMGUARPAGES	Value: 8
PCR_OTHERSOCKBUF	Value: 15
PCR_PHYSPAGES	Value: 6
PCR_PRIVVMPAGES	Value: 3
PCR_QUOTAUGIDLIMIT	Value: 22
PCR_SHMPAGES	Value: 4
PCR_SWAPPAGES	Value: 21
PCR_TCPRCVBUF	Value: 14
PCR_TCPSNDBUF	Value: 13
PCR_VMGUARPAGES	Value: 7
PCSF_BACKUP	Value: 4096
PCSF_DISK_ONLY	Value: 2048
PCS_CONNECTED	Value: 1
PCS_CONNECTING	Value: 2
PCS_DISCONNECTED	Value: 0
PCTMPL_FORCE	Value: 2048
PCTMP_HIGH_SECURITY	Value: 2
PCTMP_LOW_SECURITY	Value: 0
PCTMP_NORMAL_SECURITY	Value: 1
PCT_TYPE_EZ_APP	Value: 1
PCT_TYPE_EZ_OS	Value: 0
PCVD_CANCEL	Value: 2048
PCVD_MERGE_ALL_SNAPSHOTS	Value: 65536
PCVD_TO_EXPANDING_DISK	Value: 8192
PCVD_TO_NON_SPLIT_DISK	Value: 32768
PCVD_TO_PLAIN_DISK	Value: 4096

continued on next page

Name	Description
PCVD_TO_SPLIT_DISK	Value: 16384
PCVF_CHANGE_SID	Value: 4096
PCVF_CLONE_TO_TEMPLATE	Value: 2048
PCVF_DETACH_EXTERNAL_VIRTUAL_HDD	Value: 32768
PCVF_IMPORT_BOOT_CAMP	Value: 16384
PCVF_LINKED_CLONE	Value: 8192
PDA_DEVICE_IDLE	Value: 0
PDA_DEVICE_READ	Value: 1
PDA_DEVICE_WRITE	Value: 2
PDBF_BGR32	Value: 5
PDBF_INDEX8	Value: 1
PDBF_NO_CONVERSION	Value: 0
PDBF_RGB15	Value: 2
PDBF_RGB16	Value: 3
PDBF_RGB24	Value: 4
PDBF_RGB32	Value: 6
PDBF_YUV420	Value: 16
PDBF_YUV422x4	Value: 12
PDBF_YUV422x6	Value: 11
PDBF_YUV422x8	Value: 10
PDCC_HIGH_COMPRESSION	Value: 32768
PDCC_LOW_COMPRESSION	Value: 131072
PDCC_MEDIUM_COMPRESSION	Value: 65536
PDCC_NO_COMPRESSION	Value: 262144
PDCM_CLIENT_DISPLAY_INFO	Value: 1
PDCM_DISABLE_HIDPI_ADJUSTMENT	Value: 16
PDCM_DO_NOT_RESTORE	Value: 4
PDCM_ENABLE_HEADS	Value: 64
PDCM_HAS_HIDPI_DISPLAY	Value: 2
PDCM_RESTORE_DEFAULT	Value: 8

continued on next page

Name	Description
PDCM_RETINA_MODE	Value: 32
PDCQ_HIGH_QUALITY	Value: 1
PDCQ_LOW_QUALITY	Value: 4
PDCQ_MEDIUM_QUALITY	Value: 2
PDCT_HIGH_QUALITY_WITHOUT_COMPRESSION	Value: 262145
PDCT_HIGH_QUALITY_WITH_COMPRESSION	Value: 65537
PDCT_LOW_QUALITY_WITHOUT_COMPRESSION	Value: 262148
PDCT_LOW_QUALITY_WITH_COMPRESSION	Value: 65540
PDCT_MEDIUM_QUALITY_WITHOUT_COMPRESSION	Value: 262146
PDCT_MEDIUM_QUALITY_WITH_COMPRESSION	Value: 65538
PDE_ATTACHED_BACKUP_DISK	Value: 22
PDE_CLUSTERED_DEVICE	Value: 1
PDE_FLOPPY_DISK	Value: 3
PDE_GENERIC_DEVICE	Value: 0
PDE_GENERIC_NETWORK_ADAPTER	Value: 8
PDE_GENERIC_PCI_DEVICE	Value: 17
PDE_GENERIC_PORT	Value: 9
PDE_GENERIC_SCSI_DEVICE	Value: 18
PDE_HARD_DISK	Value: 6
PDE_MASSSTORAGE_DEVICE	Value: 4
PDE_MAX	Value: 23
PDE_MIXER_DEVICE	Value: 13
PDE_OPTICAL_DISK	Value: 5
PDE_PARALLEL_PORT	Value: 11

continued on next page

Name	Description
PDE_PCI_VIDEO_ADAPTER	Value: 20
PDE_PRINTER	Value: 16
PDE_SERIAL_PORT	Value: 10
PDE_SOUND_DEVICE	Value: 12
PDE_STORAGE_DEVICE	Value: 2
PDE_USB_DEVICE	Value: 15
PDE_VIRTUAL_SHARE- D_FOLDERS_DEVICE	Value: 21
PDE_VIRTUAL_SNAPSHOT_DEVICE	Value: 19
PDM_APP_IN_DOCK_ALWAYS	Value: 2
PDM_APP_IN_DOCK_COHERENCE_ONLY	Value: 1
PDM_APP_IN_DOCK_NEVER	Value: 0
PDR_ANOTHER_CLIENT_CONNECTED	Value: 4
PDR_HOST_USER_INPUT_DETECTED	Value: 3
PDR_HOST_USER_LOGGED_IN	Value: 2
PDR_RECONNECT	Value: 1
PDR_SESSION_BECOME_INACTIVE	Value: 5
PDR_UNSPECIFIED	Value: 0
PDSF_BACKUP	Value: 4096
PDSF_BACKUP_MAP	Value: 8192
PDSF_SKIP_SPACE_CHECK	Value: 2048
PDSS_UNKNOWN	Value: 0
PDSS_VM_DISK_DATA_SPACE	Value: 4
PDSS_VM_FULL_SPACE	Value: 5
PDSS_VM_MISCELLANEOUS_SPACE	Value: 1
PDSS_VM_RECLAIM_SPACE	Value: 2
PDSS_VM_SNAPSHOTS_SPACE	Value: 3

continued on next page

Name	Description
PDT_ANY_TYPE	Value: 65535
PDT_USE_AC97_SOUND	Value: 0
PDT_USE_BOOTCAMP	Value: 3
PDT_USE_BRIDGE_ETHERNET	Value: 2
PDT_USE_CREATIVE_SB16_SOUND	Value: 1
PDT_USE_DIRECT_ASSIGN	Value: 4
PDT_USE_FILE_SYSTEM	Value: 5
PDT_USE_HOST_ONLY_NETWORK	Value: 0
PDT_USE_IMAGE_FILE	Value: 1
PDT_USE_OTHER	Value: 3
PDT_USE_OUTPUT_FILE	Value: 2
PDT_USE_PARALLEL_PORT_PRINTER_MODE	Value: 3
PDT_USE_PARALLEL_PORT_PRINT_TO_PDF_MODE	Value: 1
PDT_USE_REAL_CDDVD	Value: 0
PDT_USE_REAL_DEVICE	Value: 0
PDT_USE_REAL_FLOPPY	Value: 0
PDT_USE_REAL_HDD	Value: 0
PDT_USE_REAL_PARALLEL_PORT	Value: 0
PDT_USE_REAL_SERIAL_PORT	Value: 0
PDT_USE_REAL_USB_CONTROLLER	Value: 0
PDT_USE_SERIAL_PORT_SOCKET_MODE	Value: 3
PDT_USE_SERIAL_PORT_TCP_MODE	Value: 6
PDT_USE_SERIAL_PORT_UDP_MODE	Value: 7
PDT_USE_SHARED_NETWORK	Value: 1

continued on next page

Name	Description
PDT_USE_TCP	Value: 6
PDT_USE_UDP	Value: 7
PEMBF_FAILURE_CLEANUP	Value: 2048
PET_DESKCTL_ACCEPT_CLIENTS	Value: 200408
PET_DESKCTL_ATTACH	Value: 200402
PET_DESKCTL_ATTACH_FIN	Value: 200403
PET_DESKCTL_CONFIG	Value: 200410
PET_DESKCTL_CONFIG_QUERY	Value: 200411
PET_DESKCTL_LOCAL_AUTH	Value: 200404
PET_DESKCTL_LOCAL_AUTH_ANSWER	Value: 200406
PET_DESKCTL_LOCAL_AUTH_FIN	Value: 200407
PET_DESKCTL_LOCAL_AUTH_REQUEST	Value: 200405
PET_DESKCTL_REJECT_CLIENTS	Value: 200409
PET_DESKCTL_SEND_SAS	Value: 200412
PET_DESKCTL_SESSION_AUTH	Value: 200400
PET_DESKCTL_SESSION_AUTH_FIN	Value: 200401
PET_DESKCTL_STATUS_CHANGE	Value: 200413
PET_DSP_COHERENCE_FAKE_STUB_NOTIFICATION	Value: 101401
PET_DSP_EVT_ANSWER_TO_VM_WAS_DONE	Value: 100513
PET_DSP_EVT_APPLIANCE_ARCHIVE_UNPACK_FINISHED	Value: 101303

continued on next page

Name	Description
PET_DSP_EVT_APPLIANCE_ARCHIVE_UNPACK_STARTED	Value: 101302
PET_DSP_EVT_APPLIANCE_DOWNLOAD_FINISHED	Value: 101301
PET_DSP_EVT_APPLIANCE_DOWNLOAD_PROGRESS_CHANGED	Value: 101300
PET_DSP_EVT_APPLIANCE_REGISTER_VM_FINISHED	Value: 101305
PET_DSP_EVT_APPLIANCE_REGISTER_VM_STARTED	Value: 101304
PET_DSP_EVT_BACKUP_CANCELLED	Value: 100048
PET_DSP_EVT_BACKUP_PROGRESS_CHANGED	Value: 100050
PET_DSP_EVT_BACKUP_STARTED	Value: 100047
PET_DSP_EVT_CEP_WRITE_STRING	Value: 101400
PET_DSP_EVT_CLIENT_CONNECTED	Value: 100300
PET_DSP_EVT_CLIENT_DISCONNECTED	Value: 100301
PET_DSP_EVT_CLIENT_REJECTED	Value: 100302
PET_DSP_EVT_COMMIT_UNFINISHED_DISK_OP_FINISHED	Value: 100520
PET_DSP_EVT_COMMIT_UNFINISHED_DISK_OP_STARTED	Value: 100519
PET_DSP_EVT_COMMON_PREFS_CHANGED	Value: 100501
PET_DSP_EVT_CONNECTED_TO_PROXY	Value: 100065
PET_DSP_EVT_CONNECTING_TO_PROXY	Value: 100067

continued on next page

Name	Description
PET_DSP_EVT_CONNECTION_CLIENT_INFO_WAS_SET	Value: 100079
PET_DSP_EVT_CONNECTION_WAS_CLOSED	Value: 100080
PET_DSP_EVT_CONVERSION_DISKS_PROGRESS_CHANGED	Value: 100062
PET_DSP_EVT_CONVERSION_DISKS_PROGRESS_FINISHED	Value: 100063
PET_DSP_EVT_CONVERT_THIRD_PARTY_PROGRESS_CHANGED	Value: 100064
PET_DSP_EVT_CREATE_BACKUP_FINISHED	Value: 100049
PET_DSP_EVT_DIR_STATE_CHANGED	Value: 100200
PET_DSP_EVT_DISCONNECTED_FROM_PROXY	Value: 100066
PET_DSP_EVT_DISK_RESIZE_FINISHED	Value: 100054
PET_DSP_EVT_DISK_RESIZE_PROGRESS_CHANGED	Value: 100055
PET_DSP_EVT_DISK_RESIZE_STARTED	Value: 100053
PET_DSP_EVT_DISP_CONNECTION_CLOSED	Value: 100403
PET_DSP_EVT_DISP_SHUTDOWN	Value: 100404
PET_DSP_EVT_ENCRYPTED_VM_NEED_AUTH_AGAIN	Value: 101503
PET_DSP_EVT_ENCRYPTED_VM_PASSWORD_CHANGED	Value: 101502
PET_DSP_EVT_ERROR_MESSAGE	Value: 100507
PET_DSP_EVT_FOUND_LOST_VM_CONFIG	Value: 100400

continued on next page

Name	Description
PET_DSP_EVT_HAS_EVENT	Value: 100401
PET_DSP_EVT_HOST_STATISTICS_UPDATED	Value: 100201
PET_DSP_EVT_HW_CONFIG_CHANGED	Value: 100202
PET_DSP_EVT_JOB_PROGRESS_CHANGED	Value: 100051
PET_DSP_EVT_LICENSE_CHANGED	Value: 100514
PET_DSP_EVT_OP_ACCEPTED	Value: 100100
PET_DSP_EVT_OP_REJECTED	Value: 100101
PET_DSP_EVT_OP_RESULT	Value: 100102
PET_DSP_EVT_PERFSTATS	Value: 100900
PET_DSP_EVT_REBOOT_HOST	Value: 100045
PET_DSP_EVT_REBOOT_HOST_MANUAL_TO_INIT_VTD_DEVICES	Value: 100046
PET_DSP_EVT_RECONFIG_VM_PROGRESS_CHANGED	Value: 100068
PET_DSP_EVT_RECONNECT	Value: 100402
PET_DSP_EVT_REMOVE_BACKUP_FINISHED	Value: 100058
PET_DSP_EVT_RESTORE_BACKUP_FINISHED	Value: 100057
PET_DSP_EVT_RESTORE_PROGRESS_CHANGED	Value: 100052
PET_DSP_EVT_SMC_CANCEL_USER_COMMAND	Value: 100601
PET_DSP_EVT_SMC_DISPATCHER_SHUTDOWN	Value: 100602
PET_DSP_EVT_SMC_USER_FORCE_DISCONNECTED	Value: 100600

continued on next page

Name	Description
PET_DSP_EVT_TIME_MACHINE_BACKUP_IS_OVER	Value: 100061
PET_DSP_EVT_USER_PROFILE_CHANGED	Value: 100500
PET_DSP_EVT_VM_ABORTED	Value: 100009
PET_DSP_EVT_VM_ABORT_TO_RESET	Value: 100024
PET_DSP_EVT_VM_ABORT_TO_START_DEINIT	Value: 100039
PET_DSP_EVT_VM_ABORT_TO_START_INIT	Value: 100040
PET_DSP_EVT_VM_ADDED	Value: 100005
PET_DSP_EVT_VM_ADDITION_STATE_CHANGED	Value: 100056
PET_DSP_EVT_VM_COMPACT_FINISHED	Value: 100802
PET_DSP_EVT_VM_COMPACT_PROCESSING	Value: 100801
PET_DSP_EVT_VM_COMPRESSOR_CONTINUED	Value: 100804
PET_DSP_EVT_VM_COMPRESSOR_FINISHED	Value: 100803
PET_DSP_EVT_VM_CONFIG_APPLIED	Value: 100021
PET_DSP_EVT_VM_CONFIG_APPLY_FINISHED	Value: 100070
PET_DSP_EVT_VM_CONFIG_CHANGED	Value: 100002
PET_DSP_EVT_VM_CONFIG_CONTINUED	Value: 100020
PET_DSP_EVT_VM_CONFIG_CONTINUED_BY_HOST_WAKEUP	Value: 100076
PET_DSP_EVT_VM_CREATED	Value: 100004

continued on next page

Name	Description
PET_DSP_EVT_VM_DECRYPT_PROGRESS_CHANGED	Value: 100522
PET_DSP_EVT_VM_DELETED	Value: 100006
PET_DSP_EVT_VM_DELETING_STATE	Value: 100037
PET_DSP_EVT_VM_DEV_STATE_CHANGED	Value: 100003
PET_DSP_EVT_VM_ENCRYPT_PROGRESS_CHANGED	Value: 100521
PET_DSP_EVT_VM_FROZEN	Value: 100077
PET_DSP_EVT_VM_IO_CLIENT_STATISTICS	Value: 100071
PET_DSP_EVT_VM_LOW_HOST_MEMORY	Value: 100073
PET_DSP_EVT_VM_MAC_OS_VER	Value: 100074
PET_DSP_EVT_VM_MEMORY_SWAPPING_FINISHED	Value: 100042
PET_DSP_EVT_VM_MEMORY_SWAPPING_STARTED	Value: 100041
PET_DSP_EVT_VM_MESSAGE	Value: 100502
PET_DSP_EVT_VM_MIGRATE_CANCELLED	Value: 100031
PET_DSP_EVT_VM_MIGRATE_CANCELLED_DISP	Value: 100059
PET_DSP_EVT_VM_MIGRATE_FINISHED	Value: 100032
PET_DSP_EVT_VM_MIGRATE_FINISHED_DISP	Value: 100060
PET_DSP_EVT_VM_MIGRATE_PROGRESS_CHANGED	Value: 100033
PET_DSP_EVT_VM_MIGRATE_STARTED	Value: 100030

continued on next page

Name	Description
PET_DSP_EVT_VM_MIGRATE_WAIT_REMOUNT	Value: 100069
PET_DSP_EVT_VM_NETWORK_RECONNECTED	Value: 100018
PET_DSP_EVT_VM_PAUSED	Value: 100019
PET_DSP_EVT_VM_PAUSED_BY_HOST_SLEEP	Value: 100075
PET_DSP_EVT_VM_PERF_STATS	Value: 100901
PET_DSP_EVT_VM_PISO_NOTIFICATION_ASK_TO_INSTALL	Value: 100806
PET_DSP_EVT_VM_PROBLEM_REPORT_CREATED	Value: 100023
PET_DSP_EVT_VM_QUESTIONS	Value: 100503
PET_DSP_EVT_VM_REMOTE_DEV_READY_TO_START	Value: 100027
PET_DSP_EVT_VM_RESETED	Value: 100010
PET_DSP_EVT_VM_RESTORED	Value: 100017
PET_DSP_EVT_VM_RESTOREING	Value: 100035
PET_DSP_EVT_VM_RESUMED	Value: 100014
PET_DSP_EVT_VM_RESUMING	Value: 100013
PET_DSP_EVT_VM_SECURITY_CHANGED	Value: 100025
PET_DSP_EVT_VM_SET_HOST_TIME	Value: 100072
PET_DSP_EVT_VM_SNAPSHOTED	Value: 100016
PET_DSP_EVT_VM_SNAPSHOTING	Value: 100034
PET_DSP_EVT_VM_SNAPSHOTS_TREE_CHANGED	Value: 100036

continued on next page

Name	Description
PET_DSP_EVT_VM_SOFTWARE_INSTALLED	Value: 100805
PET_DSP_EVT_VM_STARTED	Value: 100007
PET_DSP_EVT_VM_START_IO_FLOW	Value: 100015
PET_DSP_EVT_VM_STATE_RESTORED	Value: 100017
PET_DSP_EVT_VM_STATE_SAVED	Value: 100016
PET_DSP_EVT_VM_STATE_CHANGED	Value: 100001
PET_DSP_EVT_VM_STATE_DELETED	Value: 100038
PET_DSP_EVT_VM_STATISTICS_UPDATED	Value: 100022
PET_DSP_EVT_VM_STOPPED	Value: 100008
PET_DSP_EVT_VM_SUSPENDED	Value: 100012
PET_DSP_EVT_VM_SUSPENDING	Value: 100011
PET_DSP_EVT_VM_TOOLS_STATE_CHANGED	Value: 100800
PET_DSP_EVT_VM_UNFROZEN	Value: 100078
PET_DSP_EVT_VM_UNREGISTERED	Value: 100026
PET_DSP_EVT_VM_UPGRADE_COMPLETED	Value: 101005
PET_DSP_EVT_VM_UPGRADE_INIT	Value: 101000
PET_DSP_EVT_VM_UPGRADE_INIT_PHY	Value: 101008
PET_DSP_EVT_VM_UPGRADE_INIT_TIMEOUT	Value: 101001
PET_DSP_EVT_VM_UPGRADE_INIT_VMW	Value: 101007
PET_DSP_EVT_VM_UPGRADE_STAGE_1	Value: 101002
PET_DSP_EVT_VM_UPGRADE_STAGE_2	Value: 101003

continued on next page

Name	Description
PET_DSP_EVT_VM_UPGRADE_STAGE_3	Value: 101004
PET_DSP_EVT_VM_UPGRADE_UNKNOWN_ERROR	Value: 101006
PET_DSP_EVT_VM_VIRTUAL_DEVICES_STATE_CHANGED	Value: 100807
PET_DSP_EVT_VM_WAS_DECRYPTED	Value: 101501
PET_DSP_EVT_VM_WAS_ENCRYPTED	Value: 101500
PET_DSP_EVT_VM_WAS_PROTECTED	Value: 101504
PET_DSP_EVT_VM_WAS_UNPROTECTED	Value: 101505
PET_DSP_EVT_WARNING_MESSAGE	Value: 100508
PET_IO_ATTACH_RESPONSE	Value: 200004
PET_IO_AUDIO_OUTPUT_DATA	Value: 100730
PET_IO_AUDIO_OUTPUT_ENCODING_SET	Value: 100731
PET_IO_AUDIO_OUTPUT_STOP	Value: 100734
PET_IO_AUDIO_OUTPUT_STREAM_STARTED	Value: 100732
PET_IO_AUTH_RESPONSE	Value: 200003
PET_IO_AVAILABLE_DISPLAYS	Value: 100727
PET_IO_BEFORE_SCREEN_SIZE	Value: 100707
PET_IO_CLIENT_PROCESSED_ALL_DESCS_DATA	Value: 200205
PET_IO_CLI_ATTACH_TO_VM	Value: 200101
PET_IO_CLI_AUDIO_LAYOUT_STREAM_START	Value: 200143

continued on next page

Name	Description
PET_IO_CLI_AUDIO_PLAYOUT_STREAM_STOP	Value: 200144
PET_IO_CLI_AUDIO_RECORDING_STREAM_START	Value: 200141
PET_IO_CLI_AUDIO_RECORDING_STREAM_STOP	Value: 200142
PET_IO_CLI_AUTHENTICATE_EXEC_SESSION	Value: 200133
PET_IO_CLI_AUTHENTICATE_SESSION	Value: 200100
PET_IO_CLI_CVSRC_CONNECT	Value: 200131
PET_IO_CLI_CVSRC_DISCONNECT	Value: 200132
PET_IO_CLI_DPI_SCREEN_SIZE	Value: 200139
PET_IO_CLI_ENCODING_REQUEST	Value: 200102
PET_IO_CLI_GRACEFUL_SHUTDOWN	Value: 200110
PET_IO_CLI_KEYBOARD_KEY	Value: 200126
PET_IO_CLI_KEYBOARD_SCANCODE	Value: 200106
PET_IO_CLI_MOUSE_MOVE	Value: 200108
PET_IO_CLI_MOUSE_NEEDED_CURSOR	Value: 200109
PET_IO_CLI_MOUSE_SETPOS	Value: 200107
PET_IO_CLI_REMOTE_COMMAND	Value: 200112
PET_IO_CLI_SCREEN_CAPTURE_BUFFER	Value: 200104
PET_IO_CLI_SCREEN_SET_SURFACE	Value: 200111
PET_IO_CLI_SCREEN_SIZE	Value: 200105
PET_IO_CLI_SCREEN_WATCH_UPDATES	Value: 200103

continued on next page

Name	Description
PET_IO_CLI_SSO_LOCKED	Value: 200137
PET_IO_CLI_SSO_SET_CREDENTIALS	Value: 200135
PET_IO_CLI_SSO_SET_CREDENTIALS_ASYNC	Value: 200136
PET_IO_CLI_SSO_UNLOCKED	Value: 200138
PET_IO_CLI_SWITCH_SLIDING_MOUSE	Value: 200134
PET_IO_CLI_TOOLS_ADJUST_WORKING_AREA	Value: 200125
PET_IO_CLI_TOOLS_CLI_PBOARD_DATA	Value: 200115
PET_IO_CLI_TOOLS_EMPTY_RECYCLE_BIN	Value: 200119
PET_IO_CLI_TOOLS_GENERAL_COMMAND	Value: 200118
PET_IO_CLI_TOOLS_MOVE_TASKBAR	Value: 200122
PET_IO_CLI_TOOLS_NOTIFY_COHERENCE_STATE	Value: 200124
PET_IO_CLI_TOOLS_OPEN_FILE_BROWSER	Value: 200145
PET_IO_CLI_TOOLS_SET_INDENTS	Value: 200140
PET_IO_CLI_TOOLS_SET_TASKBAR_VISIBILITY	Value: 200120
PET_IO_CLI_TOOLS_SHOW_RECYCLE_BIN	Value: 200123
PET_IO_CLI_TOOLS_SIA_DATA	Value: 200116
PET_IO_CLI_TOOLS_TIS_QUERY	Value: 200114
PET_IO_CLI_TOOLS_TOGGLE_DESKTOP	Value: 200121
PET_IO_CLI_TOOLS_UIEMU	Value: 200127
PET_IO_CLI_TOOLS_UTILITY_COMMAND	Value: 200113

continued on next page

Name	Description
PET_IO_CLI_TOOLS_VM-CTG_COMMAND	Value: 200117
PET_IO_CVSRC_CLOSE	Value: 100736
PET_IO_CVSRC_OPEN	Value: 100735
PET_IO_DEVICE_IS_IN_USE	Value: 100703
PET_IO_DISCONNECT_WITH_REASON	Value: 200500
PET_IO_DISPLAY_BEFORE_SCREEN_SIZE	Value: 100723
PET_IO_DISPLAY_GAMMA_CHANGED	Value: 100740
PET_IO_DISPLAY_PALETTE_CHANGED	Value: 200000
PET_IO_DISPLAY_RESOLUTION_SET	Value: 200510
PET_IO_DISPLAY_SCREEN_CAPTURED	Value: 100724
PET_IO_DISPLAY_SCREEN_SIZE	Value: 100722
PET_IO_DYNRES_TOOL_STATUS	Value: 100712
PET_IO_ENCODING_RESPONSE	Value: 200005
PET_IO_EVT_DISCONNECT_WITH_REASON	Value: 101700
PET_IO_FIN_TO_TRANSMIT_STDOUT_STDERR	Value: 200204
PET_IO_IOSERVICE_CHANNELS_PROTOCOL	Value: 200800
PET_IO_KEYBOARD_LEDS	Value: 100704
PET_IO_MEMORY_INFO	Value: 200006
PET_IO_MOUSE_CURSOR_CHANGED	Value: 100709
PET_IO_MOUSE_CURSOR_HID	Value: 100710
PET_IO_MOUSE_CURSOR_MOVED	Value: 100738
PET_IO_MOUSE_CURSOR_SET	Value: 100711
PET_IO_PTM_PROTOCOL	Value: 200700

continued on next page

Name	Description
PET.IO.READY_TO_ACCEPT_STDIN_PKGS	Value: 101100
PET.IO.READY_TO_ACCEPT_STDOUT_STDERR_PKGS	Value: 200203
PET.IO.REMOTE_COMMAND	Value: 100708
PET.IO.SCREEN_CAPTURED	Value: 100706
PET.IO.SCREEN_CAPTURED_BUFFER	Value: 200007
PET.IO.SCREEN_SIZE	Value: 100700
PET.IO.SCREEN_SURFACE_ATTACHED	Value: 100728
PET.IO.SCREEN_SURFACE_DETACHED	Value: 100716
PET.IO.SCREEN_UPDATED	Value: 200002
PET.IO.SLIDING_MOUSE_FLAG	Value: 100702
PET.IO.SSO_GET_CREDENTIALS	Value: 100737
PET.IO.STATE	Value: 100705
PET.IO.STDERR_PORTION	Value: 200202
PET.IO.STDIN_PORTION	Value: 200200
PET.IO.STDIN_WAS_CLOSED	Value: 200208
PET.IO.STDOUT_PORTION	Value: 200201
PET.IO.SWITCH_VESA_MODE	Value: 100725
PET.IO.TOOLS_CLIPBOARD_DATA	Value: 100715
PET.IO.TOOLS_DESKTOP_UTILITY_STATE	Value: 100721
PET.IO.TOOLS_DRAGDROP_DATA	Value: 100719
PET.IO.TOOLS_GENERAL_COMMAND	Value: 100720

continued on next page

Name	Description
PET_IO_TOOLS_LANGUAGE_HOTKEY_CHANGED	Value: 100726
PET_IO_TOOLS_SIA_DATA	Value: 100717
PET_IO_TOOLS_TIS_QUERY	Value: 200001
PET_IO_TOOLS_TIS_SUBSCRIBE	Value: 200008
PET_IO_TOOLS_TIS_UNSUBSCRIBE	Value: 200009
PET_IO_TOOLS_UTILITY_COMMAND	Value: 100713
PET_IO_TOOLS_VMCTG_COMMAND	Value: 100718
PET_IO_TOOLS_VM_SHUTDOWN	Value: 100714
PET_IO_TTY_SETTINGS_PROVIDED	Value: 200207
PET_IO_TTY_SETTINGS_REQUIRED	Value: 200206
PET_IO_UIEMU_CARET_INFO	Value: 100739
PET_IO_UIEMU_ELEMENT_AT_POS	Value: 100729
PET_IT_COMPACTING_START	Value: 200314
PET_IT_CONVERT_TO_CURRENT_START	Value: 200303
PET_IT_CONVERT_TO_EXTEND_START	Value: 200316
PET_IT_CONVERT_TO_OLD_START	Value: 200302
PET_IT DECREASING_START	Value: 200313
PET_IT_FIX_CONSISTENCY_START	Value: 200315
PET_IT_GET_RESIZE_INFORMATION_START	Value: 200310
PET_IT_INCREASE_LAST_VOLUME_START	Value: 200311
PET_IT_MAKE_EXPANDING_START	Value: 200307

continued on next page

Name	Description
PET_IT_MAKE_NON_SPLIT_START	Value: 200309
PET_IT_MAKE_PLAIN_START	Value: 200306
PET_IT_MAKE_SPLIT_START	Value: 200308
PET_IT_MERGE_SNAPSHOTS_START	Value: 200305
PET_IT_RECONFIG_BOOTCAMP_START	Value: 200300
PET_IT_RECONFIG_START	Value: 200304
PET_IT_RESIZING_START	Value: 200312
PET_IT_VALIDATE_BOOTCAMP_START	Value: 200301
PET_JOB_COMMIT_UNFINISHED_DISK_OP_PROGRESS_CHANGED	Value: 100518
PET_JOB_CREATE_SNAPSHOT_PROGRESS_CHANGED	Value: 100515
PET_JOB_DELETE_SNAPSHOT_PROGRESS_CHANGED	Value: 100517
PET_JOB_DELETE_VM_PROGRESS_CHANGED	Value: 100504
PET_JOB_FILE_COPY_PROGRESS_CHANGED	Value: 100510
PET_JOB_HDD_CREATE_PROGRESS_CHANGED	Value: 100509
PET_JOB_RESUME_PROGRESS_CHANGED	Value: 100512
PET_JOB_STAGE_PROGRESS_CHANGED	Value: 100523
PET_JOB_SUSPEND_PROGRESS_CHANGED	Value: 100511
PET_JOB_SWITCH_TO_SNAPSHOT_PROGRESS_CHANGED	Value: 100516

continued on next page

Name	Description
PET_PTM_EVT_OBJECT_CREATED	Value: 101902
PET_PTM_EVT_OBJECT_DELETED	Value: 101901
PET_PTM_EVT_PROPERTY_CHANGED	Value: 101900
PET_PTM_EVT_RPC_COMPLETED	Value: 101904
PET_PTM_EVT_SUBSCRIBED	Value: 101903
PET_VIDEO_CAPTURE_GEOMETRY	Value: 101803
PET_VIDEO_DATA_CHANNEL_CTL	Value: 200607
PET_VIDEO_RECEIVER_CLOSED	Value: 101802
PET_VIDEO_RECEIVER_CONNECTION_STATE	Value: 101804
PET_VIDEO_RECEIVER_FORMAT	Value: 101800
PET_VIDEO_RECEIVER_FRAME	Value: 101801
PET_VIDEO_STREAM_ACK_FRAME	Value: 200605
PET_VIDEO_STREAM_CLOSE	Value: 200601
PET_VIDEO_STREAM_CLOSED	Value: 200604
PET_VIDEO_STREAM_DATA	Value: 200603
PET_VIDEO_STREAM_FORMAT	Value: 200602
PET_VIDEO_STREAM_OPEN	Value: 200606
PET_VIDEO_STREAM_START	Value: 200600
PET_VIDEO_STREAM_STOP	Value: 200608
PET_VM_DEFAULT_SOUND_RECONNECTED	Value: 101202
PET_VM_EVT_MOUNT	Value: 100044
PET_VM_EVT_REQUEST_FILE_OPEN	Value: 100029

continued on next page

Name	Description
PET_VM_EVT_TIS_BAC- KUP_WRITE	Value: 101600
PET_VM_EVT_UNMOU- NT	Value: 100043
PET_VM_EVT_UNMOU- NT_DVD_MEDIA	Value: 101204
PET_VM_EVT_UNMOU- NT_USB_MEDIA	Value: 101203
PET_VM_EVT_VM.CON- FIG_CHANGED	Value: 100028
PET_VM_INF_END_BUN- CH_COPYING	Value: 100525
PET_VM_INF_END_FILE- _COPYING	Value: 100506
PET_VM_INF_START_B- UNCH_COPYING	Value: 100524
PET_VM_INF_START_FI- LE_COPYING	Value: 100505
PET_VM_INF_UNINITIA- LIZED_EVENT_CODE	Value: 100000
PET_VM_READY_TO_B- OOT	Value: 101200
PET_VM_READY_TO_P- RINT	Value: 101201
PEVF_WAIT_FOR_APPL- Y	Value: 4096
PEVT_NATIVE_VM	Value: 0
PEVT_VMWARE	Value: 1
PEVT_VM_UNKNOWN	Value: 0
PFD_ALL	Value: 14336
PFD_BINARY	Value: 9
PFD_BOOLEAN	Value: 4
PFD_CDATA	Value: 3
PFD_ENTITY	Value: 5
PFD_ENUMERATION	Value: 6
PFD_INCOMING	Value: 0
PFD_INT32	Value: 2
PFD_INT64	Value: 7
PFD_OUTGOING	Value: 1
PFD_STDERR	Value: 4096
PFD_STDIN	Value: 8192
PFD_STDOUT	Value: 2048

continued on next page

Name	Description
PFD_STRING	Value: 1
PFD_UINT32	Value: 0
PFD_UINT64	Value: 8
PFD_UNKNOWN	Value: 255
PFP_ACCEPT	Value: 0
PFP_DENY	Value: 1
PFSM_AUTOSTART_VM_AS_OWNER	Value: 4
PFSM_CPU_HOTPLUG_SUPPORT	Value: 11
PFSM_DEFAULT_PLAIN_DISK_ALLOWED	Value: 5
PFSM_DEFAULT_SATA_ALLOWED	Value: 1
PFSM_DESKTOP_CONTROL_SUPPORT	Value: 15
PFSM_DISK_IO_LIMITS	Value: 7
PFSM_FINE_CPU_LIMITS	Value: 8
PFSM_IPV6_SUPPORT	Value: 12
PFSM_NIC_CHANGE_ALLOWED	Value: 14
PFSM_NO_SHARED_NETWORKING	Value: 6
PFSM_PSBM5	Value: 3
PFSM_RAM_HOTPLUG_SUPPORT	Value: 10
PFSM_ROUTED_NETWORKING	Value: 9
PFSM_SATA_HOTPLUG_SUPPORT	Value: 1
PFSM_UNKNOWN_FEATURE	Value: 0
PFSM_USB_PRINTER_SUPPORT	Value: 13
PFSM_VM_CONFIG_MERGE_SUPPORT	Value: 2
PFS_UNIX_LIKE_FS	Value: 1
PFS_WINDOWS_LIKE_FS	Value: 0
PGD_PCI_DISPLAY	Value: 1
PGD_PCI_NETWORK	Value: 0

continued on next page

Name	Description
PGD_PCI_OTHER	Value: 3
PGD_PCI_SOUND	Value: 2
PGD_UNKNOWN	Value: 0
PGD_WINDOWS_VISTA	Value: 1
PGD_WINDOWS_VISTA- _32	Value: 1
PGD_WINDOWS_VISTA- _64	Value: 4
PGD_WINDOWS_XP	Value: 2
PGD_WINDOWS_XP_32	Value: 2
PGD_WINDOWS_XP_64	Value: 3
PGST_CAPABILITY_HI- BERNATE	Value: 8
PGST_CAPABILITY_RE- BOOT	Value: 2
PGST_CAPABILITY_SH- UTDOWN	Value: 1
PGST_CAPABILITY_SU- SPEND	Value: 4
PGST_FULL_SIZE_SCRE- ENSHOTS	Value: 2048
PGST_WITHOUT_SCRE- ENSHOTS	Value: 4096
PGS_CONNECTED_TO_- HOST	Value: 0
PGS_CONNECTED_TO_- VM	Value: 1
PGS_CONNECTING_TO_- VM	Value: 3
PGS_NON_CONTROLLE- D_USB	Value: 2
PGS_OS_EXPERIMENT- AL	Value: 1
PGS_OS_SUPPORTED	Value: 0
PGS_RESERVED	Value: 2
PGVC_FILL_AUTOGEN- ERATED	Value: 8192
PGVC_SEARCH_BY_NA- ME	Value: 4096
PGVC_SEARCH_BY_UUI- D	Value: 2048
PGVLF_FILL_AUTOGE- NERATED	Value: 32768

continued on next page

Name	Description
PGVLF_GET_ONLY_CT	Value: 4096
PGVLF_GET_ONLY_IDENTITY_INFO	Value: 8192
PGVLF_GET_ONLY_VM	Value: 2048
PGVLF_GET_ONLY_VM_TEMPLATES	Value: 65536
PGVLF_GET_STATE_INFO	Value: 16384
PHD_EXPANDING_HARD_DISK	Value: 1
PHD_PLAIN_HARD_DISK	Value: 0
PHI_REAL_NET_ADAPTER	Value: 0
PHI_VIRTUAL_NET_ADAPTER	Value: 1
PHO_LIN	Value: 1
PHO_MAC	Value: 0
PHO_UNKNOWN	Value: 255
PHO_WIN	Value: 2
PHT_ACCESS_RIGHTS	Value: 268435504
PHT_APPLIANCE_CONFIG	Value: 268435522
PHT_BACKUP_RESULT	Value: 268435543
PHT_BOOT_DEVICE	Value: 268435497
PHT_CPU_FEATURES	Value: 268435549
PHT_CPU_POOL	Value: 268435550
PHT_CT_TEMPLATE	Value: 268435529
PHT_CVSR	Value: 268435541
PHT_DESKTOP_CONTROL	Value: 268435542
PHT_DISP_CONFIG	Value: 268435478
PHT_DISP_NET_ADAPTER	Value: 268435481
PHT_ERROR	Value: 0
PHT_EVENT	Value: 268435474
PHT_EVENT_PARAMETER	Value: 268435486
PHT_FIREWALL_RULE	Value: 268435538
PHT_FOUND_VM_INFO	Value: 268435506
PHT_GUEST_OSES_MATRIX	Value: 268435520

continued on next page

Name	Description
PHT_HANDLES_LIST	Value: 268435502
PHT_HW_GENERIC_DEVICE	Value: 268435482
PHT_HW_GENERIC_PCI_DEVICE	Value: 268435518
PHT_HW_HARD_DISK	Value: 268435483
PHT_HW_HARD_DISK_PARTITION	Value: 268435484
PHT_HW_NET_ADAPTE-R	Value: 268435485
PHT_IPPRIV_NET	Value: 268435539
PHT_ISCSILLUN	Value: 268435528
PHT_JOB	Value: 268435473
PHT_LAST	Value: 268435554
PHT_LICENSE	Value: 268435495
PHT_LOGIN_RESPONSE	Value: 268435499
PHT_NETWORK_CLASS	Value: 268435525
PHT_NETWORK_RATE	Value: 268435527
PHT_NETWORK_SHAPI-NG	Value: 268435526
PHT_NETWORK_SHAPI-NG_BANDWIDTH	Value: 268435545
PHT_NETWORK_SHAPI-NG_CONFIG	Value: 268435544
PHT_NET_SERVICE_ST-ATUS	Value: 268435501
PHT_OFFLINE_SERVIC-E	Value: 268435523
PHT_OPAQUE_TYPE_LI-ST	Value: 268435519
PHT_PLUGIN_INFO	Value: 268435540
PHT_PORT_FORWARDI-NG	Value: 268435517
PHT_PROBLEM.REPOR-T	Value: 268435521
PHT_REMOTEDEV_CM-D	Value: 268435487
PHT_REMOTE_FILESYS-TEM_ENTRY	Value: 268435460
PHT_REMOTE_FILESYS-TEM_INFO	Value: 268435459
PHT_RESULT	Value: 268435475

continued on next page

Name	Description
PHT_RUNNING_TASK	Value: 268435500
PHT_SCREEN_RESOLUTION	Value: 268435480
PHT_SERVER	Value: 268435457
PHT_SERVER_CONFIG	Value: 268435458
PHT_SERVER_INFO	Value: 268435496
PHT_SESSION_INFO	Value: 268435548
PHT_SHARE	Value: 268435479
PHT_STRINGS_LIST	Value: 268435498
PHT_SYSTEM_STATISTICS	Value: 268435488
PHT_SYSTEM_STATISTICS_CPU	Value: 268435489
PHT_SYSTEM_STATISTICS_DISK	Value: 268435492
PHT_SYSTEM_STATISTICS_DISK_PARTITION	Value: 268435493
PHT_SYSTEM_STATISTICS_IFACE	Value: 268435490
PHT_SYSTEM_STATISTICS_PROCESS	Value: 268435494
PHT_SYSTEM_STATISTICS_USER_SESSION	Value: 268435491
PHT_SYSTEM_STATISTICS_VM_DATA	Value: 268435546
PHT_TIS_EMITTER	Value: 268435510
PHT_TIS_RECORD	Value: 268435507
PHT_TOOL	Value: 268435511
PHT_USB_IDENTITY	Value: 268435537
PHT_USER_INFO	Value: 268435508
PHT_USER_PROFILE	Value: 268435477
PHT_VCMMD_CONFIG	Value: 268435554
PHT_VIDEO_RECEIVER	Value: 268435547
PHT_VIRTUAL_DEV_DISPLAY	Value: 268435462
PHT_VIRTUAL_DEV_FLOPPY	Value: 268435465
PHT_VIRTUAL_DEV_GENERIC_PCI	Value: 268435513
PHT_VIRTUAL_DEV_GENERIC_SCSI	Value: 268435514
PHT_VIRTUAL_DEV_HARDDISK	Value: 268435466

continued on next page

Name	Description
PHT_VIRTUAL_DEV_HD_PARTITION	Value: 268435512
PHT_VIRTUAL_DEV_KEYBOARD	Value: 268435463
PHT_VIRTUAL_DEV_MOUSE	Value: 268435464
PHT_VIRTUAL_DEV_NETWORK_ADAPTER	Value: 268435467
PHT_VIRTUAL_DEV_OPTICAL_DISK	Value: 268435470
PHT_VIRTUAL_DEV_PARALLEL_PORT	Value: 268435468
PHT_VIRTUAL_DEV_SERIAL_PORT	Value: 268435469
PHT_VIRTUAL_DEV_SOUND	Value: 268435472
PHT_VIRTUAL_DEV_USB_DEVICE	Value: 268435471
PHT_VIRTUAL_DISK	Value: 268435503
PHT_VIRTUAL_DISK_ENCRYPTION	Value: 268435553
PHT_VIRTUAL_DISK_MAP	Value: 268435551
PHT_VIRTUAL_DISK_OPEN_POLICY	Value: 268435552
PHT_VIRTUAL_MACHINE	Value: 268435461
PHT_VIRTUAL_NETWORK	Value: 268435516
PHT_VM_CONFIGURATION	Value: 268435461
PHT_VM_GUEST_SESSION	Value: 268435515
PHT_VM_INFO	Value: 268435476
PHT_VM_TOOLS_INFO	Value: 268435505
PHT_VM_VIRTUAL_DEVICES_INFO	Value: 268435524
PHY_WIFI_REAL_NETWORK_ADAPTER	Value: 2
PIAF_CANCEL	Value: 2048
PIAF_FORCE	Value: 4096
PIAF_STOP	Value: 8192

continued on next page

Name	Description
PIE_DISPATCHER	Value: 1
PIE_IO_SERVICE	Value: 2
PIE_UNKNOWN	Value: 255
PIE_VIRTUAL_MACHINE	Value: 0
PIE_WEB_SERVICE	Value: 3
PIF_BMP	Value: 1342177289
PIF_JPG	Value: 1342177290
PIF_PNG	Value: 1342177291
PIF_RAW	Value: 1342177288
PIM_ALL_DISKS	Value: 67108863
PIM_COMPACT_DELAYED	Value: 2147483648
PIM_IDE_0_0	Value: 1
PIM_IDE_0_1	Value: 2
PIM_IDE_1_0	Value: 4
PIM_IDE_1_1	Value: 8
PIM_IDE_MASK_OFFSET	Value: 1
PIM_SATA_0_0	Value: 1048576
PIM_SATA_0_1	Value: 2097152
PIM_SATA_0_2	Value: 4194304
PIM_SATA_0_3	Value: 8388608
PIM_SATA_0_4	Value: 16777216
PIM_SATA_0_5	Value: 33554432
PIM_SATA_MASK_OFFSET	Value: 1048576
PIM_SCSI_0_0	Value: 16
PIM_SCSI_10_0	Value: 16384
PIM_SCSI_11_0	Value: 32768
PIM_SCSI_12_0	Value: 65536
PIM_SCSI_13_0	Value: 131072
PIM_SCSI_14_0	Value: 262144
PIM_SCSI_15_0	Value: 524288
PIM_SCSI_1_0	Value: 32
PIM_SCSI_2_0	Value: 64
PIM_SCSI_3_0	Value: 128
PIM_SCSI_4_0	Value: 256
PIM_SCSI_5_0	Value: 512
PIM_SCSI_6_0	Value: 1024
PIM_SCSI_7_0	Value: 2048
PIM_SCSI_8_0	Value: 4096

continued on next page

Name	Description
PIM SCSI_9_0	Value: 8192
PIM SCSI_MASK_OFFSET	Value: 16
PISCSI_STORAGE_CREATE	Value: 2048
PISCSI_STORAGE_EXT3	Value: 2048
PISCSI_STORAGE_EXT4	Value: 4096
PISCSI_STORAGE_MOUNT	Value: 32768
PISCSI_STORAGE_MOUNT_RDONLY	Value: 8192
PISCSI_STORAGE_NTFS	Value: 8192
PISCSI_STORAGE_REMOVE	Value: 16384
PISCSI_STORAGE_REMOVE	Value: 4096
PIT_DOCK_ICON_LIVE_SCREEN_SHOT	Value: 1
PIT_DOCK_ICON_START_MENU	Value: 2
PIT_DOCK_ICON_SYSTEM	Value: 0
PJOC_API_GET_USER_DATA	Value: 183
PJOC_API_GET_USER_KEYS	Value: 184
PJOC_API_PUT_ICON	Value: 186
PJOC_API_PUT_USER_DATA	Value: 182
PJOC_API_REMOVE_USER_DATA	Value: 185
PJOC_API_SEND_PACKED_PROBLEM_REPORT	Value: 132
PJOC_API_SEND_PROBLEM_REPORT	Value: 117
PJOC_API_SUBSCRIBE_ON_REGISTRATION	Value: 189
PJOC_API_VALIDATE_IN_CACHE	Value: 187
PJOC_CT_REINSTALL	Value: 201
PJOC_DESKTOP_CONTROL_CONNECT	Value: 176

continued on next page

Name	Description
PJOC_JOB_CANCEL	Value: 1
PJOC_PTM_RPC	Value: 181
PJOC_REPORT_ASSEMBLY	Value: 137
PJOC_SRV_ADD_IPPRIVATE_NETWORK	Value: 166
PJOC_SRV_ADD_NET_ADAPTER	Value: 35
PJOC_SRV_ADD_VIRTUAL_NETWORK	Value: 108
PJOC_SRV_AFTER_HOST_RESUME	Value: 113
PJOC_SRV_ATTACH_TO_LOST_TASK	Value: 39
PJOC_SRV_CHECK_ALIVE	Value: 162
PJOC_SRV_COMMON_PREFS_BEGIN_EDIT	Value: 8
PJOC_SRV_COMMON_PREFS_COMMIT	Value: 9
PJOC_SRV_CONFIGURE_GENERIC_PCI	Value: 111
PJOC_SRV_COPY_CT_TEMPLATE	Value: 165
PJOC_SRV_CPU_POOLS_JOIN	Value: 197
PJOC_SRV_CPU_POOLS_LEAVE	Value: 198
PJOC_SRV_CPU_POOLS_LIST_POOLS	Value: 194
PJOC_SRV_CPU_POOLS_MOVE	Value: 195
PJOC_SRV_CPU_POOLS_RECALCULATE	Value: 196
PJOC_SRV_CREATE_UNATTENDED_CD	Value: 121
PJOC_SRV_CREATE_VM_BACKUP	Value: 115
PJOC_SRV_DELETE_NET_ADAPTER	Value: 36
PJOC_SRV_DELETE_OFFLINE_SERVICE	Value: 140

continued on next page

Name	Description
PJOC_SRV_DELETE_VIRTUAL_NETWORK	Value: 110
PJOC_SRV_EXTEND_ISCSI_STORAGE	Value: 160
PJOC_SRV_FS_CAN_CREATE_FILE	Value: 23
PJOC_SRV_FS_CREATE_DIR	Value: 21
PJOC_SRV_FS_GENERATE_ENTRY_NAME	Value: 25
PJOC_SRV_FS_GET_DIR_ENTRIES	Value: 20
PJOC_SRV_FS_GET_DISK_LIST	Value: 19
PJOC_SRV_FS_REMOVE_ENTRY	Value: 22
PJOC_SRV_FS_RENAME_ENTRY	Value: 24
PJOC_SRV_GENERATE_CSR	Value: 178
PJOC_SRV_GET_ALL_HOST_USERS	Value: 100
PJOC_SRV_GET_BACKUP_TREE	Value: 114
PJOC_SRV_GET_COMMON_PREFS	Value: 7
PJOC_SRV_GET_CT_TEMPLATE_LIST	Value: 161
PJOC_SRV_GET_DEFAULT_VM_CONFIG	Value: 163
PJOC_SRV_GET_DISK_FREE_SPACE	Value: 175
PJOC_SRV_GET_IPPRIVATE_NETWORKS_LIST	Value: 169
PJOC_SRV_GET_LICENSE_INFO	Value: 27
PJOC_SRV_GET_NETWORK_CLASSES_LIST	Value: 153
PJOC_SRV_GET_NETWORK_SHAPING_CONFIG	Value: 155
PJOC_SRV_GET_NET_SERVICE_STATUS	Value: 34

continued on next page

Name	Description
PJOC_SRV_GET_OFFLINE.SERVICES_LIST	Value: 141
PJOC_SRV_GET_PACKED_PROBLEM_REPORT	Value: 131
PJOC_SRV_GET_PERFSTATS	Value: 82
PJOC_SRV_GET_PLUGINS_LIST	Value: 174
PJOC_SRV_GET_PROBLEM_REPORT	Value: 38
PJOC_SRV_GET_SRV_CONFIG	Value: 6
PJOC_SRV_GET_STATISTICS	Value: 11
PJOC_SRV_GET_USER_INFO	Value: 41
PJOC_SRV_GET_USER_INFO_LIST	Value: 40
PJOC_SRV_GET_USER_PROFILE	Value: 10
PJOC_SRV_GET_VCMM_CONFIG	Value: 200
PJOC_SRV_GET_VIRTUAL_NETWORK_LIST	Value: 105
PJOC_SRV_GET_VM_CONFIG	Value: 180
PJOC_SRV_GET_VM_LIST	Value: 15
PJOC_SRV_INSTALL_APPLIANCE	Value: 138
PJOC_SRV_LOGIN	Value: 3
PJOC_SRV_LOGIN_LOCAL	Value: 4
PJOC_SRV_LOGOFF	Value: 5
PJOC_SRV_LOOKUP_PARALLELS_SERVERS	Value: 2
PJOC_SRV_NET_SERVICE_RESTART	Value: 32
PJOC_SRV_NET_SERVICE_RESTORE_DEFAULTS	Value: 33

continued on next page

Name	Description
PJOC_SRV_NET_SERVICE_START	Value: 30
PJOC_SRV_NET_SERVICE_STOP	Value: 31
PJOC_SRV_PREPARE_FOR_HIBERNATE	Value: 112
PJOC_SRV_PROXY_GET_REGISTERED_HOSTS	Value: 157
PJOC_SRV_REFRESH_PLUGINS	Value: 171
PJOC_SRV_REGISTER_3RD_PARTY_VM	Value: 134
PJOC_SRV_REGISTER_ISCSI_STORAGE	Value: 158
PJOC_SRV_REGISTER_VM	Value: 14
PJOC_SRV_REGISTER_VM_EX	Value: 14
PJOC_SRV_REMOVE_CCT_TEMPLATE	Value: 164
PJOC_SRV_REMOVE_IP_PRIVATE_NETWORK	Value: 167
PJOC_SRV_REMOVE_VM_BACKUP	Value: 122
PJOC_SRV_RESTART_NETWORK_SHAPING	Value: 156
PJOC_SRV_RESTORE_VM_BACKUP	Value: 116
PJOC_SRV_SEND_ANSWER	Value: 28
PJOC_SRV_SEND_CLIENT_STATISTICS	Value: 129
PJOC_SRV_SEND_PROBLEM_REPORT	Value: 190
PJOC_SRV_SET_NON_INTERACTIVE_SESSION	Value: 120
PJOC_SRV_SET_SESSION_CONFIRMATION_MODE	Value: 124
PJOC_SRV_SHUTDOWN	Value: 18
PJOC_SRV_SIGN_CERTIFICATION_REQUEST	Value: 179

continued on next page

Name	Description
PJOC_SRV_START_CLUSTER_SERVICE	Value: 142
PJOC_SRV_START_SEARCH_VMS	Value: 29
PJOC_SRV_STOP_CLUSTER_SERVICE	Value: 143
PJOC_SRV_STORE_VALUE_BY_KEY	Value: 125
PJOC_SRV_SUBSCRIBE_PERFSTATS	Value: 80
PJOC_SRV_SUBSCRIBE_TO_HOST_STATISTICS	Value: 16
PJOC_SRV_UNREGISTER_ISCSI_STORAGE	Value: 159
PJOC_SRV_UNSUBSCRIBE_FROM_HOST_STATISTICS	Value: 17
PJOC_SRV_UNSUBSCRIBE_PERFSTATS	Value: 81
PJOC_SRV_UPDATE_IP_PRIVATE_NETWORK	Value: 168
PJOC_SRV_UPDATE_LICENSE	Value: 26
PJOC_SRV_UPDATE_NETWORK_CLASSES_CONFIG	Value: 152
PJOC_SRV_UPDATE_NETWORK_SHAPING_CONFIG	Value: 154
PJOC_SRV_UPDATE_NETWORK_ADAPTER	Value: 37
PJOC_SRV_UPDATE_OFFLINE_SERVICE	Value: 139
PJOC_SRV_UPDATE_SESSION_INFO	Value: 188
PJOC_SRV_UPDATE_USB_ASSOC_LIST	Value: 133
PJOC_SRV_UPDATE_VIRTUAL_NETWORK	Value: 109
PJOC_SRV_USER_PROFILE_BEGIN_EDIT	Value: 12
PJOC_SRV_USER_PROFILE_COMMIT	Value: 13

continued on next page

Name	Description
PJOC_UNKNOWN	Value: 0
PJOC_VM_AUTH_WITH_GUEST_SECURITY_DB	Value: 106
PJOC_VM_BEGIN_EDIT	Value: 62
PJOC_VM_CANCEL_COMPACT	Value: 128
PJOC_VM_CANCEL_COMPRESSOR	Value: 89
PJOC_VM_CHANGE_SID	Value: 135
PJOC_VM_CLONE	Value: 50
PJOC_VM_CMD_INTERNAL	Value: 144
PJOC_VM_COMMIT	Value: 63
PJOC_VM_COMMIT_ENCRYPTION	Value: 199
PJOC_VM_COMPACT	Value: 127
PJOC_VM_CONNECT_TO_VM	Value: 74
PJOC_VM_CONVERT_DISKS	Value: 146
PJOC_VM_CREATE_SNAPSHOT	Value: 90
PJOC_VM_CREATE_UNATTENDED_FLOPPY	Value: 64
PJOC_VM_DELETE	Value: 51
PJOC_VM_DELETE_SNAPSHOT	Value: 92
PJOC_VM_DEV_CONNECT	Value: 68
PJOC_VM_DEV_COPY_IMAGE	Value: 170
PJOC_VM_DEV_CREATE_IMAGE	Value: 70
PJOC_VM_DEV_DISCONNECT	Value: 69
PJOC_VM_DEV_DISPLAY_CAPTURE_SCREEN	Value: 75
PJOC_VM_DROP_SUSPENDED_STATE	Value: 49
PJOC_VM_GENERATE_VM_DEV_FILENAME	Value: 54

continued on next page

Name	Description
PJOC_VM_GET_PACKED_PROBLEM_REPORT	Value: 130
PJOC_VM_GET_PERFSTATS	Value: 85
PJOC_VM_GET_PROBLEM_REPORT	Value: 52
PJOC_VM_GET_SNAPSHOTS_TREE	Value: 93
PJOC_VM_GET_STATE	Value: 53
PJOC_VM_GET_STATISTICS	Value: 57
PJOC_VM_GET_SUSPENDED_SCREEN	Value: 86
PJOC_VM_GET_TOOLS_STATE	Value: 55
PJOC_VM_GET_VIRTUAL_DEVICES_INFO	Value: 145
PJOC_VM_GUEST_GET_NETWORK_SETTINGS	Value: 104
PJOC_VM_GUEST_LOGOUT	Value: 79
PJOC_VM_GUEST_RUN_PROGRAM	Value: 78
PJOC_VM_GUEST_SET_USER_PASSWD	Value: 107
PJOC_VM_INITIATE_DEV_STATE_NOTIFICATIONS	Value: 65
PJOC_VM_INSTALL_TOOLS	Value: 71
PJOC_VM_INSTALL_UTILITY	Value: 98
PJOC_VM_LOCK	Value: 118
PJOC_VM_LOGIN_IN_GUEST	Value: 95
PJOC_VM_MIGRATE	Value: 76
PJOC_VM_MIGRATE_CANCEL	Value: 87
PJOC_VM_MOUNT	Value: 172
PJOC_VM_MOVE	Value: 177
PJOC_VM_PAUSE	Value: 44
PJOC_VM_REFRESH_CONFIG	Value: 56

continued on next page

Name	Description
PJOC_VM_REG	Value: 60
PJOC_VM_REMOVE_PROTECTION	Value: 193
PJOC_VM_RESET	Value: 45
PJOC_VM_RESET_UPTIME	Value: 136
PJOC_VM_RESIZE_DISK_IMAGE	Value: 123
PJOC_VM_RESTART	Value: 97
PJOC_VM_RESTORE	Value: 101
PJOC_VM_RESUME	Value: 42
PJOC_VM_RUN_COMPRESSOR	Value: 88
PJOC_VM_SEND_CLIPBOARD_REQUEST	Value: 73
PJOC_VM_SEND_DRAG_DROP_COMMAND	Value: 77
PJOC_VM_SEND_PROBLEM_REPORT	Value: 191
PJOC_VM_SEND_SHUTDOWN_COMMAND	Value: 72
PJOC_VM_SET_PROTECTION	Value: 192
PJOC_VM_START	Value: 42
PJOC_VM_START_EX	Value: 94
PJOC_VM_START_VNC_SERVER	Value: 102
PJOC_VM_STOP	Value: 43
PJOC_VM_STOP_VNC_SERVER	Value: 103
PJOC_VM_STORE_VALUE_BY_KEY	Value: 126
PJOC_VM_SUBSCRIBE_PERFSTATS	Value: 83
PJOC_VM_SUBSCRIBE_TO_GUEST_STATISTICS	Value: 58
PJOC_VM_SUSPEND	Value: 46
PJOC_VM_SWITCH_TO_SNAPSHOT	Value: 91
PJOC_VM_UMOUNT	Value: 173
PJOC_VM_UNLOCK	Value: 119

continued on next page

Name	Description
PJOC_VM_UNREG	Value: 61
PJOC_VM_UNSUBSCRIBE_FROM_GUEST_STATISTICS	Value: 59
PJOC_VM_UNSUBSCRIBE_PERFSTATS	Value: 84
PJOC_VM_UPDATE_SECURITY	Value: 66
PJOC_VM_UPDATE_SNAPSHOT_DATA	Value: 96
PJOC_VM_UPDATE_TOOLS_SECTION	Value: 99
PJOC_VM_VALIDATE_CONFIG	Value: 67
PJS_FINISHED	Value: -805306366
PJS_RUNNING	Value: -805306367
PJS_UNKNOWN	Value: 0
PKE_CLICK	Value: 255
PKE_PRESS	Value: 0
PKE_RELEASE	Value: 128
PLLF_LOGIN_WITH_DELAYED_CONNECTION	Value: 2048
PLM_ROOT_ACCOUNT	Value: 1
PLM_ROOT_ACOUNT	Value: 1
PLM_START_ACCOUNT	Value: 0
PLM_START_ACOUNT	Value: 0
PLM_USER_ACCOUNT	Value: 2
PLM_USER_ACOUNT	Value: 2
PLRK_ALLOWED_GUEST_OS_VERSIONS	Value: 4
PLRK_RUNNING_VMS_LIMIT	Value: 5
PLRK_RUNNING_VMS_LIMIT_PER_USER	Value: 23
PLRK_UNKNOWN	Value: 0
PLRK_VM_CLONE	Value: 9
PLRK_VM_CONVERT_FROM_TEMPLATE	Value: 11
PLRK_VM_CONVERT_TO_TEMPLATE	Value: 10
PLRK_VM_CPU_LIMIT	Value: 1
PLRK_VM_CREATE	Value: 6

continued on next page

Name	Description
PLRK_VM_DOWNLOAD	Value: 12
PLRK_VM_IMPORT_3RD_PARTY	Value: 8
PLRK_VM_MEMORY_LIMIT	Value: 2
PLRK_VM_PAUSE	Value: 14
PLRK_VM_REGISTER	Value: 7
PLRK_VM_SAFEMODE_FEATURE	Value: 20
PLRK_VM_SHOW_FULLSCREEN	Value: 22
PLRK_VM_SMARTGUARD_FEATURE	Value: 21
PLRK_VM_SNAPSHOT_CREATE	Value: 15
PLRK_VM_SNAPSHOT_DELETE	Value: 17
PLRK_VM_SNAPSHOT_SWITCH	Value: 16
PLRK_VM_SNAPSHOT_TREE	Value: 18
PLRK_VM_SUSPEND	Value: 13
PLRK_VM_UNDODISK_FEATURE	Value: 19
PLRK_VM_VTD_AVAILABLE	Value: 3
PMAA_NO_ADVANCED_AUTH_NEEDED	Value: 0
PMAA_USE_SYSTEM_CREDENTIALS	Value: 1
PMB_LEFT_BUTTON	Value: 1
PMB_MIDDLE_BUTTON	Value: 4
PMB_NOBUTTON	Value: 0
PMB_RIGHT_BUTTON	Value: 2
PMB_XBUTTON1	Value: 8
PMB_XBUTTON2	Value: 16
PMB_XBUTTON3	Value: 32
PMB_XBUTTON4	Value: 64
PMB_XBUTTON5	Value: 128
PMS_IDE_DEVICE	Value: 0
PMS_SATA_DEVICE	Value: 2
PMS_SCSI_DEVICE	Value: 1

continued on next page

Name	Description
PMS_UNKNOWN_DEVICE	Value: 255
PMS_VIRTIO_BLOCK_DEVICE	Value: 3
PMT_ANSWER	Value: 4
PMT_CRITICAL	Value: 2
PMT_INFORMATION	Value: 1
PMT_QUESTION	Value: 3
PMT_WARNING	Value: 0
PMVD_INFO	Value: 8192
PMVD_READ_ONLY	Value: 2048
PMVD_READ_WRITE	Value: 4096
PNA_BRIDGE	Value: 6
PNA_BRIDGED_ETHERNET	Value: 2
PNA_BRIDGED_NETWORK	Value: 2
PNA_DIRECT_ASSIGN	Value: 4
PNA_HOST_ONLY	Value: 0
PNA_ROUTED	Value: 5
PNA_SHARED	Value: 1
PNSF_CT_SKIP_ARPDETECT	Value: 8192
PNSF_VM_START_WAIT	Value: 4096
PNT_E1000	Value: 2
PNT_E1000E	Value: 4
PNT_RTL	Value: 1
PNT_UNDEFINED	Value: 0
PNT_VIRTIO	Value: 3
PNWR_AUTO	Value: 2
PNWR_GENERATED_MAC	Value: 0
PNWR_HOST_MAC	Value: 1
POCA_PAUSE	Value: 0
POCA_RESTART	Value: 1
POCM_AUTO	Value: 2
POCM_DISABLED	Value: 0
POCM_ENABLED	Value: 1
POCO_DUMP	Value: 2048
POCO_FULL	Value: 6144
POCO_REPORT	Value: 4096

continued on next page

Name	Description
POD_OPTIMIZE_FOR_ACCESSIBILITY	Value: 2
POD_OPTIMIZE_FOR_GAMES	Value: 1
POD_STANDARD	Value: 0
PPF_TCP	Value: 0
PPF_UDP	Value: 1
PPRF_ADD_CLIENT_PART	Value: 2048
PPRF_ADD_SERVER_PART	Value: 4096
PPRF_DO_NOT_CREATE_HOST_SCREENSHOT	Value: 8192
PPS_PROC_IDLE	Value: 4
PPS_PROC_RUN	Value: 1
PPS_PROC_SLEEP	Value: 0
PPS_PROC_STOP	Value: 2
PPS_PROC_ZOMBIE	Value: 3
PR3F_ALLOW_UNKNOWN_OS	Value: 2048
PR3F_CREATE_SHADOW_VM	Value: 4096
PRCF_FORCE	Value: 8192
PRCF_UNREG_PRESERVE	Value: 65536
PRD_AUTO	Value: 1
PRD_DISABLED	Value: 0
PRD_MANUAL	Value: 2
PRIF_DISK_INFO	Value: 4096
PRIF_RESIZE_LAST_PARTITION	Value: 2048
PRIF_RESIZE_OFFLINE	Value: 8192
PRL_CPULIMIT_MHZ	Value: 2
PRL_CPULIMIT_PERCENTS	Value: 3
PRL_CPULIMIT_PERCENTS100	Value: 1
PRL_CPULIMIT_PERCENTS_TO_MHZ	Value: 4
PRL_CPUUNITS_DEFAULT	Value: 1000
PRL_CPUUNITS_MAX	Value: 500000

continued on next page

Name	Description
PRL_CPUUNITS_MIN	Value: 10
PRL_CPU_UNLIMITED	Value: 4294967295
PRL_CURRENT_GUEST- _OS_SESSION	Value: '4a5533a7-31c6-4d7a-a400-1f330dc57a9d'
PRL_FS_ADFS	Value: 5
PRL_FS_AFFS	Value: 6
PRL_FS_AFS	Value: 7
PRL_FS_AUTOFS	Value: 8
PRL_FS_CODA	Value: 9
PRL_FS_EFS	Value: 10
PRL_FS_EXTFS	Value: 11
PRL_FS_FAT	Value: 1
PRL_FS_FAT32	Value: 2
PRL_FS_FUSE	Value: 20
PRL_FS_GFS	Value: 19
PRL_FS_HFS	Value: 4
PRL_FS_HPFS	Value: 12
PRL_FS_INVALID	Value: 0
PRL_FS_ISOFS	Value: 13
PRL_FS_JFFS2	Value: 14
PRL_FS_NFS	Value: 15
PRL_FS_NTFS	Value: 3
PRL_FS_QNX4	Value: 16
PRL_FS_REISERFS	Value: 17
PRL_FS_SMBFS	Value: 18
PRL_FS_UNSPECIFIED	Value: 255
PRL_INVALID_FILE_DE- SCRIPTOR	Value: -1
PRL_INVALID_HANDLE	Value: 0
PRL_IOLIMIT_BS	Value: 1
PRL_IOPRIO_DEFAULT	Value: 4
PRL_IOPRIO_MAX	Value: 7
PRL_IOPRIO_MIN	Value: 0
PRL_KEY_0	Value: 19
PRL_KEY_1	Value: 10
PRL_KEY_2	Value: 11
PRL_KEY_3	Value: 12
PRL_KEY_4	Value: 13
PRL_KEY_5	Value: 14
PRL_KEY_6	Value: 15
PRL_KEY_7	Value: 16
PRL_KEY_8	Value: 17

continued on next page

Name	Description
PRL_KEY_9	Value: 18
PRL_KEY_A	Value: 38
PRL_KEY_APP_CALCULATOR	Value: 127
PRL_KEY_APP_DASHBOARD	Value: 174
PRL_KEY_APP_EXPOSE	Value: 173
PRL_KEY_APP_MAIL	Value: 126
PRL_KEY_APP_MY_COMPUTER	Value: 128
PRL_KEY_B	Value: 56
PRL_KEY_BACKSLASH	Value: 51
PRL_KEY_BACKSPACE	Value: 22
PRL_KEY_BRAZILIAN_KEYPAD	Value: 140
PRL_KEY_BREAK	Value: 165
PRL_KEY_C	Value: 54
PRL_KEY_CAPS_LOCK	Value: 66
PRL_KEY_COMMA	Value: 59
PRL_KEY_D	Value: 40
PRL_KEY_DELETE	Value: 107
PRL_KEY_DOLLAR	Value: 170
PRL_KEY_DOT	Value: 60
PRL_KEY_DOWN	Value: 104
PRL_KEY_E	Value: 26
PRL_KEY_EJECT	Value: 136
PRL_KEY_END	Value: 103
PRL_KEY_ENTER	Value: 36
PRL_KEY_EQUAL	Value: 21
PRL_KEY_ESCAPE	Value: 9
PRL_KEY_EURO	Value: 169
PRL_KEY_EUROPE_1	Value: 93
PRL_KEY_EUROPE_2	Value: 94
PRL_KEY_F	Value: 41
PRL_KEY_F1	Value: 67
PRL_KEY_F10	Value: 76
PRL_KEY_F11	Value: 95
PRL_KEY_F12	Value: 96
PRL_KEY_F13	Value: 152
PRL_KEY_F14	Value: 153
PRL_KEY_F15	Value: 154
PRL_KEY_F16	Value: 155

continued on next page

Name	Description
PRL_KEY_F17	Value: 156
PRL_KEY_F18	Value: 157
PRL_KEY_F19	Value: 158
PRL_KEY_F2	Value: 68
PRL_KEY_F20	Value: 159
PRL_KEY_F21	Value: 160
PRL_KEY_F22	Value: 161
PRL_KEY_F23	Value: 162
PRL_KEY_F24	Value: 163
PRL_KEY_F3	Value: 69
PRL_KEY_F4	Value: 70
PRL_KEY_F5	Value: 71
PRL_KEY_F6	Value: 72
PRL_KEY_F7	Value: 73
PRL_KEY_F8	Value: 74
PRL_KEY_F9	Value: 75
PRL_KEY_FN	Value: 168
PRL_KEY_G	Value: 42
PRL_KEY_H	Value: 43
PRL_KEY_HANGUEL	Value: 147
PRL_KEY_HANJA	Value: 148
PRL_KEY_HENKAN	Value: 144
PRL_KEY_HIRAGANA	Value: 150
PRL_KEY_HIRAGANA_- KATAKANA	Value: 142
PRL_KEY_HOME	Value: 97
PRL_KEY_I	Value: 31
PRL_KEY_INSERT	Value: 106
PRL_KEY_INVALID	Value: 0
PRL_KEY_J	Value: 44
PRL_KEY_K	Value: 45
PRL_KEY_KATAKANA	Value: 149
PRL_KEY_KBD_BRIGHT- NESS_DOWN	Value: 175
PRL_KEY_KBD_BRIGHT- NESS_UP	Value: 176
PRL_KEY_L	Value: 46
PRL_KEY_LEFT	Value: 100
PRL_KEY_LEFT_ALT	Value: 64
PRL_KEY_LEFT_BRAC- KET	Value: 34
PRL_KEY_LEFT_BUTT- ON	Value: 178

continued on next page

Name	Description
PRL_KEY_LEFT_CONTROL	Value: 37
PRL_KEY_LEFT_SHIFT	Value: 50
PRL_KEY_LEFT_WIN	Value: 115
PRL_KEY_M	Value: 58
PRL_KEY_MAC129	Value: 177
PRL_KEY_MAX	Value: 193
PRL_KEY_MEDIA_NEXT_TRACK	Value: 118
PRL_KEY_MEDIA_PLAY_PAUSE	Value: 121
PRL_KEY_MEDIA_PREV_TRACK	Value: 119
PRL_KEY_MEDIA_SELECT	Value: 125
PRL_KEY_MEDIA_STOP	Value: 120
PRL_KEY_MENU	Value: 117
PRL_KEY_MIDDLE_BUTTON	Value: 179
PRL_KEY_MINUS	Value: 20
PRL_KEY_MON_BRIGHTNESS_DOWN	Value: 171
PRL_KEY_MON_BRIGHTNESS_UP	Value: 172
PRL_KEY_MOVE_DOWN	Value: 187
PRL_KEY_MOVE_DOWN_LEFT	Value: 186
PRL_KEY_MOVE_DOWN_RIGHT	Value: 188
PRL_KEY_MOVE_LEFT	Value: 184
PRL_KEY_MOVE_RIGHT	Value: 185
PRL_KEY_MOVE_UP	Value: 182
PRL_KEY_MOVE_UP_LEFT	Value: 181
PRL_KEY_MOVE_UP_RIGHT	Value: 183
PRL_KEY_MUHENKAN	Value: 145
PRL_KEY_MUTE	Value: 122
PRL_KEY_N	Value: 57
PRL_KEY_NP_0	Value: 90

continued on next page

Name	Description
PRL_KEY_NP_1	Value: 87
PRL_KEY_NP_2	Value: 88
PRL_KEY_NP_3	Value: 89
PRL_KEY_NP_4	Value: 83
PRL_KEY_NP_5	Value: 84
PRL_KEY_NP_6	Value: 85
PRL_KEY_NP_7	Value: 79
PRL_KEY_NP_8	Value: 80
PRL_KEY_NP_9	Value: 81
PRL_KEY_NP_DELETE	Value: 91
PRL_KEY_NP_ENTER	Value: 108
PRL_KEY_NP_EQUAL	Value: 164
PRL_KEY_NP_MINUS	Value: 82
PRL_KEY_NP_PLUS	Value: 86
PRL_KEY_NP_SLASH	Value: 112
PRL_KEY_NP_STAR	Value: 63
PRL_KEY_NUM_LOCK	Value: 77
PRL_KEY_O	Value: 32
PRL_KEY_P	Value: 33
PRL_KEY_PAGE_DOWN	Value: 105
PRL_KEY_PAGE_UP	Value: 99
PRL_KEY_PAUSE	Value: 110
PRL_KEY_PC9800_KEYPAD	Value: 146
PRL_KEY_PRINT	Value: 92
PRL_KEY_PRINT_WITH_MODIFIER	Value: 166
PRL_KEY_Q	Value: 24
PRL_KEY_QUOTE	Value: 48
PRL_KEY_R	Value: 27
PRL_KEY_RIGHT	Value: 102
PRL_KEY_RIGHT_ALT	Value: 113
PRL_KEY_RIGHT_BRACKET	Value: 35
PRL_KEY_RIGHT_BUTTON	Value: 180
PRL_KEY_RIGHT_CONTROL	Value: 109
PRL_KEY_RIGHT_SHIFT	Value: 62
PRL_KEY_RIGHT_WIN	Value: 116
PRL_KEY_RO	Value: 141

continued on next page

Name	Description
PRL_KEY_S	Value: 39
PRL_KEY_SCROLL_LOCK	Value: 78
PRL_KEY_SEMICOLON	Value: 47
PRL_KEY_SLASH	Value: 61
PRL_KEY_SPACE	Value: 65
PRL_KEY_SYSRQ	Value: 167
PRL_KEY_SYSTEM_POWER	Value: 137
PRL_KEY_SYSTEM_SLEEP	Value: 138
PRL_KEY_SYSTEM_WAKE	Value: 139
PRL_KEY_T	Value: 28
PRL_KEY_TAB	Value: 23
PRL_KEY_TILDA	Value: 49
PRL_KEY_U	Value: 30
PRL_KEY_UP	Value: 98
PRL_KEY_V	Value: 55
PRL_KEY_VOLUME_DOWN	Value: 124
PRL_KEY_VOLUME_UP	Value: 123
PRL_KEY_W	Value: 25
PRL_KEY_WHEEL_DOWN	Value: 190
PRL_KEY_WHEEL_LEFT	Value: 191
PRL_KEY_WHEEL_RIGHT	Value: 192
PRL_KEY_WHEEL_UP	Value: 189
PRL_KEY_WILDCARD_ANY	Value: 6
PRL_KEY_WILDCARD_ANY	Value: 1
PRL_KEY_WILDCARD_CTRL	Value: 5
PRL_KEY_WILDCARD_KEYBOARD	Value: 2
PRL_KEY_WILDCARD_MOUSE	Value: 3
PRL_KEY_WILDCARD_SHIFT	Value: 4

continued on next page

Name	Description
PRL_KEY_WILDCARD.-WIN	Value: 7
PRL_KEY_WWW_BACK	Value: 131
PRL_KEY_WWW_FAVORITES	Value: 135
PRL_KEY_WWW_FORWARD	Value: 132
PRL_KEY_WWW_HOME	Value: 130
PRL_KEY_WWW_REFRESH	Value: 134
PRL_KEY_WWW_SEARCH	Value: 129
PRL_KEY_WWW_STOP	Value: 133
PRL_KEY_X	Value: 53
PRL_KEY_Y	Value: 29
PRL_KEY_YEN	Value: 143
PRL_KEY_Z	Value: 52
PRL_KEY_ZENKAKU_HANKAKU	Value: 151
PRL_MEMGUARANTEE.-AUTO	Value: 0
PRL_MEMGUARANTEE.-PERCENTS	Value: 1
PRL_PRIVILEGED_GUEST_OS_SESSION	Value: '531582ac-3dce-446f-8c26-dd7e3384dcf4'
PRL_PRODUCT_ANY	Value: 0
PRL_PRODUCT_DESKTOP	Value: 1
PRL_PRODUCT_DESKTOP.WL	Value: 6
PRL_PRODUCT_PLAYER	Value: 5
PRL_PRODUCT_SERVER	Value: 2
PRL_PRODUCT_STM	Value: 4
PRL_PRODUCT_WORKSTATION	Value: 3
PRL_UIEMU_ELEMENT.-SEARCH_AREA_GLOBAL	Value: 1
PRL_UIEMU_ELEMENT.-SEARCH_AREA_WINDOW	Value: 0

continued on next page

Name	Description
PRL_USE_VNET_NAME_FOR_BRIDGE_NAME	Value: 2048
PRL_VERSION_10X	Value: 8
PRL_VERSION_3X	Value: 1
PRL_VERSION_4X	Value: 2
PRL_VERSION_5X	Value: 3
PRL_VERSION_6X	Value: 4
PRL_VERSION_7X	Value: 5
PRL_VERSION_8X	Value: 6
PRL_VERSION_9X	Value: 7
PRL_VERSION_ANY	Value: 0
PRL_VM_CPULIMIT_FULL	Value: 0
PRL_VM_CPULIMIT_GUEST	Value: 1
PRNVM_ALLOW_TO_AUTO_DECREASE_HDD_SIZE	Value: 4096
PRNVM_CREATE_FROM_LION_RECOVERY_PARTITION	Value: 2048
PRNVM_PRESERVE_DISK	Value: 8192
PRN_LPT_DEVICE	Value: 0
PRN_UNKNOWN_DEVICE	Value: 255
PRN_USB_DEVICE	Value: 1
PRPM_RUN_PROGRAM_AND_RETURN_IMMEDIATELY	Value: 16384
PRPM_RUN_PROGRAM_ENTER	Value: 65536
PRPM_RUN_PROGRAM_IN_SHELL	Value: 32768
PRR_BACKUP	Value: 14
PRR_BOOT_CAMP	Value: 1
PRR_CONNECTION	Value: 16
PRR_HANG_LOCKUP	Value: 2
PRR_KEYBOARD	Value: 3
PRR_LAST	Value: 16
PRR_MIGRATION	Value: 15
PRR_NETWORK	Value: 4

continued on next page

Name	Description
PRR_OTHER	Value: 13
PRR_PARALLELS_TOOLS	Value: 5
PRR_PERFORMANCE	Value: 6
PRR_PRODUCT_REGISTRATION	Value: 7
PRR_SNAPSHOTS	Value: 8
PRR_SOUND	Value: 9
PRR_SUPPORT_REQUEST	Value: 10
PRR_UNKNOWN	Value: 0
PRR_USB	Value: 11
PRR_VIDEO_3D_GRAPHICS	Value: 12
PRS_NEW_PACKED	Value: 1
PRS_OLD_XML_BASED	Value: 0
PRT_AUTOMATIC_DETECTED_REPORT	Value: 8
PRT_AUTOMATIC_DISPATCHER_GENERATED_REPORT	Value: 2
PRT_AUTOMATIC_GUEST_GENERATED_REPORT	Value: 16
PRT_AUTOMATIC_INSTALLED_SOFTWARE_REPORT	Value: 10
PRT_AUTOMATIC_STATISTICS_REPORT	Value: 9
PRT_AUTOMATIC_TRANSPORTER_REPORT	Value: 14
PRT_AUTOMATIC_UTW7AGENT_POST_MIGRATION	Value: 13
PRT_AUTOMATIC_UTW7AGENT_PRE_MIGRATION	Value: 12
PRT_AUTOMATIC_VM_GENERATED_REPORT	Value: 1
PRT_AUTOMATIC_VZ_STATISTICS_REPORT	Value: 11
PRT_LAST	Value: 19

continued on next page

Name	Description
PRT_REPORT_TYPE_UNDEFINED	Value: 0
PRT_USER_DEFINED_ON_CONNECTED_SERVER	Value: 5
PRT_USER_DEFINED_ON_CONTAINER_REPORT	Value: 17
PRT_USER_DEFINED_ON_DISCONNECTED_SERVER	Value: 6
PRT_USER_DEFINED_ON_MOBILE_FEEDBACK_REPORT	Value: 19
PRT_USER_DEFINED_ON_MOBILE_REPORT	Value: 18
PRT_USER_DEFINED_ON_NOT_RESPONDING_VM_REPORT	Value: 7
PRT_USER_DEFINED_ON_RUNNING_VM_REPORT	Value: 4
PRT_USER_DEFINED_ON_STOPPED_VM_REPORT	Value: 3
PRT_USER_DEFINED_TRANSPORTER_REPORT	Value: 15
PRVF_IGNORE_HA_CLUSTER	Value: 32768
PRVF_KEEP_OTHERS_PERMISSIONS	Value: 4096
PRVF_REGENERATE_SRC_VM_UUID	Value: 16384
PRVF_REGENERATE_VM_UUID	Value: 2048
PSCT_AUTO	Value: 0
PSCT_STEREO	Value: 1
PSCT_SURROUND_5_1	Value: 2
PSE_DIRECTORY	Value: 1
PSE_DRIVE	Value: 0
PSE_FILE	Value: 2

continued on next page

Name	Description
PSF_FORCE	Value: 2048
PSF_NOFORCE	Value: 4096
PSHF_DONT_WAIT_TO_COMPLETE	Value: 4096
PSHF_FORCE_SHUTDOWN	Value: 2048
PSHF_SUSPEND_VM_TO_PRAM	Value: 8192
PSIA_OPEN_DEFAULT	Value: 0
PSIA_OPEN_IN_GUEST	Value: 1
PSIA_OPEN_IN_HOST	Value: 2
PSL_HIGH_SECURITY	Value: 2
PSL_LOW_SECURITY	Value: 0
PSL_NORMAL_SECURITY	Value: 1
PSM ACPI	Value: 2
PSM_KILL	Value: 0
PSM_LAST	Value: 2
PSM_SHUTDOWN	Value: 1
PSM_VM_SAFE_START	Value: 4096
PSM_VM_START	Value: 2048
PSM_VM_START_FOR_COMPACT	Value: 8192
PSM_VM_START_LAST_ITEM	Value: 8192
PSPF_PASSWD_CRYPTED	Value: 2048
PSP_SERIAL_SOCKET_CLIENT	Value: 1
PSP_SERIAL_SOCKET_SERVER	Value: 0
PSSF_SKIP_RESUME	Value: 2048
PSS_NOT_INSTALLED	Value: 2
PSS_STARTED	Value: 0
PSS_STOPPED	Value: 1
PSS_UNKNOWN	Value: 3
PST_VM_HIBERNATE	Value: 2
PST_VM_REBOOT	Value: 1
PST_VM_SHUTDOWN	Value: 0
PST_VM_SUSPEND	Value: 3
PSVM_AUTO	Value: 1
PSVM_IGNORE_ASPECT_RATIO	Value: 4

continued on next page

Name	Description
PSVM_KEEP_ASPECT_RATIO	Value: 2
PSVM_KEEP_ASPECT_RATIO_BY_EXPANDING	Value: 3
PSVM_OFF	Value: 0
PSV_CALC_BOOT_CAMP_SIZE	Value: 2048
PTBS_DEFAULT	Value: 2
PTBS_HIDE	Value: 0
PTBS_SHOW	Value: 1
PTBS_UNKNOWN	Value: -1
PTIS_RECORD_ACTIVE	Value: 1
PTIS_RECORD_CANCELED	Value: 2
PTIS_RECORD_CLEARED	Value: -2147483648
PTIS_RECORD_DATA	Value: 16
PTIS_RECORD_EMPTY	Value: 0
PTIS_RECORD_FLAGS	Value: 256
PTIS_RECORD_INFO	Value: 4
PTIS_RECORD_NAME	Value: 2
PTIS_RECORD_OWNER	Value: 128
PTIS_RECORD_REMOVED	Value: 1073741824
PTIS_RECORD_STATE	Value: 32
PTIS_RECORD_TEXT	Value: 8
PTIS_RECORD_TIME	Value: 64
PTIS_RECORD_UID	Value: 1
PTS_ABSOLUTE_MOUSE	Value: 2
PTS_INSTALLED	Value: 2
PTS_MOVING_CURSOR	Value: 2
PTS_NOT_INSTALLED	Value: 1
PTS_NO_CURSOR	Value: 0
PTS_OUTDATED	Value: 3
PTS_POSSIBLY_INSTALLED	Value: 0
PTS_RELATIVE_MOUSE	Value: 0
PTS_SLIDING_CURSOR	Value: 1
PTS_SLIDING_MOUSE	Value: 1
PTS_UNKNOWN	Value: 0

continued on next page

Name	Description
PTU_CMD_INVALID	Value: 0
PTU_CMD_PTU_ALIVE	Value: 1
PTU_FLG_ZERO	Value: 1
PUDT_APPLE_IETH	Value: 1003
PUDT_APPLE_IPAD	Value: 1002
PUDT_APPLE_IPHONE	Value: 1000
PUDT_APPLE_IPOD	Value: 1001
PUDT_ATAPI_STORAG- E	Value: 14
PUDT_AUDIO	Value: 4
PUDT_BLUETOOTH	Value: 7
PUDT_COMMUNICATI- ON	Value: 9
PUDT_DISK_STORAGE	Value: 13
PUDT_FOTO	Value: 3
PUDT_GARMIN_GPS	Value: 3000
PUDT_HUB	Value: 1
PUDT_KEYBOARD	Value: 10
PUDT_MOUSE	Value: 11
PUDT_OTHER	Value: 0
PUDT_PRINTER	Value: 5
PUDT_RIM_BLACKBER- RY	Value: 2000
PUDT_SCANNER	Value: 6
PUDT_SMART_CARD	Value: 12
PUDT_VIDEO	Value: 2
PUDT_WIRELESS	Value: 8
PUD_ASK_USER_WHAT- _TODO	Value: 2
PUD_COMMIT_CHANG- ES	Value: 2
PUD_CONNECTED_AU- TOMATICALLY	Value: 1
PUD_CONNECTED_MA- NUALLY	Value: 0
PUD_CONNECT_TO_GU- EST_OS	Value: 1
PUD_CONNECT_TO_PR- IMARY_OS	Value: 0
PUD_DISABLE_UNDO_D- ISKS	Value: 0
PUD_PROMPT_BEHAVI- OUR	Value: 3

continued on next page

Name	Description
PUD_REVERSE_CHANGES	Value: 1
PUPLF_ACTIVATE_PERMANENT_LICENSE_OFFLINE	Value: 8192
PUPLF_ACTIVATE_PERMANENT_LICENSE_ONLINE	Value: 4096
PUPLF_ACTIVATE_PRECACHED_KEY	Value: 65536
PUPLF_CHECK_KEY_ONLY	Value: 16384
PUPLF_CHECK_KEY_ONLY_VOLUME	Value: 1048576
PUPLF_DEACTIVATE_CURRENT_LICENSE	Value: 32768
PUPLF_DEACTIVATE_CURRENT_LICENSE_OFFLINE_ALLOWED	Value: 524288
PUPLF_KICK_TO_UPDATE_CURR_FILE_LICENSE	Value: 2048
PUPLF_REGISTER_CURRENT_LICENSE	Value: 2097152
PUPLF_REMOVE_PRECACHED_KEY	Value: 262144
PUPLF_STORE_PRECACHED_KEY	Value: 131072
PVA_ACCELERATION_DISABLED	Value: 0
PVA_ACCELERATION_HIGH	Value: 2
PVA_ACCELERATION_NORMAL	Value: 1
PVA_POSTSTART	Value: 1
PVA_POSTSTOP	Value: 3
PVA_PRESTART	Value: 0
PVA_PRESTOP	Value: 2
PVBT_CT_PLOOP	Value: 2
PVBT_CT_VZFS	Value: 1
PVBT_CT_VZWIN	Value: 3
PVBT_VM	Value: 0

continued on next page

Name	Description
PVCF_DESTROY_HDD_- BUNDLE	Value: 2048
PVCF_DESTROY_HDD_- BUNDLE_FORCE	Value: 8192
PVCF_DETACH_HDD_B- UNDLE	Value: 16384
PVCF_RENAME_EXT_D- ISKS	Value: 32768
PVCF_WAIT_FOR_APPL- Y	Value: 4096
PVC_ALL	Value: 1
PVC_BOOT_OPTION	Value: 3
PVC_CD_DVD_ROM	Value: 10
PVC_COLOR_BLUE	Value: 5940223
PVC_COLOR_GREEN	Value: 11851591
PVC_COLOR_GREY	Value: 8421504
PVC_COLOR_ORANGE	Value: 16165444
PVC_COLOR_PURPLE	Value: 12619480
PVC_COLOR_RED	Value: 16409690
PVC_COLOR_YELLOW	Value: 15719239
PVC_CPU	Value: 6
PVC_FLOPPY_DISK	Value: 9
PVC_GENERAL PARA- METERS	Value: 2
PVC_GENERIC_PCI	Value: 18
PVC_HARD_DISK	Value: 11
PVC_IDE_DEVICES	Value: 16
PVC_LAST_SECTION	Value: 21
PVC_LICENSE RESTRI- CTIONS	Value: 20
PVC_MAIN_MEMORY	Value: 7
PVC_NETWORK ADAP- TER	Value: 12
PVC_NO_COLOR	Value: 0
PVC_OFFLINE MANAG- EMENT SETTINGS	Value: 19
PVC_PARALLEL_PORT	Value: 15
PVC_REMOTE DISPLA- Y	Value: 4
PVC_SATA_DEVICES	Value: 21
PVC_SCSI_DEVICES	Value: 17
PVC_SERIAL_PORT	Value: 14

continued on next page

Name	Description
PVC_SHARED_FOLDER-S	Value: 5
PVC_SOUND	Value: 13
PVC_VALIDATE_CHANGES_ONLY	Value: 0
PVC_VIDEO_MEMORY	Value: 8
PVL_FIREWIRE_DRIVE	Value: 4
PVL_LOCAL_FS	Value: 1
PVL_REMOTE_FS	Value: 2
PVL_UNKNOWN	Value: 0
PVL_USB_DRIVE	Value: 3
PVMSF_GUEST_OS_INFORMATION_ONLY	Value: 4096
PVMSF_HOST_DISK_SPACE_USAGE_ONLY	Value: 2048
PVMSL_HIGH_SECURITY	Value: 2
PVMSL_LOW_SECURITY	Value: 0
PVMSL_NORMAL_SECURITY	Value: 1
PVMT_CHANGE_SID	Value: 131072
PVMT_CLONE_MODE	Value: 32768
PVMT_COLD_MIGRATION	Value: 2048
PVMT_DIRECT_DATA_CONNECTION	Value: 4194304
PVMT_DONT_CREATE_DISK	Value: 8388608
PVMT_DONT_RESUME_VM	Value: 16384
PVMT_HOT_MIGRATION	Value: 8192
PVMT_IGNORE_EXISTING_BUNDLE	Value: 262144
PVMT_REMOVE_SOURCE_BUNDLE	Value: 524288
PVMT_SEND_DISK_MAP	Value: 1048576
PVMT_SWITCH_TEMPLATE	Value: 65536
PVMT_UNCOMPRESSED	Value: 2097152

continued on next page

Name	Description
PVMT_WARM_MIGRATION	Value: 4096
PVM_DONT_RESUME_VM	Value: 16384
PVN_BRIDGED_ETHERNET	Value: 0
PVN_HOST_ONLY	Value: 1
PVRCS_CONNECTED	Value: 0
PVRCS_CONNECTING	Value: 3
PVRCS_DISCONNECTED	Value: 1
PVRCS_NO_CONNECTION	Value: 2
PVR_PRIORITY_HIGH	Value: 2
PVR_PRIORITY_LOW	Value: 0
PVR_PRIORITY_NORMAL	Value: 1
PVSC_ACPI_ERROR	Value: -3
PVSC_DMAR_ERROR	Value: -4
PVSC_DMAR_NOT_FOUND	Value: -5
PVSC_ENABLED	Value: 1
PVSC_HARDWARE_ERROR	Value: -2
PVSC_INTERNAL_ERROR	Value: -1
PVSC_NOT_PRESENT	Value: 0
PVSS_CUSTOM	Value: 2
PVSS_OPTIMIZED_FOR_TIME_MACHINE	Value: 1
PVS_GUEST_TYPE_ANDROID	Value: 16
PVS_GUEST_TYPE_CHROMEOS	Value: 15
PVS_GUEST_TYPE_FREEBSD	Value: 10
PVS_GUEST_TYPE_LINUX	Value: 9
PVS_GUEST_TYPE_MACOS	Value: 7
PVS_GUEST_TYPE_MSDOS	Value: 12

continued on next page

Name	Description
PVS_GUEST_TYPE_NETWARE	Value: 13
PVS_GUEST_TYPE_OS2	Value: 11
PVS_GUEST_TYPE_OTHER	Value: 255
PVS_GUEST_TYPE_SOLARIS	Value: 14
PVS_GUEST_TYPE_WINDOWS	Value: 8
PVS_GUEST_VER_ANDROID_2_x	Value: 4096
PVS_GUEST_VER_ANDROID_3_x	Value: 4097
PVS_GUEST_VER_ANDROID_4_0	Value: 4098
PVS_GUEST_VER_ANDROID_LAST	Value: 4098
PVS_GUEST_VER_ANDROID_OTHER	Value: 4351
PVS_GUEST_VER_BSD_4_X	Value: 2561
PVS_GUEST_VER_BSD_5_X	Value: 2562
PVS_GUEST_VER_BSD_6_X	Value: 2563
PVS_GUEST_VER_BSD_7_X	Value: 2564
PVS_GUEST_VER_BSD_8_X	Value: 2565
PVS_GUEST_VER_BSD_-LAST	Value: 2565
PVS_GUEST_VER_BSD_-OTHER	Value: 2815
PVS_GUEST_VER_CHROMEOS_1x	Value: 3841
PVS_GUEST_VER_CHROMEOS_LAST	Value: 3841
PVS_GUEST_VER_CHROMEOS_OTHER	Value: 4095
PVS_GUEST_VER_DOS_-LAST	Value: 3073
PVS_GUEST_VER_DOS_-MS622	Value: 3073

continued on next page

Name	Description
PVS_GUEST_VER_DOS_OTHER	Value: 3327
PVS_GUEST_VER_LIN_CENTOS	Value: 2317
PVS_GUEST_VER_LIN_CENTOS_7	Value: 2324
PVS_GUEST_VER_LIN_CLOUDLINUX	Value: 2329
PVS_GUEST_VER_LIN_CLOUDLINUX_7	Value: 2336
PVS_GUEST_VER_LIN_DEBIAN	Value: 2310
PVS_GUEST_VER_LIN_FEDORA	Value: 2311
PVS_GUEST_VER_LIN_FEDORA_5	Value: 2312
PVS_GUEST_VER_LIN_KERNEL_24	Value: 2308
PVS_GUEST_VER_LIN_KERNEL_26	Value: 2309
PVS_GUEST_VER_LIN_LAST	Value: 2336
PVS_GUEST_VER_LIN_MAGEIA	Value: 2321
PVS_GUEST_VER_LIN_MANDRAKE	Value: 2307
PVS_GUEST_VER_LIN_MINT	Value: 2322
PVS_GUEST_VER_LIN_OPENUSE	Value: 2319
PVS_GUEST_VER_LIN_OTHER	Value: 2559
PVS_GUEST_VER_LIN_PSBM	Value: 2320
PVS_GUEST_VER_LIN_REDHAT	Value: 2305
PVS_GUEST_VER_LIN_REDHAT_7	Value: 2323
PVS_GUEST_VER_LIN_RHLES3	Value: 2316
PVS_GUEST_VER_LIN_RH_LEGACY	Value: 2318

continued on next page

Name	Description
PVS_GUEST_VER_LIN_SLES11	Value: 2327
PVS_GUEST_VER_LIN_SLES12	Value: 2328
PVS_GUEST_VER_LIN_SLES9	Value: 2315
PVS_GUEST_VER_LIN_SUSE	Value: 2306
PVS_GUEST_VER_LIN_UBUNTU	Value: 2314
PVS_GUEST_VER_LIN_VZLINUX	Value: 2325
PVS_GUEST_VER_LIN_VZLINUX_7	Value: 2326
PVS_GUEST_VER_LIN_XANDROS	Value: 2313
PVS_GUEST_VER_MAC_OS_LAST	Value: 1795
PVS_GUEST_VER_MAC_OS_LEOPARD	Value: 1794
PVS_GUEST_VER_MAC_OS_SNOW_LEOPARD	Value: 1795
PVS_GUEST_VER_MAC_OS_TIGER	Value: 1793
PVS_GUEST_VER_MAC_OS_UNIVERSAL	Value: 1795
PVS_GUEST_VER_NET_4X	Value: 3329
PVS_GUEST_VER_NET_5X	Value: 3330
PVS_GUEST_VER_NET_6X	Value: 3331
PVS_GUEST_VER_NET_LAST	Value: 3331
PVS_GUEST_VER_NET_OTHER	Value: 3583
PVS_GUEST_VER_OS2_ECS11	Value: 2820
PVS_GUEST_VER_OS2_ECS12	Value: 2821
PVS_GUEST_VER_OS2_LAST	Value: 2821

continued on next page

Name	Description
PVS_GUEST_VER_OS2_-OTHER	Value: 3071
PVS_GUEST_VER_OS2_-WARP3	Value: 2817
PVS_GUEST_VER_OS2_-WARP4	Value: 2818
PVS_GUEST_VER_OS2_-WARP45	Value: 2819
PVS_GUEST_VER_OTH_-LAST	Value: 65282
PVS_GUEST_VER_OTH_-OPENSTEP	Value: 65282
PVS_GUEST_VER_OTH_-OTHER	Value: 65535
PVS_GUEST_VER_OTH_-QNX	Value: 65281
PVS_GUEST_VER_SOL_1-0	Value: 3586
PVS_GUEST_VER_SOL_1-1	Value: 3587
PVS_GUEST_VER_SOL_9	Value: 3585
PVS_GUEST_VER_SOL_-LAST	Value: 3588
PVS_GUEST_VER_SOL_-OPEN	Value: 3588
PVS_GUEST_VER_SOL_-OTHER	Value: 3839
PVS_GUEST_VER_WIN_-2003	Value: 2056
PVS_GUEST_VER_WIN_-2008	Value: 2058
PVS_GUEST_VER_WIN_-2012	Value: 2061
PVS_GUEST_VER_WIN_-2016	Value: 2064
PVS_GUEST_VER_WIN_-2K	Value: 2054
PVS_GUEST_VER_WIN_-311	Value: 2049
PVS_GUEST_VER_WIN_-95	Value: 2050
PVS_GUEST_VER_WIN_-98	Value: 2051

continued on next page

Name	Description
PVS_GUEST_VER_WIN_-LAST	Value: 2064
PVS_GUEST_VER_WIN_-ME	Value: 2052
PVS_GUEST_VER_WIN_-NT	Value: 2053
PVS_GUEST_VER_WIN_-OTHER	Value: 2303
PVS_GUEST_VER_WIN_-VISTA	Value: 2057
PVS_GUEST_VER_WIN_-WINDOWS10	Value: 2063
PVS_GUEST_VER_WIN_-WINDOWS7	Value: 2059
PVS_GUEST_VER_WIN_-WINDOWS8	Value: 2060
PVS_GUEST_VER_WIN_-WINDOWS8.1	Value: 2062
PVS_GUEST_VER_WIN_-XP	Value: 2055
PVTF_CT	Value: 4096
PVTF_VM	Value: 2048
PVT_CT	Value: 1
PVT_VM	Value: 0
PWC_BOTTOM_LEFT_CORNER	Value: 2
PWC_BOTTOM_RIGHT_CORNER	Value: 3
PWC_TOP_LEFT_CORNER	Value: 0
PWC_TOP_RIGHT_CORNER	Value: 1
PWC_VM_ASK_USER	Value: 2
PWC_VM_DO_NOTHING	Value: 5
PWC_VM_PAUSE	Value: 3
PWC_VM_SHUTDOWN	Value: 4
PWC_VM_STOP	Value: 0
PWC_VM_SUSPEND	Value: 1
PWC_VM_UNKNOWN_ACTION	Value: 65535
PWM_DEFAULT_WINDOW_MODE	Value: 0

continued on next page

Name	Description
PWM_FULL_SCREEN_WINDOW_MODE	Value: 2
PWM_WINDOWED_WINDOW_MODE	Value: 1
REINSTALL_RESET_PASSWORD	Value: 6144
REINSTALL_SKIP_BACKUP	Value: 2048
REINSTALL_SKIP_SCRIPTS	Value: 4096
RTT_RUNNING_TASK_CLONE_VM	Value: 3
RTT_RUNNING_TASK_COPY_IMAGE	Value: 9
RTT_RUNNING_TASK_CREATE_IMAGE	Value: 6
RTT_RUNNING_TASK_CREATE_VM	Value: 1
RTT_RUNNING_TASK_DELETE_VM	Value: 4
RTT_RUNNING_TASK_MIGRATE_VM	Value: 8
RTT_RUNNING_TASK_REGISTER_VM	Value: 2
RTT_RUNNING_TASK_RESTORE_VM	Value: 7
RTT_RUNNING_TASK_UNKNOWN	Value: 0
RTT_RUNNING_TASK_UNREG_VM	Value: 5
ScanCodesList	Value: {'0': (11), '1': (2), '2': (3), '3': (4), '4': (5), '5': ...
TEV_CONNECTED	Value: 1
TEV_DATA_RECEIVED	Value: 0
TEV_DISCONNECTED	Value: 2
VCMMMD_COMMAND_RUNTIME	Value: 2048
VMAS_BACKUPING	Value: 2
VMAS_CLONING	Value: 32
VMAS_MAX	Value: -2147483648
VMAS_MOVING	Value: 64
VMAS_NOSTATE	Value: 1

continued on next page

Name	Description
VMAS_RESTOREING_FROM_BACKUP	Value: 4
VMP_DESIGNER	Value: 3
VMP_GAMES	Value: 1
VMP_PRODUCTIVITY	Value: 0
VMP_SOFTWARE_DEVELOPER	Value: 2
VMS_COMPACTING	Value: 805306376
VMS_CONTINUING	Value: 805306381
VMS_DELETING_STATE	Value: 805306383
VMS_MIGRATING	Value: 805306382
VMS_MOUNTED	Value: 805306387
VMS_PAUSED	Value: 805306373
VMS_PAUSING	Value: 805306380
VMS_RECONNECTING	Value: 805306386
VMS_RESETTING	Value: 805306379
VMS_RESTOREING	Value: 805306371
VMS_RESUMING	Value: 805306384
VMS_RUNNING	Value: 805306372
VMS_SNAPSHOTING	Value: 805306378
VMS_STARTING	Value: 805306370
VMS_STOPPED	Value: 805306369
VMS_STOPPING	Value: 805306375
VMS_SUSPENDED	Value: 805306377
VMS_SUSPENDING	Value: 805306374
VMS_SUSPENDING_SYNC	Value: 805306385
VMS_UNKNOWN	Value: 0
WINDOW_ALL_EDGE_MASK	Value: 15
WINDOW_BOTTOM_EDGE_MASK	Value: 8
WINDOW_LEFT_EDGE_MASK	Value: 1
WINDOW_RIGHT_EDGE_MASK	Value: 4
WINDOW_TOP_EDGE_MASK	Value: 2
__package__	Value: None

4 Module prlsdkapi.prlsdk.errors

4.1 Variables

Name	Description
PET_ANSWER_APPEND	Value: 16011
PET_ANSWER_BREAK	Value: 16004
PET_ANSWER_BROWS- E	Value: 16028
PET_ANSWER_CANCEL	Value: 16001
PET_ANSWER_CHANG- E	Value: 16032
PET_ANSWER_COMMIT	Value: 16016
PET_ANSWER_COMPAC- CT	Value: 16024
PET_ANSWER_CONTIN- UE	Value: 16008
PET_ANSWER_COPIED	Value: 16013
PET_ANSWER_CREATE	Value: 16019
PET_ANSWER_CREATE- _NEW	Value: 16009
PET_ANSWER_DISCON- NECT_ANYWAY	Value: 16018
PET_ANSWER_DONT_C- HANGE	Value: 16033
PET_ANSWER_LATER	Value: 16023
PET_ANSWER_MOVED	Value: 16014
PET_ANSWER_NO	Value: 16003
PET_ANSWER_OK	Value: 16000
PET_ANSWER_OVERID- E	Value: 16005
PET_ANSWER_REPLAC- E	Value: 16012
PET_ANSWER_RESTAR- T	Value: 16030
PET_ANSWER_RESTAR- T_NOW	Value: 16022
PET_ANSWER_RESTOR- E	Value: 16027
PET_ANSWER_RESUME	Value: 16031
PET_ANSWER_RETRY	Value: 16029
PET_ANSWER_REVERT	Value: 16017

continued on next page

Name	Description
PET_ANSWER_SHUTDOWN	Value: 16006
PET_ANSWER_SKIP	Value: 16020
PET_ANSWER_STARTVM	Value: 16015
PET_ANSWER_STOP	Value: 16007
PET_ANSWER_STOP_AND_RESTORE	Value: 16026
PET_ANSWER_SUSPEND	Value: 16025
PET_ANSWER_SUSPEND_ANYWAY	Value: 16021
PET_ANSWER_USE_CURRENT	Value: 16010
PET_ANSWER_YES	Value: 16002
PET_ERR_WARN_REACH_OVERCOMMIT_STATE_ON_SETMEM	Value: 441
PET_QUESTION_ALLOW_TO_SUSPEND_VM_WITH_BOOTCAMP_DISK	Value: 13022
PET_QUESTION_APPLIANCE_CORRUPTED_INSTALLATION	Value: 13037
PET_QUESTION_APPLY_WHEN_HYP_CANNOT_ALLOC_VMS_MEM	Value: 13021
PET_QUESTION_BACKUP_CREATE_NOT_ENOUGH_FREE_DISK_SPACE	Value: -2147405770
PET_QUESTION_BACKUP_RESTORE_NOT_ENOUGH_FREE_DISK_SPACE	Value: -2147405771
PET_QUESTION_BOOTCAMP_HELPER_INIT_FAILURE	Value: 13015
PET_QUESTION_BOOTCAMP_HELPER_OS_UNSUPPORTED	Value: 13016

continued on next page

Name	Description
PET_QUESTION_CANCEL_CLONE_OPERATION	Value: 13024
PET_QUESTION_CANCEL_CLONE_TO_TEMPLATE_OPERATION	Value: 13025
PET_QUESTION_CANCEL_CONVERT_3RD_VM_OPERATION	Value: 13046
PET_QUESTION_CANCEL_DEPLOY_OPERATION	Value: 13026
PET_QUESTION_CANCEL_IMPORT_BOOTCAMP_OPERATION	Value: 13044
PET_QUESTION_CHANGE_VM_MIGRATION_TYPE	Value: 13012
PET_QUESTION_COMMON_HDD_ERROR	Value: 13047
PET_QUESTION_COMPACT_VM_DISKS	Value: 13030
PET_QUESTION_CONTINUE_IF_HVT_DISABLED	Value: 13031
PET_QUESTION_CREATE_NEW_MAC_ADDRESSES	Value: 13011
PET_QUESTION_CREATE_OS2_GUEST_WITHOUT_FDD_IMAGE	Value: 13020
PET_QUESTION_CREATE_VM_FROM_LION_RECOVERY_PART	Value: 13052
PET_QUESTION_DELAYED_COMPACT_VM_DISKS	Value: 13032
PET_QUESTION_DELETE_FILES_OUT_OF_VM_DIR	Value: 13006
PET_QUESTION_DELETE_PARALLELS_FILES_IN_VM_DIR	Value: 13007

continued on next page

Name	Description
PET_QUESTION_DELETE_VM_WITH_CORRUPTED_CONFIG	Value: 13009
PET_QUESTION_DO_YOU_WANT_TO_OVERWRITE_FILE	Value: 13002
PET_QUESTION_FORCE_COMPACT_VM_DISKS	Value: 13034
PET_QUESTION_FREE_SIZE_FOR_COMPRESSED_DISK	Value: 13005
PET_QUESTION_MAC_PHYSICAL_MEMORY_MAP_BUG	Value: 13019
PET_QUESTION_OLD_CONFIG_CONVERSION	Value: 13004
PET_QUESTION_ON_QUERY_END_SESSION	Value: 13038
PET_QUESTION_ON_QUERY_END_SESSION_RESTRICTED	Value: 13039
PET_QUESTION_REACH_OVERCOMMIT_STATE	Value: 13014
PET_QUESTION_REACH_OVERCOMMIT_STATE_ON_SETMEM	Value: 13017
PET_QUESTION_REBOOT_HOST_ON_PCLDRIVER_INSTALL_OR_REVERT	Value: 13027
PET_QUESTION_REGISTER_USED_VM	Value: 13010
PET_QUESTION_REGISTER_VM_TEMPLATE	Value: 13008
PET_QUESTION_RESTART_VM_GUEST_TO_COMPACT	Value: 13029
PET_QUESTION_RESTORE_VM_CONFIG_FROM_BACKUP	Value: 13023

continued on next page

Name	Description
PET_QUESTION_SAMPLE_1	Value: 13000
PET_QUESTION_SAMPLE_2	Value: 13001
PET_QUESTION_SNAPSHOT_STATE_INCOMPATIBLE	Value: 13054
PET_QUESTION_SNAPSHOT_STATE_INCOMPATIBLE_CPU	Value: 13051
PET_QUESTION_STOP_VM_TO_COMPACT	Value: 13029
PET_QUESTION_SUSPEND_STATE_INCOMPATIBLE	Value: 13053
PET_QUESTION_SUSPEND_STATE_INCOMPATIBLE_CPU	Value: 13050
PET_QUESTION_SWITCH_OFF_AUTO_COMPRESS	Value: 13033
PET_QUESTION_TXT_ERROR	Value: 13003
PET_QUESTION_UNDO_DISKS_MODE	Value: 13018
PET_QUESTION_VM_COPY_OR_MOVE	Value: 13013
PET_QUESTION_VM_REBOOT_REQUIRED_BY_PRL_TOOLS	Value: 13041
PET_QUESTION_VM_ROOT_DIRECTORY_NOT_EXISTS	Value: 13028
PRL_CHECKED_DISK_INVALID	Value: 25002
PRL_CHECKED_DISK_OLD_VERSION	Value: 25001
PRL_CHECKED_DISK_VALID	Value: 25000
PRL_ERR_ACCESS_DENIED	Value: -2147483643

continued on next page

Name	Description
PRL_ERR_ACCESS_DENIED_TO_CHANGE_PERMISSIONS	Value: -2147482751
PRL_ERR_ACCESS_DENIED_TO_DISK_IMAGE	Value: -2147483528
PRL_ERR_ACCESS_DENIED_TO_RUN_WIZARD	Value: -2147482784
PRL_ERR_ACCESS_TOKEN_INVALID	Value: -2147483552
PRL_ERR_ACCESS_TO_-CLONE_VM_DEVICE_DENIED	Value: -2147482359
PRL_ERR_ACCESS_TO_-VM_DENIED	Value: -2147483079
PRL_ERR_ACCESS_TO_-VM_HDD_DENIED	Value: -2147482360
PRL_ERR_ACCESS_DENIED_FILE_TO_PARENT_PARENT_DIR	Value: -2147483392
PRL_ERR_ACTION_NOT_SUPPORTED_FOR_CT	Value: -2147205117
PRL_ERR_ACTIVATE_NO_INSTALLED_LICENSE	Value: -2147412220
PRL_ERR_ACTIVATE_TRIAL_LICENSE	Value: -2147412219
PRL_ERR_ACTIVATE_WRONG_TYPE_OF_ACTIVE_LICENSE	Value: -2147412221
PRL_ERR_ACTIVATION_COMMON_SERVER_ERROR	Value: -2147412200
PRL_ERR_ACTIVATION_HTTP_REQUEST_FAILED	Value: -2147412205
PRL_ERR_ACTIVATION_OFFLINE_PERIOD_EXPIRED	Value: -2147412201
PRL_ERR_ACTIVATION_SERVER_ACTIVATION_ID_IS_INVALID	Value: -2147412217
PRL_ERR_ACTIVATION_SERVER_ERROR	Value: -2147412218

continued on next page

Name	Description
PRL_ERR_ACTIVATION_SERVER_HWIDS_AMOUNT_REACHED	Value: -2147412208
PRL_ERR_ACTIVATION_SERVER_KEY_IS_BLACKLISTED	Value: -2147412215
PRL_ERR_ACTIVATION_SERVER_KEY_IS_INVALID	Value: -2147412216
PRL_ERR_ACTIVATION_UNABLE_TO_SEND_REQUEST	Value: -2147412206
PRL_ERR_ACTIVATION_UPDATE_FAILED	Value: -2147412202
PRL_ERR_ACTIVATION_WRONG_CONFIRMATION_FORMAT	Value: -2147412224
PRL_ERR_ACTIVATION_WRONG_CONFIRMATION_MESSAGE	Value: -2147412223
PRL_ERR_ACTIVATION_WRONG_CONFIRMATION_SIGNATURE	Value: -2147412222
PRL_ERR_ACTIVATION_WRONG_SERVER_RESPONSE	Value: -2147412207
PRL_ERR_ADD_HW_FLOPPY_IMAGE_NOT_SPECIFIED	Value: -2147482857
PRL_ERR_ADD_VM_OPERATION_WAS_CANCELED	Value: -2147482855
PRL_ERR_ADMIN_CONFIRMATION_IS_REQUIRED_FOR_OPERATION	Value: -2147217149
PRL_ERR_ADMIN_CONFIRMATION_IS_REQUIRED_FOR_VM_OPERATION	Value: -2147217148
PRL_ERR_ALIGN_ON_4	Value: -2147483133

continued on next page

Name	Description
PRL_ERR_ALREADY_CONNECTED_TO_DISPATCHER	Value: -2147483054
PRL_ERR_ANOTHER_USER_SESSIONS_PRESENT	Value: -2147482783
PRL_ERR_API_INCOMPATIBLE	Value: -2147482590
PRL_ERR_API_WASNT_INITIALIZED	Value: -2147483001
PRL_ERR_APPLIANCE_CANNOT_CALCULATE_MD5	Value: -2147216108
PRL_ERR_APPLIANCE_CANNOT_CHANGE_OWNER	Value: -2147216112
PRL_ERR_APPLIANCE_CANNOT_EXTRACT_VM	Value: -2147216120
PRL_ERR_APPLIANCE_CANNOT_MOVE_VM_BUNDLE	Value: -2147216110
PRL_ERR_APPLIANCE_DOWNLOAD_PARENT_PATH_NOT_DIR	Value: -2147216126
PRL_ERR_APPLIANCE_DOWNLOAD_PARENT_PATH_NOT_EXISTS	Value: -2147216125
PRL_ERR_APPLIANCE_DOWNLOAD_PATH_CANNOT_CREATE	Value: -2147216124
PRL_ERR_APPLIANCE_DOWNLOAD_UTILITY_NOT_FOUND	Value: -2147216123
PRL_ERR_APPLIANCE_DOWNLOAD_UTILITY_NOT_STARTED	Value: -2147216122
PRL_ERR_APPLIANCE_EXIT_WITH_ERROR	Value: -2147216121
PRL_ERR_APPLIANCE_INSTALL_ALREADY_IN_PROCESS	Value: -2147216119

continued on next page

Name	Description
PRL_ERR_APPLIANCE_INSTALL_WAS_NOT_STARTED	Value: -2147216109
PRL_ERR_APPLIANCE_INVALID_CONFIG	Value: -2147216128
PRL_ERR_APPLIANCE_MISMATCH_MD5	Value: -2147216107
PRL_ERR_APPLIANCE_NAME_NOT_MATCH_VM_BUNDLE	Value: -2147216111
PRL_ERR_APPLIANCE_USER_NOT_FOUND	Value: -2147216127
PRL_ERR_ATTACH_BACKUP_ALREADY_ATTACHED	Value: -2147139579
PRL_ERR_ATTACH_BACKUP_BUSE_NOT_MOUNTED	Value: -2147139578
PRL_ERR_ATTACH_BACKUP_CUSTOM_BACKUP_SERVER_NOT_SUPPORTED	Value: -2147139582
PRL_ERR_ATTACH_BACKUP_FORMAT_NOT_SUPPORTED	Value: -2147139580
PRL_ERR_ATTACH_BACKUP_INTERNAL_ERROR	Value: -2147139584
PRL_ERR_ATTACH_BACKUP_INVALID_STORAGE_URL	Value: -2147139583
PRL_ERR_ATTACH_BACKUP_PROTO_ERROR	Value: -2147139581
PRL_ERR_ATTACH_BACKUP_URL_CHANGE_PROHIBITED	Value: -2147139577
PRL_ERR_ATTACH_TO_TASK_BAD_SESSION	Value: -2147482807
PRL_ERR_AUDIO_ENCODINGS_NOT_SUPPORTED	Value: -2147482301
PRL_ERR_AUTHENTICATION_FAILED	Value: -2147482832

continued on next page

Name	Description
PRL_ERR_BACKUP_ACCESS_TO_VM_DENIED	Value: -2147258365
PRL_ERR_BACKUP_ACRONIS_ERR	Value: -2147258346
PRL_ERR_BACKUP_BACKUP_CMD_FAILED	Value: -2147258344
PRL_ERR_BACKUP_BACKUP_NOT_FOUND	Value: -2147258351
PRL_ERR_BACKUP_BACKUP_UUID_NOT_FOUND	Value: -2147258364
PRL_ERR_BACKUP_CANNOT_CREATE_DIRECTORY	Value: -2147258359
PRL_ERR_BACKUP_CANNOT_REMOVE_DIRECTORY	Value: -2147258350
PRL_ERR_BACKUP_CANNOT_SET_PERMISSIONS	Value: -2147258332
PRL_ERR_BACKUP_CREATE_NOT_ENOUGH_FREE_DISK_SPACE	Value: -2147258328
PRL_ERR_BACKUP_CREATE_SNAPSHOT_FAILED	Value: -2147258363
PRL_ERR_BACKUP_CT_ID_ALREADY_EXIST	Value: -2147258317
PRL_ERR_BACKUP_DIRECTORY_ALREADY_EXIST	Value: -2147258360
PRL_ERR_BACKUP_INTERNAL_ERROR	Value: -2147258367
PRL_ERR_BACKUP_INTERNAL_PROTO_ERROR	Value: -2147258368
PRL_ERR_BACKUP_LOCKED_FOR_READING	Value: -2147258349
PRL_ERR_BACKUP_LOCKED_FOR_WRITING	Value: -2147258348
PRL_ERR_BACKUP_REGISTER_VM_FAILED	Value: -2147258361

continued on next page

Name	Description
PRL_ERR_BACKUP_REMOVE_PERMISSIONS_DENIED	Value: -2147258316
PRL_ERR_BACKUP_REQUIRE_LOGIN_PASSWORD	Value: -2147258347
PRL_ERR_BACKUP_RESTORE_CANNOT_CREATE_DIRECTORY	Value: -2147258303
PRL_ERR_BACKUP_RESTORE_CMD_FAILED	Value: -2147258343
PRL_ERR_BACKUP_RESTORE_DIRECTORY_ALREADY_EXIST	Value: -2147258304
PRL_ERR_BACKUP_RESTORE_EXISTING_SET_PRIVATE	Value: -2147258301
PRL_ERR_BACKUP_RESTORE_INTERNAL_ERROR	Value: -2147258312
PRL_ERR_BACKUP_RESTORE_INTERNAL_PROTOCOL_ERROR	Value: -2147258311
PRL_ERR_BACKUP_RESTORE_NOT_ENOUGH_FREE_DISK_SPACE	Value: -2147258329
PRL_ERR_BACKUP_RESTORE_PROHIBIT_WHEN_ATTACHED	Value: -2147258302
PRL_ERR_BACKUP_RESTORE_VM_RUNNING	Value: -2147258352
PRL_ERR_BACKUP_SNAPSHOT_OF_PAUSED_VM	Value: -2147258335
PRL_ERR_BACKUP_SWITCH_TO_SNAPSHOT_FAILED	Value: -2147258362
PRL_ERR_BACKUP_TIMEOUT_EXCEEDED	Value: -2147258366
PRL_ERR_BACKUP_TOOL_CANNOT_START	Value: -2147258318

continued on next page

Name	Description
PRL_ERR_BACKUP_UN-SUPPORTED_KEEP_CH-AIN	Value: -2147258300
PRL_ERR_BACKUP_UN-SUPPORTED_STORAG-E_VERSION	Value: -2147258299
PRL_ERR_BAD_DISP_C-ONFIG_FILE_SPECIFIE-D	Value: -2147483616
PRL_ERR_BAD_PARAM-ETERS	Value: -2147483517
PRL_ERR_BAD_VM.CO-NFIG_FILE_SPECIFIED	Value: -2147483598
PRL_ERR_BAD_VM.DIR-_CONFIG_FILE_SPECIFI-ED	Value: -2147483609
PRL_ERR_BRIDGE_NOT-_FOUND_FOR_NETWORK-K_ADAPTER	Value: -2147482240
PRL_ERR_BUFFER_OVE-RRUN	Value: -2147483642
PRL_ERR_BUSE_ENTRY-_ALREADY_EXIST	Value: -2147147773
PRL_ERR_BUSE_ENTRY-_ALREADY_INITIALIZE-D	Value: -2147147772
PRL_ERR_BUSE_ENTRY-_INVALID	Value: -2147147774
PRL_ERR_BUSE_ENTRY-_IO_ERROR	Value: -2147147771
PRL_ERR_BUSE_INTER-NAL_ERROR	Value: -2147147775
PRL_ERR_BUSE_NOT_M-OUNTED	Value: -2147147776
PRL_ERR_CANNOT_EDI-T_FIREWALL_AT_TRA-NS_VM_STATE	Value: -2147482304
PRL_ERR_CANNOT_EDI-T_HARDWARE_FOR_PA-USED_VM	Value: -2147482315
PRL_ERR_CANNOT_PR-OCESSING_SAFE_MOD-E_FOR_INVALID_VM	Value: -2147482555

continued on next page

Name	Description
PRL_ERR_CANNOT_PROCESSING_UNDO_DISK_S_FOR_INVALID_VM	Value: -2147482556
PRL_ERR_CANNOT_SAVE_REMOTE_DEVICE_STATE	Value: -2147482503
PRL_ERR_CANTS_CREATE_DISK_IMAGE_ON_FAT	Value: -2147482746
PRL_ERR_CANTS_CREATE_DISK_IMAGE_ON_FAT32	Value: -2147482745
PRL_ERR_CANT_ALLOC_A_MEM_FILE_COPY	Value: -2147483383
PRL_ERR_CANT_CHANGE_FILE_PERMISSIONS	Value: -2147482823
PRL_ERR_CANT_CHANGE_HOST_ID	Value: -2147482271
PRL_ERR_CANT_CHANGE_OWNER_OF_DISK_IMAGE_FILE	Value: -2147482732
PRL_ERR_CANT_CHANGE_OWNER_OF_FILE	Value: -2147483007
PRL_ERR_CANT_CHANGE_OWNER_OF_VM_FILE	Value: -2147482733
PRL_ERR_CANT_CHANGE_PROXY_MANAGER_URL	Value: -2147482272
PRL_ERR_CANT_CHANGE_PROXY_MANAGER_URL_BY_NON_PRIVILEGED_USER	Value: -2147482270
PRL_ERR_CANT_CHANGE_WEB_PORTAL_DOMAIN	Value: -2147482252
PRL_ERR_CANT_CHANGE_WEB_PORTAL_DOMAIN_BY_NON_PRIVILEGED_USER	Value: -2147482251

continued on next page

Name	Description
PRL_ERR_CANT_CONFIGURE_PARTITION_HDD	Value: -2147482599
PRL_ERR_CANT_CONFIGURE_PHYSICAL_HDD	Value: -2147482824
PRL_ERR_CANT_CONNECT_TO_DISPATCHER	Value: -2147483063
PRL_ERR_CANT_CONNECT_TO_DISPATCHER_ITERATIVELY	Value: -2147482352
PRL_ERR_CANT_CONVERT_CONFIG	Value: -2147201022
PRL_ERR_CANT_CONVERT_HDD_IMAGE_FILE	Value: -2147482864
PRL_ERR_CANT_CONVERT_OLD_VM_WITH_INSTALLED_TOOLS	Value: -2147482747
PRL_ERR_CANT_CONVERT_OTHER_VENDOR_HDD	Value: -2147201020
PRL_ERR_CANT_CONVERT_OTHER_VENDOR_VM	Value: -2147201021
PRL_ERR_CANT_CONVERT_VM_CONFIG_DUE_UNDO_DISKS_PRESENT	Value: -2147482872
PRL_ERR_CANT_CONVERT_VM_CONFIG_DUE_UNDO_SNAPSHOTS_PRESENT	Value: -2147482871
PRL_ERR_CANT_CREATE_FLOPPY_IMAGE	Value: -2147483495
PRL_ERR_CANT_CREATE_HDD_IMAGE	Value: -2147483496
PRL_ERR_CANT_CREATE_HDD_IMAGE_NO_SPACE	Value: -2147482743
PRL_ERR_CANT_CREATE_PARALLEL_PORT_IMAGE	Value: -2147483391
PRL_ERR_CANT_CREATE_SERIAL_PORT_IMAGE	Value: -2147482624

continued on next page

Name	Description
PRL_ERR_CANT_DELETE_FILE	Value: -2147483006
PRL_ERR_CANT_EDIT_SUSPENDED_VM	Value: -2147483388
PRL_ERR_CANT_GET_FILE_PERMISSIONS	Value: -2147482750
PRL_ERR_CANT_INIT_REAL_CPUS_INFO	Value: -2147483022
PRL_ERR_CANT_PARSE_DISP_EVENT	Value: -2147483068
PRL_ERR_CANT_PARSE_VM_CONFIG	Value: -2147483095
PRL_ERR_CANT_PREPARE_RECONFIG_DATA	Value: -2147201018
PRL_ERR_CANT_RECONFIG_GUEST_OS	Value: -2147201019
PRL_ERR_CANT_RECREATE_HDD	Value: -2147482839
PRL_ERR_CANT_REMOVE_DIR_ENTRY	Value: -2147482616
PRL_ERR_CANT_REMOVE_ENTRY	Value: -2147483518
PRL_ERR_CANT_REMOVE_INVALID_VM_AS_NON_ADMIN	Value: -2147482749
PRL_ERR_CANT_RENAME_DIR_ENTRY	Value: -2147482615
PRL_ERR_CANT_RENAME_ENTRY	Value: -2147483519
PRL_ERR_CANT_REPLACE_FLOPPY_IMAGE	Value: -2147482829
PRL_ERR_CANT_RESIZE_HDD	Value: -2147482492
PRL_ERR_CANT_RESOLVE_HOSTNAME	Value: -2147482351
PRL_ERR_CANT_REVERT_VM_SINCE_VTD_DEVICE_ALREADY_USED	Value: -2147482519
PRL_ERR_CANT_START_VM_SINCE_NO_VTD_DRIVER	Value: -2147482527

continued on next page

Name	Description
PRL_ERR_CANT_START_VM_SINCE_VTD_DEVICE_ALREADY_USED	Value: -2147482525
PRL_ERR_CANT_SUSPEND_VM_WITH_BOOTCAMP	Value: -2147352560
PRL_ERR_CANT_TO_CHANGE_PERMISSIONS_ON_REMOTE_LOCATION	Value: -2147482601
PRL_ERR_CANT_TO_START_VM_TEMPLATE	Value: -2147482776
PRL_ERR_CANT_UNPACK_ARCHIVE	Value: -2147201023
PRL_ERR_CANT_UPDATE_DEVICE_INFO	Value: -2147482830
PRL_ERR_CAN_NOT_GET_DISK_FREE_SPACE	Value: -2147482874
PRL_ERR_CDD_IMAGE_NOT_SPECIFIED	Value: -2147483128
PRL_ERR_CHANGESID_FAILED	Value: -2147216896
PRL_ERR_CHANGESID_GUEST_TOOLS_NOT_AVAILABLE	Value: -2147216895
PRL_ERR_CHANGESID_NOT_AVAILABLE	Value: -2147216892
PRL_ERR_CHANGESID_NOT_SUPPORTED	Value: -2147216893
PRL_ERR_CHANGESID_VM_START_FAILED	Value: -2147216894
PRL_ERR_CI_CANNOT_COPY_IMAGE_NON_STOPPED_VM	Value: -2147195135
PRL_ERR_CI_DEVICE_IS_NOT_VIRTUAL	Value: -2147195136
PRL_ERR_CI_PERMISSIONS_DENIED	Value: -2147195134
PRL_ERR_CLONE_OPERATION_CANCELED	Value: -2147483385
PRL_ERR_CLUSTER_RESOURCE_ERROR	Value: -2147194624

continued on next page

Name	Description
PRL_ERR_COMMAND_SUPPORTED_ONLY_AT_SERVER_MODE	Value: -2147482591
PRL_ERR_COMMON_SERVER_PREFS_BLOCKED_TO_CHANGE	Value: -2147483023
PRL_ERR_COMMON_SERVER_PREFS_WERE_CHANGED	Value: -2147483358
PRL_ERR_COMPACT_ALREADY_SWITCHED_ON	Value: 494
PRL_ERR_COMPACT_WRONG_VM_STATE	Value: -2147482487
PRL_ERR_COM_DEVICE_ALREADY_EXIST	Value: -2147483052
PRL_ERR_COM_OUTPUT_FILE_IS_NOT_SPECIFIED	Value: -2147483115
PRL_ERR_COM_OUTPUT_FILE_NOT_EXIST	Value: -2147483113
PRL_ERR_CONCURRENT_COMMAND_EXECUTING	Value: -2147483070
PRL_ERR_CONFIGURE_GENERIC_PCI_TASK_ALREADY_RUN	Value: -2147482535
PRL_ERR_CONFIG_BEGIN_EDIT_NOT_FOUND_OBJECT_UUID	Value: -2147482810
PRL_ERR_CONFIG_BEGIN_EDIT_NOT_FOUND_USER_UUID	Value: -2147482809
PRL_ERR_CONFIG_EDIT_COLLISION	Value: -2147482845
PRL_ERR_CONFIG_FILE_NOT_SET	Value: -2147483592
PRL_ERR_CONFIRMATION_MODE_ALREADY_DISABLED	Value: -2147217150
PRL_ERR_CONFIRMATION_MODE_ALREADY_ENABLED	Value: -2147217151

continued on next page

Name	Description
PRL_ERR_CONFIRMATION_MODE_UNABLE_CHANGE_BY_NOT_ADMIN	Value: -2147217152
PRL_ERR_CONNECT_TO_MOUNTER	Value: -2147195390
PRL_ERR_CONN_CLIENT_CERTIFICATE_EXPIRED	Value: -2147482105
PRL_ERR_CONN_CLIENT_CERTIFICATE_INVALID	Value: -2147482106
PRL_ERR_CONN_CLIENT_CERTIFICATE_REVOKED	Value: -2147482104
PRL_ERR_CONN_SERVER_CERTIFICATE_EXPIRED	Value: -2147482096
PRL_ERR_CONN_SERVER_CERTIFICATE_INVALID	Value: -2147482103
PRL_ERR_CONN_SERVER_CERTIFICATE_REVOKED	Value: -2147482095
PRL_ERR_CONN_UNABLE_TO_ESTABLISH_TRUSTED_CHANNEL	Value: -2147482107
PRL_ERR_CONVERT_3RD_PARTY_VM_FAILED	Value: -2147216640
PRL_ERR_CONVERT_3RD_PARTY_VM_NO_SPACE	Value: -2147216639
PRL_ERR_CONVERT_EFI_CONFIG_INVALID	Value: -2147216635
PRL_ERR_CONVERT_EFI_GUEST_OS_UNSUPPORTED	Value: -2147216634
PRL_ERR_CONVERT_GUEST_OS_IS_HIBERNATED	Value: -2147216633
PRL_ERR_CONVERT_NO_GUEST_OS_FOUND	Value: -2147216636

continued on next page

Name	Description
PRL_ERR_CONV_HD_CONFLICT	Value: -2147215868
PRL_ERR_CONV_HD_DISK_TOOL_NOT_STARTED	Value: -2147215869
PRL_ERR_CONV_HD_EXIT_WITH_ERROR	Value: -2147215871
PRL_ERR_CONV_HD_NO_ONE_DISK_FOR_CONVERSION	Value: -2147215870
PRL_ERR_CONV_HD_WRONG_VM_STATE	Value: -2147215872
PRL_ERR_COPY_CT_TMPL_INTERNAL_ERROR	Value: -2147282890
PRL_ERR_COPY_VM_INFO_FILE	Value: -2147482296
PRL_ERR_CORE_STATE_CANCELLED	Value: -2147352552
PRL_ERR_CORE_STATE_CHANGE_VM_CONFIG	Value: -2147352572
PRL_ERR_CORE_STATE_CORRUPT_MEM_FILE	Value: -2147352573
PRL_ERR_CORE_STATE_CORRUPT_SAV_FILE	Value: -2147352574
PRL_ERR_CORE_STATE_ERROR_COMMON	Value: -2147352576
PRL_ERR_CORE_STATE_INV_SAV_VERSION	Value: -2147352575
PRL_ERR_CORE_STATE_NO_FILE	Value: -2147352553
PRL_ERR_CORE_STATE_VM_WOULD_RESTART	Value: -2147352551
PRL_ERR_CORE_STATE_VM_WOULD_STOP	Value: -2147352558
PRL_ERR_COULDNT_CREATE_AUTHORIZATION_FILE	Value: -2147482987
PRL_ERR_COULDNT_SET_PERMISSIONS_TO_AUTHORIZATION_FILE	Value: -2147482986
PRL_ERR_COULDNT_CREATE_HDD_LINKED_CLONE	Value: -2147482348

continued on next page

Name	Description
PRL_ERR_COULD_NOT_START_FIREWALL_TOOL	Value: -2147482317
PRL_ERR_CPUFEATURES_DEFAULT_POOL_ARG	Value: -2147139323
PRL_ERR_CPUFEATURES_INCOMPATIBLE_NODE	Value: -2147139322
PRL_ERR_CPUFEATURES_INCORRECT_MASK	Value: -2147139327
PRL_ERR_CPUFEATURES_NOT_IN_POOLS	Value: -2147139324
PRL_ERR_CPUFEATURES_NO_BINARY	Value: -2147139328
PRL_ERR_CPUFEATURES_POOLS_MANAGEMENT	Value: -2147139326
PRL_ERR_CPUFEATURES_RUNNING_VM_OR_CT	Value: -2147139325
PRL_ERR_CPU_RESTART	Value: -2147482752
PRL_ERR_CPU_SHUTDOWN	Value: -2147482759
PRL_ERR_CREATE_BOOTABLE_ISO	Value: -2147221504
PRL_ERR_CREATE_HARD_DISK_WITH_ZERO_SIZE	Value: -2147475453
PRL_ERR_CREATE_PRIVILEGED_PROCESS	Value: -2147389438
PRL_ERR_CREATE_SNAPSHOT_VM_VTD_BY_GUEST_SLEEP_TIMEOUT	Value: -2147262459
PRL_ERR_CREATE_SNAPSHOT_VM_VTD_PAUSED	Value: -2147262461
PRL_ERR_CREATE_SNAPSHOT_VM_VTD_WITH_OUTDATED_SHUTDOWN_TOOL	Value: -2147262455

continued on next page

Name	Description
PRL_ERR_CREATE_SNAPSHOT_VM_VTD_WITH_UNLOADED_SHUTDOWN_TOOL	Value: -2147262456
PRL_ERR_CREATE_SNAPSHOT_VM_VTD_WITH_UNSUPPORTED_CAPS	Value: -2147262426
PRL_ERR_CREATE_SNAPSHOT_VM_VTD_WITH_UNSUPPORTED_SHUTDOWN_TOOL	Value: -2147262460
PRL_ERR_CT_IS_RUNNING	Value: -2147205112
PRL_ERR_CT_MIGRATE_EXTERNAL_PROCESS	Value: -2147282860
PRL_ERR_CT_MIGRATE_ID_ALREADY_EXIST	Value: -2147282876
PRL_ERR_CT_MIGRATE_INTERNAL_ERROR	Value: -2147282891
PRL_ERR_CT_MIGRATE_TARGET_ALREADY_EXISTS	Value: -2147282871
PRL_ERR_CT_NOT_FOUND	Value: -2147323865
PRL_ERR_CVSRD_IO_ERROR	Value: -2147194880
PRL_ERR_CVSRD_NO_CHANNEL	Value: -2147194878
PRL_ERR_CVSRD_NO_OPEN_REQUEST	Value: -2147194879
PRL_ERR_DEACTIVATE_NO_INSTALLED_LICENSE	Value: -2147412192
PRL_ERR_DEACTIVATE_TRIAL_LICENSE	Value: -2147412191
PRL_ERR_DEACTIVATE_WRONG_TYPE_OF_ACTIVE_LICENSE	Value: -2147412199
PRL_ERR_DEACTIVATION_COMMON_SERVER_ERROR	Value: -2147412183

continued on next page

Name	Description
PRL_ERR_DEACTIVATION_HTTP_REQUEST_FAILED	Value: -2147412184
PRL_ERR_DEACTIVATION_OLD_HWID_NOT_FOUND	Value: -2147412176
PRL_ERR_DEACTIVATION_SERVER_ACTIVATION_ID_IS_INVALID	Value: -2147412189
PRL_ERR_DEACTIVATION_SERVER_ERROR	Value: -2147412190
PRL_ERR_DEACTIVATION_SERVER_KEY_IS_BLACKLISTED	Value: -2147412187
PRL_ERR_DEACTIVATION_SERVER_KEY_IS_INVALID	Value: -2147412188
PRL_ERR_DEACTIVATION_UNABLE_TO_SEND_REQUEST	Value: -2147412185
PRL_ERR_DEACTIVATION_WRONG_SERVER_RESPONSE	Value: -2147412186
PRL_ERR_DELETE_UNFINISHED_STATE_FAILED	Value: -2147482249
PRL_ERR_DELETING_VM_FROM_CATALOGUE	Value: -2147483053
PRL_ERR_DEV_ALREADY_CONNECTED	Value: -2147446784
PRL_ERR_DEV_ALREADY_DISCONNECTED	Value: -2147446783
PRL_ERR_DEV_DISABLED_AFTER_LOST	Value: -2147482813
PRL_ERR_DEV_FLOPPY_CONNECT_FAILED	Value: -2147479552
PRL_ERR_DEV_MAX_CD_EXCEEDED_WITH_DISABLED_CLIENT_SCSI	Value: -2147418092
PRL_ERR_DEV_MAX_CD_HDD_EXCEEDED	Value: -2147418111
PRL_ERR_DEV_MAX_NUMBER_EXCEEDED	Value: -2147418112

continued on next page

Name	Description
PRL_ERR_DEV_PARALLEL_PORT_FILE_CONNECT_FAILED	Value: -2147454974
PRL_ERR_DEV_PARALLEL_PORT_PHYSICAL_CONNECT_FAILED	Value: -2147454976
PRL_ERR_DEV_PARALLEL_PORT_PRINTER_CONNECT_FAILED	Value: -2147454975
PRL_ERR_DEV_PARALLEL_PORT_REMOTE_CONNECT_FAILED	Value: -2147454973
PRL_ERR_DEV_PRINTER_OVERFLOW	Value: -2147446781
PRL_ERR_DEV_SERIAL_PORT_FILE_CONNECT_FAILED	Value: -2147459070
PRL_ERR_DEV_SERIAL_PORT_PHYSICAL_CONNECT_FAILED	Value: -2147459072
PRL_ERR_DEV_SERIAL_PORT_PIPE_CONNECT_FAILED	Value: -2147459071
PRL_ERR_DEV_SERIAL_PORT_REMOTE_CONNECT_FAILED	Value: -2147459069
PRL_ERR_DEV_USB_BUSY	Value: -2147450875
PRL_ERR_DEV_USB_CHANGEPIID	Value: -2147450873
PRL_ERR_DEV_USB_HARD_DEVICE_INSERTED	Value: -2147450877
PRL_ERR_DEV_USB_HARD_DEVICE_INSERTED-2	Value: -2147450876
PRL_ERR_DEV_USB_INSTALL_DRIVER_FAILED	Value: -2147450879
PRL_ERR_DEV_USB_NOT_CONFIGURED	Value: -2147450872
PRL_ERR_DEV_USB_NO_FREE_PORTS	Value: -2147450878

continued on next page

Name	Description
PRL_ERR_DEV_USB_OPEN_MANAGER_FAILED	Value: -2147450880
PRL_ERR_DEV_USB_REUSE	Value: -2147450874
PRL_ERR_DIRECTORY_DOES_NOT_EXIST	Value: -2147483531
PRL_ERR_DISK_BLOCK_CREATED	Value: -2147348411
PRL_ERR_DISK_BLOCK_PARTIALLY_PROCESSED	Value: -2147348455
PRL_ERR_DISK_BLOCK_SEARCH_FAILED	Value: -2147344381
PRL_ERR_DISK_BLOCK_SKIPPED	Value: -2147348456
PRL_ERR_DISK_BOOTCAMP_WRITE_MBR	Value: -2147348391
PRL_ERR_DISK_CANT_INITIALIZE_IMAGE	Value: -2147348407
PRL_ERR_DISK_COMPRESSED_FILE_EMPTY	Value: -2147344383
PRL_ERR_DISK_CREATE_IMAGE_ERROR	Value: -2147348458
PRL_ERR_DISK_DATA_NOT_FOUND	Value: -2147340288
PRL_ERR_DISK_DIR_CREATE_ERROR	Value: -2147348459
PRL_ERR_DISK_DISK_NOT_OPENED	Value: -2147348447
PRL_ERR_DISK_ENLARGE_FAILED	Value: -2147348393
PRL_ERR_DISK_FAT32_SIZE_EXCEEDED	Value: -2147348445
PRL_ERR_DISK_FILE_CREATE_ERROR	Value: -2147348461
PRL_ERR_DISK_FILE_EXISTS	Value: -2147348462
PRL_ERR_DISK_FILE_OPEN_ERROR	Value: -2147348460
PRL_ERR_DISK_FSYNC_FAILED	Value: -2147348431
PRL_ERR_DISK_FULLFSYNC_FAILED	Value: -2147348430

continued on next page

Name	Description
PRL_ERR_DISK_GENERIC_ERROR	Value: -2147348480
PRL_ERR_DISK_GET_MOUNTPATH_FAILED	Value: -2147336192
PRL_ERR_DISK_GET_PARAMS_FAILED	Value: -2147336189
PRL_ERR_DISK_GET_SIZE_FAILED	Value: -2147348380
PRL_ERR_DISK_GPT_MBR_NOT_EQUAL	Value: -2147348379
PRL_ERR_DISK_GROUP_INTERSECT	Value: -2147348410
PRL_ERR_DISK_IDENTIFY_FAILED	Value: -2147336188
PRL_ERR_DISK_IMAGES_CORRUPTED	Value: -2147348472
PRL_ERR_DISK_IMAGE_BUSY	Value: -2147348412
PRL_ERR_DISK_IMPERSONATE_FAILED	Value: -2147348384
PRL_ERR_DISK_INCORRECTLY_CLOSED	Value: -2147348409
PRL_ERR_DISK_INSUFFICIENT_SPACE	Value: -2147348446
PRL_ERR_DISK_INTERNAL_CLASS_ERROR	Value: -2147348443
PRL_ERR_DISK_INVALID_BLOCKSIZE	Value: -2147348471
PRL_ERR_DISK_INVALID_FORMAT	Value: -2147348429
PRL_ERR_DISK_INVALID_PARAMETERS	Value: -2147348463
PRL_ERR_DISK_MEMORY_ERROR	Value: -2147348448
PRL_ERR_DISK_MOUNTED_OVERLAP	Value: -2147348381
PRL_ERR_DISK_MOUNT_FAILED	Value: -2147336191
PRL_ERR_DISK_NOT_IMPLEMENTED	Value: -2147348414
PRL_ERR_DISK_NOT_PERMITTED	Value: -2147348444

continued on next page

Name	Description
PRL_ERR_DISK_NOT_VALID_OFFSET	Value: -2147348394
PRL_ERR_DISK_NULL_PARTITION_SIZE	Value: -2147348399
PRL_ERR_DISK_OFFSETS_FIXED	Value: -2147348408
PRL_ERR_DISK_OPERATION_ABORTED	Value: -2147348426
PRL_ERR_DISK_OPERATION_IN_PROGRESS	Value: -2147348457
PRL_ERR_DISK_OPERATION_NOT_ALLOWED	Value: -2147348427
PRL_ERR_DISK_PARTITIONS_TABLE_CYCLE	Value: -2147348413
PRL_ERR_DISK_PARTITION_INVALID_NAME	Value: -2147348396
PRL_ERR_DISK_PARTITION_NOT_FOUND	Value: -2147348397
PRL_ERR_DISK_POINTERS_MIXED_UP	Value: -2147344380
PRL_ERR_DISK_POSSIBLE_OVERRUN	Value: -2147348392
PRL_ERR_DISK_READ_FAILED	Value: -2147348439
PRL_ERR_DISK_READ_OUT_DISK	Value: -2147348440
PRL_ERR_DISK_RENAME_ERROR	Value: -2147348428
PRL_ERR_DISK_RESERVED_WORD	Value: -2147340287
PRL_ERR_DISK_RESIZE_NOT_FOUND	Value: -2147217408
PRL_ERR_DISK_RESIZE_FAILED	Value: -2147217405
PRL_ERR_DISK_RESIZE_SIZE_TOO_LOW	Value: -2147217406
PRL_ERR_DISK_RESIZE_WITH_SNAPSHOTS_NOT_ALLOWED	Value: -2147217407
PRL_ERR_DISK_SET_CACHING_FAILED	Value: -2147348432
PRL_ERR_DISK_SET_FILE_SIZE_FAILED	Value: -2147344379

continued on next page

Name	Description
PRL_ERR_DISK_SHARE-D_BLOCK	Value: -2147344384
PRL_ERR_DISK_SHARING_VIOLATION	Value: -2147348425
PRL_ERR_DISK_SMALL-IMAGE_SIZE	Value: -2147348400
PRL_ERR_DISK_SNAPSHOTS_CORRUPTED	Value: -2147348474
PRL_ERR_DISK_STATE-S_ERROR	Value: -2147348464
PRL_ERR_DISK_STORAGE_CORRUPTED	Value: -2147348473
PRL_ERR_DISK_TOOL-NOT_FOUND	Value: -2147482478
PRL_ERR_DISK_TOOL-PROCESS_ERROR	Value: -2147482479
PRL_ERR_DISK_TRUNCATE_FAILED	Value: -2147344382
PRL_ERR_DISK_UNALIGNED	Value: -2147348395
PRL_ERR_DISK_UNCOMMITTED_OPERATION	Value: -2147348382
PRL_ERR_DISK_UNMOUNT_FAILED	Value: -2147336190
PRL_ERR_DISK_USER_INTERRUPTED	Value: -2147348424
PRL_ERR_DISK_WRITE-FAILED	Value: -2147348441
PRL_ERR_DISK_WRITE-OUT_DISK	Value: -2147348442
PRL_ERR_DISK_WRITE-REAL_FAILED	Value: -2147348415
PRL_ERR_DISK_XML_DIFFERS_FROM_REAL	Value: -2147348378
PRL_ERR_DISK_XML_INVALID	Value: -2147348478
PRL_ERR_DISK_XML_INVALID_VERSION	Value: -2147348477
PRL_ERR_DISK_XML_LARGE_FILE	Value: -2147348475
PRL_ERR_DISK_XML_LOCKED	Value: -2147348398

continued on next page

Name	Description
PRL_ERR_DISK_XML_MIS- SSING	Value: -2147348383
PRL_ERR_DISK_XML_O- PEN_FAILED	Value: -2147348479
PRL_ERR_DISK_XML_P- ARTITION_NOT_FOUN- D	Value: -2147348377
PRL_ERR_DISK_XML_S- AVE_ERROR	Value: -2147348476
PRL_ERR_DISK_XML_S- AVE_REMOVE_ERROR	Value: -2147348423
PRL_ERR_DISK_XML_S- AVE_RENAME_ERROR	Value: -2147348416
PRL_ERR_DISP2DISP_S- SESSION_ALREADY_AU- THORIZED	Value: -2147287040
PRL_ERR_DISP2DISP_W- RONG_USER_SESSION_- UUID	Value: -2147287039
PRL_ERR_DISPATCHER- _SERVICE_MODE	Value: -2147482780
PRL_ERR_DISPLAY_EN- CODINGS_NOT_SUPPO- RTED	Value: -2147482330
PRL_ERR_DISPLAY_FO- RMAT_NOT_SUPPORT- ED	Value: -2147482295
PRL_ERR_DISP_AUTO_- COMPRESS_PERIOD_O- UT_OF_RANGE	Value: -2147482488
PRL_ERR_DISP_CANNO- T_COMPACT_VM_HAR- D_DISK	Value: -2147482477
PRL_ERR_DISP_CONFI- G_ALREADY_EXISTS	Value: -2147483611
PRL_ERR_DISP_CONFI- G_FILE_NOT_SET	Value: -2147483584
PRL_ERR_DISP_CONFI- G_WRITE_ERR	Value: -2147483546
PRL_ERR_DISP_LOGON- _ACTIONS_REACHED_U- P_LIMIT	Value: -2147482603

continued on next page

Name	Description
PRL_ERR_DISP_SHUTDOWN_IN_PROCESS	Value: -2147482620
PRL_ERR_DISP_START_VM_FOR_COMPACT_FAILED	Value: -2147482490
PRL_ERR_DISP_TIME_MACHINE_IS_RUNNING	Value: -2147482364
PRL_ERR_DISP_VM_COMMAND_CANT_BE_EXECUTED	Value: -2147482602
PRL_ERR_DISP_VM_IS_NOT_STARTED	Value: -2147482761
PRL_ERR_DISP_VM_IS_NOT_STOPPED	Value: -2147482281
PRL_ERR_DOUBLE_INIT	Value: -2147483631
PRL_ERR_DROP_SUSPEND_FOR_HDD_REQUEST	Value: -2147482619
PRL_ERR_ENCRYPTION_COMMIT_PROHIBITED	Value: -2147139071
PRL_ERR_ENCRYPTION_COMMIT_REJECTED	Value: -2147139072
PRL_ERR_ENTRY_ALREADY_EXISTS	Value: -2147483520
PRL_ERR_ENTRY_DIR_ALREADY_EXISTS	Value: -2147482608
PRL_ERR_ENTRY_DIR_DOES_NOT_EXIST	Value: -2147482607
PRL_ERR_ENTRY_DOES_NOT_EXIST	Value: -2147483527
PRL_ERR_EXCEED_LIMIT_MAX_RUNNING_VMS	Value: -2147482744
PRL_ERR_EXCEED_MEMORY_LIMIT	Value: -2147483131
PRL_ERR_EXT_DISK_ALREADY_EXISTS	Value: -2147482248
PRL_ERR_EXT_DISK_CANT_RENAME	Value: -2147482247
PRL_ERR_FAILED_TO_AUTH_ON_BACKUP_SERVER	Value: -2147258333

continued on next page

Name	Description
PRL_ERR_FAILED_TO_CONNECT_TO_BACKUP_SERVER	Value: -2147258334
PRL_ERR_FAILED_TO_START_VNC_SERVER	Value: -2147266557
PRL_ERR_FAILED_TO_STOP_VNC_SERVER	Value: -2147266556
PRL_ERR_FAILURE	Value: -2147483639
PRL_ERR_FAILURE_ON_VM_DESTROYED	Value: -2147482526
PRL_ERR_FDD_IMAGE_CLONE_TO_SELF	Value: -2147482859
PRL_ERR_FDD_IMAGE_COPY	Value: -2147482860
PRL_ERR_FDD_IMAGE_NOT_SPECIFIED	Value: -2147483127
PRL_ERR_FILECOPY_CANT_CREATE_DIR	Value: -2147282911
PRL_ERR_FILECOPY_CANT_OPEN_FILE	Value: -2147282910
PRL_ERR_FILECOPY_CANT_WRITE	Value: -2147282909
PRL_ERR_FILECOPY_DIR_EXIST	Value: -2147282919
PRL_ERR_FILECOPY_FILE_EXIST	Value: -2147282912
PRL_ERR_FILECOPY_INTERNAL	Value: -2147282908
PRL_ERR_FILECOPY_PROTOCOL	Value: -2147282920
PRL_ERR_FILE_DISK_SPACE_ERROR	Value: -2147482765
PRL_ERR_FILE_NOT_EXIST	Value: -2147482846
PRL_ERR_FILE_NOT_FOUND	Value: -2147483632
PRL_ERR_FILE_OR_DIR_ALREADY_EXISTS	Value: -2147482795
PRL_ERR_FILE_READ_ERROR	Value: -2147483376

continued on next page

Name	Description
PRL_ERR_FILE_TRANSFER_CANT_CREATE_DST_FILE	Value: -2147327996
PRL_ERR_FILE_TRANSFER_CANT_LOCATE_SRC_FILE	Value: -2147327999
PRL_ERR_FILE_TRANSFER_CANT_READ_SRC_FILE	Value: -2147327998
PRL_ERR_FILE_TRANSFER_CANT_WRITE_DATA_TO_DST_FILE	Value: -2147327995
PRL_ERR_FILE_TRANSFER_CLIENT_NOT_CONNECTED	Value: -2147328000
PRL_ERR_FILE_TRANSFER_DST_FILE_ALREADY_EXIST	Value: -2147327994
PRL_ERR_FILE_TRANSFER_INVALID_ARGUMENTS	Value: -2147327991
PRL_ERR_FILE_TRANSFER_INVALID_CREDENTIALS	Value: -2147327997
PRL_ERR_FILE_TRANSFER_OPERATION_NOT_SUPPORTED	Value: -2147327993
PRL_ERR_FILE_TRANSFER_UPLOAD_CANCELLED_BY_USER	Value: -2147327992
PRL_ERR_FILE_WRITE_ERROR	Value: -2147482766
PRL_ERR_FIREWALL_TOOL_EXECUTED_WITH_ERROR	Value: -2147482316
PRL_ERR_FIXME	Value: -2147483097
PRL_ERR_FLOPPY_DRIVE_INVALID	Value: -2147483098
PRL_ERR_FLOPPY_IMAGE_ALREADY_EXIST	Value: -2147483050
PRL_ERR_FLOPPY_IMAGE_NOT_EXIST	Value: -2147483499

continued on next page

Name	Description
PRL_ERR_FORCE_REG_ON_SHARED_STORAGE_IS_NEEDED	Value: -2147194623
PRL_ERR_FREE_DISK_SPACE_FOR_CLONE	Value: -2147482767
PRL_ERR_FREE_DISK_SPACE_FOR_CREATE_SNAPSHOT	Value: -2147482558
PRL_ERR_FREE_DISK_SPACE_FOR_REVERT_TO_SNAPSHOT	Value: -2147482557
PRL_ERR_GET_DISK_FREE_SPACE_FAILED	Value: -2147482282
PRL_ERR_GET_LICENSE_INVALID_ARG	Value: -2147483337
PRL_ERR_GET_MON_STATE_INVALID_ARG	Value: -2147483352
PRL_ERR_GET_MON_STATE_VM_NOT_CONFIGURED	Value: -2147483351
PRL_ERR_GET_MON_STATE_VM_NOT_CREATED	Value: -2147483353
PRL_ERR_GET_NET_SERVICE_STATUS_FAILED	Value: -2147482797
PRL_ERR_GET_RESOLUTION_TOOL_INVALID_ARG	Value: -2147483274
PRL_ERR_GET_RESOLUTION_TOOL_VMNOTCREATED	Value: -2147483275
PRL_ERR_GET_USER_HOME_DIR	Value: -2147483069
PRL_ERR_GUEST_MAC_INVALID_VERSION	Value: -2147482791
PRL_ERR_GUEST_MAC_NOT_ENOUGH_MEMORY	Value: -2147482792
PRL_ERR_GUEST_MAC_NOT_MACSERVER_HOST	Value: -2147482729

continued on next page

Name	Description
PRL_ERR_GUEST_PROGRAM_EXECUTION_FAILED	Value: -2147270652
PRL_ERR_GUEST_TOOLS_NOT_INSTALLED	Value: -2147482589
PRL_ERR_HANDSHAKE_FAILED	Value: -2147482606
PRL_ERR_HARD_DISK_IMAGE_CORRUPTED	Value: -2147475454
PRL_ERR_HARD_DISK_NOT_VIRTUAL_OR_DISABLED	Value: -2147482471
PRL_ERR_HDD_IMAGE_CLONE_TO_SELF	Value: -2147483500
PRL_ERR_HDD_IMAGE_COPY	Value: -2147483081
PRL_ERR_HDD_IMAGE_IS_ALREADY_EXIST	Value: -2147483000
PRL_ERR_HDD_IMAGE_NOT_EXIST	Value: -2147483501
PRL_ERR_HDD_IMAGE_NOT_SPECIFIED	Value: -2147483130
PRL_ERR_HOST_AMD_GUEST_MAC	Value: -2147482808
PRL_ERR_HTTP_AUTH_REQUIRED	Value: -2147254266
PRL_ERR_HTTP_CONNECTION_REFUSED	Value: -2147254271
PRL_ERR_HTTP_HOST_NOT_FOUND	Value: -2147254272
PRL_ERR_HTTP_INVALID_RESPONSE_HEADER	Value: -2147254269
PRL_ERR_HTTP_PROBLEM_REPORT_SEND_FAILURE	Value: -2147254265
PRL_ERR_HTTP_PROXY_AUTH_REQUIRED	Value: -2147254267
PRL_ERR_HTTP_REQUEST_FAILED	Value: -2147412203
PRL_ERR_HTTP_UNEXPECTED_CLOSE	Value: -2147254270
PRL_ERR_HTTP_WRONG_CONTENT_LENGTH	Value: -2147254268

continued on next page

Name	Description
PRL_ERR_HVT_DISABLED	Value: -2147482815
PRL_ERR_HVT_DISABLED_WARNING	Value: -2147482361
PRL_ERR_HVT_NOT_AVAILABLE_WARNING	Value: -2147482493
PRL_ERR_HVT_NOT_PRESENT	Value: -2147482826
PRL_ERR_HVT_NOT_PRESENT_WARNING	Value: -2147262424
PRL_ERR_HVT_TURND_OFF_IN_CONFIG	Value: -2147482777
PRL_ERR_HYP_ALLOC_VMS_MEMORY	Value: -2147482575
PRL_ERR_IMAGE_NEED_TO_CONVERT	Value: -2147475455
PRL_ERR_IMPERSONATE_FAILED	Value: -2147482800
PRL_ERR_IMPORT_BOOTCAMP_VM_FAILED	Value: -2147216638
PRL_ERR_IMPORT_BOOTCAMP_VM_NO_SPACE	Value: -2147216637
PRL_ERR_INCONSISTENCY_VM_CONFIG	Value: -2147483386
PRL_ERR_INCORRECT_CDROM_PATH	Value: -2147479551
PRL_ERR_INCORRECT_FDD_PATH	Value: -2147482827
PRL_ERR_INCORRECT_PATH	Value: -2147482844
PRL_ERR_INSERTING_VM_TO_CATALOGUE	Value: -2147483080
PRL_ERR_INSTALLATION_PROBLEM	Value: -2147483004
PRL_ERR_INVALID_ACCESS_TOKEN_RECEIVED	Value: -2147483067
PRL_ERR_INVALID_ACTION_REQUESTED	Value: -2147482346
PRL_ERR_INVALID_ARG	Value: -2147483645

continued on next page

Name	Description
PRL_ERR_INVALID_CONFIGURATION	Value: -2147482779
PRL_ERR_INVALID_CREATE_FLOPPY_IMAGE_PARAMETERS	Value: -2147482287
PRL_ERR_INVALID_HANDLE	Value: -2147483644
PRL_ERR_INVALID_HDD_GEOMETRY	Value: -2147483129
PRL_ERR_INVALID_KEXT_REBOOT_REQUIRED	Value: -2147482576
PRL_ERR_INVALID_MEMORY_GUARANTEE	Value: -2147482313
PRL_ERR_INVALID_MEMORY_QUOTA	Value: -2147482314
PRL_ERR_INVALID_MEMORY_SIZE	Value: -2147483132
PRL_ERR_INVALID_OS_TYPE	Value: -2147418088
PRL_ERR_INVALID_PARALLELS_DISK	Value: -2147475456
PRL_ERR_INVALID_PARAMETER	Value: -2147483624
PRL_ERR_INVALID_TOTAL_LIMIT	Value: -2147482302
PRL_ERR_IOSERVICE_COMPRESS	Value: -2147482288
PRL_ERR_IO_AUTHENTICATION_FAILED	Value: -2147482876
PRL_ERR_IO_CONNECTION_TIMEOUT	Value: -2147482877
PRL_ERR_IO_DISABLED	Value: -2147482816
PRL_ERR_IO_INVALID_POINTER_ACCESS	Value: -2147482542
PRL_ERR_IO_NO_CONNECTION	Value: -2147482623
PRL_ERR_IO_SEND_QUEUE_IS_FULL	Value: -2147482880
PRL_ERR_IO_STOPPED	Value: -2147482879
PRL_ERR_IO_UNKNOWN_VM_ID	Value: -2147482878

continued on next page

Name	Description
PRL_ERR_IPC_ATTACH_FAILED	Value: -2147315696
PRL_ERR_IPC_CREATE_MAP_FAILED	Value: -2147315703
PRL_ERR_IPC_FTOK_FAILED	Value: -2147315695
PRL_ERR_IPFO_INVALID_MODE	Value: -2147315706
PRL_ERR_IPFO_RECEIVE_FAILED	Value: -2147315704
PRL_ERR_IPFO_SEND_FAILED	Value: -2147315705
PRL_ERR_IPFO_SOCKET_ACCEPT_FAILED	Value: -2147315709
PRL_ERR_IPFO_SOCKET_BIND_FAILED	Value: -2147315711
PRL_ERR_IPFO_SOCKET_CONNECT_FAILED	Value: -2147315708
PRL_ERR_IPFO_SOCKET_CREATE_FAILED	Value: -2147315712
PRL_ERR_IPFO_SOCKET_LISTEN_FAILED	Value: -2147315710
PRL_ERR_IPFO_SOCKET_NOT_OPENED	Value: -2147315707
PRL_ERR_IPHONE_PROXY_ALREADY_STARTED	Value: -2147278846
PRL_ERR_IPHONE_PROXY_CANNOT_START	Value: -2147278848
PRL_ERR_IPHONE_PROXY_CANNOT_STOP	Value: -2147278847
PRL_ERR_ISCSISTORAGE_ALREADY_REGISTERED	Value: -2147204077
PRL_ERR_ISCSISTORAGE_CANNOT_CREATE_MOUNT_POINT	Value: -2147204076
PRL_ERR_ISCSISTORAGE_CREATE	Value: -2147204094
PRL_ERR_ISCSISTORAGE_EXTEND	Value: -2147204090
PRL_ERR_ISCSISTORAGE_GET_STATE	Value: -2147204089

continued on next page

Name	Description
PRL_ERR_ISCSISTORAGE_INVALID_FSTYPE	Value: -2147204079
PRL_ERR_ISCSISTORAGE_LIBRARY	Value: -2147204096
PRL_ERR_ISCSISTORAGE_MOUNT	Value: -2147204092
PRL_ERR_ISCSISTORAGE_MOUNTED	Value: -2147204088
PRL_ERR_ISCSISTORAGE_MOUNT_POINT_ALREADY_EXISTS	Value: -2147204075
PRL_ERR_ISCSISTORAGE_NOT_FOUND	Value: -2147204078
PRL_ERR_ISCSISTORAGE_NOT_MOUNTED	Value: -2147204087
PRL_ERR_ISCSISTORAGE_NOT_SUPPORTED	Value: -2147204080
PRL_ERR_ISCSISTORAGE_REMOVE	Value: -2147204093
PRL_ERR_ISCSISTORAGE_START	Value: -2147204095
PRL_ERR_ISCSISTORAGE_UMOUNT	Value: -2147204091
PRL_ERR_IT_CANT_COMPACT	Value: -2147196391
PRL_ERR_IT_CANT_COMPACT_LDM_DISK	Value: -2147196384
PRL_ERR_IT_CANT_COMPACT_PLAIN_DISK	Value: -2147196382
PRL_ERR_IT_CANT_GET_BITMAP	Value: -2147196383
PRL_ERR_IT_CANT_GET_PARAMS_FROM_OLD_IMAGE	Value: -2147196412
PRL_ERR_IT_CANT_OPEN_IMAGE	Value: -2147196413
PRL_ERR_IT_CANT_PREPARE_RECONFIG_DATA	Value: -2147196407
PRL_ERR_IT_CANT_RECONFIG	Value: -2147196409

continued on next page

Name	Description
PRL_ERR_IT_CANT_RECONFIG_BOOTCAMP	Value: -2147196408
PRL_ERR_IT_CANT_RESIZE_LDM_DISK	Value: -2147196393
PRL_ERR_IT_CANT_RESIZE_VOLUME	Value: -2147196394
PRL_ERR_IT_CANT_VALIDATE_BOOTCAMP	Value: -2147196410
PRL_ERR_IT_CONVERT_TO_CURRENT_ERROR	Value: -2147196396
PRL_ERR_IT_DISK_SMALL_FOR_SPLIT	Value: -2147196395
PRL_ERR_IT_FAST_RESIZE_FAILURE	Value: -2147196671
PRL_ERR_IT_FIRST_ERROR	Value: -2147196416
PRL_ERR_IT_FIRST_FAILURE	Value: -2147196672
PRL_ERR_IT_FS_NOT_SUPPORTED_FOR_RESIZE	Value: -2147196392
PRL_ERR_IT_GUEST_TOOLS_UNKNOWN_STATE	Value: -2147196411
PRL_ERR_IT_HAL_NOT_FOUND	Value: -2147196398
PRL_ERR_IT_RECONFIG_PATH_NEEDED	Value: -2147196400
PRL_ERR_IT_ROLLBACK_FAILURE	Value: -2147196670
PRL_ERR_IT_SIZE_CHANGED	Value: -2147196414
PRL_ERR_IT_SNAPSHOTS_MERGE_IS_NEEDED	Value: -2147196397
PRL_ERR_IT_UNKNOWN_OS	Value: -2147196399
PRL_ERR_IT_USER_INTERRUPTED	Value: -2147196415
PRL_ERR_LICENSE_AUTH_FAILED	Value: -2147414009
PRL_ERR_LICENSE_BETA_KEY_RELEASE_PRODUCT	Value: -2147413999

continued on next page

Name	Description
PRL_ERR_LICENSE_BL-ACKLISTED	Value: -2147413995
PRL_ERR_LICENSE_BL-ACKLISTED_TO_VM_O- PERATION	Value: -2147413919
PRL_ERR_LICENSE_DE-FERRED_LICENSE_NOT- FOUND	Value: -2147413903
PRL_ERR_LICENSE_EX-PIRED	Value: -2147414015
PRL_ERR_LICENSE_FIL-E_WRITE_FAILED	Value: -2147414000
PRL_ERR_LICENSE_GR-ACED	Value: -2147413928
PRL_ERR_LICENSE_IS_-NOT_VOLUME	Value: -2147413901
PRL_ERR_LICENSE_NO-T_STARTED	Value: -2147413996
PRL_ERR_LICENSE_NO-T_VALID	Value: -2147414016
PRL_ERR_LICENSE_RE-LEASE_KEY_BETA_PRO-DUCT	Value: -2147413997
PRL_ERR_LICENSE_RES-TRICTED_CPU_COUNT	Value: -2147413927
PRL_ERR_LICENSE_RES-TRICTED_GUEST_OS	Value: -2147413951
PRL_ERR_LICENSE_RES-TRICTED_TO_CLONE_V-M	Value: -2147413946
PRL_ERR_LICENSE_RES-TRICTED_TO_CONVER-T_FROM_TEMPLATE	Value: -2147413944
PRL_ERR_LICENSE_RES-TRICTED_TO_CONVER-T_TO_TEMPLATE	Value: -2147413945
PRL_ERR_LICENSE_RES-TRICTED_TO_CREATE_-VM	Value: -2147413949
PRL_ERR_LICENSE_RES-TRICTED_TO_PAUSE_V-M	Value: -2147413936

continued on next page

Name	Description
PRL_ERR_LICENSE_RESTRICTED_TO_REGISTER_3RD_PARTY_VM	Value: -2147413947
PRL_ERR_LICENSE_RESTRICTED_TO_REGISTER_VM	Value: -2147413948
PRL_ERR_LICENSE_RESTRICTED_TO_RUNNING_VMS_LIMIT	Value: -2147413950
PRL_ERR_LICENSE_RESTRICTED_TO_RUNNING_VMS_LIMIT_PER_USER	Value: -2147413920
PRL_ERR_LICENSE_RESTRICTED_TO_SAFEMODE_FEATURE	Value: -2147413930
PRL_ERR_LICENSE_RESTRICTED_TO_SMARTGUARD_FEATURE	Value: -2147413929
PRL_ERR_LICENSE_RESTRICTED_TO_SNAPSHOT_CREATE	Value: -2147413935
PRL_ERR_LICENSE_RESTRICTED_TO_SNAPSHOT_DELETE	Value: -2147413933
PRL_ERR_LICENSE_RESTRICTED_TO_SNAPSHOT_SHOW_TREE	Value: -2147413932
PRL_ERR_LICENSE_RESTRICTED_TO_SNAPSHOT_SWITCH	Value: -2147413934
PRL_ERR_LICENSE_RESTRICTED_TO_SUSPEND_VM	Value: -2147413943
PRL_ERR_LICENSE_RESTRICTED_TO_UNDODISK_FEATURE	Value: -2147413931
PRL_ERR_LICENSE_TOO_MANY_MEMORY	Value: -2147413994
PRL_ERR_LICENSE_TOO_MANY_VCPUS	Value: -2147413998

continued on next page

Name	Description
PRL_ERR_LICENSE_UNSUPPORTED_LICENSE_TYPE_TO_DEACTIVATION	Value: -2147413904
PRL_ERR_LICENSE_UPGRADE_NO_ACCEPTABLE_LICENSE	Value: -2147414007
PRL_ERR_LICENSE_UPGRADE_NO_PERMANENT_LICENSE	Value: -2147414007
PRL_ERR_LICENSE_INVALID	Value: 0
PRL_ERR_LICENSE_VM_HAS_VTD_DEVICES	Value: -2147413993
PRL_ERR_LICENSE_WRONG_ADVANCED_FIELD	Value: -2147414008
PRL_ERR_LICENSE_WRONG_DISTRIBUTOR	Value: -2147414010
PRL_ERR_LICENSE_WRONG_LANGUAGE	Value: -2147414011
PRL_ERR_LICENSE_WRONG_PLATFORM	Value: -2147414012
PRL_ERR_LICENSE_WRONG_PRODUCT	Value: -2147414013
PRL_ERR_LICENSE_WRONG_VERSION	Value: -2147414014
PRL_ERR_LIC_REGISTRATION_COMMON_ERROR	Value: -2147412175
PRL_ERR_LOCAL_AUTHENTICATION_FAILED	Value: -2147482831
PRL_ERR_LOGIN_BY_MISMATCH_CLIENT_MODE	Value: -2147482507
PRL_ERR_LOW_MEMORY_LIMIT	Value: -2147482311
PRL_ERR_LPT_DEVICE_ALREADY_EXIST	Value: -2147483051
PRL_ERR_LPT_OUTPUT_FILE_IS_NOT_SPECIFIED	Value: -2147483114

continued on next page

Name	Description
PRL_ERR_LPT_OUTPUT_FILE_NOT_EXIST	Value: -2147483112
PRL_ERR_MAC_ADDRESS_INCORRECT	Value: -2147482840
PRL_ERR_MAC_ADDRESS_IN_CORRECT_LENGTH	Value: -2147483119
PRL_ERR_MAC_ADDRESS_IS_EMPTY	Value: -2147483120
PRL_ERR_MAC_ADDRESS_WITHIN_CORRECT_SYMBOLS	Value: -2147483116
PRL_ERR_MAC_ADDRESS_WITH_2_ZERO_START	Value: -2147483118
PRL_ERR_MAC_ADDRESS_WITH_ALL_ZEROS	Value: -2147483117
PRL_ERR_MAKE_DIRECTORY	Value: -2147483086
PRL_ERR_MEMORY_ALLOCATION_ERROR	Value: -2147418093
PRL_ERR_MEM_EXCEEDED_PHY_SPACE	Value: -2147482283
PRL_ERR_MERGE_XML_DOCUMENT_CONFLICT	Value: -2147482347
PRL_ERR_MOBILE_ADVANCED_AUTH_REQUIRED	Value: -2147482280
PRL_ERR_MOUNTER_LIST_NO_OBJECT	Value: -2147195388
PRL_ERR_MSG_START_32BIT_VM_ON_64BIT_HOST	Value: -2147482300
PRL_ERR_NEED_KILL_PREV_SETTING	Value: 426
PRL_ERR_NETWORK_ADAPTER_NOT_FOUND	Value: -2147482491
PRL_ERR_NETWORK_ROLLBACK_FAILED	Value: -2147483024
PRL_ERR_NOT_ALL_FILES_WAS_DELETED	Value: -2147483390

continued on next page

Name	Description
PRL_ERR_NOT_CONNECTED_TO_DISPATCHER	Value: -2147483055
PRL_ERR_NOT_CONNECTED_TO_PROXY_MANAGER	Value: -2147482268
PRL_ERR_NOT_ENOUGH_DISK_FREE_SPACE	Value: -2147482873
PRL_ERR_NOT_ENOUGH_DISK_SPACE_TO_START_VM	Value: -2147482538
PRL_ERR_NOT_ENOUGH_DISK_SPACE_TO_XML_SAVE	Value: -2147482541
PRL_ERR_NOT_ENOUGH_PERMS_TO_OPEN_AUTHORIZATION_FILE	Value: -2147482984
PRL_ERR_NOT_ENOUGH_RIGHTS_FOR_LINKED_CLONE	Value: -2147482349
PRL_ERR_NOT_LOCK_OWNER_SESSION_TRIES_TO_UNLOCK	Value: -2147482504
PRL_ERR_NOT_SENTILION_CLIENT	Value: -2147250176
PRL_ERR_NO_BOOTING_DEVICE_SELECTED	Value: -2147482828
PRL_ERR_NO_CD_DRIVE_AVAILABLE	Value: -2147482600
PRL_ERR_NO_DATA	Value: -2147483628
PRL_ERR_NO_DISP_CONFIG_FOUND	Value: -2147483623
PRL_ERR_NO_GUEST_OS_FOUND	Value: -2147201017
PRL_ERR_NO_MORE_FREE_INTERFACE_SLOTS	Value: -2147482775
PRL_ERR_NO_ONE_HARD_DISK_TO_COMPRESS	Value: 490
PRL_ERR_NO_PROBLEM_REPORT_FOUND	Value: -2147483515
PRL_ERR_NO_TARGET_DIR_PATH_SPECIFIED	Value: -2147482617

continued on next page

Name	Description
PRL_ERR_NO_TARGET_PATH_SPECIFIED	Value: -2147483532
PRL_ERR_NO_VM_DIR_CONFIG_FOUND	Value: -2147483610
PRL_ERR_NVRAM_FILE_COPY	Value: -2147482570
PRL_ERR_OBJECT_BAD_INTERFACE	Value: -2147213308
PRL_ERR_OBJECT_CLASS_NOT_FOUND	Value: -2147213304
PRL_ERR_OBJECT_DUPLICATE_CLASS	Value: -2147213305
PRL_ERR_OBJECT_DUPLICATE_UID	Value: -2147213309
PRL_ERR_OBJECT_LIB_CANT_GET_PERMS	Value: -2147213306
PRL_ERR_OBJECT_LIB_LOAD_ERROR	Value: -2147213311
PRL_ERR_OBJECT_LIB_NO_FUNCTIONS	Value: -2147213310
PRL_ERR_OBJECT_LIB_WRONG_PERMS	Value: -2147213307
PRL_ERR_OBJECT_NOT_FOUND	Value: -2147213312
PRL_ERR_OBJECT_WAS_REMOVED	Value: -2147482618
PRL_ERR_ONLY_ADMIN_CAN_SET_PARAMETER_STARTLOGINMODE_ROOT	Value: -2147482731
PRL_ERR_ONLY_ADMIN_CAN_SET_VERBOSE_LOGGING	Value: -2147482329
PRL_ERR_ONLY_ADMIN_OR_VM_OWNER_CAN_OPEN_THIS_SESSION	Value: -2147270656
PRL_ERR_OPEN_DISP_CONFIG_READ	Value: -2147483615
PRL_ERR_OPEN_DISP_CONFIG_WRITE	Value: -2147483614
PRL_ERR_OPEN_FAILED	Value: -2147482336

continued on next page

Name	Description
PRL_ERR_OPEN_PROBLEM_REPORT_READ	Value: -2147483514
PRL_ERR_OPEN_VM_CONFIG_READ	Value: -2147483597
PRL_ERR_OPEN_VM_CONFIG_WRITE	Value: -2147483596
PRL_ERR_OPEN_VM_DIR_CONFIG_READ	Value: -2147483608
PRL_ERR_OPEN_VM_DIR_CONFIG_WRITE	Value: -2147483607
PRL_ERR_OPERATION_FAILED	Value: -2147483626
PRL_ERR_OPERATION_PENDING	Value: -2147483629
PRL_ERR_OPERATION_WAS_CANCELED	Value: -2147483019
PRL_ERR_OS_RECONFIG_DATA_ABSENT	Value: -2147201008
PRL_ERR_OUT_OF_DISK_SPACE	Value: -2147482985
PRL_ERR_OUT_OF_MEMORY	Value: -2147483646
PRL_ERR_PARALLEL_PORT_IMAGE_NOT_EXIST	Value: -2147483497
PRL_ERR_PARALLEL_PORT_IMG_COPY	Value: -2147483082
PRL_ERR_PARALLEL_PORT_NO_RASTERIZER	Value: -2147482350
PRL_ERR_PARAM_NOT_FOUND	Value: -2147483625
PRL_ERR_PARSE_CLIENT_PREFS	Value: -2147483369
PRL_ERR_PARSE_COMMON_SERVER_PREFS	Value: -2147483359
PRL_ERR_PARSE_DISP_CONFIG	Value: -2147483613
PRL_ERR_PARSE_FILESYSTEM_INFO	Value: -2147483534
PRL_ERR_PARSE_HARD_DISK_HW_INFO	Value: -2147483535
PRL_ERR_PARSE_HOST_HW_INFO	Value: -2147483536

continued on next page

Name	Description
PRL_ERR_PARSE_PROBLEM_REPORT	Value: -2147483516
PRL_ERR_PARSE_STATISTICS	Value: -2147483018
PRL_ERR_PARSE_USER_PROFILE	Value: -2147483533
PRL_ERR_PARSE_VM_CONFIG	Value: -2147483594
PRL_ERR_PARSE_VM_DIR_CONFIG	Value: -2147483600
PRL_ERR_PARSING_EVENT	Value: -2147483612
PRL_ERR_PATH_IS_NOT_DIRECTORY	Value: -2147258319
PRL_ERR_PAX_ACCESS_FORBIDDEN	Value: -2147482094
PRL_ERR_PAX_HOST_LIMIT_WAS_EXCEEDED	Value: -2147482108
PRL_ERR_PCMOVED_FAILED	Value: -2147208957
PRL_ERR_PCMOVED_MIGRATE_FAILED	Value: -2147208958
PRL_ERR_PCMOVED_NOT_INSTALLED	Value: -2147208960
PRL_ERR_PCMOVED_POLICY_FILE_OPEN_ERROR	Value: -2147208955
PRL_ERR_PCMOVED_POLICY_FILE_WRITE_ERROR	Value: -2147208956
PRL_ERR_PCMOVED_VAN_FILE_CREATE_ERROR	Value: -2147208954
PRL_ERR_PCMOVED_VAN_FILE_OPEN_ERROR	Value: -2147208953
PRL_ERR_PCMOVED_VAN_FILE_PREPARE_FAILED	Value: -2147208959
PRL_ERR_PCMOVED_WINDOWS_DIR_NOT_EXIST	Value: -2147208952

continued on next page

Name	Description
PRL_ERR_PERFORM_M- OUNTER_COMMAND	Value: -2147195389
PRL_ERR_PLAYER_CA- NT_SUSPEND_IN_PAUS- E	Value: -2147482495
PRL_ERR_PPC_INVALI- D_CREDENTIALS	Value: -2147482112
PRL_ERR_PPC_INVALI- D_CREDENTIALS_ON_R- ECONNECT	Value: -2147482111
PRL_ERR_PPC_SERVER- _BUSY	Value: -2147482110
PRL_ERR_PPC_UNABLE- _TO_CONNECT	Value: -2147482109
PRL_ERR_PREPARE_FO- R_HIBERNATE_TASK_A- LREADY_RUN	Value: -2147482524
PRL_ERR_PREPARE_FO- R_HIBERNATE_VM_CA- NNOT_STAND_BY	Value: -2147482521
PRL_ERR_PREPARE_FO- R_HIBERNATE_VM_WI- THOUT_TOOLS	Value: -2147482522
PRL_ERR_PREPARE_FO- R_HIBERNATE_VM_WR- ONG_STATE	Value: -2147482523
PRL_ERR_PREV_SESSIO- N_IS_ACTIVE	Value: -2147483548
PRL_ERR_PROBLEM_R- EPORT_ALREADY_EXI- STS	Value: -2147483512
PRL_ERR_PROBLEM_R- EPORT_FILE_NOTSET	Value: -2147483513
PRL_ERR_PROBLEM_R- EPORT_WRITE	Value: -2147483511
PRL_ERR_PROXY_HAN- DSHAKE_FAILED	Value: -2147482334
PRL_ERR_PROXY_PEE- R_NOT_FOUND	Value: -2147482331
PRL_ERR_PROXY_WRO- NG_PORT_NUMBER	Value: -2147482332

continued on next page

Name	Description
PRL_ERR_PROXY_WRONG_PROTOCOL_VERSION	Value: -2147482333
PRL_ERR_READONLY_FILESYSTEM	Value: -2147482794
PRL_ERR_READ_FAILED	Value: -2147482344
PRL_ERR_READ_XML_CONTENT	Value: -2147483595
PRL_ERR_REBOOT_HOST	Value: -2147482798
PRL_ERR_REG_PSTORAGE_REVOKE_IS_NEEDS	Value: -2147194623
PRL_ERR_REMOTE_DEVICE_EXIST	Value: -2147483015
PRL_ERR_REMOTE_DEVICE_NOT_EXIST	Value: -2147483008
PRL_ERR_REMOTE_DEVICE_NOT_REGISTERED	Value: -2147483016
PRL_ERR_REMOTE_DISPLAY_EMPTY_PASSWORD	Value: -2147482489
PRL_ERR_REMOTE_DISPLAY_HOST_NOT_SPECIFIED	Value: -2147482812
PRL_ERR_REMOTE_DISPLAY_WRONG_PORT_NUMBER	Value: -2147482811
PRL_ERR_RESUME_BOOTCAMP_CHANGED_DISK_CONTENTS	Value: -2147352556
PRL_ERR_RESUME_BOOTCAMP_CORRUPT_DISK_STATE_PARAM	Value: -2147352557
PRL_ERR_RETRIEVE_VM_CONFIG	Value: -2147483072
PRL_ERR_RETURN_CODE_RANGE_END	Value: -2147483373
PRL_ERR_REVERT_IMPERSONATE_FAILED	Value: -2147482799

continued on next page

Name	Description
PRL_ERR_REVERT_SNAPSHOT_VM_VTD_BY_GUEST_SLEEP_TIMEOUT	Value: -2147262447
PRL_ERR_REVERT_SNAPSHOT_VM_VTD_PAUSED	Value: -2147262448
PRL_ERR_REVERT_SNAPSHOT_VM_VTD_WITHOUTDATED_SHUTDOWN_TOOL	Value: -2147262444
PRL_ERR_REVERT_SNAPSHOT_VM_VTD_WITHUNLOADED_SHUTDOWN_TOOL	Value: -2147262445
PRL_ERR_REVERT_SNAPSHOT_VM_VTD_WITHUNSUPPORTED_CAPS	Value: -2147262425
PRL_ERR_REVERT_SNAPSHOT_VM_VTD_WITHUNSUPPORTED_SHUTDOWN_TOOL	Value: -2147262446
PRL_ERR_RUNNING_VM_OR_CT	Value: -2147139325
PRL_ERR_RUN_VM_ACTION_SCRIPT	Value: -2147482286
PRL_ERR_SAFE_MODE_START_DURING_SUSPENDING_SYNC	Value: -2147352559
PRL_ERR_SAMPLE_CONFIG_NOT_FOUND	Value: -2147323863
PRL_ERR_SAVE_VM_CATALOG	Value: -2147483504
PRL_ERR_SAVE_VM_CONFIG	Value: -2147483084
PRL_ERR_SDK_TRY_AGAIN	Value: -2147155968
PRL_ERR_SEARCH_CONFIG_OPERATION_CANCELED	Value: -2147483384
PRL_ERR_SEND_COMMAND_TOWS_FAILED	Value: -2147483056
PRL_ERR_SERIAL_IMG_COPY	Value: -2147483083

continued on next page

Name	Description
PRL_ERR_SERIAL_IMG_NOT_FOUND	Value: -2147483085
PRL_ERR_SERIAL_PORT_IMAGE_NOT_EXIST	Value: -2147483498
PRL_ERR_SERVER_GOES_DOWN	Value: -2147483064
PRL_ERR_SERVER_PREFS_EDIT_COLLISION	Value: -2147482842
PRL_ERR_SERVICE_BUSY	Value: -2147482335
PRL_ERR_SET_CPULIMIT	Value: -2147205120
PRL_ERR_SET_CPUMASK	Value: -2147205115
PRL_ERR_SET_CPUUNITS	Value: -2147205119
PRL_ERR_SET_IOLIMIT	Value: -2147205116
PRL_ERR_SET_IOPRIO	Value: -2147205118
PRL_ERR_SET_LICENSE_INVALID_ARG	Value: -2147483336
PRL_ERR_SET_LICENSE_INVALID_KEY	Value: -2147483335
PRL_ERR_SET_NETWORK_SETTINGS_FAILED	Value: -2147270651
PRL_ERR_SHUT_DOWN_NOTIFICATION_SERVICE	Value: -2147483065
PRL_ERR_SMC_ERROR	Value: -2147483375
PRL_ERR_SMP_NOT_SUPPORTED_HVT_DISABLED	Value: -2147482363
PRL_ERR_SMP_NOT_SUPPORTED_HVT_NOT_PRESENT	Value: -2147482362
PRL_ERR_SNAPSHOTS_COPY	Value: -2147482569
PRL_ERR_SOME_TASKS_PRESENT	Value: -2147482781
PRL_ERR_SOME_VMS_RUNNING	Value: -2147482782
PRL_ERR_SOUND_BAD_EMULATION_TYPE	Value: -2147463165

continued on next page

Name	Description
PRL_ERR_SOUND_DEVICE_WRITE_FAILED	Value: -2147463168
PRL_ERR_SOUND_IN_DEVICE_OPEN_FAILED	Value: -2147463166
PRL_ERR_SOUND_OUT_DEVICE_OPEN_FAILED	Value: -2147463167
PRL_ERR_SOURCE_ISNT_BOOTCAMP_DISK	Value: -2147201015
PRL_ERR_SSL_HANDSHAKE_FAILED	Value: -2147482604
PRL_ERR_STAND_BY_VM_BY_GUEST_SLEEP_TIMEOUT	Value: -2147262439
PRL_ERR_STAND_BY_VM_PAUSED	Value: -2147262443
PRL_ERR_STAND_BY_VM_WITH_OUTDATED_SHUTDOWN_TOOL	Value: -2147262441
PRL_ERR_STAND_BY_VM_WITH_UNLOADED_SHUTDOWN_TOOL	Value: -2147262442
PRL_ERR_STAND_BY_VM_WITH_UNSUPPORTED_SHUTDOWN_TOOL	Value: -2147262440
PRL_ERR_START_SAFE_MODE_UNSUPPORTED	Value: -2147482297
PRL_ERR_START_VM_BY_NOT_AUTH_USER	Value: -2147482320
PRL_ERR_START_VM_BY_NOT_DEFINED_USER	Value: -2147482327
PRL_ERR_STATE_ALREADY_EXISTS	Value: -2147381227
PRL_ERR_STATE_CANT_LOAD_SPECIFIED_CFG	Value: -2147381212
PRL_ERR_STATE_CANT_OPEN_FOR_WRITE	Value: -2147381232
PRL_ERR_STATE_CANT_OPEN_IMAGE	Value: -2147381239
PRL_ERR_STATE_CANT_OPEN_LOCKED	Value: -2147381231
PRL_ERR_STATE_CANT_SAVE_LOCKED	Value: -2147381230

continued on next page

Name	Description
PRL_ERR_STATE_DELETE_NONCLOSED	Value: -2147381213
PRL_ERR_STATE_ERROR_CREATE_IMAGE	Value: -2147381241
PRL_ERR_STATE_ERROR_RENAMING_IMAGE	Value: -2147381240
PRL_ERR_STATE_FULL_DELETE_FAILED	Value: -2147381224
PRL_ERR_STATE_GETFREESPACE_FAILED	Value: -2147381211
PRL_ERR_STATE_INT_CORRUPTED	Value: -2147381229
PRL_ERR_STATE_INVALID_IMAGE_TYPE	Value: -2147381214
PRL_ERR_STATE_INVALID_PARAMETERS	Value: -2147381242
PRL_ERR_STATE_MEMORY_ERROR	Value: -2147381215
PRL_ERR_STATE_MERGE_FAILED	Value: -2147381223
PRL_ERR_STATE_MERGE_NO_SPACE	Value: -2147381216
PRL_ERR_STATE_NOT_OPENED	Value: -2147381226
PRL_ERR_STATE_NOT_PERMITTED	Value: -2147381225
PRL_ERR_STATE_NOT_RELEASED	Value: -2147381209
PRL_ERR_STATE_NO_DISKS	Value: -2147381247
PRL_ERR_STATE_NO_STATE	Value: -2147381228
PRL_ERR_STATE_PROCESS_RUNNING	Value: -2147381246
PRL_ERR_STATE_ROLLBACK_ERROR	Value: -2147381243
PRL_ERR_STATE_ROLLBACK_IN_PROGRESS	Value: -2147381244
PRL_ERR_STATE_STATFS_FAILED	Value: -2147381210
PRL_ERR_STATE_STOPPING_STATE	Value: -2147381245

continued on next page

Name	Description
PRL_ERR.STATE_UNEXPECTED_ERROR	Value: -2147381248
PRL_ERR.SUCCESS	Value: 0
PRL_ERR.SUSPEND_BOOTCAMP_NOT_NTFS_ONLY_DISK	Value: -2147352555
PRL_ERR.SUSPEND_BOOTCAMP_NTFS_RW_MOUNTS_DETECTED	Value: -2147352554
PRL_ERR.SUSPEND_REJECTED_BY_GUEST	Value: -2147482496
PRL_ERR.SUSPEND_VM_VTD_BY_GUEST_SLEEP_TIMEOUT	Value: -2147262462
PRL_ERR.SUSPEND_VM_VTD_PAUSED	Value: -2147262464
PRL_ERR.SUSPEND_VM_VTD_WITH_OUTDATED_SHUTDOWN_TOOL	Value: -2147262457
PRL_ERR.SUSPEND_VM_VTD_WITH_UNLOADED_SHUTDOWN_TOOL	Value: -2147262458
PRL_ERR.SUSPEND_VM_VTD_WITH_UNSUPPORTED_CAPS	Value: -2147262427
PRL_ERR.SUSPEND_VM_VTD_WITH_UNSUPPORTED_SHUTDOWN_TOOL	Value: -2147262463
PRL_ERR.SUSPEND_WITH_USB_BOOTDISK	Value: -2147262423
PRL_ERR.SYMBOL_NOT_FOUND	Value: -2147483630
PRL_ERR.TARGET_NAME_ALREADY_OCCUPIED	Value: -2147483529
PRL_ERR.TARGET_PATH_IS_NOT_DIRECTORY	Value: -2147483530
PRL_ERR.TASK_NOT_FOUND	Value: -2147483502
PRL_ERR.TEMPLATE_HAS_APPS	Value: -2147195904

continued on next page

Name	Description
PRL_ERR_TEMPLATE_NOT_FOUND	Value: -2147195903
PRL_ERR_TEST_TEXT_MESSAGES	Value: -2147208704
PRL_ERR_TEST_TEXT_MESSAGES_PS	Value: -2147208703
PRL_ERR_TIMEOUT	Value: -2147483627
PRL_ERR_TIME_MACHINE_EXCLUDED_LIST_OP	Value: -2147482298
PRL_ERR_TIS_INVALID_UID	Value: -2147321856
PRL_ERR_TOOLS_UNSUPPORTED_GUEST	Value: -2147482768
PRL_ERR_TOO_LOW_HDD_SIZE	Value: -2147483040
PRL_ERR_TRY_AGAIN	Value: -2147482544
PRL_ERR_UNABLE_APPLY_MEMORY_GUARANTEE	Value: -2147482312
PRL_ERR_UNABLE_APPLY_TOTAL_LIMIT	Value: -2147482303
PRL_ERR_UNABLE_DROP_SUSPENDED_STATE	Value: -2147483389
PRL_ERR_UNABLE_SEND_REQUEST	Value: -2147483278
PRL_ERR_UNABLE_TO_CONTINUE_VM_LIFETIME_IS_EXPIRED	Value: -2147482253
PRL_ERR_UNABLE_TO_SEND_REQUEST	Value: -2147412204
PRL_ERR_UNABLE_TO_SETUP_HEADLESS_MODE	Value: -2147482266
PRL_ERR_UNABLE_TO_SETUP_HEADLESS_MODE_BY_NON_PRIVILEGED_USER	Value: -2147482265
PRL_ERR_UNATTENDED_UNSUPPORTED_GUEST	Value: -2147221503

continued on next page

Name	Description
PRL_ERR_UNDER_OLD_HYPERVISOR	Value: -2147483048
PRL_ERR_UNEXPECTED	Value: -2147483647
PRL_ERR_UNIMPLEMENTED	Value: -2147483640
PRL_ERR_UNINITIALIZED	Value: -2147483641
PRL_ERR_UNNAMED_C-T_MOVE	Value: -2147205111
PRL_ERR_UNRECOGNIZED_REQUEST	Value: -2147483503
PRL_ERR_UNSUPPORTED_DEVICE_TYPE	Value: -2147479550
PRL_ERR_UNSUPPORTED_FILE_SYSTEM	Value: -2147482727
PRL_ERR_UNSUPPORTED_LAYOUTS_STRUCTURE	Value: -2147201016
PRL_ERR_UNSUPPORTED_NETWORK_FILE_SYSTEM	Value: -2147482727
PRL_ERR_UNSUPPORTED_VIRTUAL_SOURCE	Value: -2147201024
PRL_ERR_UPDATE_MEM_VM_NOT_CREATED	Value: -2147483279
PRL_ERR_UPD.TOOLS-VER_VM_NOT_CONFIGURED	Value: -2147483276
PRL_ERR_UPD.TOOLS-VER_VM_NOT_CREATED	Value: -2147483277
PRL_ERR_UPD.UPDATER_CONFIG	Value: -2147389440
PRL_ERR_UPD.UPDATES	Value: -2147389439
PRL_ERR_USER_CANT_CHANGE_ACCESS_PROFILE	Value: -2147483367
PRL_ERR_USER_CANT_CHANGE_PROFILE_ACCESS_PART	Value: -2147483047

continued on next page

Name	Description
PRL_ERR_USER_CANT_CHANGE_READ_ONLY_VALUE	Value: -2147483360
PRL_ERR_USER_DIRECTORY_NOT_SET	Value: -2147483545
PRL_ERR_USER_IS_ALREADY_LOGGED	Value: -2147483551
PRL_ERR_USER_NOT_FOUND	Value: -2147482736
PRL_ERR_USER_NO_AUTH_TO_CREATE_ROOT_VM_DIR	Value: -2147482520
PRL_ERR_USER_NO_AUTH_TO_CREATE_VM_IN_DIR	Value: -2147482858
PRL_ERR_USER_NO_AUTH_TO_EDIT_SERVER_SETTINGS	Value: -2147483049
PRL_ERR_USER_NO_AUTH_TO_EDIT_VM	Value: -2147482847
PRL_ERR_USER_NO_AUTH_TO_SAVE_BACKUP_FILES	Value: -2147258320
PRL_ERR_USER_NO_AUTH_TO_SAVE_FILES	Value: -2147482861
PRL_ERR_USER_OPERATION_NOT_AUTHORIZED	Value: -2147483559
PRL_ERR_USER_PROFILE_WAS_CHANGED	Value: -2147483368
PRL_ERR_VA_CONFIG	Value: -2147385344
PRL_ERR_VCMMD_NO_CONNECTION	Value: -2147482239
PRL_ERR_VMCONF_AUTOSTART_FROM_CURRENT_USER_FORBIDDEN	Value: -2147323821
PRL_ERR_VMCONF_BOOTCAMP_HARD_DISK_SMART_GUARD_NOT_ALLOWED	Value: -2147323882

continued on next page

Name	Description
PRL_ERR_VMCONF_BO- OTCAMP_HARD_SNAPS- HOTS_NOT_ALLOW	Value: -2147323888
PRL_ERR_VMCONF_BO- OTCAMP_HARD_UNDO- DISKS_NOT_ALLOW	Value: -2147323896
PRL_ERR_VMCONF_BO- OTCAMP_SAFE_MODE_- NOT_ALLOW	Value: -2147323886
PRL_ERR_VMCONF_BO- OT_OPTION_DEVICE_N- OT_EXISTS	Value: -2147323822
PRL_ERR_VMCONF_BO- OT_OPTION_DUPLICA- TE_DEVICE	Value: -2147323823
PRL_ERR_VMCONF_BO- OT_OPTION_INVALID_- DEVICE_TYPE	Value: -2147323824
PRL_ERR_VMCONF_CD- _DVD_ROM_DUPLICAT- E_SYS_NAME	Value: -2147322879
PRL_ERR_VMCONF_CD- _DVD_ROM_IMAGE_IS_N- OT_EXIST	Value: -2147322878
PRL_ERR_VMCONF_CD- _DVD_ROM_SET_SATA_- FOR_OLD_CHIPSET	Value: -2147322875
PRL_ERR_VMCONF_CD- _DVD_ROM_SET_SATA_- FOR_UNSUPPORTED_O- S	Value: -2147322876
PRL_ERR_VMCONF_CD- _DVD_ROM_SYS_NAME_- IS_EMPTY	Value: -2147322880
PRL_ERR_VMCONF_CD- _DVD_ROM_URL_FORM- AT_SYS_NAME	Value: -2147322877
PRL_ERR_VMCONF_CP- ULIMIT_NOT_SUPPORT- ED	Value: -2147323869
PRL_ERR_VMCONF_CP- UUNITS_NOT_SUPPORT- ED	Value: -2147323870

continued on next page

Name	Description
PRL_ERR_VMCONF_CPU_COUNT_MORE_HOST_CPU_COUNT	Value: -2147323390
PRL_ERR_VMCONF_CPU_COUNT_MORE_MAX_CPU_COUNT	Value: -2147323391
PRL_ERR_VMCONF_CPU_MASK_INVALID	Value: -2147323389
PRL_ERR_VMCONF_CPU_MASK_INVALID_CPU_NUM	Value: -2147323388
PRL_ERR_VMCONF_CPU_NODE_MASK_INVALID	Value: -2147323387
PRL_ERR_VMCONF_CPU_ZERO_COUNT	Value: -2147323392
PRL_ERR_VMCONF_DESKTOP_MODE_REMOTE_DEVICES	Value: -2147323898
PRL_ERR_VMCONF_DUPLICATE_IP_ADDRESS	Value: -2147322617
PRL_ERR_VMCONF_EFI_UNSUPPORTED_GUEST	Value: -2147323851
PRL_ERR_VMCONF_FLOPPY_DISK_IMAGE_IS_NOT_EXIST	Value: -2147323055
PRL_ERR_VMCONF_FLOPPY_DISK_IMAGE_IS_NOT_VALID	Value: -2147323053
PRL_ERR_VMCONF_FLOPPY_DISK_IS_NOT_ACCESSIBLE	Value: -2147323054
PRL_ERR_VMCONF_FLOPPY_DISK_SYS_NAME_HAS_INVALID_SYMBOL	Value: -2147323052
PRL_ERR_VMCONF_FLOPPY_DISK_SYS_NAME_IS_EMPTY	Value: -2147323056

continued on next page

Name	Description
PRL_ERR_VMCONF_FLOPPY_DISK_URL_FORMAT_SYS_NAME	Value: -2147323051
PRL_ERR_VMCONF_GENERIC_PCI_DEVICE_CANNOT_BE_ADDED	Value: -2147322016
PRL_ERR_VMCONF_GENERIC_PCI_DEVICE_DUPLICATE_IN_ANOTHER_VM	Value: -2147322012
PRL_ERR_VMCONF_GENERIC_PCI_DEVICE_NOT_CONNECTED	Value: -2147322014
PRL_ERR_VMCONF_GENERIC_PCI_DEVICE_NOT_FOUND	Value: -2147322015
PRL_ERR_VMCONF_GENERIC_PCI_DUPLICATE_SYS_NAME	Value: -2147322010
PRL_ERR_VMCONF_GENERIC_PCI_VIDEO_DEVICE_IS_ONE	Value: -2147322013
PRL_ERR_VMCONF_GENERIC_PCI_VIDEO_NOT_SINGLE	Value: -2147322009
PRL_ERR_VMCONF_GENERIC_PCI_VIDEO_WRONG_COUNT	Value: -2147322009
PRL_ERR_VMCONF_GENERIC_PCI_WRONG_DEVICE	Value: -2147322011
PRL_ERR_VMCONF_HARD_DISK_DUPLICATE_SYS_NAME	Value: -2147322797
PRL_ERR_VMCONF_HARD_DISK_IMAGE_IS_NOT_EXIST	Value: -2147322799
PRL_ERR_VMCONF_HARD_DISK_IMAGE_IS_NOT_VALID	Value: -2147322798
PRL_ERR_VMCONF_HARD_DISK_MISS_BOOTCAMP_PARTITION	Value: -2147322793

continued on next page

Name	Description
PRL_ERR_VMCONF_HARD_DISK_NOT_ENOUGH_SPACE_FOR_ENCRYPT_DISK	Value: -2147322791
PRL_ERR_VMCONF_HARD_DISK_SERIAL_IS_NOT_VALID	Value: -2147322781
PRL_ERR_VMCONF_HARD_DISK_SET_SATA_FOR_OLD_CHIPSET	Value: -2147322783
PRL_ERR_VMCONF_HARD_DISK_SET_SATA_FOR_UNSUPPORTED_OS	Value: -2147322784
PRL_ERR_VMCONF_HARD_DISK_SYS_NAME_HAS_INVALID_SYMBOL	Value: -2147322796
PRL_ERR_VMCONF_HARD_DISK_SYS_NAME_IS_EMPTY	Value: -2147322800
PRL_ERR_VMCONF_HARD_DISK_UNABLE_DELETE_DISK_WITH_SNAPSHOTS	Value: -2147322782
PRL_ERR_VMCONF_HARD_DISK_URL_FORMAT_SYS_NAME	Value: -2147322795
PRL_ERR_VMCONF_HARD_DISK_WRONG_TYPE_BOOTCAMP_PARTITION	Value: -2147322794
PRL_ERR_VMCONF_HARD_DISK_WRONG_TYPE_FOR_ENCRYPTRED_VM	Value: -2147322792
PRL_ERR_VMCONF_IDE_DEVICES_COUNT_OUT_OF_RANGE	Value: -2147322112
PRL_ERR_VMCONF_IDE_DEVICES_DUPLICATE_STACK_INDEX	Value: -2147322111

continued on next page

Name	Description
PRL_ERR_VMCONF_INCOMPAT_HARD_DISK_SMART_GUARD_NOT_ALLOWED	Value: -2147323881
PRL_ERR_VMCONF_INCOMPAT_HARD_UNDO_DISKS_NOT_ALLOW	Value: -2147323895
PRL_ERR_VMCONF_INCOMPAT_SAFE_MODE_NOT_ALLOW	Value: -2147323885
PRL_ERR_VMCONF_INVALID_DEVICE_MAIN_INDEX	Value: -2147323899
PRL_ERR_VMCONF_IOLIMIT_NOT_SUPPORTED	Value: -2147323867
PRL_ERR_VMCONF_IOPRIO_NOT_SUPPORTED	Value: -2147323868
PRL_ERR_VMCONF_IOPSLIMIT_NOT_SUPPORTED	Value: -2147323864
PRL_ERR_VMCONF_MAIN_MEMORY_MAX_BALLOON_SIZE_MORE_100_PERCENT	Value: -2147323308
PRL_ERR_VMCONF_MAIN_MEMORY_MQ_INVALID_RANGE	Value: -2147323305
PRL_ERR_VMCONF_MAIN_MEMORY_MQ_MIN_LESS_VMM_OVERHEAD_VALUE	Value: -2147323304
PRL_ERR_VMCONF_MAIN_MEMORY_MQ_MIN_OUT_OF_RANGE	Value: -2147323303
PRL_ERR_VMCONF_MAIN_MEMORY_MQ_PRIORITY_OUT_OF_RANGE	Value: -2147323306
PRL_ERR_VMCONF_MAIN_MEMORY_MQ_PRIORITY_ZERO	Value: -2147323307

continued on next page

Name	Description
PRL_ERR_VMCONF_MAIN_MEMORY_NOT_4_RATIO_SIZE	Value: -2147323310
PRL_ERR_VMCONF_MAIN_MEMORY_OUT_OF_RANGE	Value: -2147323311
PRL_ERR_VMCONF_MAIN_MEMORY_SIZE_NOT_EQUAL_RECOMMENDED	Value: 27253
PRL_ERR_VMCONF_MAIN_MEMORY_ZERO_SIZE	Value: -2147323312
PRL_ERR_VMCONF_NEEDED_HEADLESS_MODE_FOR_AUTOSTART	Value: -2147323856
PRL_ERR_VMCONF_NEEDED_HEADLESS_MODE_FOR_AUTOSTOP	Value: -2147323855
PRL_ERR_VMCONF_NEEDED_HEADLESS_MODE_FOR_KEEP_VM_ALIVE_ON_GUI_EXIT	Value: -2147323854
PRL_ERR_VMCONF_NEEDED_MORE_MEMORY_TO_ENABLE_HOTPLUG	Value: -2147323852
PRL_ERR_VMCONF_NETWORK_ADAPTER_BROADCAST_IP_ADDRESS	Value: -2147322615
PRL_ERR_VMCONF_NETWORK_ADAPTER_DUPLICATE_IP_ADDRESS	Value: -2147322621
PRL_ERR_VMCONF_NETWORK_ADAPTER_DUPLICATE_MAC_ADDRESS	Value: -2147322622
PRL_ERR_VMCONF_NETWORK_ADAPTER_ETHLIST_CREATE_ERROR	Value: -2147322620

continued on next page

Name	Description
PRL_ERR_VMCONF_NETWORK_ADAPTER_GATEWAY_NOT_IN_SUBNET	Value: -2147322607
PRL_ERR_VMCONF_NETWORK_ADAPTER_GUEST_TOOLS_NOT_AVAILABLE	Value: -2147322618
PRL_ERR_VMCONF_NETWORK_ADAPTER_INVALID_BOUND_INDEX	Value: -2147322624
PRL_ERR_VMCONF_NETWORK_ADAPTER_INVALID_DNS_IP_ADDRESS	Value: -2147322606
PRL_ERR_VMCONF_NETWORK_ADAPTER_INVALID_GATEWAY_IP_ADDRESS	Value: -2147322608
PRL_ERR_VMCONF_NETWORK_ADAPTER_INVALID_IP_ADDRESS	Value: -2147322619
PRL_ERR_VMCONF_NETWORK_ADAPTER_INVALID_MAC_ADDRESS	Value: -2147322623
PRL_ERR_VMCONF_NETWORK_ADAPTER_INVALID_SEARCH_DOMAIN_NAME	Value: -2147322605
PRL_ERR_VMCONF_NETWORK_ADAPTER_MULTICAST_IP_ADDRESS	Value: -2147322616
PRL_ERR_VMCONF_NETWORK_ADAPTER_ROUTED_NO_STATIC_ADDRESS	Value: -2147322604
PRL_ERR_VMCONF_NO_AUTO_COMPRESS_WITH_SMART_GUARD	Value: -2147323872
PRL_ERR_VMCONF_NO_AUTO_COMPRESS_WITH_UNDO_DISKS	Value: -2147323879

continued on next page

Name	Description
PRL_ERR_VMCONF_NO_CONFIGURED_TOTAL_RATE_FOR_NETWORK_CLASS	Value: -2147321998
PRL_ERR_VMCONF_NO_HD_IMAGES_IN_SAFE_MODE	Value: -2147323883
PRL_ERR_VMCONF_NO_HD_IMAGES_IN_UNDO_DISKS_MODE	Value: -2147323884
PRL_ERR_VMCONF_NO_IP_ADDRESSES_SPECIFIED_FOR_OFFLINE_MANAGEMENT	Value: -2147322000
PRL_ERR_VMCONF_NO_SMART_GUARD_WITH_UNDO_DISKS	Value: -2147323871
PRL_ERR_VMCONF_PARALLEL_PORT_IMAGE_IS_NOT_EXIST	Value: -2147322287
PRL_ERR_VMCONF_PARALLEL_PORT_SYS_NAME_HAS_INVALID_SYMBOL	Value: -2147322286
PRL_ERR_VMCONF_PARALLEL_PORT_SYS_NAME_IS_EMPTY	Value: -2147322288
PRL_ERR_VMCONF_PARALLEL_PORT_URL_FORMAT_SYS_NAME	Value: -2147322285
PRL_ERR_VMCONF_REAL_HARD_SAFE_MODE_NOT_ALLOW	Value: -2147323887
PRL_ERR_VMCONF_REAL_HARD_UNDO_DISKS_NOT_ALLOW	Value: -2147323897
PRL_ERR_VMCONF_REMOTE_DISPLAY_EMPTY_PASSWORD	Value: -2147323645
PRL_ERR_VMCONF_REMOTE_DISPLAY_HOST_IP_ADDRESS_IS_ZERO	Value: -2147323647

continued on next page

Name	Description
PRL_ERR_VMCONF_REMOTE_DISPLAY_INVALID_HOST_IP_ADDRESS	Value: -2147323646
PRL_ERR_VMCONF_REMOTE_DISPLAY_PASSWORD_TOO_LONG	Value: -2147323644
PRL_ERR_VMCONF_REMOTE_DISPLAY_PORT_NUMBER_IS_ZERO	Value: -2147323648
PRL_ERR_VMCONF_RESTRICTED_CPU_COUNT	Value: -2147326719
PRL_ERR_VMCONF_RESTRICTED_MEMORY_SIZE	Value: -2147326718
PRL_ERR_VMCONF_RESTRICTED_OS_VERSION	Value: -2147326720
PRL_ERR_VMCONF_RESTRICTED_SMART_GUARD	Value: -2147326716
PRL_ERR_VMCONF_RESTRICTED_UNDO_DISKS	Value: -2147326717
PRL_ERR_VMCONF_SATA_DEVICES_COUNT_OUT_OF_RANGE	Value: -2147322110
PRL_ERR_VMCONF_SATA_DEVICES_DUPLICATE_STACK_INDEX	Value: -2147322109
PRL_ERR_VMCONF_SCSI_BUSLOGIC_WITH_EFI_NOT_SUPPORTED	Value: -2147322030
PRL_ERR_VMCONF_SCSI_DEVICES_COUNT_OUT_OF_RANGE	Value: -2147322032
PRL_ERR_VMCONF_SCSI_DEVICES_DUPLICATE_STACK_INDEX	Value: -2147322031
PRL_ERR_VMCONF_SERIAL_PORT_IMAGE_IS_NOT_EXIST	Value: -2147322367

continued on next page

Name	Description
PRL_ERR_VMCONF_SERIAL_PORT_SYS_NAME_HAS_INVALID_SYMBOL	Value: -2147322366
PRL_ERR_VMCONF_SERIAL_PORT_SYS_NAME_IS_EMPTY	Value: -2147322368
PRL_ERR_VMCONF_SERIAL_PORT_URL_FORMAT_SYS_NAME	Value: -2147322365
PRL_ERR_VMCONF_SHARED_FOLDERS_DUPLICATE_FOLDER_NAME	Value: -2147323567
PRL_ERR_VMCONF_SHARED_FOLDERS_DUPLICATE_FOLDER_PATH	Value: -2147323565
PRL_ERR_VMCONF_SHARED_FOLDERS_EMPTY_FOLDER_NAME	Value: -2147323568
PRL_ERR_VMCONF_SHARED_FOLDERS_INVALID_FOLDER_PATH	Value: -2147323566
PRL_ERR_VMCONF_SOUND_MIXER_IS_EMPTY	Value: -2147322544
PRL_ERR_VMCONF_SOUND_OUTPUT_IS_EMPTY	Value: -2147322543
PRL_ERR_VMCONF_UNKNOWN_OS_TYPE	Value: -2147323902
PRL_ERR_VMCONF_UNKNOWN_OS_VERSION	Value: -2147323901
PRL_ERR_VMCONF_VALIDATION_FAILED	Value: -2147323904
PRL_ERR_VMCONF_VIDEO_MEMORY_OUT_OF_RANGE	Value: -2147323136
PRL_ERR_VMCONF_VIDEO_NOT_ENABLED	Value: -2147323880
PRL_ERR_VMCONF_VIRTIO_BLOCK_DEVICES_DUPLICATE_STACK_INDEX	Value: -2147322108

continued on next page

Name	Description
PRL_ERR_VMCONF_VM_NAME_HAS_INVALID_SYMBOL	Value: -2147323900
PRL_ERR_VMCONF_VM_NAME_IS_EMPTY	Value: -2147323903
PRL_ERR_VMCONF_VM_NAME_IS_TOO_LONG	Value: -2147323853
PRL_ERR_VMDIR_INVALID_PATH	Value: -2147483003
PRL_ERR_VMDIR_PATH_IS_NOT_ABSOLUTE	Value: -2147483002
PRL_ERR_VMHELPER_CREATEVM_FAILED	Value: -2147216384
PRL_ERR_VMHELPER_DIR_PATH_INVALID	Value: -2147216380
PRL_ERR_VMHELPER_DISK_MOUNT_FAILED	Value: -2147216382
PRL_ERR_VMHELPER_DISK_UNMOUNT_FAILED	Value: -2147216381
PRL_ERR_VMHELPER_GETTING_AVAILABLE_DRIVE_FAILED	Value: -2147216383
PRL_ERR_VM_ABORT	Value: -2147482843
PRL_ERR_VM_ALLOC_MEM_DRV_NOT_STARTED	Value: -2147483260
PRL_ERR_VM_ALLOC_VM_MEMORY	Value: -2147483259
PRL_ERR_VM_ALREADY_CONNECTED	Value: -2147482735
PRL_ERR_VM_ALREADY_CREATED	Value: -2147483356
PRL_ERR_VM_ALREADY_REGISTERED	Value: -2147482553
PRL_ERR_VM_ALREADY_REGISTERED_UNIQUE_PARAMS	Value: -2147483372
PRL_ERR_VM_ALREADY_REGISTERED_VM_NAME	Value: -2147483371

continued on next page

Name	Description
PRL_ERR_VM_ALREADY_REGISTERED_VM_PATH	Value: -2147483549
PRL_ERR_VM_ALREADY_REGISTERED_VM_UID	Value: -2147483550
PRL_ERR_VM_ALREADY_RESUMED	Value: -2147483566
PRL_ERR_VM_ALREADY_RUNNING	Value: -2147482622
PRL_ERR_VM_ALREADY_SUSPENDED	Value: -2147483568
PRL_ERR_VM_ANOTHER_TOOLS_IN_USE	Value: -2147482587
PRL_ERR_VM_APPLY_CHANGES_PENDING	Value: -2147482778
PRL_ERR_VM_APPLY_CONFIG_FAILED	Value: -2147482992
PRL_ERR_VM_APPLY_CONFIG_NEEDS_REBOOT	Value: -2147482991
PRL_ERR_VM_ASYNC_CD_CONSTRUCTOR	Value: -2147483264
PRL_ERR_VM_AUTO_COMPRESS_TASK_ALREADY_RUN	Value: -2147482473
PRL_ERR_VM_BACKUP_HDD_IMAGE_OUT_OF_BUNDLE	Value: -2147258315
PRL_ERR_VM_BACKUP_INVALID_DISK_TYPE	Value: -2147258314
PRL_ERR_VM_BAD_OS_TYPE	Value: -2147483134
PRL_ERR_VM_CANT_CLONE_HDD_MISSING	Value: -2147482848
PRL_ERR_VM_CANT_CLONE_RUNNING	Value: -2147482990
PRL_ERR_VM_CANT_DELETE_RUNNING	Value: -2147482989
PRL_ERR_VM_CANT_UNREG_RUNNING	Value: -2147482988
PRL_ERR_VM_COMPACT_HARD_DISK_FAILED	Value: -2147482474

continued on next page

Name	Description
PRL_ERR_VM_COMPACT_NOT_SUPPORTED_GUEST_OS	Value: -2147482368
PRL_ERR_VM_COMPACT_PROCESSING	Value: -2147319808
PRL_ERR_VM_CONFIG_ALREADY_EXISTS	Value: -2147483593
PRL_ERR_VM_CONFIG_CANNOT_BE_RESTORED	Value: -2147482540
PRL_ERR_VM_CONFIG_DOESNT_EXIST	Value: -2147483005
PRL_ERR_VM_CONFIG_INVALID_SERVER_UUID	Value: -2147482763
PRL_ERR_VM_CONFIG_INVALID_VM_UUID	Value: -2147482764
PRL_ERR_VM_CONFIG_IS_ALREADY_VALID	Value: -2147482539
PRL_ERR_VM_CONFIG_WAS_CHANGED	Value: -2147483374
PRL_ERR_VM_CONF_CHANGED_INVALID_ARG	Value: -2147483340
PRL_ERR_VM_CONF_CHANGED_NOT_CREATED	Value: -2147483341
PRL_ERR_VM_CONF_CHANGED_NOT_STARTED	Value: -2147483339
PRL_ERR_VM_CONF_CHANGED_UNSUPPORTED_DEV	Value: -2147483338
PRL_ERR_VM_COULDNT_BE_STARTED_UNDER_SPECIFIED_USER	Value: -2147482728
PRL_ERR_VM_CREATE_HDD_IMG_INVALID_ARG	Value: -2147483289
PRL_ERR_VM_CREATE_HDD_IMG_INVALID_CREATE	Value: -2147483288

continued on next page

Name	Description
PRL_ERR_VM_CREATE_INVALID_ARG	Value: -2147483357
PRL_ERR_VM_CREATE_SNAPSHOT_FAILED	Value: -2147483565
PRL_ERR_VM_DELETE_STATE_FAILED	Value: -2147482585
PRL_ERR_VM_DEVICES_INITIALIZATION_FAILED	Value: -2147483021
PRL_ERR_VM_DEVICES_TERMINATION_FAILED	Value: -2147483020
PRL_ERR_VM_DEV_CHANGE_MEDIA_FAILED	Value: -2147483561
PRL_ERR_VM_DEV_CONNECT_FAILED	Value: -2147483563
PRL_ERR_VM_DEV_DISCONNECT_FAILED	Value: -2147483562
PRL_ERR_VM_DIRECTORY_FOLDER_DOESNT_EXIST	Value: -2147482551
PRL_ERR_VM_DIRECTORY_NOT_EXIST	Value: -2147482841
PRL_ERR_VM_DIRECTORY_NOT_INITIALIZED	Value: -2147483547
PRL_ERR_VM_DIR_CONFIG_ALREADY_EXISTS	Value: -2147483599
PRL_ERR_VM_DIR_FILE_NOT_SET	Value: -2147483591
PRL_ERR_VM_DOES_NOT_STOPPED	Value: -2147483071
PRL_ERR_VM_DVD_DISCONNECT_FAILED_LOCKED	Value: -2147482572
PRL_ERR_VM_EDIT_UNABLE_CHANGE_IP_ADDRESS	Value: -2147482537
PRL_ERR_VM_EDIT_UNABLE_CONVERT_TO_TEMPLATE	Value: -2147482250
PRL_ERR_VM_EDIT_UNABLE_SWITCH_OFF_UNDO_DISKS_MODE	Value: -2147482543

continued on next page

Name	Description
PRL_ERR_VM_EDIT_UNABLE_SWITCH_ON_UNDO_DISKS_MODE	Value: -2147482571
PRL_ERR_VM_EMPTY_NAME_OF_CLONE	Value: -2147483087
PRL_ERR_VM_EXEC_GUEST_TOOL_NOT_AVAILABLE	Value: -2147270655
PRL_ERR_VM_EXEC_PROGRAM_NOT_FOUND	Value: -2147270653
PRL_ERR_VM_EXPIRATION_HOST_DATETIME_SKEWED	Value: -2147482256
PRL_ERR_VM_EXPIRATION_OFFLINE_GRACE_PERIOD_EXPIRED	Value: -2147482263
PRL_ERR_VM_EXPIRATION_TIME_CHECK_INTERVAL_OUT_OF_RANGE	Value: -2147482264
PRL_ERR_VM_EXPIRATION_VM_IS_ABOUT_TO_EXPIRE	Value: -2147482254
PRL_ERR_VM_EXPIRATION_VM_IS_IN_OFFLINE_GRACE_PERIOD	Value: -2147482255
PRL_ERR_VM_FILES_ALREADY_REMOVED	Value: -2147482875
PRL_ERR_VM_FREE_VM_MEMORY	Value: -2147483258
PRL_ERR_VM_GET_CONFIG_FAILED	Value: -2147483575
PRL_ERR_VM_GET_CONFIG_INVALID_ARG	Value: -2147483344
PRL_ERR_VM_GET_CONFIG_NOT_CONFIGURED	Value: -2147483343
PRL_ERR_VM_GET_DEVICE_STATE_FAILED	Value: -2147483560
PRL_ERR_VM_GET_HDD_IMG_INVALID_ARG	Value: -2147483287

continued on next page

Name	Description
PRL_ERR_VM.GET_HDD_IMG_NOT_OPEN	Value: -2147483280
PRL_ERR_VM.GET_INDICATORS_INVALID_ARG	Value: -2147483291
PRL_ERR_VM.GET_INDICATORS_NOT_CREATED	Value: -2147483292
PRL_ERR_VM.GET_INDICATORS_NOT_RUNNING	Value: -2147483290
PRL_ERR_VM.GET_PROBLEM_REPORT_FAILED	Value: -2147483576
PRL_ERR_VM.GET_SCR_SIZE_NOT_CREATED	Value: -2147483320
PRL_ERR_VM.GET_SCR_UPDATED_NOT_CREATED	Value: -2147483319
PRL_ERR_VM.GET_SCR_UPDATED_NOT_RUNNING	Value: -2147483312
PRL_ERR_VM.GET_STATUS_FAILED	Value: -2147483577
PRL_ERR_VM.GET_STATUS_INVALID_ARG	Value: -2147483354
PRL_ERR_VM.GUESTMEM_FAIL	Value: -2147482734
PRL_ERR_VM.GUEST_SESSION_EXPIRED	Value: -2147270654
PRL_ERR_VM.HARD_DISK_NOT_COMPACTABLE	Value: -2147482472
PRL_ERR_VM.HDD.DISCONNECT_FAILED_LOCKED	Value: -2147482328
PRL_ERR_VM.HDD.SIZE	Value: -2147483273
PRL_ERR_VM.HOME_PATH_IS_NOT_EMPTY	Value: -2147483096
PRL_ERR_VM.HYPERVISOR_HVT_ENABLED_ON_HYPERSWITCH	Value: -2147482279

continued on next page

Name	Description
PRL_ERR_VM_HYPERVIZOR_COMM	Value: -2147483240
PRL_ERR_VM_INIT_MONITOR	Value: -2147483248
PRL_ERR_VM_INIT_VCPU	Value: -2147483247
PRL_ERR_VM_INTERACT_PRLS_DRIVER	Value: -2147483257
PRL_ERR_VM_INTERNAL_OS_ERROR	Value: -2147483031
PRL_ERR_VM_INVALID_SWAP_REGION	Value: -2147482760
PRL_ERR_VM_IN_FROZEN_STATE	Value: -2147482284
PRL_ERR_VM_IN_HDD_CONSTRUCTOR	Value: -2147483272
PRL_ERR_VM_IN_WAKING_UP_STATE	Value: -2147482285
PRL_ERR_VM_IS_EXCLUSIVELY_LOCKED	Value: -2147482506
PRL_ERR_VM_IS_NOT_LOCKED	Value: -2147482505
PRL_ERR_VM_IS_NOT_SUSPENDED	Value: -2147482592
PRL_ERR_VM_LIFETIME_IS_EXPIRED	Value: -2147482267
PRL_ERR_VM_LOAD_BINARY_FAILED	Value: -2147482621
PRL_ERR_VM_LOAD_MONITOR	Value: -2147483243
PRL_ERR_VM_LOCKED_FOR_BACKUP	Value: -2147253995
PRL_ERR_VM_LOCKED_FOR_BACKUP	Value: -2147253997
PRL_ERR_VM_LOCKED_FOR_CHANGE_FIREWALL	Value: -2147253982
PRL_ERR_VM_LOCKED_FOR_CHANGE_PASSWORD	Value: -2147253983
PRL_ERR_VM_LOCKED_FOR_CLONE	Value: -2147254016

continued on next page

Name	Description
PRL_ERR_VM_LOCKED._FOR_COPY_IMAGE	Value: -2147253981
PRL_ERR_VM_LOCKED._FOR_CREATE_SNAPSHOT	Value: -2147254000
PRL_ERR_VM_LOCKED._FOR_DECRYPT	Value: -2147253984
PRL_ERR_VM_LOCKED._FOR_DELETE	Value: -2147254015
PRL_ERR_VM_LOCKED._FOR_DELETE_TO_SNAPSHOT	Value: -2147253998
PRL_ERR_VM_LOCKED._FOR_DISK_COMPACT	Value: -2147253993
PRL_ERR_VM_LOCKED._FOR_DISK_CONVERT	Value: -2147253992
PRL_ERR_VM_LOCKED._FOR_DISK_RESIZE	Value: -2147253994
PRL_ERR_VM_LOCKED._FOR_EDIT_COMMIT	Value: -2147254013
PRL_ERR_VM_LOCKED._FOR_EDIT_COMMIT_WITH_RENAME	Value: -2147254009
PRL_ERR_VM_LOCKED._FOR_ENCRYPT	Value: -2147253991
PRL_ERR_VM_LOCKED._FOR_EXECUTE	Value: -2147254012
PRL_ERR_VM_LOCKED._FOR_EXECUTE_EX	Value: -2147254011
PRL_ERR_VM_LOCKED._FOR_INTERNAL_REASON	Value: -2147254010
PRL_ERR_VM_LOCKED._FOR_MIGRATE	Value: -2147254007
PRL_ERR_VM_LOCKED._FOR_MOVE	Value: -2147253980
PRL_ERR_VM_LOCKED._FOR_REMOVE_PROTECTION	Value: -2147253978
PRL_ERR_VM_LOCKED._FOR_RESTORE_FROM_BACKUP	Value: -2147253996

continued on next page

Name	Description
PRL_ERR_VM_LOCKED_FOR_SET_PROTECTION	Value: -2147253979
PRL_ERR_VM_LOCKED_FOR_SWITCH_TO_SNAPSHOT	Value: -2147253999
PRL_ERR_VM_LOCKED_FOR_UNREGISTER	Value: -2147254014
PRL_ERR_VM_LOCKED_FOR_UPDATE_SECURITY	Value: -2147254008
PRL_ERR_VM_MAP_VM_MEM0	Value: -2147483255
PRL_ERR_VM_MEMORY_SWAPPING_IN_PROGRESS	Value: -2147352567
PRL_ERR_VM_MIGRATE_ACCESS_TO_VM_DENIED	Value: -2147282874
PRL_ERR_VM_MIGRATE_BREAK_BY_DISK_CONDITION	Value: -2147282887
PRL_ERR_VM_MIGRATE_CANNOT_CREATE_DIRECTORY	Value: -2147282862
PRL_ERR_VM_MIGRATE_CANNOT_REMOTE_CLONE_SHARED_VM	Value: -2147282889
PRL_ERR_VM_MIGRATE_CHECKING_PRECONDITIONS_FAILED	Value: -2147282944
PRL_ERR_VM_MIGRATE_CONTINUE_START_FAILED	Value: -2147282888
PRL_ERR_VM_MIGRATE_COULDNT_DETACH_TARGET_CONNECTION	Value: -2147282922
PRL_ERR_VM_MIGRATE_DEVICE_IMAGE_OUT_OF_BUNDLE	Value: -2147282879
PRL_ERR_VM_MIGRATE_ERROR_DELETE_VM	Value: -2147282873

continued on next page

Name	Description
PRL_ERR_VM_MIGRATE_ERROR_UNREGISTER_VM	Value: -2147282872
PRL_ERR_VM_MIGRATE_EXTERNAL_DISKS_NOT_SUPPORTED	Value: -2147282864
PRL_ERR_VM_MIGRATE_EXT_DISK_DIR_ALREADY_EXISTS_ON_TARGET	Value: -2147282863
PRL_ERR_VM_MIGRATE_FLOPPY_DISK_IS_ABSENT_ON_TARGET	Value: -2147282937
PRL_ERR_VM_MIGRATE_INVALID_DISK_TYPE	Value: -2147282878
PRL_ERR_VM_MIGRATE_NETWORK_ADAPTER_IS_ABSENT_ON_TARGET	Value: -2147282927
PRL_ERR_VM_MIGRATE_NETWORK_SHARE_IS_ABSENT_ON_TARGET	Value: -2147282938
PRL_ERR_VM_MIGRATE_NON_COMPATIBLE_CPU_ON_TARGET	Value: -2147282939
PRL_ERR_VM_MIGRATE_NON_COMPATIBLE_CPU_ON_TARGET_SHORT	Value: -2147282877
PRL_ERR_VM_MIGRATE_NOT_ENOUGH_CPUS_ON_TARGET	Value: -2147282940
PRL_ERR_VM_MIGRATE_NOT_ENOUGH_DISK_SPACE_ON_SOURCE	Value: -2147282943
PRL_ERR_VM_MIGRATE_NOT_ENOUGH_DISK_SPACE_ON_TARGET	Value: -2147282923
PRL_ERR_VM_MIGRATE_OPTICAL_DISK_IS_ABSENT_ON_TARGET	Value: -2147282936

continued on next page

Name	Description
PRL_ERR_VM_MIGRATE_OUT_OF_MEMORY_ON_TARGET	Value: -2147282942
PRL_ERR_VM_MIGRATE_PARALLEL_PORT_IS_ABSENT_ON_TARGET	Value: -2147282928
PRL_ERR_VM_MIGRATE_REGISTER_VM_FAILED	Value: -2147282895
PRL_ERR_VM_MIGRATE_REMOTE_DEVICE_IS_NOT_ATTACHED	Value: -2147282905
PRL_ERR_VM_MIGRATE_RESUME_FAILED	Value: -2147282903
PRL_ERR_VM_MIGRATE_RESUME_VM_FAILED	Value: -2147282893
PRL_ERR_VM_MIGRATE_SERIAL_PORT_IS_ABSENT_ON_TARGET	Value: -2147282935
PRL_ERR_VM_MIGRATE_SOUND_DEVICE_IS_ABSENT_ON_TARGET	Value: -2147282925
PRL_ERR_VM_MIGRATE_STORAGE_INFO_PARSE	Value: -2147282896
PRL_ERR_VM_MIGRATE_SUSPEND_VM_FAILED	Value: -2147282894
PRL_ERR_VM_MIGRATE_TARGET_INSIDE_SHARED_VM_PRIVATE	Value: -2147282861
PRL_ERR_VM_MIGRATE_TARGET_VM_HOME_PATH_NOT_EXISTS	Value: -2147282941
PRL_ERR_VM_MIGRATE_TO_THE_SAME_NODE	Value: -2147282875
PRL_ERR_VM_MIGRATE_UNSUITABLE_VM_STATE	Value: -2147282921
PRL_ERR_VM_MIGRATE_USB_CONTROLLER_IS_ABSENT_ON_TARGET	Value: -2147282926

continued on next page

Name	Description
PRL_ERR_VM_MIGRATE_VM_ALREADY_EXISTS_ON_TARGET	Value: -2147282924
PRL_ERR_VM_MIGRATE_VM_ALREADY_MIGRATE_ON_TARGET	Value: -2147282892
PRL_ERR_VM_MIGRATE_VM_HOME_ALREADY_EXISTS_ON_TARGET	Value: -2147282906
PRL_ERR_VM_MIGRATE_VM_UUID_ALREADY_EXISTS_ON_TARGET	Value: -2147282907
PRL_ERR_VM_MIGRATE_WARM_MODE_NOT_SUPPORTED	Value: -2147282880
PRL_ERR_VM_MONITOR	Value: -2147483136
PRL_ERR_VM_MOUNT	Value: -2147195392
PRL_ERR_VM_MUST_BE_STOPPED_BEFORE_RENAMING	Value: -2147482762
PRL_ERR_VM_MUST_BE_STOPPED_FOR_CHANGE_DEVICES	Value: -2147482748
PRL_ERR_VM_NAME_IS_EMPTY	Value: -2147483370
PRL_ERR_VM_NOT_CREATED	Value: -2147483355
PRL_ERR_VM_OPERATION_FAILED	Value: -2147483543
PRL_ERR_VM_PAUSE_ALREADY_PAUSED	Value: -2147483321
PRL_ERR_VM_PAUSE_FAILED	Value: -2147483567
PRL_ERR_VM_PAUSE_NOT_CREATED	Value: -2147483323
PRL_ERR_VM_PAUSE_NOT_STARTED	Value: -2147483322
PRL_ERR_VM_POWER_OFF_FAILED	Value: -2147483579
PRL_ERR_VM_POWER_ON_FAILED	Value: -2147483580

continued on next page

Name	Description
PRL_ERR_VM_PRLS_DESCTOP_ALLOC_PHYS_MEM	Value: -2147483239
PRL_ERR_VM_PROCESS_IS_NOT_STARTED	Value: -2147483544
PRL_ERR_VM_PROCESS_IS_NOT_STARTED_BY_WRONG_HOST_SW	Value: -2147482366
PRL_ERR_VM_REQUEST_NOT_SUPPORTED	Value: -2147483135
PRL_ERR_VM_RESET_FAILED	Value: -2147483578
PRL_ERR_VM_RESTART_GUEST_FAILED	Value: -2147482568
PRL_ERR_VM_RESTART_NOT_CREATED	Value: -2147483325
PRL_ERR_VM_RESTART_NOT_STARTED	Value: -2147483324
PRL_ERR_VM_RESTORE_STATE_FAILED	Value: -2147483564
PRL_ERR_VM_RESTORE_STATE_FAILED_VM_STOPPED	Value: -2147482365
PRL_ERR_VM_RESUME_FAILED	Value: -2147352570
PRL_ERR_VM_RESUME_INV_SAV_VERSION_CANCEL_RESUME	Value: 20007
PRL_ERR_VM_SAVE_STATE_FAILED	Value: -2147483565
PRL_ERR_VM_SEND_ABS_MOUSE_NOT_CREATED	Value: -2147483304
PRL_ERR_VM_SEND_ABS_MOUSE_NOT_RUNNING	Value: -2147483303
PRL_ERR_VM_SEND_ABS_MOUSE_PAUSED	Value: -2147483296
PRL_ERR_VM_SEND_KEYBOARD_NOT_CREATED	Value: -2147483295

continued on next page

Name	Description
PRL_ERR_VM_SEND_KEYBOARD_NOT_RUNNING	Value: -2147483294
PRL_ERR_VM_SEND_KEYBOARD_PAUSED	Value: -2147483293
PRL_ERR_VM_SEND_REL_MOUSE_NOT_CREATED	Value: -2147483307
PRL_ERR_VM_SEND_REL_MOUSE_NOT_RUNNING	Value: -2147483306
PRL_ERR_VM_SEND_REL_MOUSE_PAUSED	Value: -2147483305
PRL_ERR_VM_SET_CONFIG_FAILED	Value: -2147483581
PRL_ERR_VM_SET_CONFIG_INVALID_ARG	Value: -2147483342
PRL_ERR_VM_SET_LICENSE_FAILED	Value: -2147483582
PRL_ERR_VM_SET_VISIBLE_NOT_CREATED	Value: -2147483311
PRL_ERR_VM_SHUTDOWN_FAILED	Value: -2147262432
PRL_ERR_VM_SHUTDOWN_HIBERNATE_FAILED	Value: -2147262428
PRL_ERR_VM_SHUTDOWN_HIBERNATE_NOT_SUPPORTED	Value: -2147262430
PRL_ERR_VM_SHUTDOWN_MACHINE_LOCKED	Value: -2147262431
PRL_ERR_VM_SHUTDOWN_SUSPEND_NOT_SUPPORTED	Value: -2147262429
PRL_ERR_VM_SNAPSHOTS_CONFIG_NOT_FOUND	Value: -2147482509
PRL_ERR_VM_SNAPSHOT_CHANGED_VM_CONFIG	Value: -2147482584
PRL_ERR_VM_SNAPSHOT_IN_SAFE_MODE	Value: -2147482560

continued on next page

Name	Description
PRL_ERR_VM_SNAPSHOT_IN_UNDO_DISKS_MODE	Value: -2147482583
PRL_ERR_VM_SNAPSHOT_NOT_FOUND	Value: -2147482510
PRL_ERR_VM_SPECIFY_GUEST_INSTALL_FILES	Value: -2147482983
PRL_ERR_VM_START_FAILED	Value: -2147483583
PRL_ERR_VM_START_NOT_CONFIGURED	Value: -2147483327
PRL_ERR_VM_START_NOT_CREATED	Value: -2147483328
PRL_ERR_VM_STOP_NOT_CREATED	Value: -2147483326
PRL_ERR_VM_SUSPENDED_CHANGED_VM_CONFIG	Value: -2147352568
PRL_ERR_VM_SUSPENDED_FAILED	Value: -2147352571
PRL_ERR_VM_TOOLS_CANT_PARSE_UPDATE_PARAMETERS	Value: -2147274752
PRL_ERR_VM_TOOLS_CANT_UPDATE_WITHOUT_RESTART	Value: -2147274751
PRL_ERR_VM_TOOL_NOT_AVAILABLE	Value: -2147274750
PRL_ERR_VM_TO_REGISTER_IS_NOT_SPECIFIED	Value: -2147482825
PRL_ERR_VM_UNABLE_ALLOC_MEM	Value: -2147483256
PRL_ERR_VM_UNABLE_ALLOC_MEM_MONITOR	Value: -2147483242
PRL_ERR_VM_UNABLE_CREATE_TIMER	Value: -2147483241
PRL_ERR_VM_UNABLE_GET_GUEST_CPU	Value: -2147483246

continued on next page

Name	Description
PRL_ERR_VM_UNABLE_OPEN_DISK_IMAGE	Value: -2147483263
PRL_ERR_VM_UNABLE_SEND_REQUEST	Value: -2147483261
PRL_ERR_VM_UNABLE_TO_OPEN_VIRTUAL_BRIDGE	Value: -2147483271
PRL_ERR_VM_UNDEFINED_API_CALL	Value: -2147483262
PRL_ERR_VM_UNMOUNT	Value: -2147195391
PRL_ERR_VM_UNPAUSE_FAILED	Value: -2147482345
PRL_ERR_VM_UPDATE_SNAPSHOT_DATA_FAILED	Value: -2147482574
PRL_ERR_VM_USER_AUTHENTICATION_FAILED	Value: -2147482730
PRL_ERR_VM_UUID_EMPTY	Value: -2147483088
PRL_ERR_VM_UUID_NOT_FOUND	Value: -2147483387
PRL_ERR_VM_VALLOC_MON_BODY	Value: -2147483245
PRL_ERR_VM_VALLOC_PE_IMG	Value: -2147483244
PRL_ERR_VM_VIEW_SCR_INVALID_ARG	Value: -2147483309
PRL_ERR_VM_VIEW_SCR_NOT_CREATED	Value: -2147483310
PRL_ERR_VM_VIEW_SCR_NOT_RUNNING	Value: -2147483308
PRL_ERR_VNC_SERVER_ALREADY_STARTED	Value: -2147266560
PRL_ERR_VNC_SERVER_AUTOSET_PORT_FAILED	Value: -2147266558
PRL_ERR_VNC_SERVER_DISABLED	Value: -2147266559
PRL_ERR_VNC_SERVER_NOT_STARTED	Value: -2147266555

continued on next page

Name	Description
PRL_ERR_VOLUME_LICENSE_EXCEEDED_LIMIT	Value: -2147413918
PRL_ERR_VTD_ALREADY_HOOKED_FAILED	Value: -2147418109
PRL_ERR_VTD_DEVICE_DOES_NOT_EXIST	Value: -2147482528
PRL_ERR_VTD_DEVICE_NOT_MAPPED	Value: -2147409920
PRL_ERR_VTD_DEVICE_TROUBLESHOOT	Value: -2147418089
PRL_ERR_VTD_HOOK_AFTER_INSTALL_NEED_REBOOT	Value: -2147418105
PRL_ERR_VTD_HOOK_AFTER_REVERT_NEED_REBOOT	Value: -2147418104
PRL_ERR_VTD_HOOK_DEVICE_CURRENTLY_IN_USE	Value: -2147418094
PRL_ERR_VTD_HOOK_FAILED	Value: -2147418108
PRL_ERR_VTD_HOOK_INSTALLATION_FAILED	Value: -2147418103
PRL_ERR_VTD_HOOK_INVALID_CONFIG	Value: -2147418095
PRL_ERR_VTD_HOOK_NEED_REBOOT_FAILED	Value: -2147418107
PRL_ERR_VTD_HOOK_REVERT_FAILED	Value: -2147418096
PRL_ERR_VTD_HOOK_UPDATE_SCRIPT_EXECUTE	Value: -2147418087
PRL_ERR_VTD_INITIALIZATION_FAILED	Value: -2147418110
PRL_ERR_VTD_WAIT_ASR	Value: -2147418106
PRL_ERR_VTX_ENABLED_ONLY_IN_SMX	Value: -2147482814
PRL_ERR_VZCTL_OPERATION_FAILED	Value: -2147205104

continued on next page

Name	Description
PRL_ERR_VZLICENSE_- ACTIVATION_KEY	Value: -2147413961
PRL_ERR_VZLICENSE_- CANCEL	Value: -2147413991
PRL_ERR_VZLICENSE_- EACCES	Value: -2147413976
PRL_ERR_VZLICENSE_- ERR_KA	Value: -2147413978
PRL_ERR_VZLICENSE_- EXIST	Value: -2147413967
PRL_ERR_VZLICENSE.F- ATAL	Value: -2147413963
PRL_ERR_VZLICENSE.I- NVAL	Value: -2147413965
PRL_ERR_VZLICENSE.I- NVALID_HWID	Value: -2147413962
PRL_ERR_VZLICENSE.I- O	Value: -2147413966
PRL_ERR_VZLICENSE_- KA_ACTIVATION_LIMI- T_REACHED	Value: -2147413914
PRL_ERR_VZLICENSE_- KA_HWID_DOES_NOT_- MATCH	Value: -2147413913
PRL_ERR_VZLICENSE_- KA_LICENSE_EXPIRED	Value: -2147413915
PRL_ERR_VZLICENSE_- KA_LICENSE_IS_NOT_P- ROLONGATED_YET	Value: -2147413916
PRL_ERR_VZLICENSE_- KA_LICENSE_IS_TERMI- NATED	Value: -2147413912
PRL_ERR_VZLICENSE_- KA_LICENSE_IS_UP_TO_- DATE	Value: -2147413917
PRL_ERR_VZLICENSE.L- OCK	Value: -2147413977
PRL_ERR_VZLICENSE_- NETWORK	Value: -2147413982
PRL_ERR_VZLICENSE_- NODATA	Value: -2147413979
PRL_ERR_VZLICENSE_- NOENT	Value: -2147413975

continued on next page

Name	Description
PRL_ERR_VZLICENSE_-NOINIT	Value: -2147413968
PRL_ERR_VZLICENSE_-NOMEM	Value: -2147413964
PRL_ERR_VZLICENSE_-NOTSUP	Value: -2147413981
PRL_ERR_VZLICENSE_-PROXY	Value: -2147413983
PRL_ERR_VZLICENSE_-PROXY_AUTH	Value: -2147413984
PRL_ERR_VZLICENSE_-TASK_ALREADY_RUN	Value: -2147413952
PRL_ERR_VZLICENSE_-TIMEOUT	Value: -2147413992
PRL_ERR_VZLICENSE_-UNSUPPORTED_APP_MODE	Value: -2147413959
PRL_ERR_VZLICENSE_-UNSUPPORTED_MODE	Value: -2147413959
PRL_ERR_VZLICENSE_-UNSUPPORTED_UPDATE_OP	Value: -2147413902
PRL_ERR_VZLICENSE_-VMS_LIMIT_EXCEEDED	Value: -2147413960
PRL_ERR_VZLICENSE_-WRONG	Value: -2147413980
PRL_ERR_VZ_API_NOT_INITIALIZED	Value: -2147323866
PRL_ERR_VZ_OPERATION_FAILED	Value: -2147205114
PRL_ERR_VZ_OSTEMPLATE_NOT_FOUND	Value: -2147205113
PRL_ERR_WEB_PORTAL_ACCEPTED	Value: 47001
PRL_ERR_WEB_PORTAL_ACCOUNT_ALREADY_EXISTS	Value: -2147192826
PRL_ERR_WEB_PORTAL_BAD_REQUEST	Value: -2147192830
PRL_ERR_WEB_PORTAL_CONFLICT	Value: -2147192826

continued on next page

Name	Description
PRL_ERR_WEB_PORTAL_CREATED	Value: 47000
PRL_ERR_WEB_PORTAL_FORBIDDEN	Value: -2147192816
PRL_ERR_WEB_PORTAL_INVALID_EMAIL	Value: -2147192824
PRL_ERR_WEB_PORTAL_INVALID_PARAMETERS	Value: -2147192827
PRL_ERR_WEB_PORTAL_INVALID_PASSWORD	Value: -2147192830
PRL_ERR_WEB_PORTAL_NOT_FOUND	Value: -2147192829
PRL_ERR_WEB_PORTAL_NO_CONTENT	Value: 47009
PRL_ERR_WEB_PORTAL_OK	Value: 0
PRL_ERR_WEB_PORTAL_SERVICE_UNAVAILABLE	Value: -2147192825
PRL_ERR_WEB_PORTAL_SOCIAL_APP_DENIED	Value: -2147192813
PRL_ERR_WEB_PORTAL_SOCIAL_CONFIRM_EMAIL_SENT	Value: -2147192815
PRL_ERR_WEB_PORTAL_SOCIAL_PROHIBITED_FOR_BA	Value: -2147192810
PRL_ERR_WEB_PORTAL_SOCIAL_SERVICE_BAD_RESPONSE	Value: -2147192812
PRL_ERR_WEB_PORTAL_SOCIAL_SERVICE_UNAVAILABLE	Value: -2147192811
PRL_ERR_WEB_PORTAL_SOCIAL_UNCONFIRMED_ACCOUNT	Value: -2147192814
PRL_ERR_WEB_PORTAL_UNAUTHORIZED	Value: -2147192828
PRL_ERR_WINDOWS_EXPRESS_INSTALL_USER_NAME_EMPTY	Value: -2147482856

continued on next page

Name	Description
PRL_ERR_WIN_AERO_DISABLED	Value: -2147418090
PRL_ERR_WRITE_FAILED	Value: -2147482343
PRL_ERR_WRONG_CONNECTION_SECURITY_LEVEL	Value: -2147483017
PRL_ERR_WRONG_PROTOCOL_VERSION	Value: -2147482605
PRL_ERR_WRONG_VM_STATE	Value: -2147482487
PRL_ERR_WS_DISP_CONNECTION_CLOSED	Value: -2147483066
PRL_ERR_X64GUEST_ON_X32HOST	Value: -2147482796
PRL_ERR_X64GUEST_ON_X64VM_HVT_DISABLED	Value: -2147482793
PRL_ERR_XMLRPC_INTERNAL_ERROR	Value: -2147254254
PRL_ERR_XMLRPC_INVALID_CREDENTIALS	Value: -2147254263
PRL_ERR_XMLRPC_INVALID_REQUEST_INFO	Value: -2147254255
PRL_ERR_XMLRPC_LIMITS_EXHAUSTED	Value: -2147254256
PRL_ERR_XMLRPC_WRONG_METHOD_CALL	Value: -2147254264
PRL_ERR_XML_WRITE_FILE	Value: -2147482588
PRL_INFO_VM_MIGRATE_STORAGE_IS_SHARED	Value: 31028
PRL_NET_ADAPTER_ALREADY_USED	Value: -2147467225
PRL_NET_ADAPTER_NOT_EXIST	Value: -2147467260
PRL_NET_BIND_FAILED	Value: -2147467255
PRL_NET_CABLE_DISCONNECTED	Value: -2147467248
PRL_NET_CONNECTION_SHARING_CONFLICT	Value: -2147467243

continued on next page

Name	Description
PRL_NET_DUPLICATE_IPPRIVATE_NETWORK_NAME	Value: -2147467215
PRL_NET_DUPLICATE_VIRTUAL_NETWORK_ID	Value: -2147467228
PRL_NET_ERR_ADAPTER_CONFIG	Value: -2147467259
PRL_NET_ERR_ETH_NO_BINDABLE_ADAPTER	Value: -2147467258
PRL_NET_ERR_PRL_NO_BINDABLE_ADAPTER	Value: -2147467257
PRL_NET_ETHLIST_CREATE_ERROR	Value: -2147467264
PRL_NET_INSTALL_FAILED	Value: -2147467245
PRL_NET_INSTALL_TIMEOUT	Value: -2147467246
PRL_NET_IPADDRESS_MODIFY_FAILED_WARNING	Value: 4022
PRL_NET_IPPRIVATE_NETWORK_DOES_NOT_EXIST	Value: -2147467214
PRL_NET_IPPRIVATE_NETWORK_INVALID_IP	Value: -2147467213
PRL_NET_OFFMGMT_ERROR	Value: -2147467223
PRL_NET_PKTFILTER_ERROR	Value: -2147467229
PRL_NET_PRLNET_OPEN_FAILED	Value: -2147467256
PRL_NET_RENAME_FAILED	Value: -2147467247
PRL_NET_RESTORE_DEFAULTS_PARTIAL_SUCCESS	Value: -2147467242
PRL_NET_SRV_NOTIFY_ERROR	Value: -2147467261
PRL_NET_SYSTEM_ERROR	Value: -2147467263

continued on next page

Name	Description
PRL_NET_UNINSTALL_FAILED	Value: -2147467244
PRL_NET_VALID_DHCP_RANGE_WRONG_IP_ADDRS	Value: -2147466748
PRL_NET_VALID_DHCP_SCOPE_RANGE_LESS_MIN	Value: -2147466746
PRL_NET_VALID_FAILURE	Value: -2147466752
PRL_NET_VALID_MISMATCH_DHCP_SCOPE_MASK	Value: -2147466747
PRL_NET_VALID_WRONG_DHCP_IP_ADDR	Value: -2147466749
PRL_NET_VALID_WRONG_HOST_IP_ADDR	Value: -2147466750
PRL_NET_VALID_WRONG_NET_MASK	Value: -2147466751
PRL_NET_VIRTUAL_NETWORK_ID_NOT_EXISTS	Value: -2147467227
PRL_NET_VIRTUAL_NETWORK_NOT_FOUND	Value: -2147467226
PRL_NET_VIRTUAL_NETWORK_SHARED_EXISTS	Value: -2147467224
PRL_NET_VIRTUAL_NETWORK_SHARED_PROHIBITED	Value: -2147467216
PRL_NET_VLAN_UNSUPPORTED_IN_THIS_VERSION	Value: -2147467241
PRL_NET_VMDEVICE_VIRTUAL_NETWORK_CONFIG_ERROR	Value: -2147467232
PRL_NET_VMDEVICE_VIRTUAL_NETWORK_DISABLED	Value: -2147467231
PRL_NET_VMDEVICE_VIRTUAL_NETWORK_NOT_EXIST	Value: -2147467240

continued on next page

Name	Description
PRL_NET_VMDEVICE_V- IRTUAL_NETWORK_N- O_ADAPTER	Value: -2147467239
PRL_NET_WINSCM.OP- EN_ERROR	Value: -2147467262
PRL_QUESTION_ASK_E- NCRYPTED_VM_PASS- WORD	Value: 13043
PRL_QUESTION_CAN_N- OT_GET_DISK_FREE_SP- ACE	Value: -2147482874
PRL_QUESTION_CONV- ERT_3RD_PARTY_CAN- NOT_MIGRATE	Value: 13040
PRL_QUESTION_CONV- ERT_GUEST_OS_IS_HIB- ERNATED	Value: 13055
PRL_QUESTION_CONV- ERT_VM_CANT_DETEC- T_OS	Value: 13045
PRL_QUESTION_CONV- ERT_VM_SPECIFY_DIS- TRO_PATH	Value: 13042
PRL_QUESTION_FINALI- ZE_VM_PROCESS	Value: 13049
PRL_QUESTION_SETUP- _YANDEX_SEARCH	Value: 13056
PRL_REQUEST_CD_IMA- GE_NOT_EXIST	Value: -2147483104
PRL_REQUEST_CD_DRIVE- _NOT_EXIST	Value: -2147483103
PRL_REQUEST_EXCEED_R- ECOMMENDED_MEMO- RY	Value: -2147483111
PRL_REQUEST_FDD_DRIV- E_NOT_EXIST	Value: -2147483099
PRL_REQUEST_FDD_IMAG- E_NOT_EXIST	Value: -2147483100
PRL_REQUEST_HDD_IMA- GE_NOT_EXIST	Value: -2147483101
PRL_REQUEST_HDD_SAM- E_IMAGE	Value: -2147483102

continued on next page

Name	Description
PRL_REQUEST_POWER_OFF	Value: -2147482863
PRL_REQUEST_RESET	Value: -2147482862
PRL_WARN_BACKUP_DEVICE_IMAGE_NOT_FOUND	Value: -2147258331
PRL_WARN_BACKUP_GUEST_SYNCHRONIZATION_FAILED	Value: 37020
PRL_WARN_BACKUP_GUEST_UNABLE_TO_SYNCHRONIZE	Value: 37029
PRL_WARN_BACKUP_HAS_NOT_FULL_BACKUP	Value: 37017
PRL_WARN_BACKUP_NON_IMAGE_HDD	Value: 37037
PRL_WARN_BACKUP_S-P_GUEST_SYNCHRONIZATION_FAILED	Value: 37026
PRL_WARN_CANNOT_MOUNT_BACK_PARTITION	Value: -2147482367
PRL_WARN_CANT_CONNECT_VOLUME	Value: -2147482536
PRL_WARN_COMPACT_DESTRUCTIVE	Value: -2147319806
PRL_WARN_COMPACT_THROUGH_COPY	Value: -2147319807
PRL_WARN_DELETE_NO_CONFIG_UNREGISTER	Value: 582
PRL_WARN_DEV_USB_CONNECT_FAILED	Value: -2147482511
PRL_WARN_DEV_USB_OPEN_FAILED	Value: -2147482508
PRL_WARN_FAILED_TO_START_VNC_SERVER	Value: 35006
PRL_WARN_FAT32_FILE_OVERRUN	Value: -2147483033

continued on next page

Name	Description
PRL_WARN_GOING_TO_TAKE_SMART_GUARD_SNAPSHOT	Value: -2147482554
PRL_WARN_HDD_ERROR	Value: -2147483032
PRL_WARN_IMAGE_IS_STOLEN	Value: -2147483036
PRL_WARN_LAN_NOT_CONNECTED	Value: -2147483039
PRL_WARN_LICENSE_RESTRICTED_RKU	Value: -2147413911
PRL_WARN_LINK_TO_OUTSIDED_HDD_WILL_BE_DROPPED_AFTER_CLONE	Value: -2147482319
PRL_WARN_NESTED_VIRT_NOT_ENABLED	Value: 583
PRL_WARN_NOT_SYMMETRIC_CPU	Value: -2147482512
PRL_WARN_NO_SHARED_NETWORK_FOR_OFFLINE_MANAGEMENT	Value: 27771
PRL_WARN_OUTSIDED_HDD_WILL_BE_ONLY_LINKED_AFTER_CLONE	Value: -2147482318
PRL_WARN_PREPARE_FOR_HIBERNATE_UNABLE_SUSPEND_DO_STOP	Value: 482
PRL_WARN_TARGET_HOST_DISK_IS_FULL	Value: -2147483035
PRL_WARN_TOO_LOW_HDD_SIZE	Value: -2147482999
PRL_WARN_UNABLE_OPEN_DEVICE	Value: -2147483037
PRL_WARN_UNABLE_OPEN_DEVICE_NAME	Value: -2147483038
PRL_WARN_UNABLE_OPEN_DEVICE_ON_START_VM	Value: -2147446782
PRL_WARN_UNKNOWN_HDD_REQUEST_TYPE	Value: -2147483034

continued on next page

Name	Description
PRL_WARN_VERBOSE_- LOGGING	Value: 495
PRL_WARN_VM_BOOT- CAMP_MODE	Value: -2147479548
PRL_WARN_VM_DISCO- NNECT_SATA_HDD	Value: -2147405752
PRL_WARN_VM_DVD_D- ISCONNECTED_BY_GU- EST	Value: -2147482552
PRL_WARN_VM_DVD_D- ISCONNECT_LOCKED_- DEV	Value: -2147482573
PRL_WARN_VM_PD3_C- OMPAT_MODE	Value: -2147479549
PRL_WARN_VM_PD3_C- OMPAT_NO_MOUSE	Value: -2147479547
PRL_WARN_VM_SYNC_- DEFAULT_PRINTER_DI- SABLED	Value: -2147482299
PRL_WARN_WINDOWS_- UPDATE_WORKING	Value: -2147482269
PRL_WNG_NO_OPERAT- ION_SYSTEM_INSTALL- ED	Value: -2147418091
PRL_WNG_START_VM_- ON_MOUNTED_DISK	Value: 439
PRL_WRN_IT_CANT_RE- SIZE_LDM_DISK	Value: -2147196924
PRL_WRN_IT_CANT_RE- SIZE_VOLUME	Value: -2147196925
PRL_WRN_IT_EMPTY_- MBR	Value: -2147196927
PRL_WRN_IT_FIRST_W- ARNING	Value: -2147196928
PRL_WRN_IT_VOLUME_- RESIZING	Value: -2147196926
__package__	Value: None

Index

- prlsdkapi (*package*), 2–144
 - prlsdkapi.AccessRights (*class*), 113–115
 - prlsdkapi.AccessRights.get_access_for_others (*method*), 113
 - prlsdkapi.AccessRights.get_owner_name (*method*), 114
 - prlsdkapi.AccessRights.is_allowed (*method*), 113
 - prlsdkapi.AccessRights.is_current_session_owner (*method*), 114
 - prlsdkapi.AccessRights.set_access_for_others (*method*), 114
 - prlsdkapi.ApiHelper (*class*), 3–5
 - prlsdkapi.ApiHelper.create_handles_list (*method*), 5
 - prlsdkapi.ApiHelper.create_op_type_list (*method*), 5
 - prlsdkapi.ApiHelper.create_problem_report (*method*), 5
 - prlsdkapi.ApiHelper.create_strings_list (*method*), 5
 - prlsdkapi.ApiHelper.deinit (*method*), 4
 - prlsdkapi.ApiHelper.get_app_mode (*method*), 4
 - prlsdkapi.ApiHelper.get_crash_dumps_path (*method*), 4
 - prlsdkapi.ApiHelper.get_default_os_version (*method*), 5
 - prlsdkapi.ApiHelper.get_message_type (*method*), 4
 - prlsdkapi.ApiHelper.get_recommend_min_vm_memory (*method*), 5
 - prlsdkapi.ApiHelper.get_result_description (*method*), 4
 - prlsdkapi.ApiHelper.get_supported_oses_types (*method*), 5
 - prlsdkapi.ApiHelper.get_supported_oses_versions (*method*), 5
 - prlsdkapi.ApiHelper.get_version (*method*), 4
 - prlsdkapi.ApiHelper.guest_to_string (*method*), 5
 - prlsdkapi.ApiHelper.init (*method*), 4
 - prlsdkapi.ApiHelper.init_crash_handler (*method*), 4
 - prlsdkapi.ApiHelper.init_ex (*method*), 4
 - prlsdkapi.ApiHelper.msg_can_be_ignored (*method*), 4
 - prlsdkapi.ApiHelper.send_packed_problem_report (*method*), 5
 - prlsdkapi.ApiHelper.send_problem_report (*method*), 5
 - prlsdkapi.ApiHelper.switch_console_logging (*method*), 5
 - prlsdkapi.ApplianceConfig (*class*), 127–128
 - prlsdkapi.ApplianceConfig.create (*method*), 127
 - prlsdkapi.BackupResult (*class*), 138
 - prlsdkapi.BackupResult.get_backup_uuid (*method*), 138
 - prlsdkapi.BootDevice (*class*), 108–110
 - prlsdkapi.BootDevice.get_index (*method*), 108
 - prlsdkapi.BootDevice.get_sequence_index (*method*), 109
 - prlsdkapi.BootDevice.is_in_use (*method*), 109
 - prlsdkapi.BootDevice.remove (*method*), 108
 - prlsdkapi.BootDevice.set_in_use (*method*), 109
 - prlsdkapi.BootDevice.set_index (*method*), 109
 - prlsdkapi.BootDevice.set_sequence_index (*method*), 109
 - prlsdkapi.BootDevice.set_type (*method*), 108
 - prlsdkapi.call_sdk_function (*function*), 2
 - prlsdkapi.conv_error (*function*), 2
 - prlsdkapi.conv_handle_arg (*function*), 2
 - prlsdkapi.CpuFeatures (*class*), 139–140
 - prlsdkapi.CpuFeatures.create (*method*), 140
 - prlsdkapi.CpuFeatures.get_value (*method*), 140

- 140
- prlsdkapi.CpuFeatures.set_value (*method*), 140
- prlsdkapi.CPUPool (*class*), 140–141
 - prlsdkapi.CPUPool.get_cpu_features_mask (*method*), 141
 - prlsdkapi.CPUPool.get_name (*method*), 141
 - prlsdkapi.CPUPool.get_vendor (*method*), 141
- prlsdkapi.CtTemplate (*class*), 132–134
 - prlsdkapi.CtTemplate.get_cpu_mode (*method*), 133
 - prlsdkapi.CtTemplate.get_description (*method*), 133
 - prlsdkapi.CtTemplate.get_name (*method*), 133
 - prlsdkapi.CtTemplate.get_os_template (*method*), 133
 - prlsdkapi.CtTemplate.get_os_type (*method*), 133
 - prlsdkapi.CtTemplate.get_os_version (*method*), 133
 - prlsdkapi.CtTemplate.get_version (*method*), 133
 - prlsdkapi.CtTemplate.is_cached (*method*), 133
- prlsdkapi.Debug (*class*), 5–6
 - prlsdkapi.Debug.event_type_to_string (*method*), 6
 - prlsdkapi.Debug.get_handles_num (*method*), 6
 - prlsdkapi.Debug.handle_type_to_string (*method*), 6
 - prlsdkapi.Debug.prl_result_to_string (*method*), 6
- prlsdkapi.Disk (*class*), 141–142
 - prlsdkapi.Disk.get_disk_info (*method*), 142
 - prlsdkapi.Disk.open_disk_local (*method*), 142
 - prlsdkapi.Disk.wait_for_completion (*method*), 142
- prlsdkapi.DiskMap (*class*), 142–143
 - prlsdkapi.DiskMap.get_granularity (*method*), 142
- prlsdkapi.DiskMap.get_size (*method*), 142
- prlsdkapi.DiskMap.read (*method*), 142
- prlsdkapi.DispConfig (*class*), 45–53
 - prlsdkapi.DispConfig.are_plugins_enabled (*method*), 51
 - prlsdkapi.DispConfig.can_change_default_settings (*method*), 49
 - prlsdkapi.DispConfig.enable_plugins (*method*), 51
 - prlsdkapi.DispConfig.get_backup_timeout (*method*), 51
 - prlsdkapi.DispConfig.get_backup_user_login (*method*), 50
 - prlsdkapi.DispConfig.get_confirmations_list (*method*), 50
 - prlsdkapi.DispConfig.get_cpu_features_mask_ex (*method*), 52
 - prlsdkapi.DispConfig.get_cpu_pool (*method*), 52
 - prlsdkapi.DispConfig.get_default_backup_directory (*method*), 51
 - prlsdkapi.DispConfig.get_default_backup_server (*method*), 50
 - prlsdkapi.DispConfig.get_default_ct_dir (*method*), 45
 - prlsdkapi.DispConfig.get_default_vm_dir (*method*), 45
 - prlsdkapi.DispConfig.get_default_vnchost_name (*method*), 48
 - prlsdkapi.DispConfig.get_max_reserv_mem_limit (*method*), 47
 - prlsdkapi.DispConfig.get_max_vm_mem (*method*), 46
 - prlsdkapi.DispConfig.get_min_reserv_mem_limit (*method*), 47
 - prlsdkapi.DispConfig.get_min_security_level (*method*), 49
 - prlsdkapi.DispConfig.get_min_vm_mem (*method*), 46
 - prlsdkapi.DispConfig.get_recommend_max_vm_mem (*method*), 46
 - prlsdkapi.DispConfig.get_reserved_mem_limit (*method*), 45

- prlsdkapi.DispConfig.get_usb_identity (*method*), 52
- prlsdkapi.DispConfig.get_usb_identity_count (*method*), 52
- prlsdkapi.DispConfig.get_vm_cpu_limit_type (*method*), 51
- prlsdkapi.DispConfig.get_vncbase_port (*method*), 48
- prlsdkapi.DispConfig.is_adjust_mem_auto (*method*), 47
- prlsdkapi.DispConfig.is_allow_multiple_pmc (*method*), 52
- prlsdkapi.DispConfig.is_backup_user_password (*method*), 51
- prlsdkapi.DispConfig.is_log_rotation_enabled (*method*), 52
- prlsdkapi.DispConfig.is_send_statistic_report (*method*), 48
- prlsdkapi.DispConfig.is_verbose_log_enabled (*method*), 51
- prlsdkapi.DispConfig.set_adjust_mem_auto (*method*), 48
- prlsdkapi.DispConfig.set_allow_multiple_pmc (*method*), 52
- prlsdkapi.DispConfig.set_backup_timeout (*method*), 51
- prlsdkapi.DispConfig.set_backup_user_login (*method*), 50
- prlsdkapi.DispConfig.set_backup_user_password (*method*), 50
- prlsdkapi.DispConfig.set_backup_user_password_confirm (*method*), 51
- prlsdkapi.DispConfig.set_can_change_default_settings (*method*), 49
- prlsdkapi.DispConfig.set_confirmations_list (*method*), 50
- prlsdkapi.DispConfig.set_cpu_features_mask_ex (*method*), 52
- prlsdkapi.DispConfig.set_default_backup_directory (*method*), 51
- prlsdkapi.DispConfig.set_default_backup_server (*method*), 50
- prlsdkapi.DispConfig.set_default_vnchost_name (*method*), 48
- prlsdkapi.DispConfig.set_log_rotation_enabled (*method*), 52
- prlsdkapi.DispConfig.set_max_reserv_mem_limit (*method*), 47
- prlsdkapi.DispConfig.set_max_vm_mem (*method*), 46
- prlsdkapi.DispConfig.set_min_reserv_mem_limit (*method*), 47
- prlsdkapi.DispConfig.set_min_security_level (*method*), 49
- prlsdkapi.DispConfig.set_min_vm_mem (*method*), 46
- prlsdkapi.DispConfig.set_recommend_max_vm_mem (*method*), 47
- prlsdkapi.DispConfig.set_reserved_mem_limit (*method*), 46
- prlsdkapi.DispConfig.set_send_statistic_report (*method*), 48
- prlsdkapi.DispConfig.set_usb_ident_association (*method*), 52
- prlsdkapi.DispConfig.set_verbose_log_enabled (*method*), 52
- prlsdkapi.DispConfig.set_vm_cpu_limit_type (*method*), 51
- prlsdkapi.DispConfig.set_vncbase_port (*method*), 49
- prlsdkapi.Event (*class*), 11–13
 - prlsdkapi.Event.__getitem__ (*method*), 12
 - prlsdkapi.Event.__iter__ (*method*), 12
 - prlsdkapi.Event.__len__ (*method*), 12
 - prlsdkapi.Event.can_be_ignored (*method*), 12
 - prlsdkapi.Event.create_answer_event (*method*), 12
 - prlsdkapi.Event.get_err_code (*method*), 12
 - prlsdkapi.Event.get_err_string (*method*), 12
 - prlsdkapi.Event.get_issuer_id (*method*), 12
 - prlsdkapi.Event.get_issuer_type (*method*), 12
 - prlsdkapi.Event.get_job (*method*), 11
 - prlsdkapi.Event.get_param (*method*), 12

- prlsdkapi.Event.get_param_by_name (*method*), 12
- prlsdkapi.Event.get_params_count (*method*), 11
- prlsdkapi.Event.get_server (*method*), 11
- prlsdkapi.Event.get_vm (*method*), 11
- prlsdkapi.Event.is_answer_required (*method*), 12
- prlsdkapi.EventParam (*class*), 13–14
 - prlsdkapi.EventParam.get_name (*method*), 13
 - prlsdkapi.EventParam.to_boolean (*method*), 13
 - prlsdkapi.EventParam.to_cdata (*method*), 13
 - prlsdkapi.EventParam.to_handle (*method*), 13
 - prlsdkapi.EventParam.to_int32 (*method*), 13
 - prlsdkapi.EventParam.to_int64 (*method*), 13
 - prlsdkapi.EventParam.to_string (*method*), 13
 - prlsdkapi.EventParam.to_uint32 (*method*), 13
 - prlsdkapi.EventParam.to_uint64 (*method*), 13
- prlsdkapi.FirewallRule (*class*), 134–136
 - prlsdkapi.FirewallRule.create (*method*), 135
 - prlsdkapi.FirewallRule.get_local_net_address (*method*), 135
 - prlsdkapi.FirewallRule.get_local_port (*method*), 135
 - prlsdkapi.FirewallRule.get_protocol (*method*), 135
 - prlsdkapi.FirewallRule.get_remote_net_address (*method*), 135
 - prlsdkapi.FirewallRule.get_remote_port (*method*), 135
 - prlsdkapi.FirewallRule.set_local_net_address (*method*), 135
 - prlsdkapi.FirewallRule.set_local_port (*method*), 135
 - prlsdkapi.FirewallRule.set_protocol (*method*), 135
 - prlsdkapi.FirewallRule.set_remote_net_address (*method*), 135
 - prlsdkapi.FirewallRule.set_remote_port (*method*), 135
- prlsdkapi.FoundVmInfo (*class*), 111–113
 - prlsdkapi.FoundVmInfo.get_config_path (*method*), 112
 - prlsdkapi.FoundVmInfo.get_name (*method*), 111
 - prlsdkapi.FoundVmInfo.get_osversion (*method*), 112
 - prlsdkapi.FoundVmInfo.is_old_config (*method*), 111
 - prlsdkapi.FoundVmInfo.is_template (*method*), 112
- prlsdkapi.FsEntry (*class*), 29–30
 - prlsdkapi.FsEntry.get_absolute_path (*method*), 29
 - prlsdkapi.FsEntry.get_last_modified_date (*method*), 29
 - prlsdkapi.FsEntry.get_permissions (*method*), 30
 - prlsdkapi.FsEntry.get_relative_name (*method*), 29
 - prlsdkapi.FsEntry.get_size (*method*), 29
- prlsdkapi.FsInfo (*class*), 27–29
 - prlsdkapi.FsInfo.get_child_entries_count (*method*), 28
 - prlsdkapi.FsInfo.get_child_entry (*method*), 28
 - prlsdkapi.FsInfo.get_fs_type (*method*), 28
 - prlsdkapi.FsInfo.get_parent_entry (*method*), 28
- prlsdkapi.get_sdk_library_path (*function*), 2
- prlsdkapi.handle_to_object (*function*), 2
- prlsdkapi.HandleList (*class*), 7–8
 - prlsdkapi.HandleList.__getitem__ (*method*), 8
 - prlsdkapi.HandleList.__iter__ (*method*), 8
 - prlsdkapi.HandleList.__len__ (*method*), 8
 - prlsdkapi.HandleList.add_item (*method*), 8

- 8
- prlsdkapi.HandleList.get_item (*method*), 8
- prlsdkapi.HandleList.get_items_count (*method*), 8
- prlsdkapi.HandleList.remove_item (*method*), 8
- prlsdkapi.HdPartition (*class*), 38–40
 - prlsdkapi.HdPartition.get_index (*method*), 38
 - prlsdkapi.HdPartition.get_name (*method*), 38
 - prlsdkapi.HdPartition.get_size (*method*), 38
 - prlsdkapi.HdPartition.get_sys_name (*method*), 38
 - prlsdkapi.HdPartition.is_active (*method*), 39
 - prlsdkapi.HdPartition.is_in_use (*method*), 39
 - prlsdkapi.HdPartition.is_logical (*method*), 39
- prlsdkapi.HostDevice (*class*), 35–36
 - prlsdkapi.HostDevice.get_device_state (*method*), 36
 - prlsdkapi.HostDevice.get_id (*method*), 36
 - prlsdkapi.HostDevice.get_name (*method*), 36
 - prlsdkapi.HostDevice.is_connected_to_vm (*method*), 36
 - prlsdkapi.HostDevice.set_device_state (*method*), 36
- prlsdkapi.HostHardDisk (*class*), 36–38
 - prlsdkapi.HostHardDisk.get_dev_id (*method*), 37
 - prlsdkapi.HostHardDisk.get_dev_name (*method*), 37
 - prlsdkapi.HostHardDisk.get_dev_size (*method*), 37
 - prlsdkapi.HostHardDisk.get_disk_index (*method*), 37
 - prlsdkapi.HostHardDisk.get_part (*method*), 37
 - prlsdkapi.HostHardDisk.get_parts_count (*method*), 37
- prlsdkapi.HostNet (*class*), 40–41
 - prlsdkapi.HostNet.get_default_gateway (*method*), 40
 - prlsdkapi.HostNet.get_default_gateway_ipv6 (*method*), 40
 - prlsdkapi.HostNet.get_dns_servers (*method*), 41
 - prlsdkapi.HostNet.get_mac_address (*method*), 40
 - prlsdkapi.HostNet.get_net_adapter_type (*method*), 40
 - prlsdkapi.HostNet.get_net_addresses (*method*), 41
 - prlsdkapi.HostNet.get_search_domains (*method*), 41
 - prlsdkapi.HostNet.get_sys_index (*method*), 40
 - prlsdkapi.HostNet.get_vlan_tag (*method*), 41
 - prlsdkapi.HostNet.is_configure_with_dhcp (*method*), 40
 - prlsdkapi.HostNet.is_configure_with_dhcp_ipv6 (*method*), 40
 - prlsdkapi.HostNet.is_enabled (*method*), 40
- prlsdkapi.HostPciDevice (*class*), 41–42
 - prlsdkapi.HostPciDevice.get_device_class (*method*), 42
 - prlsdkapi.HostPciDevice.is_primary_device (*method*), 42
- prlsdkapi.init_desktop_sdk (*function*), 2
- prlsdkapi.init_desktop_wl_sdk (*function*), 2
- prlsdkapi.init_player_sdk (*function*), 2
- prlsdkapi.init_server_sdk (*function*), 2
- prlsdkapi.init_workstation_sdk (*function*), 2
- prlsdkapi.IoDisplayScreenSize (*class*), 144
 - prlsdkapi.IoDisplayScreenSize.__init__ (*method*), 144
 - prlsdkapi.IoDisplayScreenSize.display_set_configuration (*method*), 144
 - prlsdkapi.IoDisplayScreenSize.send_key_event (*method*), 37

- (*method*), 144
- prlsdkapi.IoDisplayScreenSize.send_key_event (*method*), 144
- prlsdkapi.IoDisplayScreenSize.to_list (*method*), 144
- prlsdkapi.IPPrivNet (*class*), 136–137
- prlsdkapi.IPPrivNet.create (*method*), 136
- prlsdkapi.IPPrivNet.get_name (*method*), 136
- prlsdkapi.IPPrivNet.get_net_addresses (*method*), 136
- prlsdkapi.IPPrivNet.is_global (*method*), 136
- prlsdkapi.IPPrivNet.set_global (*method*), 136
- prlsdkapi.IPPrivNet.set_name (*method*), 136
- prlsdkapi.IPPrivNet.set_net_addresses (*method*), 136
- prlsdkapi.is_sdk_initialized (*function*), 2
- prlsdkapi.Job (*class*), 14–15
- prlsdkapi.Job.cancel (*method*), 14
- prlsdkapi.Job.get_error (*method*), 15
- prlsdkapi.Job.get_op_code (*method*), 15
- prlsdkapi.Job.get_progress (*method*), 14
- prlsdkapi.Job.get_result (*method*), 15
- prlsdkapi.Job.get_ret_code (*method*), 14
- prlsdkapi.Job.get_status (*method*), 14
- prlsdkapi.Job.is_request_was_sent (*method*), 15
- prlsdkapi.Job.wait (*method*), 14
- prlsdkapi.License (*class*), 119–120
- prlsdkapi.License.get_company_name (*method*), 120
- prlsdkapi.License.get_license_key (*method*), 119
- prlsdkapi.License.get_status (*method*), 119
- prlsdkapi.License.get_user_name (*method*), 119
- prlsdkapi.License.is_valid (*method*), 119
- prlsdkapi.LoginResponse (*class*), 122–123
- prlsdkapi.LoginResponse.get_host_os_version (*method*), 123
- prlsdkapi.LoginResponse.get_product_version (*method*), 123
- prlsdkapi.LoginResponse.get_running_task_by_index (*method*), 123
- prlsdkapi.LoginResponse.get_running_task_count (*method*), 123
- prlsdkapi.LoginResponse.get_server_uuid (*method*), 123
- prlsdkapi.LoginResponse.get_session_uuid (*method*), 123
- prlsdkapi.NetService (*class*), 121–122
- prlsdkapi.NetService.get_status (*method*), 122
- prlsdkapi.NetworkClass (*class*), 131–132
- prlsdkapi.NetworkClass.create (*method*), 131
- prlsdkapi.NetworkClass.get_class_id (*method*), 131
- prlsdkapi.NetworkClass.get_network_list (*method*), 131
- prlsdkapi.NetworkClass.set_class_id (*method*), 131
- prlsdkapi.NetworkClass.set_network_list (*method*), 131
- prlsdkapi.NetworkRate (*class*), 132
- prlsdkapi.NetworkRate.create (*method*), 132
- prlsdkapi.NetworkRate.get_class_id (*method*), 132
- prlsdkapi.NetworkRate.get_rate (*method*), 132
- prlsdkapi.NetworkShapingBandwidthEntry (*class*), 138–139
- prlsdkapi.NetworkShapingBandwidthEntry.create (*method*), 139
- prlsdkapi.NetworkShapingBandwidthEntry.get_bandwidth (*method*), 139
- prlsdkapi.NetworkShapingBandwidthEntry.get_device (*method*), 139
- prlsdkapi.NetworkShapingBandwidthEntry.set_bandwidth (*method*), 139
- prlsdkapi.NetworkShapingBandwidthEntry.set_device (*method*), 139
- prlsdkapi.NetworkShapingConfig (*class*), 130–131

- prlsdkapi.NetworkShapingConfig.get_network_shaping_list (method), 130
- prlsdkapi.NetworkShapingConfig.get_network_shaping_list (method), 130
- prlsdkapi.NetworkShapingConfig.is_enabled (method), 130
- prlsdkapi.NetworkShapingConfig.set_enabled (method), 130
- prlsdkapi.NetworkShapingConfig.set_network_shaping_list (method), 130
- prlsdkapi.NetworkShapingConfig.set_network_shaping_list (method), 130
- prlsdkapi.NetworkShapingEntry (class), 129–130
- prlsdkapi.NetworkShapingEntry.create (method), 129
- prlsdkapi.NetworkShapingEntry.get_class_id (method), 129
- prlsdkapi.NetworkShapingEntry.get_device (method), 129
- prlsdkapi.NetworkShapingEntry.get_rate (method), 129
- prlsdkapi.NetworkShapingEntry.get_rate_mpu (method), 129
- prlsdkapi.NetworkShapingEntry.get_total_rate (method), 129
- prlsdkapi.NetworkShapingEntry.set_class_id (method), 129
- prlsdkapi.NetworkShapingEntry.set_device (method), 129
- prlsdkapi.NetworkShapingEntry.set_rate (method), 129
- prlsdkapi.NetworkShapingEntry.set_rate_mpu (method), 129
- prlsdkapi.NetworkShapingEntry.set_total_rate (method), 129
- prlsdkapi.OfflineManageService (class), 128–129
- prlsdkapi.OfflineManageService.create (method), 128
- prlsdkapi.OfflineManageService.get_name (method), 128
- prlsdkapi.OfflineManageService.get_port (method), 128
- prlsdkapi.OfflineManageService.is_used_by_default (method), 128
- prlsdkapi.OfflineManageService.set_name (method), 128
- prlsdkapi.OfflineManageService.set_port (method), 128
- prlsdkapi.OfflineManageService.set_used_by_default (method), 128
- prlsdkapi.OpTypeList (class), 8–10
- prlsdkapi.OpTypeList.__getitem__ (method), 9
- prlsdkapi.OpTypeList.__iter__ (method), 9
- prlsdkapi.OpTypeList.__len__ (method), 9
- prlsdkapi.OpTypeList.double (method), 9
- prlsdkapi.OpTypeList.get_item (method), 9
- prlsdkapi.OpTypeList.get_items_count (method), 9
- prlsdkapi.OpTypeList.get_type_size (method), 9
- prlsdkapi.OpTypeList.remove_item (method), 9
- prlsdkapi.OpTypeList.signed (method), 9
- prlsdkapi.OpTypeList.unsigned (method), 9
- prlsdkapi.OsesMatrix (class), 124–125
- prlsdkapi.OsesMatrix.get_default_os_version (method), 125
- prlsdkapi.OsesMatrix.get_support_type (method), 125
- prlsdkapi.OsesMatrix.get_supported_oses_types (method), 125
- prlsdkapi.OsesMatrix.get_supported_oses_versions (method), 125
- prlsdkapi.PluginInfo (class), 137–138
- prlsdkapi.PluginInfo.get_copyright (method), 137
- prlsdkapi.PluginInfo.get_id (method), 137
- prlsdkapi.PluginInfo.get_long_description (method), 137

- prlsdkapi.PluginInfo.get_short_description (method), 137
- prlsdkapi.PluginInfo.get_vendor (method), 137
- prlsdkapi.PluginInfo.get_version (method), 137
- prlsdkapi.PortForward (class), 57–59
- prlsdkapi.PortForward.create (method), 58
- prlsdkapi.PortForward.get_incoming_port (method), 58
- prlsdkapi.PortForward.get_redirect_ipaddress (method), 58
- prlsdkapi.PortForward.get_redirect_port (method), 58
- prlsdkapi.PortForward.get_redirect_vm (method), (function), 146
- prlsdkapi.PortForward.get_rule_name (method), 58
- prlsdkapi.PortForward.set_incoming_port (method), 58
- prlsdkapi.PortForward.set_redirect_ipaddress (method), 58
- prlsdkapi.PortForward.set_redirect_port (method), 58
- prlsdkapi.PortForward.set_redirect_vm (method), (function), 146
- prlsdkapi.PortForward.set_rule_name (method), 58
- prlsdkapi.prlsdk (module), 145–235
- prlsdkapi.prlsdk.consts (module), 236–310
- prlsdkapi.prlsdk.DeinitializeSDK (function), 145
- prlsdkapi.prlsdk.errors (module), 311–403
- prlsdkapi.prlsdk.GetSDKLibraryPath (function), 145
- prlsdkapi.prlsdk.InitializeSDK (function), 145
- prlsdkapi.prlsdk.InitializeSDKEx (function), 145
- prlsdkapi.prlsdk.IsSDKInitialized (function), 145
- prlsdkapi.prlsdk.PrlAcl_GetAccessForOthers (function), 145
- prlsdkapi.prlsdk.PrlAcl_GetOwnerName (function), 145
- prlsdkapi.prlsdk.PrlAcl_IsAllowed (function), 145
- prlsdkapi.prlsdk.PrlAcl_IsCurrentSessionOwner (function), 145
- prlsdkapi.prlsdk.PrlAcl_SetAccessForOthers (function), 145
- prlsdkapi.prlsdk.PrlApi_CreateHandlesList (function), 146
- prlsdkapi.prlsdk.PrlApi_CreateOpTypeList (function), 146
- prlsdkapi.prlsdk.PrlApi_CreateProblemReport (function), 146
- prlsdkapi.prlsdk.PrlApi_CreateStringsList (function), 146
- prlsdkapi.prlsdk.PrlApi_Deinit (function), 146
- prlsdkapi.prlsdk.PrlApi_GetAppMode (function), 146
- prlsdkapi.prlsdk.PrlApi_GetCrashDumpsPath (function), 146
- prlsdkapi.prlsdk.PrlApi_GetDefaultOsVersion (function), 146
- prlsdkapi.prlsdk.PrlApi_GetMessageType (function), 146
- prlsdkapi.prlsdk.PrlApi_GetRecommendMinVmMem (function), 146
- prlsdkapi.prlsdk.PrlApi_GetResultDescription (function), 146
- prlsdkapi.prlsdk.PrlApi_GetSupportedOsesTypes (function), 146
- prlsdkapi.prlsdk.PrlApi_GetSupportedOsesVersions (function), 147
- prlsdkapi.prlsdk.PrlApi_GetVersion (function), 147
- prlsdkapi.prlsdk.PrlApi_GuestToString (function), 147
- prlsdkapi.prlsdk.PrlApi_Init (function), 147
- prlsdkapi.prlsdk.PrlApi_InitCrashHandler (function), 147

- prlsdkapi.prlsdk.PrlApi_InitEx (*function*), 147
- prlsdkapi.prlsdk.PrlApi_MsgCanBeIgnored (*function*), 147
- prlsdkapi.prlsdk.PrlApi_SendPackedProblemReport (*function*), 147
- prlsdkapi.prlsdk.PrlApi_SendProblemReport (*function*), 147
- prlsdkapi.prlsdk.PrlApi_SwitchConsoleLogging (*function*), 147
- prlsdkapi.prlsdk.PrlAppliance_Create (*function*), 147
- prlsdkapi.prlsdk.PrlBackupResult_GetBackupUpTime (*function*), 147
- prlsdkapi.prlsdk.PrlBootDev_GetIndex (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_GetSequenceIndex (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_GetType (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_IsInUse (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_Remove (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_SetIndex (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_SetInUse (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_SetSequenceIndex (*function*), 148
- prlsdkapi.prlsdk.PrlBootDev_SetType (*function*), 148
- prlsdkapi.prlsdk.PrlCpuFeatures_Create (*function*), 149
- prlsdkapi.prlsdk.PrlCpuFeatures_GetValue (*function*), 149
- prlsdkapi.prlsdk.PrlCpuFeatures_SetValue (*function*), 149
- prlsdkapi.prlsdk.PrlCPUPool_GetCpuFeatures (*function*), 148
- prlsdkapi.prlsdk.PrlCPUPool_GetName (*function*), 148
- prlsdkapi.prlsdk.PrlCPUPool_GetVendor (*function*), 148
- prlsdkapi.prlsdk.PrlCt_Reinstall (*function*), 150
- prlsdkapi.prlsdk.PrlCtTemplate_GetCpuMode (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_GetDescription (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_GetName (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_GetOsTemplate (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_GetOsType (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_GetOsVersion (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_GetType (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_GetVersion (*function*), 149
- prlsdkapi.prlsdk.PrlCtTemplate_IsCached (*function*), 149
- prlsdkapi.prlsdk.PrlDbg_EventTypeToString (*function*), 150
- prlsdkapi.prlsdk.PrlDbg_GetHandlesNum (*function*), 150
- prlsdkapi.prlsdk.PrlDbg_HandleTypeToString (*function*), 150
- prlsdkapi.prlsdk.PrlDbg_PrlResultToString (*function*), 150
- prlsdkapi.prlsdk.PrlDisk_GetDiskInfo (*function*), 150
- prlsdkapi.prlsdk.PrlDisk_OpenDisk_Local (*function*), 150
- prlsdkapi.prlsdk.PrlDisk_WaitForCompletion (*function*), 150
- prlsdkapi.prlsdk.PrlDiskMap_GetGranularity (*function*), 150
- prlsdkapi.prlsdk.PrlDiskMap_GetSize (*function*), 150
- prlsdkapi.prlsdk.PrlDiskMap_Read (*function*), 150
- prlsdkapi.prlsdk.PrlDispCfg_ArePluginsEnabled (*function*), 150
- prlsdkapi.prlsdk.PrlDispCfg_CanChangeDefaultSettings (*function*), 151

- prlsdkapi.prlsdk.PrlDispCfg_EnablePlugins (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetBackupTimeout (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetBackupUserLogin (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetConfirmationsList (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetCpuFeaturesMaskEx (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetCpuPool (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetDefaultBackupDirectory (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetDefaultBackupServer (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetDefaultCtDir (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetDefaultVmDir (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetDefaultVNCHostName (function), 151
- prlsdkapi.prlsdk.PrlDispCfg_GetMaxReservMemLimit (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetMaxVmMem (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetMinReservMemLimit (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetMinSecurityLevel (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetMinVmMem (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetRecommendMaxVmMem (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetReservedMemLimit (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetUsbIdentity (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetUsbIdentityComponent (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_GetVmCpuLimitType (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_GetVNCBasePort (function), 152
- prlsdkapi.prlsdk.PrlDispCfg_IsAdjustMemAuto (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_IsAllowMultiplePMC (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_IsBackupUserPasswordEnabled (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_IsLogRotationEnabled (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_IsSendStatisticReport (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_IsVerboseLogEnabled (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_SetAdjustMemAuto (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_SetAllowMultiplePMC (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_SetBackupTimeout (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_SetBackupUserLogin (function), 153
- prlsdkapi.prlsdk.PrlDispCfg_SetBackupUserPassword (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetBackupUserPassword (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetCanChangeDefaultSe (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetConfirmationsList (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetCpuFeaturesMaskEx (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetDefaultBackupDirectory (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetDefaultBackupServer (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetDefaultVNCHostName (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetLogRotationEnabled (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetMaxReservMemLimit (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetMaxVmMem (function), 154
- prlsdkapi.prlsdk.PrlDispCfg_SetMinReservMemLimit (function), 155

- prlsdkapi.prlsdk.PrlDispCfg_SetMinSecurityLevel (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetMinVmMem (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetRecommendMap (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetReservedMemLimit (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetSendStatisticReport (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetUsbIdentAssociation (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetVerboseLogEnabled (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetVmCpuLimitType (function), 155
- prlsdkapi.prlsdk.PrlDispCfg_SetVNCBasePort (function), 155
- prlsdkapi.prlsdk.PrlEvent_CanBeIgnored (function), 156
- prlsdkapi.prlsdk.PrlEvent_CreateAnswerEvent (function), 156
- prlsdkapi.prlsdk.PrlEvent_FromString (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetErrCode (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetErrString (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetIssuerId (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetIssuerType (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetJob (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetParam (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetParamByName (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetParamsCount (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetServer (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetType (function), 156
- prlsdkapi.prlsdk.PrlEvent_GetVm (function), 156
- prlsdkapi.prlsdk.PrlEvent_IsAnswerRequired (function), 156
- prlsdkapi.prlsdk.PrlEvtPrm_GetName (function), 156
- prlsdkapi.prlsdk.PrlEvtPrm_GetType (function), 156
- prlsdkapi.prlsdk.PrlEvtPrm_ToBoolean (function), 156
- prlsdkapi.prlsdk.PrlEvtPrm_ToCData (function), 157
- prlsdkapi.prlsdk.PrlEvtPrm_ToHandle (function), 157
- prlsdkapi.prlsdk.PrlEvtPrm_ToInt32 (function), 157
- prlsdkapi.prlsdk.PrlEvtPrm_ToInt64 (function), 157
- prlsdkapi.prlsdk.PrlEvtPrm_ToString (function), 157
- prlsdkapi.prlsdk.PrlEvtPrm_ToUint32 (function), 157
- prlsdkapi.prlsdk.PrlEvtPrm_ToUint64 (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_Create (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_GetLocalNetAddress (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_GetLocalPort (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_GetProtocol (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_GetRemoteNetAddress (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_GetRemotePort (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_SetLocalNetAddress (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_SetLocalPort (function), 157
- prlsdkapi.prlsdk.PrlFirewallRule_SetProtocol (function), 158
- prlsdkapi.prlsdk.PrlFirewallRule_SetRemoteNetAddress (function), 158

- prlsdkapi.prlsdk.PrlFirewallRule_SetRemotePort (function), 158
- prlsdkapi.prlsdk.PrlFoundVmInfo_GetConfigPath (function), 158
- prlsdkapi.prlsdk.PrlFoundVmInfo_GetName (function), 158
- prlsdkapi.prlsdk.PrlFoundVmInfo_GetOSVersion (function), 158
- prlsdkapi.prlsdk.PrlFoundVmInfo_IsOldConfig (function), 158
- prlsdkapi.prlsdk.PrlFoundVmInfo_IsTemplate (function), 158
- prlsdkapi.prlsdk.PrlFsEntry_GetAbsolutePath (function), 158
- prlsdkapi.prlsdk.PrlFsEntry_GetLastModifiedDate (function), 158
- prlsdkapi.prlsdk.PrlFsEntry_GetPermissions (function), 158
- prlsdkapi.prlsdk.PrlFsEntry_GetRelativeName (function), 158
- prlsdkapi.prlsdk.PrlFsEntry_GetSize (function), 159
- prlsdkapi.prlsdk.PrlFsEntry_GetType (function), 159
- prlsdkapi.prlsdk.PrlFsInfo_GetChildEntriesCount (function), 159
- prlsdkapi.prlsdk.PrlFsInfo_GetChildEntry (function), 159
- prlsdkapi.prlsdk.PrlFsInfo_GetFsType (function), 159
- prlsdkapi.prlsdk.PrlFsInfo_GetParentEntry (function), 159
- prlsdkapi.prlsdk.PrlFsInfo_GetType (function), 159
- prlsdkapi.prlsdk.PrlHandle_AddRef (function), 159
- prlsdkapi.prlsdk.PrlHandle_Free (function), 159
- prlsdkapi.prlsdk.PrlHandle_FromString (function), 159
- prlsdkapi.prlsdk.PrlHandle_GetPackageId (function), 159
- prlsdkapi.prlsdk.PrlHandle_GetType (function), 159
- prlsdkapi.prlsdk.PrlHandle_RegEventHandler (function), 159
- prlsdkapi.prlsdk.PrlHandle_UnregEventHandler (function), 160
- prlsdkapi.prlsdk.PrlHndlList_AddItem (function), 160
- prlsdkapi.prlsdk.PrlHndlList_GetItem (function), 160
- prlsdkapi.prlsdk.PrlHndlList_GetItemsCount (function), 160
- prlsdkapi.prlsdk.PrlHndlList_RemoveItem (function), 160
- prlsdkapi.prlsdk.PrlIPPrivNet_Create (function), 160
- prlsdkapi.prlsdk.PrlIPPrivNet_GetName (function), 160
- prlsdkapi.prlsdk.PrlIPPrivNet_GetNetAddresses (function), 160
- prlsdkapi.prlsdk.PrlIPPrivNet_IsGlobal (function), 160
- prlsdkapi.prlsdk.PrlIPPrivNet_SetGlobal (function), 160
- prlsdkapi.prlsdk.PrlIPPrivNet_SetName (function), 160
- prlsdkapi.prlsdk.PrlIPPrivNet_SetNetAddresses (function), 160
- prlsdkapi.prlsdk.PrlJob_Cancel (function), 160
- prlsdkapi.prlsdk.PrlJob_GetError (function), 160
- prlsdkapi.prlsdk.PrlJob_GetOpCode (function), 161
- prlsdkapi.prlsdk.PrlJob_GetProgress (function), 161
- prlsdkapi.prlsdk.PrlJob_GetResult (function), 161
- prlsdkapi.prlsdk.PrlJob_GetRetCode (function), 161
- prlsdkapi.prlsdk.PrlJob_GetStatus (function), 161
- prlsdkapi.prlsdk.PrlJob_IsRequestWasSent (function), 161
- prlsdkapi.prlsdk.PrlJob_Wait (function), 161

- prlsdkapi.prlsdk.PrlLic_GetCompanyName (function), 161
- prlsdkapi.prlsdk.PrlLic_GetLicenseKey (function), 161
- prlsdkapi.prlsdk.PrlLic_GetStatus (function), 161
- prlsdkapi.prlsdk.PrlLic_GetUserName (function), 161
- prlsdkapi.prlsdk.PrlLic_IsValid (function), 161
- prlsdkapi.prlsdk.PrlLoginResponse_GetHostOsVersion (function), 162
- prlsdkapi.prlsdk.PrlLoginResponse_GetProductId (function), 162
- prlsdkapi.prlsdk.PrlLoginResponse_GetRunningTaskByIndex (function), 162
- prlsdkapi.prlsdk.PrlLoginResponse_GetRunningTaskCount (function), 162
- prlsdkapi.prlsdk.PrlLoginResponse_GetServerUpTime (function), 162
- prlsdkapi.prlsdk.PrlLoginResponse_GetSessionUnit (function), 162
- prlsdkapi.prlsdk.PrlNetSvc_GetStatus (function), 162
- prlsdkapi.prlsdk.PrlNetworkClass_Create (function), 162
- prlsdkapi.prlsdk.PrlNetworkClass_GetClassId (function), 162
- prlsdkapi.prlsdk.PrlNetworkClass_GetNetworkList (function), 162
- prlsdkapi.prlsdk.PrlNetworkClass_SetClassId (function), 162
- prlsdkapi.prlsdk.PrlNetworkClass_SetNetworkList (function), 162
- prlsdkapi.prlsdk.PrlNetworkRate_Create (function), 162
- prlsdkapi.prlsdk.PrlNetworkRate_GetClassId (function), 163
- prlsdkapi.prlsdk.PrlNetworkRate_GetRate (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_Create (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_GetClassId (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_GetDeviceId (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_GetRate (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_GetRateM (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_GetTotalR (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_SetClassId (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_SetDeviceId (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_SetRate (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_SetRateM (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingBandwidthEntry_SetTotalR (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingConfig_GetNetwork (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingConfig_GetNetwork (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingConfig_IsEnabled (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingConfig_SetEnable (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingConfig_SetNetwork (function), 163
- prlsdkapi.prlsdk.PrlNetworkShapingConfig_SetNetwork (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_Create (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_GetClassId (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_GetDevice (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_GetRate (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_GetRateM (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_GetTotalR (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_SetClassId (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_SetDevice (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_SetRate (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_SetRateM (function), 164
- prlsdkapi.prlsdk.PrlNetworkShapingEntry_SetTotalR (function), 164
- prlsdkapi.prlsdk.PrlOffmgmtService_Create (function), 165
- prlsdkapi.prlsdk.PrlOffmgmtService_GetName (function), 165

- prlsdkapi.prlsdk.PrlOffmgmtService_GetPort (function), 165
- prlsdkapi.prlsdk.PrlOffmgmtService_IsUsedByPrlsdkapi.prlsdk.PrlPortFwd_GetRedirectPort (function), 167
- prlsdkapi.prlsdk.PrlOffmgmtService_SetName (function), 165
- prlsdkapi.prlsdk.PrlOffmgmtService_SetPort (function), 165
- prlsdkapi.prlsdk.PrlOffmgmtService_SetUsedByPrlsdkapi.prlsdk.PrlPortFwd_GetRedirectVm (function), 167
- prlsdkapi.prlsdk.PrlOpTypeList_GetItem (function), 165
- prlsdkapi.prlsdk.PrlOpTypeList_GetItemsCount (function), 165
- prlsdkapi.prlsdk.PrlOpTypeList_GetTypeSize (function), 165
- prlsdkapi.prlsdk.PrlOpTypeList_RemoveItem (function), 165
- prlsdkapi.prlsdk.PrlOsesMatrix_GetDefaultOsVersion (function), 165
- prlsdkapi.prlsdk.PrlOsesMatrix_GetSupportedOsTypes (function), 166
- prlsdkapi.prlsdk.PrlOsesMatrix_GetSupportedOsVersions (function), 166
- prlsdkapi.prlsdk.PrlOsesMatrix_GetSupportType (function), 166
- prlsdkapi.prlsdk.PrlPluginInfo_GetCopyright (function), 166
- prlsdkapi.prlsdk.PrlPluginInfo_GetId (function), 166
- prlsdkapi.prlsdk.PrlPluginInfo_GetLongDescription (function), 166
- prlsdkapi.prlsdk.PrlPluginInfo_GetShortDescription (function), 166
- prlsdkapi.prlsdk.PrlPluginInfo_GetVendor (function), 166
- prlsdkapi.prlsdk.PrlPluginInfo_GetVersion (function), 166
- prlsdkapi.prlsdk.PrlPortFwd_Create (function), 166
- prlsdkapi.prlsdk.PrlPortFwd_GetIncomingPort (function), 166
- prlsdkapi.prlsdk.PrlPortFwd_GetRedirectIPAd (function), 166
- prlsdkapi.prlsdk.PrlPortFwd_GetRedirectPort (function), 167
- prlsdkapi.prlsdk.PrlPortFwd_GetRedirectVm (function), 167
- prlsdkapi.prlsdk.PrlPortFwd_GetRuleName (function), 167
- prlsdkapi.prlsdk.PrlPortFwd_SetIncomingPort (function), 167
- prlsdkapi.prlsdk.PrlPortFwd_SetRedirectIPAddress (function), 167
- prlsdkapi.prlsdk.PrlPortFwd_SetRedirectPort (function), 167
- prlsdkapi.prlsdk.PrlPortFwd_SetRedirectVm (function), 167
- prlsdkapi.prlsdk.PrlPortFwd_SetRuleName (function), 167
- prlsdkapi.prlsdk.PrlReport_Assembly (function), 167
- prlsdkapi.prlsdk.PrlReport_AsString (function), 167
- prlsdkapi.prlsdk.PrlReport_GetArchiveFileName (function), 167
- prlsdkapi.prlsdk.PrlReport_GetData (function), 167
- prlsdkapi.prlsdk.PrlReport_GetDescription (function), 168
- prlsdkapi.prlsdk.PrlReport_GetReason (function), 168
- prlsdkapi.prlsdk.PrlReport_GetScheme (function), 168
- prlsdkapi.prlsdk.PrlReport_GetType (function), 168
- prlsdkapi.prlsdk.PrlReport_GetUserEmail (function), 168
- prlsdkapi.prlsdk.PrlReport_GetUserName (function), 168
- prlsdkapi.prlsdk.PrlReport_Send (function), 168
- prlsdkapi.prlsdk.PrlReport_SetDescription (function), 168
- prlsdkapi.prlsdk.PrlReport_SetReason (function), 168
- prlsdkapi.prlsdk.PrlReport_SetType (function), 168

- prlsdkapi.prlsdk.PrlReport_SetUserEmail
(function), 168
- prlsdkapi.prlsdk.PrlReport_SetUserName
(function), 168
- prlsdkapi.prlsdk.PrlResult_GetParam (func-
tion), 169
- prlsdkapi.prlsdk.PrlResult_GetParamAsString
(function), 169
- prlsdkapi.prlsdk.PrlResult_GetParamByIndex
(function), 169
- prlsdkapi.prlsdk.PrlResult_GetParamByIndexAsStr-
ing (function), 169
- prlsdkapi.prlsdk.PrlResult_GetParamsCount
(function), 169
- prlsdkapi.prlsdk.PrlRunningTask_GetTaskParam-
eters (function), 169
- prlsdkapi.prlsdk.PrlRunningTask_GetTaskType
(function), 169
- prlsdkapi.prlsdk.PrlRunningTask_GetTaskUuid
(function), 169
- prlsdkapi.prlsdk.PrlShare_GetDescription
(function), 169
- prlsdkapi.prlsdk.PrlShare_GetName (func-
tion), 169
- prlsdkapi.prlsdk.PrlShare_GetPath (func-
tion), 169
- prlsdkapi.prlsdk.PrlShare_IsEnabled (func-
tion), 169
- prlsdkapi.prlsdk.PrlShare_IsReadOnly (func-
tion), 170
- prlsdkapi.prlsdk.PrlShare_Remove (func-
tion), 170
- prlsdkapi.prlsdk.PrlShare_SetDescription
(function), 170
- prlsdkapi.prlsdk.PrlShare_SetEnabled (func-
tion), 170
- prlsdkapi.prlsdk.PrlShare_SetName (func-
tion), 170
- prlsdkapi.prlsdk.PrlShare_SetPath (func-
tion), 170
- prlsdkapi.prlsdk.PrlShare_SetReadOnly
(function), 170
- prlsdkapi.prlsdk.PrlSrv_AddIPPrivateNetwork
(function), 178
- prlsdkapi.prlsdk.PrlSrv_AddVirtualNetwork
(function), 178
- prlsdkapi.prlsdk.PrlSrv_AttachToLostTask
(function), 178
- prlsdkapi.prlsdk.PrlSrv_CancelInstallAppliance
(function), 178
- prlsdkapi.prlsdk.PrlSrv_CommonPrefsBeginEdit
(function), 178
- prlsdkapi.prlsdk.PrlSrv_CommonPrefsCommit
(function), 178
- prlsdkapi.prlsdk.PrlSrv_CommonPrefsCommitEx-
isting (function), 178
- prlsdkapi.prlsdk.PrlSrv_ConfigureGenericPci
(function), 179
- prlsdkapi.prlsdk.PrlSrv_CopyCtTemplate
(function), 179
- prlsdkapi.prlsdk.PrlSrv_Create (function),
179
- prlsdkapi.prlsdk.PrlSrv_CreateUnattendedCd
(function), 179
- prlsdkapi.prlsdk.PrlSrv_CreateVm (func-
tion), 179
- prlsdkapi.prlsdk.PrlSrv_CreateVmBackup
(function), 179
- prlsdkapi.prlsdk.PrlSrv_DeleteOfflineService
(function), 179
- prlsdkapi.prlsdk.PrlSrv_DeleteVirtualNetwork
(function), 179
- prlsdkapi.prlsdk.PrlSrv_DisableConfirmationMode
(function), 179
- prlsdkapi.prlsdk.PrlSrv_EnableConfirmationMode
(function), 179
- prlsdkapi.prlsdk.PrlSrv_FsCanCreateFile
(function), 179
- prlsdkapi.prlsdk.PrlSrv_FsCreateDir (func-
tion), 179
- prlsdkapi.prlsdk.PrlSrv_FsGenerateEntryName
(function), 180
- prlsdkapi.prlsdk.PrlSrv_FsGetDirEntries
(function), 180
- prlsdkapi.prlsdk.PrlSrv_FsGetDiskList (func-
tion), 180
- prlsdkapi.prlsdk.PrlSrv_FsRemoveEntry
(function), 180

- prlsdkapi.prlsdk.PrlSrv_FsRenameEntry
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetBackupTree
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetCommonPrefs
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetCPUPoolsList
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetCtTemplateList
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetDefaultVmConfig
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetDiskFreeSpace
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetIPPrivateNetworksList
(function), 180
- prlsdkapi.prlsdk.PrlSrv_GetLicenseInfo (func-
tion), 181
- prlsdkapi.prlsdk.PrlSrv_GetNetServiceStatus
(function), 181
- prlsdkapi.prlsdk.PrlSrv_GetNetworkClassesList
(function), 181
- prlsdkapi.prlsdk.PrlSrv_GetNetworkShapingConfig
(function), 181
- prlsdkapi.prlsdk.PrlSrv_GetOfflineServicesList
(function), 181
- prlsdkapi.prlsdk.PrlSrv_GetPackedProblemReport
(function), 181
- prlsdkapi.prlsdk.PrlSrv_GetPerfStats (func-
tion), 181
- prlsdkapi.prlsdk.PrlSrv_GetPluginsList (func-
tion), 181
- prlsdkapi.prlsdk.PrlSrv_GetProblemReport
(function), 181
- prlsdkapi.prlsdk.PrlSrv_GetQuestions (func-
tion), 181
- prlsdkapi.prlsdk.PrlSrv_GetRestrictionInfo
(function), 181
- prlsdkapi.prlsdk.PrlSrv_GetServerInfo (func-
tion), 181
- prlsdkapi.prlsdk.PrlSrv_GetSrvConfig (func-
tion), 182
- prlsdkapi.prlsdk.PrlSrv_GetStatistics (func-
tion), 182
- prlsdkapi.prlsdk.PrlSrv_GetSupportedOses
(function), 182
- prlsdkapi.prlsdk.PrlSrv_GetUserInfo (func-
tion), 182
- prlsdkapi.prlsdk.PrlSrv_GetUserInfoList
(function), 182
- prlsdkapi.prlsdk.PrlSrv_GetUserProfile (func-
tion), 182
- prlsdkapi.prlsdk.PrlSrv_GetVcmmdConfig
(function), 182
- prlsdkapi.prlsdk.PrlSrv_GetVirtualNetworkList
(function), 182
- prlsdkapi.prlsdk.PrlSrv_GetVmConfig (func-
tion), 182
- prlsdkapi.prlsdk.PrlSrv_GetVmList (func-
tion), 182
- prlsdkapi.prlsdk.PrlSrv_GetVmListEx (func-
tion), 182
- prlsdkapi.prlsdk.PrlSrv_HasRestriction (func-
tion), 183
- prlsdkapi.prlsdk.PrlSrv_InstallAppliance
(function), 183
- prlsdkapi.prlsdk.PrlSrv_IsConfirmationModeEnabled
(function), 183
- prlsdkapi.prlsdk.PrlSrv_IsConnected (func-
tion), 183
- prlsdkapi.prlsdk.PrlSrv_IsFeatureSupported
(function), 183
- prlsdkapi.prlsdk.PrlSrv_IsNonInteractiveSession
(function), 183
- prlsdkapi.prlsdk.PrlSrv_Login (function),
183
- prlsdkapi.prlsdk.PrlSrv_LoginEx (func-
tion), 183
- prlsdkapi.prlsdk.PrlSrv_LoginLocal (func-
tion), 183
- prlsdkapi.prlsdk.PrlSrv_LoginLocalEx (func-
tion), 183
- prlsdkapi.prlsdk.PrlSrv_Logoff (function),
183
- prlsdkapi.prlsdk.PrlSrv_MoveToCPUPool
(function), 183
- prlsdkapi.prlsdk.PrlSrv_NetServiceRestart
(function), 184

- prlsdkapi.prlsdk.PrlSrv_NetServiceRestoreDefault (function), 184
- prlsdkapi.prlsdk.PrlSrv_NetServiceStart (function), 184
- prlsdkapi.prlsdk.PrlSrv_NetServiceStop (function), 184
- prlsdkapi.prlsdk.PrlSrv_RecalculateCPUPool (function), 184
- prlsdkapi.prlsdk.PrlSrv_RefreshPlugins (function), 184
- prlsdkapi.prlsdk.PrlSrv_RegEventHandler (function), 184
- prlsdkapi.prlsdk.PrlSrv_Register3rdPartyVm (function), 184
- prlsdkapi.prlsdk.PrlSrv_RegisterVm (function), 184
- prlsdkapi.prlsdk.PrlSrv_RegisterVmEx (function), 184
- prlsdkapi.prlsdk.PrlSrv_RegisterVmWithUuid (function), 184
- prlsdkapi.prlsdk.PrlSrv_RemoveCtTemplate (function), 184
- prlsdkapi.prlsdk.PrlSrv_RemoveIPPrivateNetwork (function), 185
- prlsdkapi.prlsdk.PrlSrv_RemoveVmBackup (function), 185
- prlsdkapi.prlsdk.PrlSrv_RestoreVmBackup (function), 185
- prlsdkapi.prlsdk.PrlSrv_SendAnswer (function), 185
- prlsdkapi.prlsdk.PrlSrv_SendProblemReport (function), 185
- prlsdkapi.prlsdk.PrlSrv_SetNonInteractiveSession (function), 185
- prlsdkapi.prlsdk.PrlSrv_SetVcmmdConfig (function), 185
- prlsdkapi.prlsdk.PrlSrv_Shutdown (function), 185
- prlsdkapi.prlsdk.PrlSrv_ShutdownEx (function), 185
- prlsdkapi.prlsdk.PrlSrv_StartSearchVms (function), 185
- prlsdkapi.prlsdk.PrlSrv_StopInstallAppliance (function), 185
- prlsdkapi.prlsdk.PrlSrv_SubscribeToHostStatistics (function), 185
- prlsdkapi.prlsdk.PrlSrv_SubscribeToPerfStats (function), 186
- prlsdkapi.prlsdk.PrlSrv_UnregEventHandler (function), 186
- prlsdkapi.prlsdk.PrlSrv_UnsubscribeFromHostStatistics (function), 186
- prlsdkapi.prlsdk.PrlSrv_UnsubscribeFromPerfStats (function), 186
- prlsdkapi.prlsdk.PrlSrv_UpdateIPPrivateNetwork (function), 186
- prlsdkapi.prlsdk.PrlSrv_UpdateLicense (function), 186
- prlsdkapi.prlsdk.PrlSrv_UpdateLicenseEx (function), 186
- prlsdkapi.prlsdk.PrlSrv_UpdateNetworkClassesList (function), 186
- prlsdkapi.prlsdk.PrlSrv_UpdateNetworkShapingConfiguration (function), 186
- prlsdkapi.prlsdk.PrlSrv_UpdateOfflineService (function), 186
- prlsdkapi.prlsdk.PrlSrv_UpdateVirtualNetwork (function), 186
- prlsdkapi.prlsdk.PrlSrv_UserProfileBeginEdit (function), 186
- prlsdkapi.prlsdk.PrlSrv_UserProfileCommit (function), 187
- prlsdkapi.prlsdk.PrlSrvCfg_GetCpuCount (function), 173
- prlsdkapi.prlsdk.PrlSrvCfg_GetCpuFeaturesEx (function), 173
- prlsdkapi.prlsdk.PrlSrvCfg_GetCpuFeaturesMaskingConfiguration (function), 173
- prlsdkapi.prlsdk.PrlSrvCfg_GetCpuHvt (function), 173
- prlsdkapi.prlsdk.PrlSrvCfg_GetCpuMode (function), 173
- prlsdkapi.prlsdk.PrlSrvCfg_GetCpuModel (function), 173
- prlsdkapi.prlsdk.PrlSrvCfg_GetCpuSpeed (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetDefaultGateway (function), 174

- prlsdkapi.prlsdk.PrlSrvCfg_GetDefaultGateway (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetDnsServers (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetFloppyDisk (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetFloppyDisksCount (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetGenericPciDevice (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetGenericPciDevicesCount (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetGenericScsiDevice (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetGenericScsiDevicesCount (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetHardDisk (function), 174
- prlsdkapi.prlsdk.PrlSrvCfg_GetHardDisksCount (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetHostname (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetHostOsMajor (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetHostOsMinor (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetHostOsStrPresent (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetHostOsSubMinor (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetHostOsType (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetHostRamSize (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetMaxHostNetAdapters (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetMaxVmNetAdapters (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetNetAdapter (function), 175
- prlsdkapi.prlsdk.PrlSrvCfg_GetNetAdaptersCount (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetOpticalDisk (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetOpticalDisksCount (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetParallelPort (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetParallelPortsCount (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetPrinter (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetPrintersCount (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetSearchDomains (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetSerialPort (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetSerialPortsCount (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetSoundMixerDev (function), 176
- prlsdkapi.prlsdk.PrlSrvCfg_GetSoundMixerDevsCount (function), 177
- prlsdkapi.prlsdk.PrlSrvCfg_GetSoundOutputDev (function), 177
- prlsdkapi.prlsdk.PrlSrvCfg_GetSoundOutputDevsCount (function), 177
- prlsdkapi.prlsdk.PrlSrvCfg_GetUsbDev (function), 177
- prlsdkapi.prlsdk.PrlSrvCfg_GetUsbDevsCount (function), 177
- prlsdkapi.prlsdk.PrlSrvCfg_IsSoundDefaultEnabled (function), 177
- prlsdkapi.prlsdk.PrlSrvCfg_IsUsbSupported (function), 177
- prlsdkapi.prlsdk.PrlSrvCfg_IsVtdSupported (function), 177
- prlsdkapi.prlsdk.PrlSrvCfgDev_GetDeviceState (function), 170
- prlsdkapi.prlsdk.PrlSrvCfgDev_GetId (function), 170
- prlsdkapi.prlsdk.PrlSrvCfgDev_GetName (function), 170
- prlsdkapi.prlsdk.PrlSrvCfgDev_GetType (function), 170
- prlsdkapi.prlsdk.PrlSrvCfgDev_IsConnectedToVm (function), 170

- prlsdkapi.prlsdk.PrlSrvCfgDev_SetDeviceState (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHdd_GetDevId (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHdd_GetDevName (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHdd_GetDevSize (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgHdd_GetDiskIndex (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgHdd_GetPart (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgHdd_GetPartsCount (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_GetIndex (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_GetName (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_GetSize (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_GetSysName (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_GetType (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_IsActive (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_IsInUse (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgHddPart_IsLogical (function), 171
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetDefaultGateway (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetDefaultGatewayIp (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetDnsServers (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetMacAddress (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetNetAdapterType (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetNetAddresses (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetSearchDomain (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetSysIndex (function), 172
- prlsdkapi.prlsdk.PrlSrvCfgNet_GetVlanTag (function), 173
- prlsdkapi.prlsdk.PrlSrvCfgNet_IsConfigureWithDhcp (function), 173
- prlsdkapi.prlsdk.PrlSrvCfgNet_IsConfigureWithDhcp (function), 173
- prlsdkapi.prlsdk.PrlSrvCfgNet_IsEnabled (function), 173
- prlsdkapi.prlsdk.PrlSrvCfgPci_GetDeviceClass (function), 173
- prlsdkapi.prlsdk.PrlSrvCfgPci_IsPrimaryDevice (function), 173
- prlsdkapi.prlsdk.PrlSrvInfo_GetApplicationMode (function), 177
- prlsdkapi.prlsdk.PrlSrvInfo_GetCmdPort (function), 177
- prlsdkapi.prlsdk.PrlSrvInfo_GetHostName (function), 177
- prlsdkapi.prlsdk.PrlSrvInfo_GetOsVersion (function), 178
- prlsdkapi.prlsdk.PrlSrvInfo_GetProductVersion (function), 178
- prlsdkapi.prlsdk.PrlSrvInfo_GetServerUuid (function), 178
- prlsdkapi.prlsdk.PrlSrvInfo_GetStartTime (function), 178
- prlsdkapi.prlsdk.PrlSrvInfo_GetStartTimeMonotonic (function), 178
- prlsdkapi.prlsdk.PrlStat_GetCpusStatsCount (function), 187
- prlsdkapi.prlsdk.PrlStat_GetCpuStat (function), 187
- prlsdkapi.prlsdk.PrlStat_GetFreeRamSize (function), 187
- prlsdkapi.prlsdk.PrlStat_GetOsUptime (function), 187
- prlsdkapi.prlsdk.PrlStat_GetRealRamSize (function), 187
- prlsdkapi.prlsdk.PrlStat_GetTotalRamSize (function), 187
- prlsdkapi.prlsdk.PrlStat_GetUsageRamSize (function), 187

- prlsdkapi.prlsdk.PrlStatCpu_GetCpuUsage (function), 187
- prlsdkapi.prlsdk.PrlStatCpu_GetSystemTime (function), 187
- prlsdkapi.prlsdk.PrlStatCpu_GetTotalTime (function), 187
- prlsdkapi.prlsdk.PrlStatCpu_GetUserTime (function), 187
- prlsdkapi.prlsdk.PrlStrList_AddItem (function), 188
- prlsdkapi.prlsdk.PrlStrList_GetItem (function), 188
- prlsdkapi.prlsdk.PrlStrList_GetItemsCount (function), 188
- prlsdkapi.prlsdk.PrlStrList_RemoveItem (function), 188
- prlsdkapi.prlsdk.PrlUsbIdent_GetFriendlyName (function), 188
- prlsdkapi.prlsdk.PrlUsbIdent_GetSystemName (function), 188
- prlsdkapi.prlsdk.PrlUsbIdent_GetVmUuidAssociation (function), 188
- prlsdkapi.prlsdk.PrlUsrCfg_CanChangeSrvSets (function), 188
- prlsdkapi.prlsdk.PrlUsrCfg_CanUseMngConsole (function), 188
- prlsdkapi.prlsdk.PrlUsrCfg_GetDefaultVmFolderPath (function), 188
- prlsdkapi.prlsdk.PrlUsrCfg_GetVmDirUuid (function), 188
- prlsdkapi.prlsdk.PrlUsrCfg_IsLocalAdministrator (function), 188
- prlsdkapi.prlsdk.PrlUsrCfg_SetDefaultVmFolderPath (function), 188
- prlsdkapi.prlsdk.PrlUsrCfg_SetVmDirUuid (function), 189
- prlsdkapi.prlsdk.PrlUsrInfo_CanChangeSrvSets (function), 189
- prlsdkapi.prlsdk.PrlUsrInfo_GetDefaultVmFolderPath (function), 189
- prlsdkapi.prlsdk.PrlUsrInfo_GetName (function), 189
- prlsdkapi.prlsdk.PrlUsrInfo_GetSessionCount (function), 189
- prlsdkapi.prlsdk.PrlUsrInfo_GetUuid (function), 189
- prlsdkapi.prlsdk.PrlVcmmdConfig_GetPolicy (function), 189
- prlsdkapi.prlsdk.PrlVcmmdConfig_SetPolicy (function), 189
- prlsdkapi.prlsdk.PrlVirtNet_Create (function), 189
- prlsdkapi.prlsdk.PrlVirtNet_GetAdapterIndex (function), 189
- prlsdkapi.prlsdk.PrlVirtNet_GetAdapterName (function), 189
- prlsdkapi.prlsdk.PrlVirtNet_GetBoundAdapterInfo (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetBoundCardMac (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetDescription (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetDhcpIP6Address (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetDhcpIPAddress (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetHostIP6Address (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetHostIPAddress (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetIP6NetMask (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetIP6ScopeEnd (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetIP6ScopeStart (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetIPNetMask (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetIPScopeEnd (function), 190
- prlsdkapi.prlsdk.PrlVirtNet_GetIPScopeStart (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_GetNetworkId (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_GetNetworkType (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_GetPortForwardList (function), 191

- prlsdkapi.prlsdk.PrlVirtNet_GetVlanTag (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_IsAdapterEnabled (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_IsDHCP6ServerEnabled (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_IsDHCP6ServerEnabled (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_IsEnabled (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_IsNATServerEnabled (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_SetAdapterEnabled (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_SetAdapterIndex (function), 191
- prlsdkapi.prlsdk.PrlVirtNet_SetAdapterName (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetBoundCardMac (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetDescription (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetDHCP6ServerEnabled (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetDhcpIP6Address (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetDhcpIPAddress (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetDHCP6ServerEnabled (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetEnabled (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetHostIP6Address (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetHostIPAddress (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetIP6NetMask (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetIP6ScopeEnd (function), 192
- prlsdkapi.prlsdk.PrlVirtNet_SetIP6ScopeStart (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetIPNetMask (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetIPScopeEnd (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetIPScopeStart (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetNATServerEnabled (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetNetworkId (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetNetworkType (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetPortForwardList (function), 193
- prlsdkapi.prlsdk.PrlVirtNet_SetVlanTag (function), 193
- prlsdkapi.prlsdk.PrlVm_AuthWithGuestSecurityDb (function), 229
- prlsdkapi.prlsdk.PrlVm_BeginEdit (function), 229
- prlsdkapi.prlsdk.PrlVm_CancelCompact (function), 229
- prlsdkapi.prlsdk.PrlVm_CancelConvertDisks (function), 229
- prlsdkapi.prlsdk.PrlVm_CaptureScreen (function), 229
- prlsdkapi.prlsdk.PrlVm_ChangeSid (function), 229
- prlsdkapi.prlsdk.PrlVm_Clone (function), 229
- prlsdkapi.prlsdk.PrlVm_CloneEx (function), 229
- prlsdkapi.prlsdk.PrlVm_CloneWithUuid (function), 229
- prlsdkapi.prlsdk.PrlVm_Commit (function), 229
- prlsdkapi.prlsdk.PrlVm_CommitEncryption (function), 229
- prlsdkapi.prlsdk.PrlVm_CommitEx (function), 230
- prlsdkapi.prlsdk.PrlVm_Compact (function), 230
- prlsdkapi.prlsdk.PrlVm_Connect (function), 230
- prlsdkapi.prlsdk.PrlVm_ConvertDisks (function), 230

- prlsdkapi.prlsdk.PrlVm.CreateEvent (*function*), 230
- prlsdkapi.prlsdk.PrlVm.CreateSnapshot (*function*), 230
- prlsdkapi.prlsdk.PrlVm.CreateUnattendedFloppy (*function*), 230
- prlsdkapi.prlsdk.PrlVm.Delete (*function*), 230
- prlsdkapi.prlsdk.PrlVm.DeleteSnapshot (*function*), 230
- prlsdkapi.prlsdk.PrlVm.Disconnect (*function*), 230
- prlsdkapi.prlsdk.PrlVm.DropSuspendedState (*function*), 230
- prlsdkapi.prlsdk.PrlVm.GenerateVmDevFileName (*function*), 230
- prlsdkapi.prlsdk.PrlVm.GetConfig (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetPackedProblemReport (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetPerfStats (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetProblemReport (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetQuestions (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetSnapshotsTree (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetSnapshotsTreeEx (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetState (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetStatistics (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetStatisticsEx (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetSuspendedScreen (*function*), 231
- prlsdkapi.prlsdk.PrlVm.GetToolsState (*function*), 231
- prlsdkapi.prlsdk.PrlVm.InitiateDevStateNotification (*function*), 232
- prlsdkapi.prlsdk.PrlVm.InstallTools (*function*), 232
- prlsdkapi.prlsdk.PrlVm.Lock (*function*), 232
- prlsdkapi.prlsdk.PrlVm.LoginInGuest (*function*), 232
- prlsdkapi.prlsdk.PrlVm.Migrate (*function*), 232
- prlsdkapi.prlsdk.PrlVm.MigrateCancel (*function*), 232
- prlsdkapi.prlsdk.PrlVm.MigrateEx (*function*), 232
- prlsdkapi.prlsdk.PrlVm.MigrateWithRename (*function*), 232
- prlsdkapi.prlsdk.PrlVm.MigrateWithRenameEx (*function*), 232
- prlsdkapi.prlsdk.PrlVm.Mount (*function*), 232
- prlsdkapi.prlsdk.PrlVm.Move (*function*), 232
- prlsdkapi.prlsdk.PrlVm.Pause (*function*), 232
- prlsdkapi.prlsdk.PrlVm.RefreshConfig (*function*), 233
- prlsdkapi.prlsdk.PrlVm.RefreshConfigEx (*function*), 233
- prlsdkapi.prlsdk.PrlVm.Reg (*function*), 233
- prlsdkapi.prlsdk.PrlVm.RegEventHandler (*function*), 233
- prlsdkapi.prlsdk.PrlVm.RegEx (*function*), 233
- prlsdkapi.prlsdk.PrlVm.Reset (*function*), 233
- prlsdkapi.prlsdk.PrlVm.ResetUptime (*function*), 233
- prlsdkapi.prlsdk.PrlVm.Restart (*function*), 233
- prlsdkapi.prlsdk.PrlVm.Restore (*function*), 233
- prlsdkapi.prlsdk.PrlVm.Resume (*function*), 233
- prlsdkapi.prlsdk.PrlVm.SetConfig (*function*), 233
- prlsdkapi.prlsdk.PrlVm.SetUserPasswd (*function*), 233

- prlsdkapi.prlsdk.PrlVm.Start (*function*), 234
- prlsdkapi.prlsdk.PrlVm.StartEx (*function*), 234
- prlsdkapi.prlsdk.PrlVm.StartVncServer (*function*), 234
- prlsdkapi.prlsdk.PrlVm.Stop (*function*), 234
- prlsdkapi.prlsdk.PrlVm.StopEx (*function*), 234
- prlsdkapi.prlsdk.PrlVm.StopVncServer (*function*), 234
- prlsdkapi.prlsdk.PrlVm.SubscribeToGuestStats (*function*), 234
- prlsdkapi.prlsdk.PrlVm.SubscribeToPerfStats (*function*), 234
- prlsdkapi.prlsdk.PrlVm.Suspend (*function*), 234
- prlsdkapi.prlsdk.PrlVm.SwitchToSnapshot (*function*), 234
- prlsdkapi.prlsdk.PrlVm.SwitchToSnapshotEx (*function*), 234
- prlsdkapi.prlsdk.PrlVm.Umount (*function*), 234
- prlsdkapi.prlsdk.PrlVm.Unlock (*function*), 235
- prlsdkapi.prlsdk.PrlVm.Unreg (*function*), 235
- prlsdkapi.prlsdk.PrlVm.UnregEventHandler (*function*), 235
- prlsdkapi.prlsdk.PrlVm.UnsubscribeFromGuestStats (*function*), 235
- prlsdkapi.prlsdk.PrlVm.UnsubscribeFromPerfStats (*function*), 235
- prlsdkapi.prlsdk.PrlVm.UpdateSecurity (*function*), 235
- prlsdkapi.prlsdk.PrlVm.UpdateSnapshotData (*function*), 235
- prlsdkapi.prlsdk.PrlVm.ValidateConfig (*function*), 235
- prlsdkapi.prlsdk.PrlVmCfg.AddDefaultDevice (*function*), 193
- prlsdkapi.prlsdk.PrlVmCfg.AddDefaultDeviceEx (*function*), 193
- prlsdkapi.prlsdk.PrlVmCfg.ApplyConfigSample (*function*), 193
- prlsdkapi.prlsdk.PrlVmCfg.CreateBootDev (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.CreateShare (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.CreateVmDev (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.Get3DAccelerationMode (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetAccessRights (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetActionOnGuestCrash (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetActionOnStopMode (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetActionOnWindowClose (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetAllDevices (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetAppTemplateList (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetAutoCompressInterval (*function*), 194
- prlsdkapi.prlsdk.PrlVmCfg.GetAutoStart (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetAutoStartDelay (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetAutoStop (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetBackgroundPriority (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetBootDev (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetBootDevCount (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetCapabilitiesMask (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetConfigValidity (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetConfirmationsList (*function*), 195
- prlsdkapi.prlsdk.PrlVmCfg.GetCpuAccelLevel (*function*), 195

- prlsdkapi.prlsdk.PrlVmCfg_GetCpuCount
(function), 195
- prlsdkapi.prlsdk.PrlVmCfg_GetCpuLimit
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetCpuMask
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetCpuMode
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetCpuUnits
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetCtId (func-
tion), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetCustomProperty
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetDefaultHddSize
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetDefaultMemSize
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetDefaultVideoRamSize
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetDescription
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetDevByType
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetDevsCount
(function), 196
- prlsdkapi.prlsdk.PrlVmCfg_GetDevsCountByType
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetDisplayDev
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetDisplayDevsCount
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetDnsServers
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetExternalBootDevice
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetFeaturesMask
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetFloppyDisk
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetFloppyDisksCount
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetForegroundPriority
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetFreeDiskSpaceRatio
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetGenericPciDev
(function), 197
- prlsdkapi.prlsdk.PrlVmCfg_GetGenericPciDevsCount
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetGenericScsiDev
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetGenericScsiDevsCount
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetHardDisk
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetHardDisksCount
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetHighAvailabilityPriority
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetHomePath
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetHostname
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetIcon (func-
tion), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetIoLimit (func-
tion), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetIoPriority
(function), 198
- prlsdkapi.prlsdk.PrlVmCfg_GetIopsLimit
(function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetLastModifiedDate
(function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetLastModifierName
(function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetLinkedVmUuid
(function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetLocation
(function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetMemGuaranteeSize
(function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetName (func-
tion), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetNetAdapter
(function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetNetAdaptersCount
(function), 199

- prlsdkapi.prlsdk.PrlVmCfg_GetNetfilterMode (function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetNetworkRateList (function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetNodeMask (function), 199
- prlsdkapi.prlsdk.PrlVmCfg_GetOfflineServices (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetOpticalDisk (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetOpticalDisksCount (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetOptimizeModifier (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetOptionsOnGuestCrash (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetOsTemplate (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetOsType (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetOsVersion (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetParallelPort (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetParallelPortsCount (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetRamSize (function), 200
- prlsdkapi.prlsdk.PrlVmCfg_GetResource (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSearchDomains (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSerialPort (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSerialPortsCount (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetServerHost (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetServerUuid (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetShare (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSharesCount (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSmartGuardInterval (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSmartGuardMaxSnapshots (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSoundDev (function), 201
- prlsdkapi.prlsdk.PrlVmCfg_GetSoundDevsCount (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetStartLoginMode (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetStartUserLogin (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetSystemFlags (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetTimeSyncInterval (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetUndoDisksMode (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetUptime (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetUptimeStartDate (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetUsbDevice (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetUsbDevicesCount (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetUuid (function), 202
- prlsdkapi.prlsdk.PrlVmCfg_GetVideoRamSize (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_GetVmInfo (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_GetVmType (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_GetVNCHostName (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_GetVNCMode (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_GetVNCPassword (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_GetVNCPort (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_GetVNCWebSocketPort (function), 203

- prlsdkapi.prlsdk.PrlVmCfg_GetWindowMode (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_IsAdaptiveHypervisorEnabled (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_IsAllowSelectBootDevice (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_IsAutoApplyIpOnly (function), 203
- prlsdkapi.prlsdk.PrlVmCfg_IsAutoCompressEnabled (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsBatteryStatusEnabled (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsCloseAppOnShutdown (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsConfigInvalid (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsCpuHotplugEnabled (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsCpuVtxEnabled (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsDefaultDeviceNeeded (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsDisableAPIC (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsDisableSpeaker (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsDiskCacheWriteBack (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsEfiEnabled (function), 204
- prlsdkapi.prlsdk.PrlVmCfg_IsGuestSharingAutoMigrate (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsGuestSharingEnabled (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsGuestSharingEnabledSilent (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsHighAvailabilityEnabled (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsHighResolutionEnabled (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsHostSharingEnabled (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsIsolatedVmEnabled (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsLockGuestOnSuspend (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsLockInFullScreenMode (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsLongerBatteryLifeEnabled (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsMapSharedFoldersOnLocalDisk (function), 205
- prlsdkapi.prlsdk.PrlVmCfg_IsNestedVirtualizationEnabled (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsOfflineManagementEnabled (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsOsResInFullScrMode (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsPMUVirtualizationEnabled (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsRamHotplugEnabled (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsRateBound (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsScrResEnabled (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsShareAllHostDisks (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsShareClipboard (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsSharedProfileEnabled (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsShareUserHomeDir (function), 206
- prlsdkapi.prlsdk.PrlVmCfg_IsSmartGuardEnabled (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsSmartGuardNotifyBefore (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsSmartMountDVDsEnabled (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsSmartMountEnabled (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsSmartMountNetworkShare (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsSmartMountRemovable (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsStartInDetachedWindow (function), 207

- prlsdkapi.prlsdk.PrlVmCfg_IsSwitchOffWindowsPrlsdkEnabled (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsTemplate (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsTimeSynchronizationPrlsdkEnabled (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsTimeSyncSmartModePrlsdkEnabled (function), 207
- prlsdkapi.prlsdk.PrlVmCfg_IsToolsAutoUpdatePrlsdkEnabled (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUseDefaultAnswerPrlsdkEnabled (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUseDesktop (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUseDocuments (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUseDownloads (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUseMovies (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUseMusic (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUsePictures (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsUserDefinedSharePrlsdkEnabled (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsVerticalSynchronizationPrlsdkEnabled (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_IsVNCEncryptionPrlsdkEnabled (function), 208
- prlsdkapi.prlsdk.PrlVmCfg_Set3DAccelerationPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetActionOnGuestCrashPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetActionOnStopModePrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetActionOnWindowClosePrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAdaptiveHypervisorPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAllowSelectBootDiskPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAppTemplateListPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAutoApplyIpOnlyPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAutoCompressEnabledPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAutoCompressIntervalPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAutoStartPrlsdkEnabled (function), 209
- prlsdkapi.prlsdk.PrlVmCfg_SetAutoStartDelayPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetAutoStopPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetBackgroundPriorityPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetBatteryStatusEnabledPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetCapabilitiesMaskPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetCloseAppOnShutdownPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetConfirmationsListPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetCpuAccelLevelPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetCpuCountPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetCpuHotplugEnabledPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetCpuLimitPrlsdkEnabled (function), 210
- prlsdkapi.prlsdk.PrlVmCfg_SetCpuMaskPrlsdkEnabled (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetCpuModePrlsdkEnabled (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetCpuUnitsPrlsdkEnabled (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetCustomPropertyPrlsdkEnabled (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetDefaultConfigPrlsdkEnabled (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetDescriptionPrlsdkEnabled (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetDisableAPICSignPrlsdkEnabled (function), 211

- prlsdkapi.prlsdk.PrlVmCfg_SetDisableSpeakerSignal (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetDiskCacheWriteBack (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetDnsServers (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetEfiEnabled (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetExternalBootDevice (function), 211
- prlsdkapi.prlsdk.PrlVmCfg_SetFeaturesMask (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetForegroundPriority (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetFreeDiskSpaceRatio (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetGuestSharingAup (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetGuestSharingEnabled (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetGuestSharingEnabledCap (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetHighAvailability (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetHighAvailabilityPris (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetHighResolution (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetHostname (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetHostSharingEnabled (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetIcon (function), 212
- prlsdkapi.prlsdk.PrlVmCfg_SetIoLimit (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetIoPriority (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetIopsLimit (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetIsolatedVmEnabled (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetLockGuestOnSuspend (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetLockInFullScreenMode (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetLongerBatteryLifeEnabled (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetMapSharedFoldersOn (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetMemGuaranteeSize (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetName (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetNestedVirtualizationEnabled (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetNetfilterMode (function), 213
- prlsdkapi.prlsdk.PrlVmCfg_SetNetworkRateList (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetNodeMask (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetOfflineManagementEnabled (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetOfflineServices (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetOptimizeModifiersMode (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetOptionsOnGuestCrash (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetOsResInFullScrMode (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetOsTemplate (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetOsVersion (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetPMUVirtualizationEnabled (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetRamHotplugEnabled (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetRamSize (function), 214
- prlsdkapi.prlsdk.PrlVmCfg_SetRateBound (function), 215
- prlsdkapi.prlsdk.PrlVmCfg_SetResource (function), 215
- prlsdkapi.prlsdk.PrlVmCfg_SetScrResEnabled (function), 215

- prlsdkapi.prlsdk.PrlVmCfg_SetSearchDomains prlsdkapi.prlsdk.PrlVmCfg_SetToolsAutoUpdateEnal
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetShareAllHostDisks prlsdkapi.prlsdk.PrlVmCfg_SetUndoDisksMode
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetShareClipboard prlsdkapi.prlsdk.PrlVmCfg_SetUseDefaultAnswers
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetSharedProfileEnabled prlsdkapi.prlsdk.PrlVmCfg_SetUseDesktop
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetShareUserHomeDir prlsdkapi.prlsdk.PrlVmCfg_SetUseDocuments
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartGuardEnabled prlsdkapi.prlsdk.PrlVmCfg_SetUseDownloads
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartGuardIntercept prlsdkapi.prlsdk.PrlVmCfg_SetUseMovies
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartGuardMap prlsdkapi.prlsdk.PrlVmCfg_SetUseMusic
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartGuardNotify prlsdkapi.prlsdk.PrlVmCfg_SetUsePictures
(function), 215 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartMountDVD prlsdkapi.prlsdk.PrlVmCfg_SetUserDefinedSharedFol
(function), 216 (function), 217
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartMountEnabled prlsdkapi.prlsdk.PrlVmCfg_SetUuid (func-
(function), 216 tion), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartMountNetwork prlsdkapi.prlsdk.PrlVmCfg_SetVerticalSynchronizatio
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetSmartMountReplicate prlsdkapi.prlsdk.PrlVmCfg_SetVideoRamSize
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetStartInDetached prlsdkapi.prlsdk.PrlVmCfg_SetVmType
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetStartLoginMode prlsdkapi.prlsdk.PrlVmCfg_SetVNCHostName
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetStartUserCreds prlsdkapi.prlsdk.PrlVmCfg_SetVNCMode
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetSwitchOffWindow prlsdkapi.prlsdk.PrlVmCfg_SetVNCPassword
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetSystemFlags prlsdkapi.prlsdk.PrlVmCfg_SetVNCPort
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetTemplateSign prlsdkapi.prlsdk.PrlVmCfg_SetWindowMode
(function), 216 (function), 218
- prlsdkapi.prlsdk.PrlVmCfg_SetTimeSynchronization prlsdkapi.prlsdk.PrlVmDev_Connect (func-
(function), 217 tion), 225
- prlsdkapi.prlsdk.PrlVmCfg_SetTimeSyncInterval prlsdkapi.prlsdk.PrlVmDev_CopyImage
(function), 216 (function), 225
- prlsdkapi.prlsdk.PrlVmCfg_SetTimeSyncSmart prlsdkapi.prlsdk.PrlVmDev_Create (func-
(function), 217 tion), 225

- prlSdkapi.prlSdk.PrlVmDev_CreateImage
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_Disconnect
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_GetDescription
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_GetEmulatedType
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_GetFriendlyName
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_GetIfaceType
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_GetImagePath
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_GetIndex (func-
tion), 225
- prlSdkapi.prlSdk.PrlVmDev_GetOutputFile
(function), 225
- prlSdkapi.prlSdk.PrlVmDev_GetStackIndex
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_GetSubType
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_GetSysName
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_GetType (func-
tion), 226
- prlSdkapi.prlSdk.PrlVmDev_IsConnected
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_IsEnabled (func-
tion), 226
- prlSdkapi.prlSdk.PrlVmDev_IsPassthrough
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_IsRemote (func-
tion), 226
- prlSdkapi.prlSdk.PrlVmDev_Remove (func-
tion), 226
- prlSdkapi.prlSdk.PrlVmDev_ResizeImage
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_SetConnected
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_SetDefaultStackIndex
(function), 226
- prlSdkapi.prlSdk.PrlVmDev_SetDescription
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetEmulatedType
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetEnabled
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetFriendlyName
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetIfaceType
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetImagePath
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetIndex (func-
tion), 227
- prlSdkapi.prlSdk.PrlVmDev_SetOutputFile
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetPassthrough
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetRemote (func-
tion), 227
- prlSdkapi.prlSdk.PrlVmDev_SetStackIndex
(function), 227
- prlSdkapi.prlSdk.PrlVmDev_SetSubType
(function), 228
- prlSdkapi.prlSdk.PrlVmDev_SetSysName
(function), 228
- prlSdkapi.prlSdk.PrlVmDevHd_AddPartition
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetDiskSize
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetDiskType
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetEncryption
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetMountPoint
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetPartition
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetPartitionsCount
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetSerialNumber
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetSizeOnDisk
(function), 219
- prlSdkapi.prlSdk.PrlVmDevHd_GetStorageURL
(function), 219

- prlsdkapi.prlsdk.PrlVmDevHd_IsAutoCompressed (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_IsSplitted (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetAutoCompressed (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetDiskSize (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetDiskType (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetEncryption (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetMountPoint (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetSerialNumber (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetSplitted (function), 220
- prlsdkapi.prlsdk.PrlVmDevHd_SetStorageURL (function), 220
- prlsdkapi.prlsdk.PrlVmDevHdEncryption_GetKey (function), 218
- prlsdkapi.prlsdk.PrlVmDevHdEncryption_SetKey (function), 218
- prlsdkapi.prlsdk.PrlVmDevHdPart_GetSysName (function), 218
- prlsdkapi.prlsdk.PrlVmDevHdPart_Remove (function), 219
- prlsdkapi.prlsdk.PrlVmDevHdPart_SetSysName (function), 219
- prlsdkapi.prlsdk.PrlVmDevNet_GenerateMacAddress (function), 220
- prlsdkapi.prlsdk.PrlVmDevNet_GetAdapterType (function), 220
- prlsdkapi.prlsdk.PrlVmDevNet_GetBoundAdapterIndex (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetBoundAdapterName (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetDefaultGateway (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetDefaultGateway6 (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetDnsServers (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetFirewallDefaultPolicy (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetFirewallRuleList (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetHostInterfaceName (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetMacAddress (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetMacAddressCanonical (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetNetAddresses (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetSearchDomains (function), 221
- prlsdkapi.prlsdk.PrlVmDevNet_GetVirtualNetworkId (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_IsAutoApply (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_IsConfigureWithDhcp (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_IsConfigureWithDhcp6 (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_IsFirewallEnabled (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_IsPktFilterPreventIps (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_IsPktFilterPreventMac (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_IsPktFilterPreventPorts (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_SetAdapterType (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_SetAutoApply (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_SetBoundAdapterIndex (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_SetBoundAdapterName (function), 222
- prlsdkapi.prlsdk.PrlVmDevNet_SetConfigureWithDhcp (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetConfigureWithDhcp6 (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetDefaultGateway (function), 223

- prlsdkapi.prlsdk.PrlVmDevNet_SetDefaultGateway (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetDnsServers (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetFirewallDefaultPolicy (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetFirewallEnabled (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetFirewallRules (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetHostInterfaceName (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetMacAddress (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetNetAddress (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetPktFilterProgram (function), 223
- prlsdkapi.prlsdk.PrlVmDevNet_SetPktFilterProgramPath (function), 224
- prlsdkapi.prlsdk.PrlVmDevNet_SetPktFilterProgramSize (function), 224
- prlsdkapi.prlsdk.PrlVmDevNet_SetSearchDomain (function), 224
- prlsdkapi.prlsdk.PrlVmDevNet_SetVirtualNetworkId (function), 224
- prlsdkapi.prlsdk.PrlVmDevSerial_GetSocketMode (function), 224
- prlsdkapi.prlsdk.PrlVmDevSerial_SetSocketMode (function), 224
- prlsdkapi.prlsdk.PrlVmDevSound_GetMixerDevice (function), 224
- prlsdkapi.prlsdk.PrlVmDevSound_GetOutputDevice (function), 224
- prlsdkapi.prlsdk.PrlVmDevSound_SetMixerDevice (function), 224
- prlsdkapi.prlsdk.PrlVmDevSound_SetOutputDevice (function), 224
- prlsdkapi.prlsdk.PrlVmDevUsb_GetAutoconnectPolicy (function), 224
- prlsdkapi.prlsdk.PrlVmDevUsb_SetAutoconnectPolicy (function), 224
- prlsdkapi.prlsdk.PrlVmGuest_GetNetworkSettings (function), 228
- prlsdkapi.prlsdk.PrlVmGuest_Logout (function), 228
- prlsdkapi.prlsdk.PrlVmGuest_RunProgram (function), 228
- prlsdkapi.prlsdk.PrlVmInfo_GetAccessRights (function), 228
- prlsdkapi.prlsdk.PrlVmInfo_GetAdditionState (function), 228
- prlsdkapi.prlsdk.PrlVmInfo_GetState (function), 228
- prlsdkapi.prlsdk.PrlVmInfo_IsInvalid (function), 228
- prlsdkapi.prlsdk.PrlVmInfo_IsVmWaitingForAnswer (function), 228
- prlsdkapi.prlsdk.PrlVmInfo_IsVncServerStarted (function), 228
- prlsdkapi.prlsdk.PrlVmToolsInfo_GetState (function), 229
- prlsdkapi.prlsdk.PrlVmToolsInfo_GetVersion (function), 229
- prlsdkapi.prlsdk.SetSDKLibraryPath (function), 235
- prlsdkapi.PrlSDKError (class), 3
- prlsdkapi.PrlSDKError.get_details (method), 3
- prlsdkapi.PrlSDKError.get_result (method), 3
- prlsdkapi.ProblemReport (class), 125–127
- prlsdkapi.ProblemReport.as_string (method), 126
- prlsdkapi.ProblemReport.assembly (method), 126
- prlsdkapi.ProblemReport.get_archive_file_name (method), 126
- prlsdkapi.ProblemReport.get_data (method), 126
- prlsdkapi.ProblemReport.get_description (method), 126
- prlsdkapi.ProblemReport.get_reason (method), 126
- prlsdkapi.ProblemReport.get_scheme (method), 126
- prlsdkapi.ProblemReport.get_user_email (method), 126

- prlsdkapi.ProblemReport.get_user_name (method), 126
- prlsdkapi.ProblemReport.send (method), 126
- prlsdkapi.ProblemReport.set_description (method), 126
- prlsdkapi.ProblemReport.set_reason (method), 126
- prlsdkapi.ProblemReport.set_type (method), 126
- prlsdkapi.ProblemReport.set_user_email (method), 126
- prlsdkapi.ProblemReport.set_user_name (method), 126
- prlsdkapi.Result (class), 10–11
 - prlsdkapi.Result.__getitem__ (method), 10
 - prlsdkapi.Result.__iter__ (method), 11
 - prlsdkapi.Result.__len__ (method), 10
 - prlsdkapi.Result.get_param (method), 10
 - prlsdkapi.Result.get_param_as_string (method), 10
 - prlsdkapi.Result.get_param_by_index (method), 10
 - prlsdkapi.Result.get_param_by_index_as_string (method), 10
 - prlsdkapi.Result.get_params_count (method), 10
- prlsdkapi.RunningTask (class), 123–124
 - prlsdkapi.RunningTask.get_task_parameters_as_string (method), 124
 - prlsdkapi.RunningTask.get_task_type (method), 124
 - prlsdkapi.RunningTask.get_task_uuid (method), 124
- prlsdkapi.sdk_check_result (function), 2
- prlsdkapi.Server (class), 15–27
 - prlsdkapi.Server.add_ipprivate_network (method), 26
 - prlsdkapi.Server.add_virtual_network (method), 18
 - prlsdkapi.Server.attach_to_lost_task (method), 25
 - prlsdkapi.Server.cancel_install_appliance (method), 26
 - prlsdkapi.Server.common_prefs.begin_edit (method), 17
 - prlsdkapi.Server.common_prefs.commit (method), 17
 - prlsdkapi.Server.common_prefs.commit_ex (method), 18
 - prlsdkapi.Server.configure_generic_pci (method), 19
 - prlsdkapi.Server.copy_ct_template (method), 26
 - prlsdkapi.Server.create (method), 16
 - prlsdkapi.Server.create_unattended_cd (method), 25
 - prlsdkapi.Server.create_vm (method), 20
 - prlsdkapi.Server.create_vm_backup (method), 21
 - prlsdkapi.Server.delete_offline_service (method), 19
 - prlsdkapi.Server.delete_virtual_network (method), 19
 - prlsdkapi.Server.disable_confirmation_mode (method), 17
 - prlsdkapi.Server.enable_confirmation_mode (method), 17
 - prlsdkapi.Server.fs.can_create_file (method), 23
 - prlsdkapi.Server.fs.create_dir (method), 23
 - prlsdkapi.Server.fs.generate_entry_name (method), 25
 - prlsdkapi.Server.fs.get_dir_entries (method), 23
 - prlsdkapi.Server.fs.get_disk_list (method), 22
 - prlsdkapi.Server.fs.remove_entry (method), 23
 - prlsdkapi.Server.fs.rename_entry (method), 23
 - prlsdkapi.Server.get_backup_tree (method), 21
 - prlsdkapi.Server.get_common_prefs (method), 17
 - prlsdkapi.Server.get_cpupools_list (method), 27

- prlsdkapi.Server.get_ct_template_list (*method*), 26
- prlsdkapi.Server.get_default_vm_config (*method*), 21
- prlsdkapi.Server.get_disk_free_space (*method*), 27
- prlsdkapi.Server.get_ipprivate_networks_list (*method*), 26
- prlsdkapi.Server.get_license_info (*method*), 24
- prlsdkapi.Server.get_net_service_status (*method*), 24
- prlsdkapi.Server.get_network_classes_list (*method*), 19
- prlsdkapi.Server.get_network_shaping_config (*method*), 19
- prlsdkapi.Server.get_offline_services_list (*method*), 19
- prlsdkapi.Server.get_packed_problem_report (*method*), 25
- prlsdkapi.Server.get_perf_stats (*method*), 26
- prlsdkapi.Server.get_plugins_list (*method*), 26
- prlsdkapi.Server.get_problem_report (*method*), 24
- prlsdkapi.Server.get_questions (*method*), 16
- prlsdkapi.Server.get_restriction_info (*method*), 26
- prlsdkapi.Server.get_server_info (*method*), 20
- prlsdkapi.Server.get_srv_config (*method*), 17
- prlsdkapi.Server.get_statistics (*method*), 19
- prlsdkapi.Server.get_supported_oses (*method*), 25
- prlsdkapi.Server.get_user_info (*method*), 18
- prlsdkapi.Server.get_user_info_list (*method*), 18
- prlsdkapi.Server.get_user_profile (*method*), 18
- prlsdkapi.Server.get_vcmmd_config (*method*), 27
- prlsdkapi.Server.get_virtual_network_list (*method*), 18
- prlsdkapi.Server.get_vm_config (*method*), 27
- prlsdkapi.Server.get_vm_list (*method*), 20
- prlsdkapi.Server.get_vm_list_ex (*method*), 21
- prlsdkapi.Server.has_restriction (*method*), 26
- prlsdkapi.Server.install_appliance (*method*), 26
- prlsdkapi.Server.is_confirmation_mode_enabled (*method*), 17
- prlsdkapi.Server.is_connected (*method*), 20
- prlsdkapi.Server.is_feature_supported (*method*), 26
- prlsdkapi.Server.is_non_interactive_session (*method*), 17
- prlsdkapi.Server.login (*method*), 16
- prlsdkapi.Server.login_ex (*method*), 26
- prlsdkapi.Server.login_local (*method*), 16
- prlsdkapi.Server.login_local_ex (*method*), 26
- prlsdkapi.Server.logoff (*method*), 16
- prlsdkapi.Server.move_to_cpupool (*method*), 27
- prlsdkapi.Server.net_service_restart (*method*), 24
- prlsdkapi.Server.net_service_restore_defaults (*method*), 24
- prlsdkapi.Server.net_service_start (*method*), 24
- prlsdkapi.Server.net_service_stop (*method*), 24
- prlsdkapi.Server.recalculate_cpupool (*method*), 27
- prlsdkapi.Server.refresh_plugins (*method*), 26
- prlsdkapi.Server.register3rd_party_vm (*method*), 20
- prlsdkapi.Server.register_vm (*method*), 20

- prlsdkapi.Server.register_vm_ex (*method*), 20
- prlsdkapi.Server.register_vm_with_uuid (*method*), 20
- prlsdkapi.Server.remove_ct_template (*method*), 26
- prlsdkapi.Server.remove_ipprivate_network (*method*), 26
- prlsdkapi.Server.remove_vm_backup (*method*), 22
- prlsdkapi.Server.restore_vm_backup (*method*), 21
- prlsdkapi.Server.send_answer (*method*), 24
- prlsdkapi.Server.send_problem_report (*method*), 27
- prlsdkapi.Server.set_non_interactive_session (*method*), 16
- prlsdkapi.Server.set_vcmmd_config (*method*), 27
- prlsdkapi.Server.shutdown (*method*), 22
- prlsdkapi.Server.shutdown_ex (*method*), 22
- prlsdkapi.Server.start_search_vms (*method*), 24
- prlsdkapi.Server.stop_install_appliance (*method*), 26
- prlsdkapi.Server.subscribe_to_host_statistics (*method*), 22
- prlsdkapi.Server.subscribe_to_perf_stats (*method*), 25
- prlsdkapi.Server.unsubscribe_from_host_statistics (*method*), 22
- prlsdkapi.Server.unsubscribe_from_perf_stats (*method*), 25
- prlsdkapi.Server.update_ipprivate_network (*method*), 26
- prlsdkapi.Server.update_license (*method*), 23
- prlsdkapi.Server.update_license_ex (*method*), 24
- prlsdkapi.Server.update_network_classes_list (*method*), 19
- prlsdkapi.Server.update_network_shaping_config (*method*), 19
- prlsdkapi.Server.update_offline_service (*method*), 18
- prlsdkapi.Server.update_virtual_network (*method*), 18
- prlsdkapi.Server.user_profile_begin_edit (*method*), 19
- prlsdkapi.Server.user_profile_commit (*method*), 19
- prlsdkapi.ServerConfig (*class*), 30–35
- prlsdkapi.ServerConfig.get_cpu_count (*method*), 31
- prlsdkapi.ServerConfig.get_cpu_features_ex (*method*), 31
- prlsdkapi.ServerConfig.get_cpu_features_masking_capabilities (*method*), 31
- prlsdkapi.ServerConfig.get_cpu_hvt (*method*), 31
- prlsdkapi.ServerConfig.get_cpu_mode (*method*), 31
- prlsdkapi.ServerConfig.get_cpu_model (*method*), 31
- prlsdkapi.ServerConfig.get_cpu_speed (*method*), 31
- prlsdkapi.ServerConfig.get_default_gateway (*method*), 32
- prlsdkapi.ServerConfig.get_default_gateway_ipv6 (*method*), 32
- prlsdkapi.ServerConfig.get_dns_servers (*method*), 32
- prlsdkapi.ServerConfig.get_floppy_disk (*method*), 33
- prlsdkapi.ServerConfig.get_floppy_disks_count (*method*), 33
- prlsdkapi.ServerConfig.get_generic_pci_device (*method*), 34
- prlsdkapi.ServerConfig.get_generic_pci_devices_count (*method*), 34
- prlsdkapi.ServerConfig.get_generic_scsi_device (*method*), 34
- prlsdkapi.ServerConfig.get_generic_scsi_devices_count (*method*), 34
- prlsdkapi.ServerConfig.get_hard_disk (*method*), 34

- prlsdkapi.ServerConfig.get_hard_disks_count (method), 34
- prlsdkapi.ServerConfig.get_host_os_major (method), 31
- prlsdkapi.ServerConfig.get_host_os_minor (method), 32
- prlsdkapi.ServerConfig.get_host_os_str_presentable (method), 32
- prlsdkapi.ServerConfig.get_host_os_sub_minor (method), 32
- prlsdkapi.ServerConfig.get_host_os_type (method), 31
- prlsdkapi.ServerConfig.get_host_ram_size (method), 31
- prlsdkapi.ServerConfig.get_hostname (method), 32
- prlsdkapi.ServerConfig.get_max_host_net_adapters (method), 32
- prlsdkapi.ServerConfig.get_max_vm_net_adapters (method), 32
- prlsdkapi.ServerConfig.get_net_adapter (method), 35
- prlsdkapi.ServerConfig.get_net_adapters_count (method), 35
- prlsdkapi.ServerConfig.get_optical_disk (method), 33
- prlsdkapi.ServerConfig.get_optical_disks_count (method), 33
- prlsdkapi.ServerConfig.get_parallel_port (method), 33
- prlsdkapi.ServerConfig.get_parallel_ports_count (method), 33
- prlsdkapi.ServerConfig.get_printer (method), 34
- prlsdkapi.ServerConfig.get_printers_count (method), 34
- prlsdkapi.ServerConfig.get_search_domains (method), 32
- prlsdkapi.ServerConfig.get_serial_port (method), 33
- prlsdkapi.ServerConfig.get_serial_ports_count (method), 33
- prlsdkapi.ServerConfig.get_sound_mixer_dev (method), 34
- prlsdkapi.ServerConfig.get_sound_mixer_devs_count (method), 33
- prlsdkapi.ServerConfig.get_sound_output_dev (method), 33
- prlsdkapi.ServerConfig.get_sound_output_devs_count (method), 33
- prlsdkapi.ServerConfig.get_usb_dev (method), 34
- prlsdkapi.ServerConfig.get_usb_devs_count (method), 34
- prlsdkapi.ServerConfig.is_sound_default_enabled (method), 32
- prlsdkapi.ServerConfig.is_usb_supported (method), 32
- prlsdkapi.ServerConfig.is_vtd_supported (method), 32
- prlsdkapi.ServerInfo (class), 120–121
- prlsdkapi.ServerInfo.get_application_mode (method), 121
- prlsdkapi.ServerInfo.get_cmd_port (method), 121
- prlsdkapi.ServerInfo.get_host_name (method), 120
- prlsdkapi.ServerInfo.get_os_version (method), 120
- prlsdkapi.ServerInfo.get_product_version (method), 121
- prlsdkapi.ServerInfo.get_server_uuid (method), 121
- prlsdkapi.ServerInfo.get_start_time (method), 121
- prlsdkapi.ServerInfo.get_start_time_monotonic (method), 121
- prlsdkapi.set_sdk_library_path (function), 2
- prlsdkapi.Share (class), 106–108
- prlsdkapi.Share.get_description (method), 107
- prlsdkapi.Share.get_name (method), 106
- prlsdkapi.Share.get_path (method), 107
- prlsdkapi.Share.is_enabled (method), 107
- prlsdkapi.Share.is_read_only (method), 107
- prlsdkapi.Share.remove (method), 106
- prlsdkapi.Share.set_description (method), 107

- 107
- prlsdkapi.Share.set_enabled (*method*), 107
- prlsdkapi.Share.set_name (*method*), 107
- prlsdkapi.Share.set_path (*method*), 107
- prlsdkapi.Share.set_read_only (*method*), 107
- prlsdkapi.StatCpu (*class*), 117–119
 - prlsdkapi.StatCpu.get_cpu_usage (*method*), 118
 - prlsdkapi.StatCpu.get_system_time (*method*), 118
 - prlsdkapi.StatCpu.get_total_time (*method*), 118
 - prlsdkapi.StatCpu.get_user_time (*method*), 118
- prlsdkapi.Statistics (*class*), 116–117
 - prlsdkapi.Statistics.get_cpu_stat (*method*), 117
 - prlsdkapi.Statistics.get_cpus_stats_count (*method*), 117
 - prlsdkapi.Statistics.get_free_ram_size (*method*), 116
 - prlsdkapi.Statistics.get_os_uptime (*method*), 116
 - prlsdkapi.Statistics.get_real_ram_size (*method*), 116
 - prlsdkapi.Statistics.get_total_ram_size (*method*), 116
 - prlsdkapi.Statistics.get_usage_ram_size (*method*), 116
- prlsdkapi.StringList (*class*), 6–7
 - prlsdkapi.StringList.__getitem__ (*method*), 7
 - prlsdkapi.StringList.__iter__ (*method*), 7
 - prlsdkapi.StringList.__len__ (*method*), 7
 - prlsdkapi.StringList.add_item (*method*), 6
 - prlsdkapi.StringList.get_item (*method*), 6
 - prlsdkapi.StringList.get_items_count (*method*), 6
 - prlsdkapi.StringList.remove_item (*method*), 7
- prlsdkapi.UsbIdentity (*class*), 134
 - prlsdkapi.UsbIdentity.get_friendly_name (*method*), 134
 - prlsdkapi.UsbIdentity.get_system_name (*method*), 134
 - prlsdkapi.UsbIdentity.get_vm_uuid_association (*method*), 134
- prlsdkapi.UserConfig (*class*), 42–44
 - prlsdkapi.UserConfig.can_change_srv_sets (*method*), 43
 - prlsdkapi.UserConfig.can_use_mng_console (*method*), 43
 - prlsdkapi.UserConfig.get_default_vm_folder (*method*), 43
 - prlsdkapi.UserConfig.get_vm_dir_uuid (*method*), 43
 - prlsdkapi.UserConfig.is_local_administrator (*method*), 43
 - prlsdkapi.UserConfig.set_default_vm_folder (*method*), 43
 - prlsdkapi.UserConfig.set_vm_dir_uuid (*method*), 43
- prlsdkapi.UserInfo (*class*), 44–45
 - prlsdkapi.UserInfo.can_change_srv_sets (*method*), 44
 - prlsdkapi.UserInfo.get_default_vm_folder (*method*), 44
 - prlsdkapi.UserInfo.get_name (*method*), 44
 - prlsdkapi.UserInfo.get_session_count (*method*), 44
 - prlsdkapi.UserInfo.get_uuid (*method*), 44
- prlsdkapi.VcmmdConfig (*class*), 143–144
 - prlsdkapi.VcmmdConfig.get_policy (*method*), 143
 - prlsdkapi.VcmmdConfig.set_policy (*method*), 143
- prlsdkapi.VirtualNet (*class*), 53–57
 - prlsdkapi.VirtualNet.create (*method*), 53
 - prlsdkapi.VirtualNet.get_adapter_index (*method*), 54
 - prlsdkapi.VirtualNet.get_adapter_name (*method*), 54
 - prlsdkapi.VirtualNet.get_bound_adapter_info (*method*), 57
 - prlsdkapi.VirtualNet.get_bound_card_mac

- (*method*), 54
- prlsdkapi.VirtualNet.get_description (*method*), 53
- prlsdkapi.VirtualNet.get_dhcp_ip6address (*method*), 55
- prlsdkapi.VirtualNet.get_dhcp_ipaddress (*method*), 54
- prlsdkapi.VirtualNet.get_host_ip6address (*method*), 54
- prlsdkapi.VirtualNet.get_host_ipaddress (*method*), 54
- prlsdkapi.VirtualNet.get_ip6net_mask (*method*), 55
- prlsdkapi.VirtualNet.get_ip6scope_end (*method*), 56
- prlsdkapi.VirtualNet.get_ip6scope_start (*method*), 55
- prlsdkapi.VirtualNet.get_ipnet_mask (*method*), 55
- prlsdkapi.VirtualNet.get_ipscope_end (*method*), 55
- prlsdkapi.VirtualNet.get_ipscope_start (*method*), 55
- prlsdkapi.VirtualNet.get_network_id (*method*), 53
- prlsdkapi.VirtualNet.get_network_type (*method*), 53
- prlsdkapi.VirtualNet.get_port_forward_list (*method*), 56
- prlsdkapi.VirtualNet.get_vlan_tag (*method*), 55
- prlsdkapi.VirtualNet.is_adapter_enabled (*method*), 56
- prlsdkapi.VirtualNet.is_dhcp6server_enabled (*method*), 56
- prlsdkapi.VirtualNet.is_dhcpserver_enabled (*method*), 56
- prlsdkapi.VirtualNet.is_enabled (*method*), 56
- prlsdkapi.VirtualNet.is_natserver_enabled (*method*), 56
- prlsdkapi.VirtualNet.set_adapter_enabled (*method*), 56
- prlsdkapi.VirtualNet.set_adapter_index (*method*), 54
- prlsdkapi.VirtualNet.set_adapter_name (*method*), 54
- prlsdkapi.VirtualNet.set_bound_card_mac (*method*), 54
- prlsdkapi.VirtualNet.set_description (*method*), 53
- prlsdkapi.VirtualNet.set_dhcp6server_enabled (*method*), 56
- prlsdkapi.VirtualNet.set_dhcp_ip6address (*method*), 55
- prlsdkapi.VirtualNet.set_dhcp_ipaddress (*method*), 55
- prlsdkapi.VirtualNet.set_dhcpserver_enabled (*method*), 56
- prlsdkapi.VirtualNet.set_enabled (*method*), 56
- prlsdkapi.VirtualNet.set_host_ip6address (*method*), 54
- prlsdkapi.VirtualNet.set_host_ipaddress (*method*), 54
- prlsdkapi.VirtualNet.set_ip6net_mask (*method*), 55
- prlsdkapi.VirtualNet.set_ip6scope_end (*method*), 56
- prlsdkapi.VirtualNet.set_ip6scope_start (*method*), 56
- prlsdkapi.VirtualNet.set_ipnet_mask (*method*), 55
- prlsdkapi.VirtualNet.set_ipscope_end (*method*), 55
- prlsdkapi.VirtualNet.set_ipscope_start (*method*), 55
- prlsdkapi.VirtualNet.set_natserver_enabled (*method*), 56
- prlsdkapi.VirtualNet.set_network_id (*method*), 53
- prlsdkapi.VirtualNet.set_network_type (*method*), 54
- prlsdkapi.VirtualNet.set_port_forward_list (*method*), 57
- prlsdkapi.VirtualNet.set_vlan_tag (*method*), 55
- prlsdkapi.Vm (*class*), 96–105

- prlsdkapi.Vm.auth_with_guest_security_db
(*method*), 102
- prlsdkapi.Vm.begin_edit (*method*), 101
- prlsdkapi.Vm.cancel_compact (*method*),
102
- prlsdkapi.Vm.cancel_convert_disks (*method*),
103
- prlsdkapi.Vm.capture_screen (*method*),
103
- prlsdkapi.Vm.change_sid (*method*), 97
- prlsdkapi.Vm.clone (*method*), 99
- prlsdkapi.Vm.clone_ex (*method*), 99
- prlsdkapi.Vm.clone_with_uuid (*method*),
99
- prlsdkapi.Vm.commit (*method*), 101
- prlsdkapi.Vm.commit_encryption (*method*),
103
- prlsdkapi.Vm.commit_ex (*method*), 101
- prlsdkapi.Vm.compact (*method*), 102
- prlsdkapi.Vm.connect (*method*), 103
- prlsdkapi.Vm.convert_disks (*method*), 102
- prlsdkapi.Vm.create_event (*method*), 101
- prlsdkapi.Vm.create_snapshot (*method*),
98
- prlsdkapi.Vm.create_unattended_floppy
(*method*), 102
- prlsdkapi.Vm.delete (*method*), 99
- prlsdkapi.Vm.delete_snapshot (*method*),
98
- prlsdkapi.Vm.disconnect (*method*), 103
- prlsdkapi.Vm.drop_suspended_state (*method*),
98
- prlsdkapi.Vm.generate_vm_dev_filename
(*method*), 99
- prlsdkapi.Vm.get_config (*method*), 100
- prlsdkapi.Vm.get_packed_problem_report
(*method*), 100
- prlsdkapi.Vm.get_perf_stats (*method*), 102
- prlsdkapi.Vm.get_problem_report (*method*),
99
- prlsdkapi.Vm.get_questions (*method*), 101
- prlsdkapi.Vm.get_snapshots_tree (*method*),
98
- prlsdkapi.Vm.get_snapshots_tree_ex (*method*),
98
- prlsdkapi.Vm.get_state (*method*), 100
- prlsdkapi.Vm.get_statistics (*method*), 100
- prlsdkapi.Vm.get_statistics_ex (*method*),
100
- prlsdkapi.Vm.get_suspended_screen (*method*),
98
- prlsdkapi.Vm.get_tools_state (*method*),
102
- prlsdkapi.Vm.initiate_dev_state_notifications
(*method*), 102
- prlsdkapi.Vm.install_tools (*method*), 102
- prlsdkapi.Vm.lock (*method*), 98
- prlsdkapi.Vm.login_in_guest (*method*), 100
- prlsdkapi.Vm.migrate (*method*), 99
- prlsdkapi.Vm.migrate_cancel (*method*),
99
- prlsdkapi.Vm.migrate_ex (*method*), 99
- prlsdkapi.Vm.migrate_with_rename (*method*),
99
- prlsdkapi.Vm.migrate_with_rename_ex (*method*),
99
- prlsdkapi.Vm.mount (*method*), 103
- prlsdkapi.Vm.move (*method*), 103
- prlsdkapi.Vm.pause (*method*), 97
- prlsdkapi.Vm.refresh_config (*method*), 100
- prlsdkapi.Vm.refresh_config_ex (*method*),
100
- prlsdkapi.Vm.reg (*method*), 101
- prlsdkapi.Vm.reg_ex (*method*), 101
- prlsdkapi.Vm.reinstall (*method*), 103
- prlsdkapi.Vm.reset (*method*), 97
- prlsdkapi.Vm.reset_uptime (*method*), 98
- prlsdkapi.Vm.restart (*method*), 97
- prlsdkapi.Vm.restore (*method*), 101
- prlsdkapi.Vm.resume (*method*), 98
- prlsdkapi.Vm.set_config (*method*), 100
- prlsdkapi.Vm.set_user_passwd (*method*),
100
- prlsdkapi.Vm.start (*method*), 97
- prlsdkapi.Vm.start_ex (*method*), 97
- prlsdkapi.Vm.start_vnc_server (*method*),
100
- prlsdkapi.Vm.stop (*method*), 97

- prlsdkapi.Vm.stop_ex (*method*), 97
- prlsdkapi.Vm.stop_vnc_server (*method*), 100
- prlsdkapi.Vm.subscribe_to_guest_statistics (*method*), 100
- prlsdkapi.Vm.subscribe_to_perf_stats (*method*), 102
- prlsdkapi.Vm.suspend (*method*), 97
- prlsdkapi.Vm.switch_to_snapshot (*method*), 98
- prlsdkapi.Vm.switch_to_snapshot_ex (*method*), 98
- prlsdkapi.Vm.umount (*method*), 103
- prlsdkapi.Vm.unlock (*method*), 98
- prlsdkapi.Vm.unreg (*method*), 101
- prlsdkapi.Vm.unsubscribe_from_guest_statistics (*method*), 101
- prlsdkapi.Vm.unsubscribe_from_perf_stats (*method*), 102
- prlsdkapi.Vm.update_security (*method*), 102
- prlsdkapi.Vm.update_snapshot_data (*method*), 98
- prlsdkapi.Vm.validate_config (*method*), 102
- prlsdkapi.VmConfig (*class*), 74–96
 - prlsdkapi.VmConfig.add_default_device (*method*), 75
 - prlsdkapi.VmConfig.add_default_device_ex (*method*), 75
 - prlsdkapi.VmConfig.apply_config_sample (*method*), 75
 - prlsdkapi.VmConfig.create_boot_dev (*method*), 82
 - prlsdkapi.VmConfig.create_share (*method*), 78
 - prlsdkapi.VmConfig.create_vm_dev (*method*), 75
 - prlsdkapi.VmConfig.get3dacceleration_mode (*method*), 84
 - prlsdkapi.VmConfig.get_access_rights (*method*), 76
 - prlsdkapi.VmConfig.get_action_on_guest_crash (*method*), 96
 - prlsdkapi.VmConfig.get_action_on_stop_mode (*method*), 89
 - prlsdkapi.VmConfig.get_action_on_window_close (*method*), 88
 - prlsdkapi.VmConfig.get_all_devices (*method*), 76
 - prlsdkapi.VmConfig.get_app_template_list (*method*), 75
 - prlsdkapi.VmConfig.get_auto_compress_interval (*method*), 94
 - prlsdkapi.VmConfig.get_auto_start (*method*), 87
 - prlsdkapi.VmConfig.get_auto_start_delay (*method*), 88
 - prlsdkapi.VmConfig.get_auto_stop (*method*), 88
 - prlsdkapi.VmConfig.get_background_priority (*method*), 93
 - prlsdkapi.VmConfig.get_boot_dev (*method*), 82
 - prlsdkapi.VmConfig.get_boot_dev_count (*method*), 82
 - prlsdkapi.VmConfig.get_capabilities_mask (*method*), 95
 - prlsdkapi.VmConfig.get_config_validity (*method*), 75
 - prlsdkapi.VmConfig.get_confirmations_list (*method*), 94
 - prlsdkapi.VmConfig.get_cpu_accel_level (*method*), 84
 - prlsdkapi.VmConfig.get_cpu_count (*method*), 84
 - prlsdkapi.VmConfig.get_cpu_limit (*method*), 86
 - prlsdkapi.VmConfig.get_cpu_mask (*method*), 86
 - prlsdkapi.VmConfig.get_cpu_mode (*method*), 84
 - prlsdkapi.VmConfig.get_cpu_units (*method*), 86
 - prlsdkapi.VmConfig.get_ct_id (*method*), 83
 - prlsdkapi.VmConfig.get_custom_property (*method*), 87

- prlsdkapi.VmConfig.get_default_hdd_size
(method), 75
- prlsdkapi.VmConfig.get_default_mem_size
(method), 75
- prlsdkapi.VmConfig.get_default_video_ram_size
(method), 75
- prlsdkapi.VmConfig.get_description (method),
87
- prlsdkapi.VmConfig.get_dev_by_type (method),
76
- prlsdkapi.VmConfig.get_devs_count (method),
76
- prlsdkapi.VmConfig.get_devs_count_by_type
(method), 76
- prlsdkapi.VmConfig.get_display_dev (method),
78
- prlsdkapi.VmConfig.get_display_devs_count
(method), 78
- prlsdkapi.VmConfig.get_dns_servers (method),
83
- prlsdkapi.VmConfig.get_external_boot_device
(method), 95
- prlsdkapi.VmConfig.get_features_mask (method),
96
- prlsdkapi.VmConfig.get_floppy_disk (method),
76
- prlsdkapi.VmConfig.get_floppy_disks_count
(method), 76
- prlsdkapi.VmConfig.get_foreground_priority
(method), 93
- prlsdkapi.VmConfig.get_free_disk_space_ratio
(method), 94
- prlsdkapi.VmConfig.get_generic_pci_dev
(method), 78
- prlsdkapi.VmConfig.get_generic_pci_devs_count
(method), 77
- prlsdkapi.VmConfig.get_generic_scsi_dev
(method), 78
- prlsdkapi.VmConfig.get_generic_scsi_devs_count
(method), 78
- prlsdkapi.VmConfig.get_hard_disk (method),
76
- prlsdkapi.VmConfig.get_hard_disks_count
(method), 76
- prlsdkapi.VmConfig.get_high_availability_priority
(method), 96
- prlsdkapi.VmConfig.get_home_path (method),
87
- prlsdkapi.VmConfig.get_hostname (method),
82
- prlsdkapi.VmConfig.get_icon (method),
87
- prlsdkapi.VmConfig.get_io_limit (method),
86
- prlsdkapi.VmConfig.get_io_priority (method),
86
- prlsdkapi.VmConfig.get_iops_limit (method),
86
- prlsdkapi.VmConfig.get_last_modified_date
(method), 89
- prlsdkapi.VmConfig.get_last_modifier_name
(method), 89
- prlsdkapi.VmConfig.get_linked_vm_uuid
(method), 83
- prlsdkapi.VmConfig.get_location (method),
87
- prlsdkapi.VmConfig.get_mem_guarantee_size
(method), 84
- prlsdkapi.VmConfig.get_name (method),
82
- prlsdkapi.VmConfig.get_net_adapter (method),
77
- prlsdkapi.VmConfig.get_net_adapters_count
(method), 77
- prlsdkapi.VmConfig.get_netfilter_mode (method),
95
- prlsdkapi.VmConfig.get_network_rate_list
(method), 74
- prlsdkapi.VmConfig.get_node_mask (method),
86
- prlsdkapi.VmConfig.get_offline_services (method),
94
- prlsdkapi.VmConfig.get_optical_disk (method),
76
- prlsdkapi.VmConfig.get_optical_disks_count
(method), 76
- prlsdkapi.VmConfig.get_optimize_modifiers_mode
(method), 81

- prlsdkapi.VmConfig.get_options_on_guest_crash (method), 96
- prlsdkapi.VmConfig.get_os_template (method), 74
- prlsdkapi.VmConfig.get_os_type (method), 83
- prlsdkapi.VmConfig.get_os_version (method), 83
- prlsdkapi.VmConfig.get_parallel_port (method), 77
- prlsdkapi.VmConfig.get_parallel_ports_count (method), 77
- prlsdkapi.VmConfig.get_ram_size (method), 83
- prlsdkapi.VmConfig.get_resource (method), 95
- prlsdkapi.VmConfig.get_search_domains (method), 93
- prlsdkapi.VmConfig.get_serial_port (method), 77
- prlsdkapi.VmConfig.get_serial_ports_count (method), 77
- prlsdkapi.VmConfig.get_server_host (method), 87
- prlsdkapi.VmConfig.get_server_uuid (method), 86
- prlsdkapi.VmConfig.get_share (method), 78
- prlsdkapi.VmConfig.get_shares_count (method), 78
- prlsdkapi.VmConfig.get_smart_guard_interval (method), 79
- prlsdkapi.VmConfig.get_smart_guard_max_snapshots (method), 79
- prlsdkapi.VmConfig.get_sound_dev (method), 77
- prlsdkapi.VmConfig.get_sound_devs_count (method), 77
- prlsdkapi.VmConfig.get_start_login_mode (method), 88
- prlsdkapi.VmConfig.get_start_user_login (method), 88
- prlsdkapi.VmConfig.get_system_flags (method), 92
- prlsdkapi.VmConfig.get_time_sync_interval (method), 82
- prlsdkapi.VmConfig.get_undo_disks_mode (method), 93
- prlsdkapi.VmConfig.get_uptime (method), 89
- prlsdkapi.VmConfig.get_uptime_start_date (method), 89
- prlsdkapi.VmConfig.get_usb_device (method), 77
- prlsdkapi.VmConfig.get_usb_devices_count (method), 77
- prlsdkapi.VmConfig.get_uuid (method), 83
- prlsdkapi.VmConfig.get_video_ram_size (method), 83
- prlsdkapi.VmConfig.get_vm_info (method), 95
- prlsdkapi.VmConfig.get_vm_type (method), 95
- prlsdkapi.VmConfig.get_vnchost_name (method), 91
- prlsdkapi.VmConfig.get_vncmode (method), 91
- prlsdkapi.VmConfig.get_vncpassword (method), 91
- prlsdkapi.VmConfig.get_vncport (method), 91
- prlsdkapi.VmConfig.get_vncweb_socket_port (method), 92
- prlsdkapi.VmConfig.get_window_mode (method), 89
- prlsdkapi.VmConfig.is_adaptive_hypervisor_enabled (method), 85
- prlsdkapi.VmConfig.is_allow_select_boot_device (method), 82
- prlsdkapi.VmConfig.is_auto_apply_ip_only (method), 95
- prlsdkapi.VmConfig.is_auto_compress_enabled (method), 94
- prlsdkapi.VmConfig.is_battery_status_enabled (method), 85
- prlsdkapi.VmConfig.is_close_app_on_shutdown (method), 92

- prlsdkapi.VmConfig.is_config_invalid (*method*), 75
- prlsdkapi.VmConfig.is_cpu_hotplug_enabled (*method*), 84
- prlsdkapi.VmConfig.is_cpu_vtx_enabled (*method*), 84
- prlsdkapi.VmConfig.is_default_device_needed (*method*), 75
- prlsdkapi.VmConfig.is_disable_apic (*method*), 93
- prlsdkapi.VmConfig.is_disable_speaker (*method*), 93
- prlsdkapi.VmConfig.is_disk_cache_write_back (*method*), 92
- prlsdkapi.VmConfig.is_efi_enabled (*method*), 95
- prlsdkapi.VmConfig.is_guest_sharing_auto_mount (*method*), 90
- prlsdkapi.VmConfig.is_guest_sharing_enable_spooling (*method*), 90
- prlsdkapi.VmConfig.is_guest_sharing_enabled (*method*), 90
- prlsdkapi.VmConfig.is_high_availability_enabled (*method*), 96
- prlsdkapi.VmConfig.is_high_resolution_enabled (*method*), 85
- prlsdkapi.VmConfig.is_host_sharing_enabled (*method*), 90
- prlsdkapi.VmConfig.is_isolated_vm_enabled (*method*), 85
- prlsdkapi.VmConfig.is_lock_guest_on_suspend_enabled (*method*), 85
- prlsdkapi.VmConfig.is_lock_in_full_screen_mode (*method*), 89
- prlsdkapi.VmConfig.is_longer_battery_life_enabled (*method*), 85
- prlsdkapi.VmConfig.is_map_shared_folders_on_startup (*method*), 91
- prlsdkapi.VmConfig.is_nested_virtualization_enabled (*method*), 85
- prlsdkapi.VmConfig.is_offline_management_enabled (*method*), 81
- prlsdkapi.VmConfig.is_os_res_in_full_scr_mode (*method*), 92
- prlsdkapi.VmConfig.is_pmuvirtualization_enabled (*method*), 85
- prlsdkapi.VmConfig.is_ram_hotplug_enabled (*method*), 95
- prlsdkapi.VmConfig.is_rate_bound (*method*), 74
- prlsdkapi.VmConfig.is_scr_res_enabled (*method*), 92
- prlsdkapi.VmConfig.is_share_all_host_disks (*method*), 90
- prlsdkapi.VmConfig.is_share_clipboard (*method*), 81
- prlsdkapi.VmConfig.is_share_user_home_dir (*method*), 90
- prlsdkapi.VmConfig.is_shared_profile_enabled (*method*), 80
- prlsdkapi.VmConfig.is_smart_guard_enabled (*method*), 78
- prlsdkapi.VmConfig.is_smart_guard_notify_before_creation (*method*), 78
- prlsdkapi.VmConfig.is_smart_mount_dvds_enabled (*method*), 79
- prlsdkapi.VmConfig.is_smart_mount_enabled (*method*), 79
- prlsdkapi.VmConfig.is_smart_mount_network_shares_enabled (*method*), 79
- prlsdkapi.VmConfig.is_smart_mount_removable_drives_enabled (*method*), 79
- prlsdkapi.VmConfig.is_start_in_detached_window_enabled (*method*), 89
- prlsdkapi.VmConfig.is_switch_off_windows_logo_enabled (*method*), 85
- prlsdkapi.VmConfig.is_template (*method*), 87
- prlsdkapi.VmConfig.is_time_sync_smart_mode_enabled (*method*), 81
- prlsdkapi.VmConfig.is_time_synchronization_enabled (*method*), 81
- prlsdkapi.VmConfig.is_tools_auto_update_enabled (*method*), 81
- prlsdkapi.VmConfig.is_use_default_answers (*method*), 93
- prlsdkapi.VmConfig.is_use_desktop (*method*), 80

- prlsdkapi.VmConfig.is_use_documents (*method*), 80
- prlsdkapi.VmConfig.is_use_downloads (*method*), 80
- prlsdkapi.VmConfig.is_use_movies (*method*), 81
- prlsdkapi.VmConfig.is_use_music (*method*), 80
- prlsdkapi.VmConfig.is_use_pictures (*method*), 80
- prlsdkapi.VmConfig.is_user_defined_shared_folders (*method*), 79
- prlsdkapi.VmConfig.is_vertical_synchronization (*method*), 85
- prlsdkapi.VmConfig.is_vncencryption_enabled (*method*), 92
- prlsdkapi.VmConfig.set3dacceleration_mode (*method*), 85
- prlsdkapi.VmConfig.set_action_on_guest_crash (*method*), 96
- prlsdkapi.VmConfig.set_action_on_stop_mode (*method*), 89
- prlsdkapi.VmConfig.set_action_on_window_close (*method*), 88
- prlsdkapi.VmConfig.set_adaptive_hypervisor_enabled (*method*), 85
- prlsdkapi.VmConfig.set_allow_select_boot_device (*method*), 82
- prlsdkapi.VmConfig.set_app_template_list (*method*), 75
- prlsdkapi.VmConfig.set_auto_apply_ip_only (*method*), 95
- prlsdkapi.VmConfig.set_auto_compress_enabled (*method*), 94
- prlsdkapi.VmConfig.set_auto_compress_interval (*method*), 94
- prlsdkapi.VmConfig.set_auto_start (*method*), 88
- prlsdkapi.VmConfig.set_auto_start_delay (*method*), 88
- prlsdkapi.VmConfig.set_auto_stop (*method*), 88
- prlsdkapi.VmConfig.set_background_priority (*method*), 93
- prlsdkapi.VmConfig.set_battery_status_enabled (*method*), 85
- prlsdkapi.VmConfig.set_capabilities_mask (*method*), 95
- prlsdkapi.VmConfig.set_close_app_on_shutdown (*method*), 92
- prlsdkapi.VmConfig.set_confirmations_list (*method*), 94
- prlsdkapi.VmConfig.set_cpu_accel_level (*method*), 84
- prlsdkapi.VmConfig.set_cpu_count (*method*), 84
- prlsdkapi.VmConfig.set_cpu_hotplug_enabled (*method*), 84
- prlsdkapi.VmConfig.set_cpu_limit (*method*), 86
- prlsdkapi.VmConfig.set_cpu_mask (*method*), 86
- prlsdkapi.VmConfig.set_cpu_mode (*method*), 84
- prlsdkapi.VmConfig.set_cpu_units (*method*), 86
- prlsdkapi.VmConfig.set_custom_property (*method*), 87
- prlsdkapi.VmConfig.set_default_config (*method*), 75
- prlsdkapi.VmConfig.set_description (*method*), 87
- prlsdkapi.VmConfig.set_disable_apicsign (*method*), 93
- prlsdkapi.VmConfig.set_disable_speaker_sign (*method*), 93
- prlsdkapi.VmConfig.set_disk_cache_write_back (*method*), 92
- prlsdkapi.VmConfig.set_dns_servers (*method*), 83
- prlsdkapi.VmConfig.set_efi_enabled (*method*), 95
- prlsdkapi.VmConfig.set_external_boot_device (*method*), 95
- prlsdkapi.VmConfig.set_features_mask (*method*), 96
- prlsdkapi.VmConfig.set_foreground_priority (*method*), 93

- prlsdkapi.VmConfig.set_free_disk_space_ratio (method), 95
- prlsdkapi.VmConfig.set_guest_sharing_auto_mount (method), 90
- prlsdkapi.VmConfig.set_guest_sharing_enable_smb (method), 90
- prlsdkapi.VmConfig.set_guest_sharing_enabled (method), 90
- prlsdkapi.VmConfig.set_high_availability_enabled (method), 96
- prlsdkapi.VmConfig.set_high_availability_priority (method), 96
- prlsdkapi.VmConfig.set_high_resolution_enabled (method), 85
- prlsdkapi.VmConfig.set_host_sharing_enabled (method), 90
- prlsdkapi.VmConfig.set_hostname (method), 83
- prlsdkapi.VmConfig.set_icon (method), 87
- prlsdkapi.VmConfig.set_io_limit (method), 86
- prlsdkapi.VmConfig.set_io_priority (method), 86
- prlsdkapi.VmConfig.set_iops_limit (method), 86
- prlsdkapi.VmConfig.set_isolated_vm_enabled (method), 86
- prlsdkapi.VmConfig.set_lock_guest_on_suspend (method), 85
- prlsdkapi.VmConfig.set_lock_in_full_screen_mode (method), 89
- prlsdkapi.VmConfig.set_longer_battery_life_enabled (method), 85
- prlsdkapi.VmConfig.set_map_shared_folders_on_boot (method), 91
- prlsdkapi.VmConfig.set_mem_guarantee_size (method), 84
- prlsdkapi.VmConfig.set_name (method), 82
- prlsdkapi.VmConfig.set_nested_virtualization_enabled (method), 85
- prlsdkapi.VmConfig.set_netfilter_mode (method), 96
- prlsdkapi.VmConfig.set_network_rate_list (method), 74
- prlsdkapi.VmConfig.set_node_mask (method), 86
- prlsdkapi.VmConfig.set_offline_management_enabled (method), 81
- prlsdkapi.VmConfig.set_offline_services (method), 94
- prlsdkapi.VmConfig.set_optimize_modifiers_mode (method), 81
- prlsdkapi.VmConfig.set_options_on_guest_crash (method), 96
- prlsdkapi.VmConfig.set_os_res_in_full_scr_mode (method), 92
- prlsdkapi.VmConfig.set_os_template (method), 74
- prlsdkapi.VmConfig.set_os_version (method), 83
- prlsdkapi.VmConfig.set_pmuvirtualization_enabled (method), 85
- prlsdkapi.VmConfig.set_ram_hotplug_enabled (method), 95
- prlsdkapi.VmConfig.set_ram_size (method), 83
- prlsdkapi.VmConfig.set_rate_bound (method), 74
- prlsdkapi.VmConfig.set_resource (method), 95
- prlsdkapi.VmConfig.set_scr_res_enabled (method), 92
- prlsdkapi.VmConfig.set_search_domains (method), 94
- prlsdkapi.VmConfig.set_share_all_host_disks (method), 90
- prlsdkapi.VmConfig.set_share_clipboard (method), 81
- prlsdkapi.VmConfig.set_share_user_home_dir (method), 91
- prlsdkapi.VmConfig.set_shared_profile_enabled (method), 80
- prlsdkapi.VmConfig.set_smart_guard_enabled (method), 78
- prlsdkapi.VmConfig.set_smart_guard_interval (method), 79

- prlsdkapi.VmConfig.set_smart_guard_max_snapshots (method), 79
- prlsdkapi.VmConfig.set_smart_guard_notify_before (method), 79
- prlsdkapi.VmConfig.set_smart_mount_dvds_enabled (method), 79
- prlsdkapi.VmConfig.set_smart_mount_enabled (method), 79
- prlsdkapi.VmConfig.set_smart_mount_network (method), 80
- prlsdkapi.VmConfig.set_smart_mount_removable (method), 79
- prlsdkapi.VmConfig.set_start_in_detached_window (method), 89
- prlsdkapi.VmConfig.set_start_login_mode (method), 88
- prlsdkapi.VmConfig.set_start_user_creds (method), 88
- prlsdkapi.VmConfig.set_switch_off_windows_logging (method), 85
- prlsdkapi.VmConfig.set_system_flags (method), 92
- prlsdkapi.VmConfig.set_template_sign (method), 87
- prlsdkapi.VmConfig.set_time_sync_interval (method), 82
- prlsdkapi.VmConfig.set_time_sync_smart_mode_enabled (method), 82
- prlsdkapi.VmConfig.set_time_synchronization_enabled (method), 81
- prlsdkapi.VmConfig.set_tools_auto_update_enabled (method), 81
- prlsdkapi.VmConfig.set_undo_disks_mode (method), 93
- prlsdkapi.VmConfig.set_use_default_answers (method), 93
- prlsdkapi.VmConfig.set_use_desktop (method), 80
- prlsdkapi.VmConfig.set_use_documents (method), 80
- prlsdkapi.VmConfig.set_use_downloads (method), 80
- prlsdkapi.VmConfig.set_use_movies (method), 81
- prlsdkapi.VmConfig.set_use_music (method), 80
- prlsdkapi.VmConfig.set_use_pictures (method), 80
- prlsdkapi.VmConfig.set_user_defined_shared_folders_enabled (method), 79
- prlsdkapi.VmConfig.set_uuid (method), 83
- prlsdkapi.VmConfig.set_vertical_synchronization_enabled (method), 85
- prlsdkapi.VmConfig.set_video_ram_size (method), 84
- prlsdkapi.VmConfig.set_vm_type (method), 95
- prlsdkapi.VmConfig.set_vnchost_name (method), 91
- prlsdkapi.VmConfig.set_vncmode (method), 91
- prlsdkapi.VmConfig.set_vncpassword (method), 91
- prlsdkapi.VmConfig.set_vncport (method), 91
- prlsdkapi.VmConfig.set_window_mode (method), 89
- prlsdkapi.VmDevice (class), 59–63
- prlsdkapi.VmDevice.connect (method), 59
- prlsdkapi.VmDevice.copy_image (method), 59
- prlsdkapi.VmDevice.create (method), 59
- prlsdkapi.VmDevice.create_image (method), 59
- prlsdkapi.VmDevice.disconnect (method), 59
- prlsdkapi.VmDevice.get_description (method), 61
- prlsdkapi.VmDevice.get_emulated_type (method), 60
- prlsdkapi.VmDevice.get_friendly_name (method), 61
- prlsdkapi.VmDevice.get_iface_type (method), 61
- prlsdkapi.VmDevice.get_image_path (method), 61

- prlsdkapi.VmDevice.get_index (*method*), 60
- prlsdkapi.VmDevice.get_output_file (*method*), 62
- prlsdkapi.VmDevice.get_stack_index (*method*), 62
- prlsdkapi.VmDevice.get_sub_type (*method*), 61
- prlsdkapi.VmDevice.get_sys_name (*method*), 61
- prlsdkapi.VmDevice.is_connected (*method*), 60
- prlsdkapi.VmDevice.is_enabled (*method*), 60
- prlsdkapi.VmDevice.is_passthrough (*method*), 62
- prlsdkapi.VmDevice.is_remote (*method*), 60
- prlsdkapi.VmDevice.remove (*method*), 60
- prlsdkapi.VmDevice.resize_image (*method*), 60
- prlsdkapi.VmDevice.set_connected (*method*), 60
- prlsdkapi.VmDevice.set_default_stack_index (*method*), 62
- prlsdkapi.VmDevice.set_description (*method*), 61
- prlsdkapi.VmDevice.set_emulated_type (*method*), 61
- prlsdkapi.VmDevice.set_enabled (*method*), 60
- prlsdkapi.VmDevice.set_friendly_name (*method*), 61
- prlsdkapi.VmDevice.set_iface_type (*method*), 61
- prlsdkapi.VmDevice.set_image_path (*method*), 61
- prlsdkapi.VmDevice.set_index (*method*), 60
- prlsdkapi.VmDevice.set_output_file (*method*), 62
- prlsdkapi.VmDevice.set_passthrough (*method*), 62
- prlsdkapi.VmDevice.set_remote (*method*), 60
- prlsdkapi.VmDevice.set_stack_index (*method*), 62
- prlsdkapi.VmDevice.set_sub_type (*method*), 62
- prlsdkapi.VmDevice.set_sys_name (*method*), 61
- prlsdkapi.VmGuest (*class*), 105–106
- prlsdkapi.VmGuest.get_network_settings (*method*), 106
- prlsdkapi.VmGuest.logout (*method*), 105
- prlsdkapi.VmGuest.run_program (*method*), 105
- prlsdkapi.VmHardDisk (*class*), 63–65
- prlsdkapi.VmHardDisk.add_partition (*method*), 64
- prlsdkapi.VmHardDisk.get_disk_size (*method*), 63
- prlsdkapi.VmHardDisk.get_disk_type (*method*), 63
- prlsdkapi.VmHardDisk.get_encryption (*method*), 64
- prlsdkapi.VmHardDisk.get_mount_point (*method*), 64
- prlsdkapi.VmHardDisk.get_partition (*method*), 64
- prlsdkapi.VmHardDisk.get_partitions_count (*method*), 64
- prlsdkapi.VmHardDisk.get_serial_number (*method*), 64
- prlsdkapi.VmHardDisk.get_size_on_disk (*method*), 63
- prlsdkapi.VmHardDisk.get_storage_url (*method*), 64
- prlsdkapi.VmHardDisk.is_auto_compress_enabled (*method*), 64
- prlsdkapi.VmHardDisk.is splitted (*method*), 63
- prlsdkapi.VmHardDisk.set_auto_compress_enabled (*method*), 64
- prlsdkapi.VmHardDisk.set_disk_size (*method*), 63
- prlsdkapi.VmHardDisk.set_disk_type (*method*), 63

- prlsdkapi.VmHardDisk.set_encryption (*method*), 64
- prlsdkapi.VmHardDisk.set_mount_point (*method*), 64
- prlsdkapi.VmHardDisk.set_serial_number (*method*), 64
- prlsdkapi.VmHardDisk.set_splitting (*method*), 63
- prlsdkapi.VmHardDisk.set_storage_url (*method*), 64
- prlsdkapi.VmHdEncryption (*class*), 66–67
 - prlsdkapi.VmHdEncryption.get_key_id (*method*), 66
 - prlsdkapi.VmHdEncryption.set_key_id (*method*), 66
- prlsdkapi.VmHdPartition (*class*), 65–66
 - prlsdkapi.VmHdPartition.get_sys_name (*method*), 65
 - prlsdkapi.VmHdPartition.remove (*method*), 65
 - prlsdkapi.VmHdPartition.set_sys_name (*method*), 65
- prlsdkapi.VmInfo (*class*), 110–111
 - prlsdkapi.VmInfo.get_access_rights (*method*), 110
 - prlsdkapi.VmInfo.get_addition_state (*method*), 111
 - prlsdkapi.VmInfo.get_state (*method*), 110
 - prlsdkapi.VmInfo.is_invalid (*method*), 110
 - prlsdkapi.VmInfo.is_vm_waiting_for_answer (*method*), 110
 - prlsdkapi.VmInfo.is_vnc_server_started (*method*), 110
- prlsdkapi.VmNet (*class*), 67–70
 - prlsdkapi.VmNet.generate_mac_addr (*method*), 67
 - prlsdkapi.VmNet.get_adapter_type (*method*), 69
 - prlsdkapi.VmNet.get_bound_adapter_index (*method*), 67
 - prlsdkapi.VmNet.get_bound_adapter_name (*method*), 67
 - prlsdkapi.VmNet.get_default_gateway (*method*), 69
 - prlsdkapi.VmNet.get_default_gateway_ipv6 (*method*), 69
 - prlsdkapi.VmNet.get_dns_servers (*method*), 68
 - prlsdkapi.VmNet.get_firewall_default_policy (*method*), 70
 - prlsdkapi.VmNet.get_firewall_rule_list (*method*), 70
 - prlsdkapi.VmNet.get_host_interface_name (*method*), 70
 - prlsdkapi.VmNet.get_mac_address (*method*), 68
 - prlsdkapi.VmNet.get_mac_address_canonical (*method*), 67
 - prlsdkapi.VmNet.get_net_addresses (*method*), 68
 - prlsdkapi.VmNet.get_search_domains (*method*), 68
 - prlsdkapi.VmNet.get_virtual_network_id (*method*), 69
 - prlsdkapi.VmNet.is_auto_apply (*method*), 68
 - prlsdkapi.VmNet.is_configure_with_dhcp (*method*), 68
 - prlsdkapi.VmNet.is_configure_with_dhcp_ipv6 (*method*), 68
 - prlsdkapi.VmNet.is_firewall_enabled (*method*), 69
 - prlsdkapi.VmNet.is_pkt_filter_prevent_ip_spoof (*method*), 69
 - prlsdkapi.VmNet.is_pkt_filter_prevent_mac_spoof (*method*), 69
 - prlsdkapi.VmNet.is_pkt_filter_prevent_promisc (*method*), 69
 - prlsdkapi.VmNet.set_adapter_type (*method*), 69
 - prlsdkapi.VmNet.set_auto_apply (*method*), 68
 - prlsdkapi.VmNet.set_bound_adapter_index (*method*), 67
 - prlsdkapi.VmNet.set_bound_adapter_name (*method*), 67
 - prlsdkapi.VmNet.set_configure_with_dhcp (*method*), 68

- prlsdkapi.VmNet.set_configure_with_dhcp_ip_v6 (method), 69
- prlsdkapi.VmNet.set_default_gateway (method), 115
- prlsdkapi.VmNet.set_default_gateway_ipv6 (method), 69
- prlsdkapi.VmNet.set_dns_servers (method), 68
- prlsdkapi.VmNet.set_firewall_default_policy (method), 70
- prlsdkapi.VmNet.set_firewall_enabled (method), 69
- prlsdkapi.VmNet.set_firewall_rule_list (method), 70
- prlsdkapi.VmNet.set_host_interface_name (method), 70
- prlsdkapi.VmNet.set_mac_address (method), 67
- prlsdkapi.VmNet.set_net_addresses (method), 68
- prlsdkapi.VmNet.set_pkt_filter_prevent_ip_spoof (method), 69
- prlsdkapi.VmNet.set_pkt_filter_prevent_mac_spoof (method), 69
- prlsdkapi.VmNet.set_pkt_filter_prevent_promisc (method), 69
- prlsdkapi.VmNet.set_search_domains (method), 68
- prlsdkapi.VmNet.set_virtual_network_id (method), 69
- prlsdkapi.VmSerial (class), 73–74
 - prlsdkapi.VmSerial.get_socket_mode (method), 73
 - prlsdkapi.VmSerial.set_socket_mode (method), 73
- prlsdkapi.VmSound (class), 72–73
 - prlsdkapi.VmSound.get_mixer_dev (method), 72
 - prlsdkapi.VmSound.get_output_dev (method), 72
 - prlsdkapi.VmSound.set_mixer_dev (method), 72
 - prlsdkapi.VmSound.set_output_dev (method), 72
- prlsdkapi.VmToolsInfo (class), 115–116
 - prlsdkapi.VmToolsInfo.get_state (method), 115
 - prlsdkapi.VmToolsInfo.get_version (method), 115
- prlsdkapi.VmUsb (class), 70–72
 - prlsdkapi.VmUsb.get_autoconnect_option (method), 71
 - prlsdkapi.VmUsb.set_autoconnect_option (method), 71