



# Execução da calculadora TCP

Primeiro o cliente entra com um ID para que ele possa acessar sua última operação e depois entra com a fórmula, se no campo fórmula ele digitar “historico” então a última operação do ID associado é retornada.

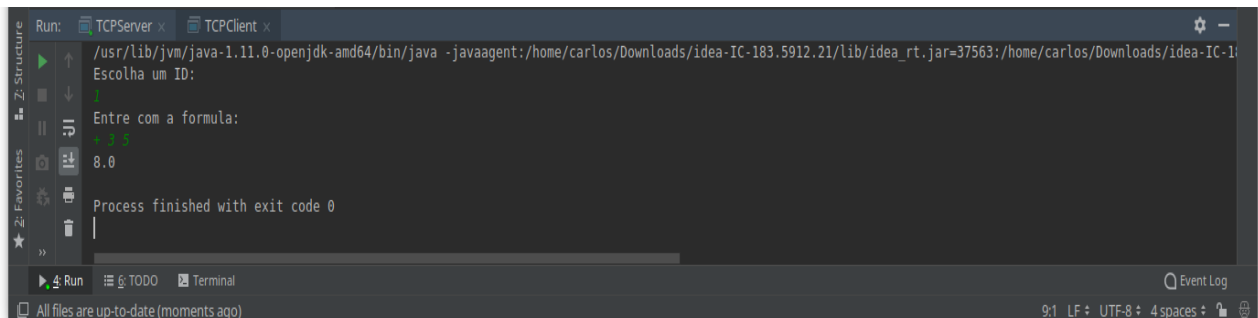


```
Run: TCPServer x TCPClient x
/usr/lib/jvm/java-1.11.0-openjdk-amd64/bin/java -javaagent:/home/carlos/Downloads/idea-IC-183.5912.21/lib/idea_rt.jar=37563:/home/carlos/Downloads/idea-IC-183.5912.21/bin -jar /home/carlos/Downloads/idea-IC-183.5912.21/bin/idea-IC-183.5912.21.jar
Escolha um ID:
1
Entre com a formula:
+ 3 5
8.0
Process finished with exit code 0
```

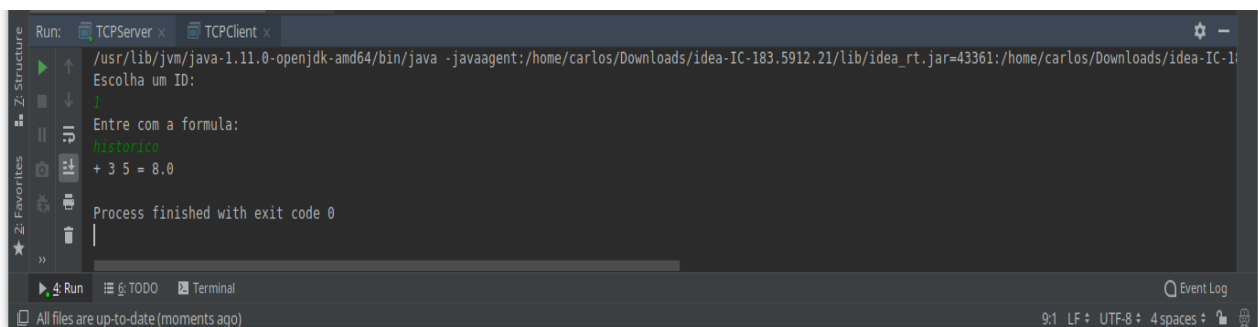

```
Run: TCPServer x TCPClient x
/usr/lib/jvm/java-1.11.0-openjdk-amd64/bin/java -javaagent:/home/carlos/Downloads/idea-IC-183.5912.21/lib/idea_rt.jar=43361:/home/carlos/Downloads/idea-IC-183.5912.21/bin -jar /home/carlos/Downloads/idea-IC-183.5912.21/bin/idea-IC-183.5912.21.jar
Escolha um ID:
1
Entre com a formula:
+ 3 5 = 8.0
historico
Process finished with exit code 0
```

## Entrando com outro ID:

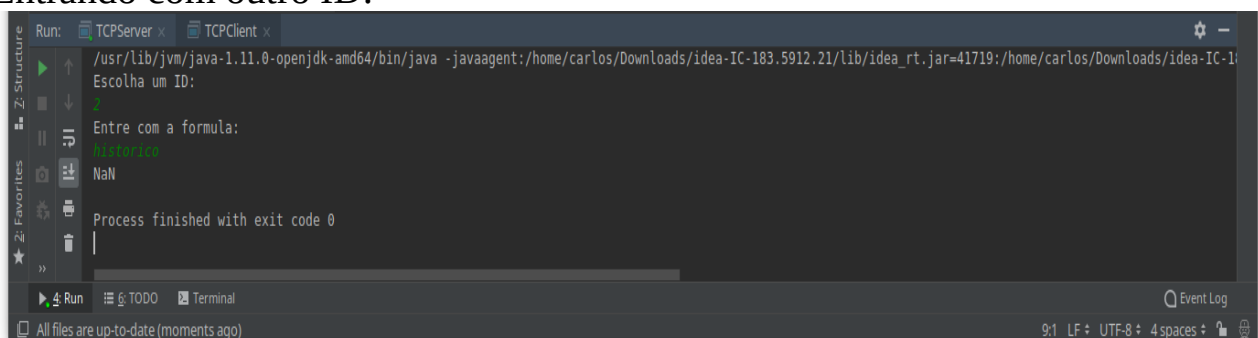

```
Run: TCPServer x TCPClient x
/usr/lib/jvm/java-1.11.0-openjdk-amd64/bin/java -javaagent:/home/carlos/Downloads/idea-IC-183.5912.21/lib/idea_rt.jar=41719:/home/carlos/Downloads/idea-IC-183.5912.21/bin -jar /home/carlos/Downloads/idea-IC-183.5912.21/bin/idea-IC-183.5912.21.jar
Escolha um ID:
2
Entre com a formula:
NaN
NaN
Process finished with exit code 0
```