

# E3 Fiber Connect Defense Reviewer

Our module-by-module manual: the problem each part solves, its input, process and output, the data structures and algorithms inside, their time and space complexity, why we chose them, how to demonstrate them live — and a plain-language walk through the code.

 E3 Fiber

PlansCoverageTrackPay BillsSupport

  Staff [Apply now](#)

 We protect your personal data under the Data Privacy Act of 2012 (RA 10173). This site uses no cookies or trackers. [Privacy Notice](#) 

E3 Fiber Connect · Santa Maria, Bulacan

# Triple the power. Limitless connection.

Pure fiber internet with no data caps and no lock-in —  
installed in days and backed by a team right here in  
Santa Maria.

[Apply now](#) [See all plans >](#)

Plans from ₱800 a month.

Fiber speeds up to  
**300** Mbps

**Joshua Santos**  
1 Plan Selection · 2 Application · 3 Application Tracking

**Justin Banaag**  
4 Application List · 5 Walk-in Override (New Application) · 6 Create Account

**Dela Cruz Riceerich**  
7 Admin Login · 8 Accounts Management · 9 Admin/Staff Creation & Management · 10 Admin Registration & Approval

**Aaron Sebastian**  
11 Billing: Client Billing List · 12 Billing: Bill Generation · 13 Payments (Payments Validation)

E3 Fiber Connect — fiber internet provider in Santa Maria, Bulacan · Built with HTML, CSS, Bootstrap 5 and JavaScript, with every data structure and algorithm written by hand · September 2026

# How to use this reviewer

Every module has the same layout, in the same order the panel asks the questions:

## 1 • Business process

What task or problem of the client (E3 Fiber Connect) the module solves.

## 2 • Input

The data the module needs — what the user types or picks, and the stored records it reads.

## 3 • Process

The data structure and algorithm used, step by step, with an Input → Process → Output picture.

## 4 • Output

What the module produces: records, screens, messages.

## 5 • Complexity analysis

Time and space complexity of each operation, and what  $n$  means.

## 6 • Justification

Why that data structure or algorithm, and why it fits the problem better than the alternatives.

## 7 • Demonstration

How to show it live, real screenshots, and a trace computed from the real code and data.

## Code walkthrough

The actual functions from our files (with line numbers) and a basic explanation of each step.

Each member also has a **one-page summary** before their modules: a short pitch, the structures they must know, and likely panel questions with answers. All numbers in the traces were computed by running our real JavaScript on the sample data — they match the screenshots.

## Running the demo

1. Open `index.html` by double-clicking it (Edge or Chrome). No server or internet is needed.
2. Staff accounts to type on the sign-in page (the site itself never shows them):

| Role                 | E-mail                            | Password    |
|----------------------|-----------------------------------|-------------|
| Owner                | maria.santos@e3fiberconnect.ph    | owner123    |
| Admin                | juan.delacruz@e3fiberconnect.ph   | e3admin     |
| Support              | paulo.reyes@e3fiberconnect.ph     | support123  |
| Pending registration | lorenzo.pascual@e3fiberconnect.ph | lorenzo2026 |

3. Sample customer for *Pay Bills*: account E3-2026-004872 with mobile 0918 555 0172 (Ramon Villareal). Sample application for *Track*: E3-2026-004886.
4. **Reloading the page resets all data** to the sample data (the arrays live in memory). The site asks before a reload if something was changed. Sample dates are relative to today, so bills are always "due this week", "overdue", and so on.
5. Every admin action can be undone (Undo button, the toast's Undo, or Ctrl + Z).

## Contents


1. System overview and the project rules
2. Data structures and algorithms used — a primer
3. **Joshua Santos** — Module 1 Plan Selection · Module 2 Application · Module 3 Application Tracking
4. **Justin Banaag** — Module 4 Application List · Module 5 Walk-in Override · Module 6 Create Account
5. **Dela Cruz Riceerich** — Module 7 Admin Login · Module 8 Accounts Management · Module 9 Admin/Staff Creation & Management · Module 10 Admin Registration & Approval
6. **Aaron Sebastian** — Module 11 Client Billing List · Module 12 Bill Generation · Module 13 Payments Validation

7. Appendix — complexity summary, general panel  
questions, glossary, file map

## System overview

E3 Fiber Connect is a fiber internet provider in Santa Maria, Bulacan. Before this system, applications were on paper, customers called to ask about their status, bills were computed by hand and online payments (GCash, Maya, bank) had to be checked one by one. Our website handles the whole customer life cycle and the staff work behind it.

### The customer and staff flow

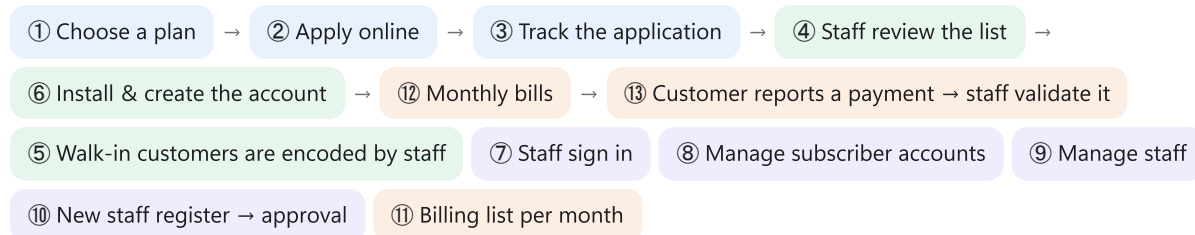

### How the program is built

#### One page, many screens

Arrays live in the browser's memory, and memory is wiped whenever a new page opens — data cannot transfer between separate HTML files. So the whole site is **one** `index.html`: moving between screens only shows and hides sections (the part after # in the address picks the screen). The arrays survive every screen change.

#### Layers

**dsa/** — our own arrays, strings, search, sort, stack, queue and hash table.

**backend/** — the “database” (arrays) and business rules (applications, billing, payments ...).

**ui/** — router, dialogs, notifications, forms.

**views/** — one script per screen.

### The data (arrays kept sorted by their key)

| Array                | Key                          | How it stays sorted                                    | Used by modules   |
|----------------------|------------------------------|--------------------------------------------------------|-------------------|
| applications         | referenceNo – E3-2026-004887 | new numbers are always bigger → append O(1)            | 2, 3, 4, 5, 6     |
| subscribers          | accountNo (= reference no.)  | installations finish in any order → sorted insert O(n) | 6, 8, 11–13       |
| bills                | billId – BILL-202609-004872  | sorted insert O(n)                                     | 8, 11, 12, 13     |
| payments             | paymentId – PAY-000002       | append O(1)                                            | 13                |
| staffMembers         | id – STF-0002                | append O(1)                                            | 7, 9, 10          |
| registrations        | registrationId – REG-000003  | append O(1)                                            | 10                |
| tickets, activityLog | ticketNo / time              | append O(1)                                            | support, activity |

Two **hash tables** sit beside the arrays as indexes: `staffEmailIndex` (e-mail → staff id; modules 7, 9, 10) and `paymentReferenceIndex` (payment reference → payment ids; module 13). **Queues** give first-come-first-served order (review, payments, staff requests, support, oldest bill). **Stacks** power Undo, the Back button and open dialogs.

### The project rules and how we met them

| Rule from our instructor                                                                               | How the code follows it                                                                                                                                                                                                                                                     |
|--------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| HTML, CSS, Bootstrap and JavaScript only; JS is the “backend”                                          | No server, no framework, no database program. Bootstrap is used for the grid and the FAQ accordion.                                                                                                                                                                         |
| Data cannot transfer between pages (arrays)                                                            | Single-page app with a hash router; no localStorage, no cookies, no server.                                                                                                                                                                                                 |
| Procedural, not OOP                                                                                    | Only functions and plain records. No <code>class</code> , no <code>this</code> , no methods on data. A queue is the record { <code>items</code> , <code>front</code> , <code>count</code> , <code>capacity</code> } plus functions like <code>enqueue(queue, item)</code> . |
| No built-in helpers: push, pop, shift, unshift, splice, sort, indexOf, includes, find, filter, map ... | All replaced by our own functions in <code>assets/js/dsa/</code> (e.g. <code>arrayAppend</code> , <code>arrayInsertAt</code> , <code>linearSearch</code> , <code>binarySearch</code> , <code>insertionSort</code> ). No regular expressions either.                         |
| State time and space complexity                                                                        | Written above every function in the code, and measured live on the admin <i>Algorithms</i> page.                                                                                                                                                                            |

# Data structures & algorithms primer

$n$  = number of records ·  $k$  = length of a text or number of results ·  $b$  = number of hash buckets. All of these live in `assets/js/dsa/`.

### Array (our “table”)

4871  
[0]

4872  
[1]

4874  
[2]

4876  
[3] new

`arrayAppend` writes at index `length`:  $O(1)$ . `arrayInsertAt` shifts the later items right:  $O(n)$ . `arrayRemoveAt` shifts left:  $O(n)$ .  
Reading `a[i]`:  $O(1)$ .

### Linear search — $O(n)$

Starter  
1st

Stream  
2nd

Power  
match

Pro

Ultimate

Check the items one by one until one matches. Works on any array (sorted or not). Best case  $O(1)$ , worst  $O(n)$ .

### Binary search — $O(\log n)$

4871

4872

4873

4874

4875  
middle

4876

4877

Needs a **sorted** array. Look at the middle; if the target is bigger keep the right half, else the left half. Each step halves the range: 17 records need at most 5 steps, 100,000 need about 17.

### Lower bound + sorted insert (“put”) — $O(n)$

4872

4874

4875  
goes here

4878  
→ moves

4881  
→ moves

A binary search finds the first position whose key is  $\geq$  the new key ( $O(\log n)$ ); then the later records shift one slot right ( $O(n)$ ). The array stays sorted, so binary search keeps working.

### Insertion sort — best $O(n)$ , worst $O(n^2)$ , stable

Take the next item and slide the bigger items to the right until its place is found. Very fast when the list is already almost sorted — our tables usually are — so it is our default.

### Selection sort — always $O(n^2)$ , not stable

For each position, scan the rest for the item that belongs there and swap it in. Always  $n(n-1)/2$  comparisons, but at most  $n-1$  swaps — the fewest moves.

### Bubble sort — best $O(n)$ , worst $O(n^2)$ , stable

Walk the list swapping neighbours that are in the wrong order; after each pass the biggest item has “bubbled” to the end. Stops early when a pass makes no swap.

### Naive string matching — $O(n^2)$

Used by every search box: try every starting position of the text and compare letter by letter (“jua” finds “Juan Dela Cruz”), ignoring capital letters.

### Stack — LIFO, push / pop / peek $O(1)$

Approve A

Reject B

Confirm P  
top

Record { `items`, `top` }. Undo pushes every admin action and pops the newest (last in, first out). Also the Back button and open dialogs.

### Queue — FIFO, circular buffer, enqueue / dequeue $O(1)$

PAY-2  
[0] front

PAY-3  
[1]

PAY-4  
[2]

·  
[3] rear

Record { `items`, `front`, `count`, `capacity` }; the rear is `(front + count) % capacity`, so nothing is shifted. First come, first served: review queue, payment validation, staff requests, support tickets, oldest bill first.

### Hash table — separate chaining, $O(1)$ average

[0] empty

[1] key A → value

[2] key B → value → key C  
→ value

[3] empty

The key is turned into a bucket number with the djb2 hash (`hash × 33 + character`, then the remainder). Keys that share a bucket (a collision) form a short chain. Grows when there are more than 0.75 keys per bucket.

### Why procedural?

Every structure is a plain record plus functions that receive it (e.g. `stackPush(stack, item)`) instead of objects with methods. This follows the project rule and makes each step of the algorithm visible.

# Joshua Santos

Module 1 Plan Selection · Module 2 Application · Module 3 Application Tracking

## 60-second pitch

My modules are what a new customer does before any staff member is involved. **Plan Selection** helps them pick the cheapest plan that is fast enough — a *linear search* through the plans in speed order — and lets them sort the plans with *selection sort*. **Application** collects and checks their details in five steps, then adds the application to the end of the `applications` array with the next reference number, which keeps the array sorted. **Application Tracking** uses that sorted order: a *binary search* finds any reference number in at most  $\lceil \log_2(n+1) \rceil$  comparisons and shows the progress timeline with the name partly hidden.

## Structures and algorithms I must be able to explain

| Where                        | Structure / algorithm                       | Time                        | Space                     |
|------------------------------|---------------------------------------------|-----------------------------|---------------------------|
| Find a plan, the recommender | Linear search over the 5 plans              | $O(n)$                      | $O(1)$                    |
| Plans in speed order         | Insertion sort (already sorted → best case) | $O(n)$ best, $O(n^2)$ worst | $O(n)$ copy               |
| Sort the plan cards          | Selection sort                              | $O(n^2)$ always             | $O(n)$ copy, $O(1)$ extra |
| Save an application          | Array append (keeps the key order)          | $O(1)$                      | $O(1)$                    |
| Duplicate check              | Linear search on open applications          | $O(n)$                      | $O(1)$                    |
| Track an application         | Binary search on the reference number       | $O(\log n)$                 | $O(1)$                    |

## Likely panel questions

### Why linear search for the plans and not binary search?

There are only 5 plans; binary search would save at most 2 comparisons. The recommender also needs the first plan whose speed is at least a value — a single pass in speed order does exactly that.

### Why is the applications array always sorted without sorting it?

Reference numbers come from a counter that only goes up (E3-2026-004886, ...004887). A new application always has the largest number, so appending it at the end keeps the order —  $O(1)$ , no sort needed.

### What is the worst case of your binary search?

$\lceil \log_2(n+1) \rceil$  comparisons: 5 for our 17 applications, 14 for 10,000. A linear search would need up to  $n$ .

### Why selection sort for the plan cards?

It makes the fewest swaps (at most  $n-1$ ) and its cost is predictable: always  $n(n-1)/2 = 10$  comparisons for 5 plans — the page prints that number under the cards.

### How do you validate without regular expressions?

Each rule scans the characters with a loop — e.g. the e-mail must have exactly one “@”, allowed characters only and a dot after it; the mobile number is reduced to its digits and must be 11 digits starting with 09.

### Why hide part of the name on the tracker?

Anyone who knows or guesses a reference number can open the tracker, so it shows “Ana R.” instead of the full name, and never the address or ID.

# Plan Selection

|         |                                                                                                |
|---------|------------------------------------------------------------------------------------------------|
| Screens | Plans page (#/plans) and step 1 of the application (#/apply/power)                             |
| Files   | backend/plans.js · views/public/plans.js · views/public/apply.js · dsa/search.js · dsa/sort.js |
| Data    | PLANS — array of 5 plan records { id, name, speed, price, bestFor, devices, popular }          |
| DSA     | Linear search · insertion sort · selection sort                                                |

## 1 Business process

*What task or problem from the client are you solving?*

E3 sells five plans — Starter (50 Mbps, ₱800), Stream (70 Mbps, ₱1,000), Power (100 Mbps, ₱1,200), Pro (200 Mbps, ₱1,500) and Ultimate (300 Mbps, ₱2,000). Customers often don't know which speed they need, so they either overpay or pick a plan that is too slow and complain later. This module **recommends the cheapest plan that is still fast enough** for the household, lets the customer **sort and compare** the plans, and carries the chosen plan into the application form.


## 2 Input

*What data is needed by the module?*

| Input             | Where it comes from                   | Values                                                                  |
|-------------------|---------------------------------------|-------------------------------------------------------------------------|
| Number of devices | segmented control                     | 1–3, 4–6, 7–10, 11+ (counted as 3, 6, 10, 14 devices)                   |
| Main activity     | segmented control                     | Browsing 4 · Streaming 8 · Work & school 10 · Gaming 16 Mbps per device |
| Sort choice       | drop-down                             | speed or price, low→high or high→low (e.g. price-desc)                  |
| Chosen plan       | "Choose" button / radio card          | plan id, e.g. power (sent in the address #/apply/power)                 |
| Stored data       | PLANS, DEVICE_RANGES, PLAN_ACTIVITIES | fixed arrays of records                                                 |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

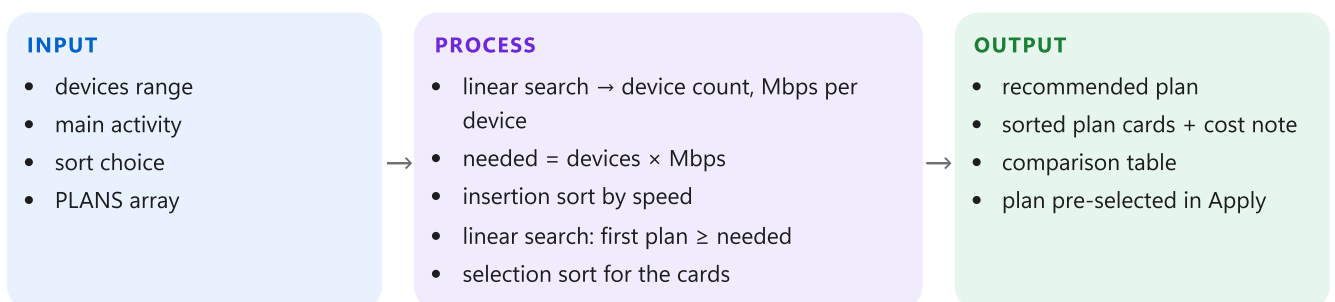

### Recommender (recommendPlan):

- Find the chosen device range and activity with a **linear search** (findDeviceRange, findActivity).
- Compute the speed needed: devices × Mbps per device (e.g. 10 × 10 = 100 Mbps).
- Put the plans in speed order with **insertion sort**. They are stored in speed order already, so this is its best case:  $n-1 = 4$  comparisons, 0 moves.
- Linear search** from the slowest plan: stop at the first plan whose speed  $\geq$  the needed speed — that is also the cheapest one that is fast enough.
- If no plan is fast enough, recommend the fastest plan (Ultimate).

**Sorting the cards (selectionSort):** copy the array; for each position scan the rest for the plan that belongs there (e.g. the most expensive) and swap it in; count comparisons and swaps and print them under the cards.

**Choosing:** the button opens `#/apply/<id>`; the Apply screen checks the id with `findPlan` (linear search) and pre-selects that plan in step 1.

#### 4 Output

*What result does the module produce?*

The recommended plan with the reason ("About 100 Mbps for 7–10 devices ... found by checking 3 plans"), the plan cards in the chosen order with "Sorted with selection sort: 10 comparisons, 2 swaps", a feature comparison table, and the chosen plan already selected on the application form with its price summary.

#### 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                                                           | Time                                                 | Space                     | Note (n = number of plans = 5)  |
|-------------------------------------------------------------------------------------|------------------------------------------------------|---------------------------|---------------------------------|
| <code>findPlan</code> , <code>findActivity</code> ,<br><code>findDeviceRange</code> | $O(n)$                                               | $O(1)$                    | linear search                   |
| Insertion sort by speed                                                             | $O(n)$ here (best case); $O(n^2)$ worst              | $O(n)$ copy, $O(1)$ extra | plans are stored in speed order |
| Find the first plan fast enough                                                     | $O(n)$                                               | $O(1)$                    | stops early                     |
| <b>recommendPlan overall</b>                                                        | <b><math>O(n)</math></b>                             | $O(n)$                    |                                 |
| Selection sort of the cards                                                         | $O(n^2)$ in every case — $n(n-1)/2 = 10$ comparisons | $O(n)$ copy, $O(1)$ extra | at most $n-1$ swaps             |
| Comparison table                                                                    | $O(n)$                                               | $O(n)$                    | 7 fixed feature rows per plan   |

#### 6 Justification


*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **Array of records:** plans are a small, fixed list that is shown in order — an array is the simplest structure and is read in  $O(1)$  by index.
- **Linear search:** with 5 items it is as fast as anything else, needs no sorted key, and naturally answers "the *first* plan that is fast enough". Binary search would need the plans sorted by the searched field and saves at most 2 comparisons.
- **Insertion sort** for the speed order: the plans are already in that order, which is insertion sort's best case (linear time).
- **Selection sort** for the cards: at most  $n-1$  swaps and a fixed, easy-to-explain number of comparisons, which we display to the user. For 5 items  $O(n^2)$  is only 10 comparisons.


#### 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Open **Plans**. Choose "7–10" devices and "Work & school" → the recommender shows **Power**.
- 2 Change the sort to "Price: high to low" → Ultimate comes first and the note shows the selection-sort cost.
- 3 Press "Choose Power" → the application opens on step 1 with Power selected.

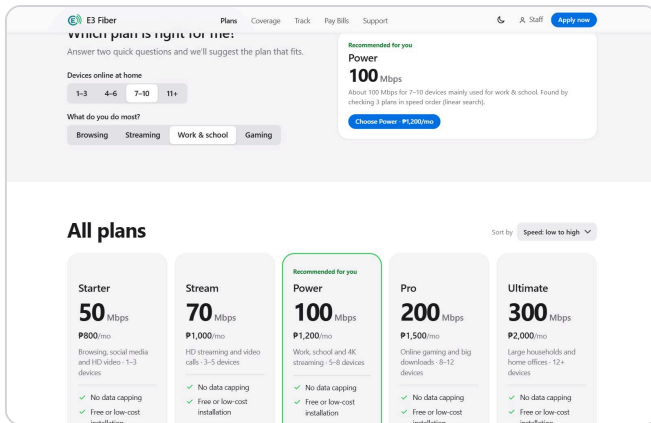

Input 7–10 devices + Work & school → output Power (100 Mbps needed).

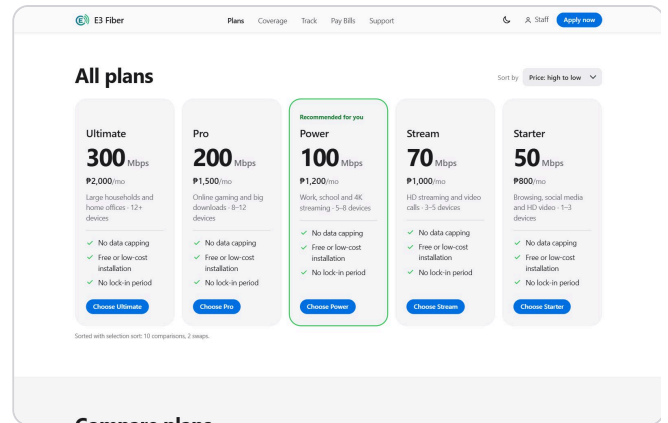

Selection sort by price, high to low, with its cost under the cards.

## Trace — the recommender (computed by our code)

**Input:** 7–10 devices (counted as 10) used mainly for work & school (10 Mbps each). **Needed speed** =  $10 \times 10 = 100$  Mbps. Insertion sort put the plans in speed order with 4 comparisons and 0 moves — they were already in order, the best case  $O(n)$ .


| Check | Plan     | Speed    | Price  | Speed $\geq$ 100 Mbps?               |
|-------|----------|----------|--------|--------------------------------------|
| 1     | Starter  | 50 Mbps  | ₱800   | ✗ too slow                           |
| 2     | Stream   | 70 Mbps  | ₱1,000 | ✗ too slow                           |
| 3     | Power    | 100 Mbps | ₱1,200 | ✓ fast enough → recommended          |
| 4     | Pro      | 200 Mbps | ₱1,500 | not checked — search already stopped |
| 5     | Ultimate | 300 Mbps | ₱2,000 | not checked — search already stopped |

**Output:** Power, found after checking 3 of 5 plans (linear search stops at the first match).

## Trace — selection sort by price, high to low

| Pass   | Work          | Most expensive of the rest         | Array after the pass (blue = sorted part)                                                                                 |
|--------|---------------|------------------------------------|---------------------------------------------------------------------------------------------------------------------------|
| start  | —             | —                                  | <div>Starter ₱800</div> <div>Stream ₱1,000</div> <div>Power ₱1,200</div> <div>Pro ₱1,500</div> <div>Ultimate ₱2,000</div> |
| pass 1 | 4 comparisons | Ultimate → swapped into position 1 | <div>Ultimate ₱2,000</div> <div>Stream ₱1,000</div> <div>Power ₱1,200</div> <div>Pro ₱1,500</div> <div>Starter ₱800</div> |
| pass 2 | 3 comparisons | Pro → swapped into position 2      | <div>Ultimate ₱2,000</div> <div>Pro ₱1,500</div> <div>Power ₱1,200</div> <div>Stream ₱1,000</div> <div>Starter ₱800</div> |
| pass 3 | 2 comparisons | Power already in place             | <div>Ultimate ₱2,000</div> <div>Pro ₱1,500</div> <div>Power ₱1,200</div> <div>Stream ₱1,000</div> <div>Starter ₱800</div> |
| pass 4 | 1 comparison  | Stream already in place            | <div>Ultimate ₱2,000</div> <div>Pro ₱1,500</div> <div>Power ₱1,200</div> <div>Stream ₱1,000</div> <div>Starter ₱800</div> |

Total: **10 comparisons** (=  $n(n-1)/2 = 5 \cdot 4/2$ ) and **2 swaps**. The real `selectionSort` reports 10 comparisons and 2 swaps — the same numbers shown under the plan cards.

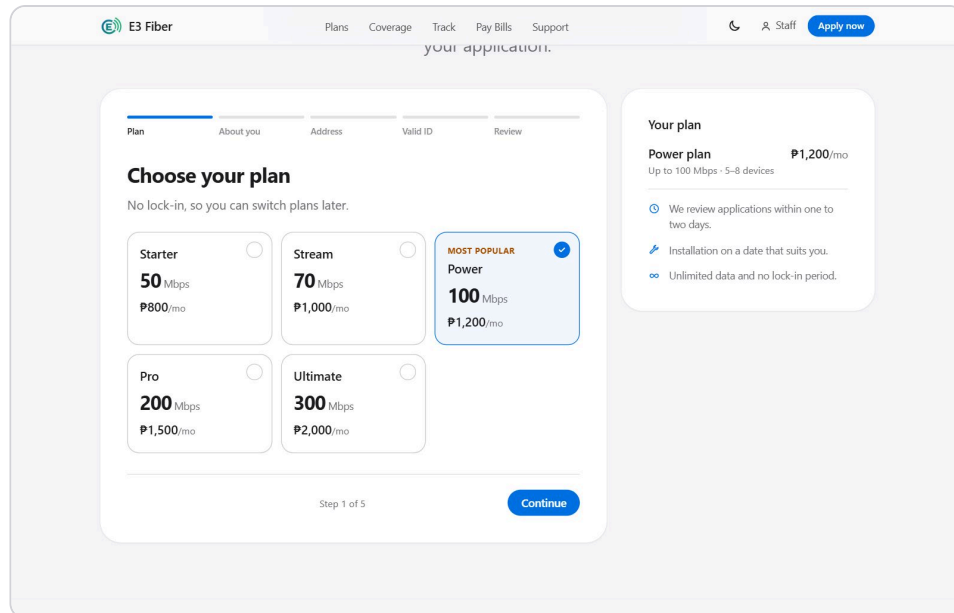

Output: the chosen plan arrives pre-selected in step 1 of the application.

## Code walkthrough

assets/js/backend/plans.js · lines 85–106

```

85  /**
86   * recommendPlan - yung pinakamabagal (pinakamura) na plan na sapat pa rin ang bilis.
87   * Kailangang speed = devices × Mbps per device para sa main activity; tapos linear
88   * search sa plans na naka-order by speed, titigil sa unang plan na ang speed ay
89   * at least ganun (kung wala, yung pinakamabilis na plan ang ibabalik).
90   * Time: O(n) (naka-order na by speed yung plans, kaya O(n) lang yung insertion sort), Space: O(n)
91   */
92  function recommendPlan(rangeId, activityId) {
93      const range = findDeviceRange(rangeId);           // 1. yung mga sagot: ilang devices...
94      const activity = findActivity(activityId);         // ...at saan madalas ginagamit
95      const needed = range.devices * activity.mbpsPerDevice; // 2. kailangang speed = devices × Mbps per device
96      const bySpeed = insertionSort(PLANS, 'speed', 'asc'); // 3. plans mula pinakamabagal (pinakamura) hanggang
pinakamabilis
97      let checked = 0;
98      for (let i = 0; i < bySpeed.length; i++) {         // 4. linear search: unang plan na sapat ang bilis
99          checked++;
100         if (bySpeed[i].speed >= needed) {
101             return { plan: bySpeed[i], neededMbps: needed, checked: checked, range: range, activity: activity };
102         }
103     }
104     // 5. walang plan na sapat ang bilis -> yung pinakamabilis na lang i-recommend
105     return { plan: bySpeed[bySpeed.length - 1], neededMbps: needed, checked: checked, range: range, activity:
activity };
106 }

```

1. Find what the customer picked. `findDeviceRange` and `findActivity` are linear searches over two tiny lists.
2. Multiply the number of devices by the speed each device needs.
3. `insertionSort` returns the plans from slowest (cheapest) to fastest. It works on a copy, so `PLANS` is not changed.
4. The loop is a linear search: the first plan with enough speed is returned, together with how many plans were checked (shown on screen).
5. If the loop ends without a match, the last (fastest) plan is recommended.

assets/js/dsa/sort.js · lines 109–135

```

109 /**
110 * selectionSort - sa bawat position, hahanapin sa unsorted part yung item na
111 * dapat nandun (pinakamaliit, o pinakamalaki kung descending) tapos i-swap papasok.
112 * Laging n(n-1)/2 comparisons pero hanggang n-1 swaps lang.
113 * Time: O(n²) kahit anong case, Space: O(1) extra (plus yung copy), Stable: hindi
114 */
115 function selectionSort(records, field, order) {
116     const list = arrayCopy(records);                 // copy yung sinosort, para same order pa rin yung table

```

```

117  const direction = order === 'desc' ? -1 : 1;
118  let comparisons = 0;
119  let swaps = 0;
120  for (let i = 0; i < list.length - 1; i++) {      // 1. punuin ng tamang item yung position i (0, 1, 2 ...)
121      let best = i;
122      for (let j = i + 1; j < list.length; j++) {    // 2. i-scan lahat ng kasunod nito
123          comparisons++;
124          if (compareForOrder(list[j][field], list[best][field], direction) < 0) {
125              best = j;                               // tandaan yung item na dapat mauna
126          }
127      }
128      if (best !== i) {                                // 3. i-swap yung item na yun papunta sa position i
129          arraySwap(list, i, best);
130          swaps++;
131      }
132  }
133  recordRun('Selection sort', comparisons, swaps);
134  return list;
135 }

```

1. `arrayCopy` makes a copy (our replacement for `slice`) so the original order stays; `direction` is `-1` for “high to low”.
2. The outer loop fills position `i`; the inner loop scans the rest and remembers in `best` the item that should come first.
3. `compareForOrder` compares two values in the chosen direction; empty values always go last.
4. `arraySwap` exchanges two slots (no built-in helper). Only one swap per position → at most  $n-1$  swaps.
5. `recordRun` saves the comparison and swap counts, which the page prints under the cards.

# Application (online)

|         |                                                                                                                                               |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Apply wizard (#/apply) → Application received (#/submitted/<ref>)                                                                             |
| Files   | backend/applications.js (validateApplication, openApplicationsFor, submitApplication) · views/public/apply.js · backend/utils.js (validators) |
| Data    | applications — array sorted by referenceNo; BARANGAYS (24, sorted); ID_TYPES                                                                  |
| DSA     | Character-by-character validation · binary search (barangay) · linear search (duplicates, ID types) · array append · queue (review queue)     |

## 1 Business process

*What task or problem from the client are you solving?*

Before, customers filled in paper forms at the office and details were often incomplete or unreadable. The online application lets anyone in Santa Maria apply from home, **checks every field before it is saved** (valid e-mail and mobile, 18 years or older, a barangay in the service area, a valid ID, consent), **catches duplicate applications** from the same person (a second internet connection is allowed, but the customer must confirm it, up to 3 in progress), and gives a **reference number** that the customer uses to track the application — and that later becomes the account number.

## 2 Input


*What data is needed by the module?*

| Step        | Field              | Rule checked                                                                |
|-------------|--------------------|-----------------------------------------------------------------------------|
| 1 Plan      | Plan               | must exist in PLANS                                                         |
| 2 About you | Full name          | first and last name, 3–80 characters                                        |
|             | E-mail             | one "@", allowed characters only, a dot in the domain                       |
|             | Mobile             | 11 digits starting with 09 (" +63 917..." is accepted and tidied)           |
|             | Birth date         | real date, not in the future, age 18–120                                    |
| 3 Address   | Barangay           | one of the 24 barangays of Santa Maria (coming-soon ones join the waitlist) |
|             | Street, landmark   | street 5–150 characters; landmark optional, ≤ 100                           |
| 4 Valid ID  | ID type, ID number | type from the list of 11; number 4–30 characters                            |
|             | ID photo           | JPG, PNG or PDF, at most 10 MB                                              |
|             | Consent            | must be ticked                                                              |

Stored data read: applications (to find open duplicates), BARANGAYS, ID\_TYPES and the reference counter.

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

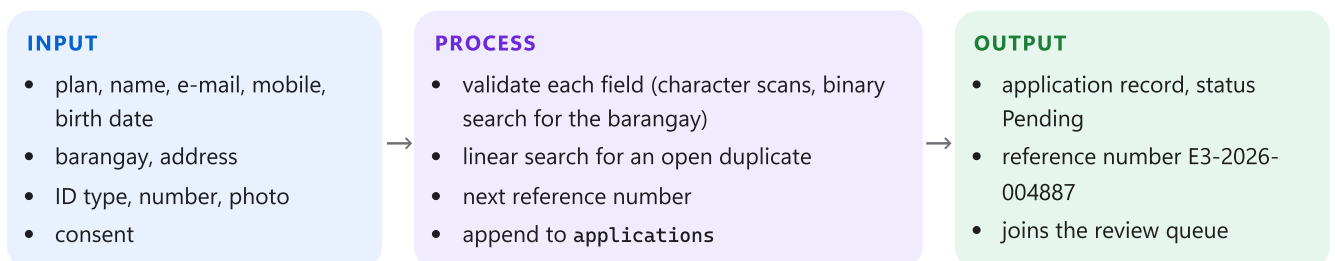

- Wizard:** “Continue” validates only the current step with the same `validateApplication` the backend uses, and shows the message under each wrong field (`stepForField` is a linear search that finds which step owns a field).

- 2 **Validate everything** again on submit: text checks loop over the characters (no regular expressions); age uses our date maths (ageOn); the barangay is found by **binary search** on the 24 barangays sorted by name; the ID type by linear search.
- 3 **Duplicate check** (openApplicationsFor): a **linear search** that collects the applications still Pending, Approved or For Installation for the same e-mail or mobile number. None → saved. Some → the customer must tick "This is for an additional internet connection" (for a second line); 3 already → refused.
- 4 **Reference number**: the counter goes up by one → E3-2026-004887.
- 5 **Save**: arrayAppend puts the record at the end. It has the largest number, so the array stays sorted — no sort is needed and binary search keeps working.
- 6 The record starts with status Pending and one history step; it is automatically part of the staff's **review queue** (first come, first served).

## 4 Output

*What result does the module produce?*

A new application record { referenceNo, fullName, email, contactNumber, birthDate, barangay, completeAddress, landmark, planId, idType, idNumber, idPhotoName, status: "Pending", submittedAt, source: "online", history: [...] }, the "Application received" screen with the reference number and a summary, and inline error messages when something is wrong.

## 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                   | Time                                                    | Space                          |
|---------------------------------------------|---------------------------------------------------------|--------------------------------|
| Field checks (e-mail, mobile, name ...)     | $O(n)$ per field, $n$ = its length                      | $O(n)$                         |
| Barangay look-up (binary search, $B = 24$ ) | $O(\log n)$                                             | $O(1)$                         |
| ID type look-up (linear, 11 types)          | $O(n)$                                                  | $O(1)$                         |
| Duplicate check over $n$ applications       | $O(n)$                                                  | $O(1)$                         |
| Next reference number + append              | $O(1)$                                                  | $O(1)$ (one new record)        |
| <b>submitApplication overall</b>            | <b><math>O(n)</math></b> (the duplicate scan dominates) | <b><math>O(1)</math></b> extra |

## 6 Justification

*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **Append to a sorted array**: reference numbers only grow, so appending is  $O(1)$  and keeps the array sorted — this is what makes the tracker's binary search possible without ever sorting.
- **Linear search for duplicates**: the rule depends on the status (only open applications count), on two fields (e-mail or mobile) and on text normalisation; a single pass handles all of that, and returning every match (not just the first) lets us count them for the 3-line limit. A hash table would need an index per field and updates on every status change — not worth it for our size.
- **Binary search for the barangay**: the list is fixed and sorted by name, so the look-up is  $O(\log n)$ .
- **Hand-written character checks**: required by the project rules (no regular expressions) and they give a precise message for each kind of mistake.
- The wizard reuses the backend validator, so the screen and the saved data follow exactly the same rules.

## 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Apply → step 2: type a one-word name, a double "@" e-mail, a short mobile number and a 2012 birth date → press Continue → every mistake is explained under its field.
- 2 Fix them, finish steps 3–4, review in step 5 and submit → the reference number appears.

Input with mistakes → the validator's messages.

Step 5 — everything valid, ready to submit.

| Field                | Value                        |
|----------------------|------------------------------|
| Plan                 | Power - 100 Mbps - P1,200/mo |
| Installation address | Brgy. Poblacion, Santa Maria |
| Sent                 | Sep 25, 2026 at 12:37 PM     |
| Status               | Pending                      |

Output: the application is saved with reference number E3-2026-004887.

## Trace — validation and saving (computed by our code)

| Field          | What was typed      | Validator result                                                           |
|----------------|---------------------|----------------------------------------------------------------------------|
| Full name      | Ana                 | <b>X Enter the first and last name.</b>                                    |
| E-mail         | ana.reyes@gmail.com | <b>X Enter an e-mail like name@example.com.</b>                            |
| Mobile         | 0917 555            | <b>X Enter an 11-digit mobile number like 0917 555 0199.</b>               |
| Birth date     | 2012-05-10          | <b>X The applicant must be at least 18 years old.</b>                      |
| Barangay       |                     | <b>X Choose a barangay in Santa Maria.</b>                                 |
| Street address |                     | <b>X Enter the house number and street.</b>                                |
| ID type        |                     | <b>X Choose an ID type.</b>                                                |
| ID number      |                     | <b>X Enter the ID number.</b>                                              |
| ID photo       | id.exe              | <b>X Upload a JPG, PNG or PDF file.</b>                                    |
| Consent        | false               | <b>X Please read the Privacy Notice and give your consent to continue.</b> |

With the corrected data the validator returns **0 errors**, so `submitApplication` continues: duplicate check → next number → append.

The new application **E3-2026-004887** (status Pending) is appended at index 16 — it has the largest number, so the table is still sorted: **verified**.

## Code walkthrough

assets/js/backend/applications.js · lines 220–284

```
220 /**
221  * submitApplication - i-validate muna, tapos mag-add ng bagong application gamit yung
222  * susunod na reference number. Yung online galing sa customer; yung walk-in naman
223  * tinatype ng staff (at pwedeng i-undo).
224  * Pwede na ang ilang application sa iisang client (halimbawa 2 internet), pero kung may
225  * in progress pa siya, kailangan munang i-tick na "additional connection" ito para
226  * hindi madoble pag aksidenteng na-submit ulit. Hanggang 3 na in progress lang.
227  * Time: O(n) (duplicate check) + O(1) append, Space: O(1)
228  */
229 function submitApplication(data, source, actor) {
230     const errors = validateApplication(data, source); // 1. i-check lahat ng field
231     if (hasAnyErrors(errors)) {
232         return { ok: false, errors: errors };
233     }
234     const open = openApplicationsFor(data.email, data.contactNumber); // 2. may in progress pa ba ang client
na ito?
235     if (open.length >= MAX_OPEN_APPLICATIONS_PER_CLIENT) {
236         return { ok: false, errors: { email: 'There are already ' + MAX_OPEN_APPLICATIONS_PER_CLIENT + ' applications
in progress for this e-mail or mobile number. Please wait until one is installed.' } };
237     }
238     if (open.length > 0 && data.additionalLine !== true) { // meron: dapat sinadya (2nd
internet), hindi double submit
239         const which = source === 'online' ? 'An application' : 'Application ' + open[0].referenceNo; // sa public
form, hindi namin pinapakita yung reference
240         return { ok: false, needsConfirm: true, errors: { additionalLine: which + ' for this e-mail or mobile number
is already in progress. Tick the box if this is for an additional internet connection.' } };
241     }
242
243     counters.reference = counters.reference + 1; // 3. kunin yung susunod na reference
number
244     const now = nowISO();
245     const referenceNo = formatReferenceNo(readClock().year, counters.reference);
246     const barangay = findBarangay(data.barangay);
247     const byName = source === 'online' ? 'Online form' : nameOfActor(actor) + ' (walk-in)';
248     const application = {
249         referenceNo: referenceNo,
250         fullName: collapseSpaces(data.fullName),
251         email: trimText(data.email),
252         contactNumber: normalizeMobile(data.contactNumber),
253         birthDate: data.birthDate,
254         city: SERVICE_CITY,
255         barangay: barangay.name,
256         completeAddress: collapseSpaces(data.completeAddress),
257         landmark: collapseSpaces(data.landmark),
258         planId: data.planId,
259         customPrice: data.planId === 'custom' ? Number(data.customPrice) : null,
260         idType: data.idType,
261         idNumber: trimText(data.idNumber),
262         idPhotoName: textOf(data.idPhotoName),
263         status: 'Pending',
264         submittedAt: now,
265         consentAt: now, // proof na pumayag sila (Data Privacy Act, RA 10173)
266         source: source,
267         notes: '',
268         installDate: null,
269         installSlot: null,
270         rejectReason: '',
271         additionalLine: data.additionalLine === true, // 2nd (o 3rd) na internet ng parehong client
272         history: [{ status: 'Pending', at: now, by: byName, note: (source === 'online' ? 'Application received
online' : 'Walk-in application at the office') + (data.additionalLine === true ? ' (additional connection)' : '') }],
273     };
274     arrayAppend(applications, application); // 4. pinakamalaki yung bagong number -> naka-sort pa rin yung table
275
276     if (source === 'online') { // 5. i-log (yung walk-in na tinype ng staff, pwede ring i-undo)
277         logActivity('application', 'New online application ' + referenceNo + ' from ' + application.fullName,
'Customer');
```

```

278   } else {
279     logActivity('application', 'Walk-in application ' + referenceNo + ' for ' + application.fullName,
nameOfActor(actor));
280     pushUndo('Create walk-in application ' + referenceNo, [insertOperation('applications', referenceNo)],
nameOfActor(actor));
281   }
282   markDataChanged();
283   return { ok: true, application: application };
284 }

```

1. Step 1 calls the validator; if any field has a message, the errors are returned to the form and nothing is saved.
2. Step 2 looks for open applications of the same e-mail or mobile number (linear search, below). A second internet connection is allowed only when the customer ticks “additional connection” — that stops accidental double submissions — and at most 3 can be in progress.
3. Step 3 builds the next reference number from the counter and the current year.
4. The record is built with tidy values (`collapseSpaces`, `normalizeMobile`) and one history step.
5. Step 4 appends it — the key order stays sorted. Step 5 writes the activity log; a walk-in (staff) application also gets an Undo step.

assets/js/backend/applications.js · lines 170–189

```

170  /**
171   * openApplicationsFor - LAHAT ng application na in progress pa na pareho yung e-mail
172   * o mobile number. Kailangan ito kasi pwede na mag-apply ng 2nd internet yung isang client.
173   * Linear search. Time: O(n), Space: O(n)
174   */
175  function openApplicationsFor(email, mobile) {
176    const wantedEmail = toLowerText(trimText(email));
177    const wantedMobile = digitsOnly(normalizeMobile(mobile));
178    const found = [];
179    for (let i = 0; i < applications.length; i++) {
180      const app = applications[i];
181      if (linearSearchValue(OPEN_APPLICATION_STATUSES, app.status) === -1) {
182        continue;
183      }
184      if (toLowerText(app.email) === wantedEmail || (wantedMobile !== '' && digitsOnly(app.contactNumber) ===
wantedMobile)) {
185        arrayAppend(found, app);
186      }
187    }
188    return found;
189  }

```

1. The typed e-mail is lower-cased and the mobile reduced to its digits, so “JUAN@...” and “juan@...” match.
2. The loop visits every application (linear search) but skips finished ones using `linearSearchValue` on the list of open statuses.
3. Every open application with the same e-mail or mobile is collected with `arrayAppend`; an empty array means no duplicate. The count decides: 0 = save, 1–2 = ask to confirm a second line, 3 = refuse.

assets/js/backend/applications.js · lines 102–121 (part of `validateApplication`)

```

102  const name = collapseSpaces(data.fullName);
103  if (name.length < 3 || textFind(name, ' ') === -1) {
104    errors.fullName = 'Enter the first and last name.';
105  } else if (name.length > 80) {
106    errors.fullName = 'Use 80 characters or fewer.';
107  }
108  if (!isValidEmail(data.email)) {
109    errors.email = 'Enter an e-mail like name@example.com.';
110  }
111  if (!isValidMobile(data.contactNumber)) {
112    errors.contactNumber = 'Enter an 11-digit mobile number like 0917 555 0199.';
113  }
114  if (!isValidISODate(data.birthDate)) {
115    errors.birthDate = 'Enter the birth date.';
116  } else if (data.birthDate > today) {
117    errors.birthDate = 'The birth date can't be in the future.';
118  } else if (ageOn(data.birthDate, today) < 18) {
119    errors.birthDate = 'The applicant must be at least 18 years old.';

```

```
120 } else if (ageOn(data.birthDate, today) > 120) {  
121     errors.birthDate = 'Check the birth year.';
```

1. The name must have a space (first and last name) and at most 80 characters.
2. `isValidEmail` and `isValidMobile` scan the text character by character (no regular expressions).
3. The birth date must be a real date, not in the future, and the applicant at least 18 (`ageOn` counts whole years with our calendar maths).

# Application Tracking

|         |                                                                                                                                                                                                             |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Track page ( <code>#/track</code> , <code>#/track/E3-2026-004887</code> )                                                                                                                                   |
| Files   | <code>backend/applications.js</code> ( <code>trackApplication</code> , <code>applicationProgress</code> ) · <code>views/public/track.js</code> · <code>dsa/search.js</code> · <code>backend/utils.js</code> |
| Data    | <code>applications</code> — sorted by <code>referenceNo</code> ; each has a <code>history</code> array of steps                                                                                             |
| DSA     | Binary search · character scans (format check) · linear scan of the history                                                                                                                                 |

## 1 Business process

*What task or problem from the client are you solving?*

Applicants used to call or visit the office to ask “what happened to my application?”. With the tracker they type their reference number and immediately see where it is — received, under review, installation scheduled (with the date), connected — or why it was not approved, **without exposing their personal details** to someone who guesses a number.


## 2 Input

*What data is needed by the module?*

- The reference number typed by the customer, in any form (“e3-2026-004887”) or given in the address (`#/track/E3-2026-004887`).
- The `applications` array (sorted by reference number) and each application’s `history` and status.

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

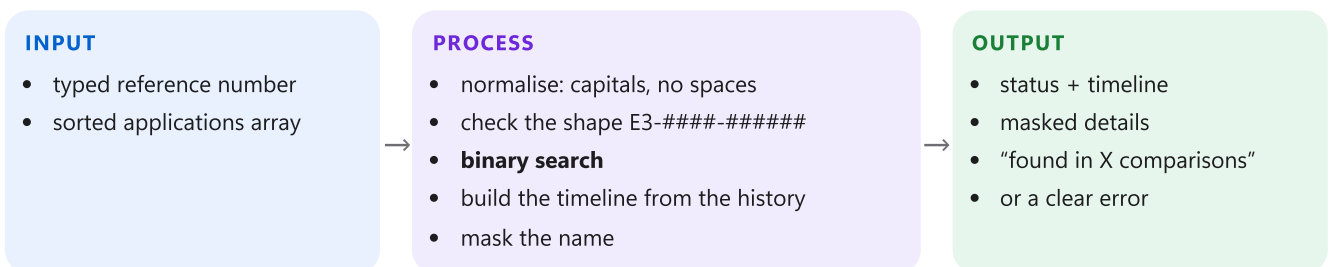

- 1 `normalizeReference` turns the input into capitals and removes spaces.
- 2 `isValidReference` checks the shape E3-####-##### character by character (`hasCodeShape`); a wrong shape shows “Use the format E3-2026-004879.”.
- 3 **Binary search** (`findApplication`): compare the middle reference of the range with the target; if the middle is smaller keep the right half, if bigger keep the left half; repeat until equal or the range is empty.
- 4 `applicationProgress` turns the status and history into 4 steps (done / current / upcoming) or a 2-step “not approved” path.
- 5 `maskName` shows “Ana R.” instead of the full name; the address and ID are never shown.

## 4 Output

*What result does the module produce?*

A result card with the status badge, the timeline, the plan, barangay and dates, a note such as “Found with binary search in ... comparisons among 17 applications” (the exact count is in the trace below), a message for the installation date or rejection reason — or an error: wrong format, or “We couldn’t find E3-2026-999999”.

## 5 Complexity analysis

What is the time complexity? What is the space complexity?

| Operation                                          | Time                                                                            | Space                    |
|----------------------------------------------------|---------------------------------------------------------------------------------|--------------------------|
| Normalise and check the format (n = 14 characters) | $O(n)$                                                                          | $O(n)$                   |
| <b>Binary search over n applications</b>           | <b><math>O(\log n)</math></b> — at most $\lceil \log_2(n+1) \rceil$ comparisons | <b><math>O(1)</math></b> |
| Timeline (4 steps × n history entries)             | $O(n)$                                                                          | $O(1)$                   |
| Linear search (for comparison)                     | $O(n)$                                                                          | $O(1)$                   |

17 applications → at most 5 comparisons; 1,000 → 10; 1,000,000 → 20.

## 6 Justification


Why did you choose that data structure or algorithm? Why is it appropriate?

- The tracker looks up **one record by an exact key** — the classic case for binary search.
- The array is **already sorted for free** (Module 2 appends increasing numbers), so binary search costs no extra work and no extra memory.
- A hash table would also find it in  $O(1)$  on average, but it needs extra memory, must be kept in step with every change, and gives no order. Binary search on the existing array is fast enough (5 steps) and simpler.
- Checking the format first means garbage input never reaches the search, and the customer gets a helpful message.


## 7 Demonstration

Show that the module works correctly — the input, the process and the output.

- From “Application received”, press “Track this application” (or open Track and type the number in small letters).
- The result shows the timeline and the binary-search note. Then type E3-2026-999999 → not found.

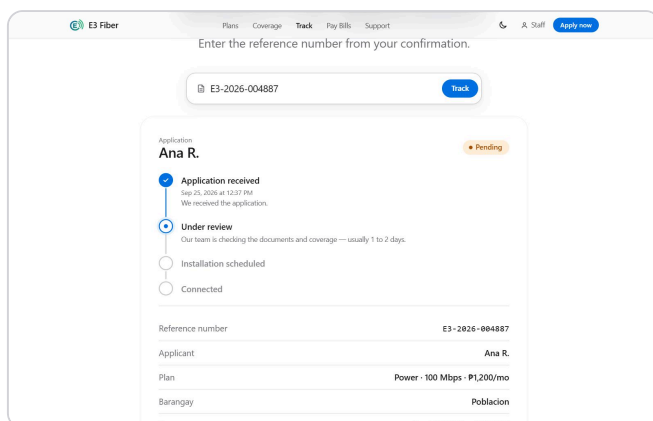

Found — masked name, timeline and the binary-search note.

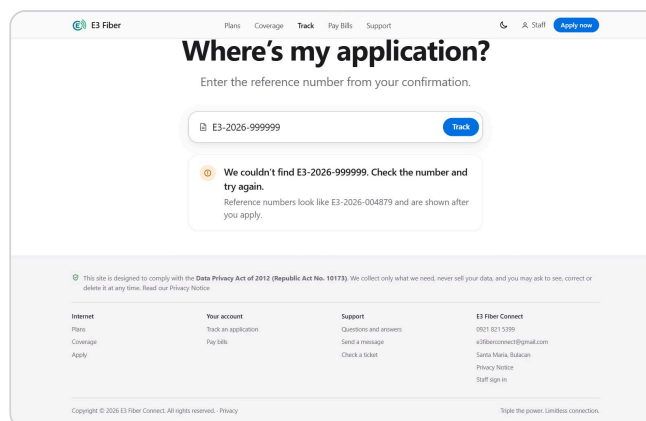

A number that does not exist.

### Trace — binary search (computed by our code)

Search for **E3-2026-004887** among **17** applications sorted by reference number (the input was typed in small letters with spaces; `normalizeReference` fixed it first).

|                       |                |                       |                       |                       |               |               |               |                      |               |                |                |
|-----------------------|----------------|-----------------------|-----------------------|-----------------------|---------------|---------------|---------------|----------------------|---------------|----------------|----------------|
| 004871<br>[0]         | 004872<br>[1]  | 004873<br>[2]         | 004874<br>[3]         | 004875<br>[4]         | 004876<br>[5] | 004877<br>[6] | 004878<br>[7] | 004879<br>[8] step 1 | 004880<br>[9] | 004881<br>[10] | 004882<br>[11] |
| 004883<br>[12] step 2 | 004884<br>[13] | 004885<br>[14] step 3 | 004886<br>[15] step 4 | 004887<br>[16] step 5 |               |               |               |                      |               |                |                |

| Step | low | high | middle | Reference at middle | Compare with the target |
|------|-----|------|--------|---------------------|-------------------------|
| 1    | 0   | 16   | 8      | E3-2026-004879      | smaller → go right      |
| 2    | 9   | 16   | 12     | E3-2026-004883      | smaller → go right      |

| Step | low | high | middle | Reference at middle | Compare with the target |
|------|-----|------|--------|---------------------|-------------------------|
| 3    | 13  | 16   | 14     | E3-2026-004885      | smaller → go right      |
| 4    | 15  | 16   | 15     | E3-2026-004886      | smaller → go right      |
| 5    | 16  | 16   | 16     | E3-2026-004887      | ✓ equal — found         |

Found in **5 comparisons** (the real `trackApplication` reported 5). A linear search would have needed all 17 — this record is the last one, its worst case. Binary search never needs more than  $\lceil \log_2(17 + 1) \rceil = 5$ .

### Not found: E3-2026-999999

| Step | low | high | middle | Reference at middle | Compare            |
|------|-----|------|--------|---------------------|--------------------|
| 1    | 0   | 16   | 8      | E3-2026-004879      | smaller → go right |
| 2    | 9   | 16   | 12     | E3-2026-004883      | smaller → go right |
| 3    | 13  | 16   | 14     | E3-2026-004885      | smaller → go right |
| 4    | 15  | 16   | 15     | E3-2026-004886      | smaller → go right |
| 5    | 16  | 16   | 16     | E3-2026-004887      | smaller → go right |

After 5 comparisons low (17) passed high (16): the range is empty, so the tracker answers “We couldn’t find E3-2026-999999”.

## Code walkthrough

assets/js/backend/applications.js · lines 39–59

```

39  /**
40   * trackApplication - para sa public tracker: aayusin muna yung tinype na reference,
41   * chine-check yung format, tapos binary search. Binabalik yung application (o null)
42   * kasama kung ilang comparisons yung nagamit.
43   * Time: O(log n)
44   */
45  function trackApplication(input) {
46      const referenceNo = normalizeReference(input);           // 1. ayusin muna: naka-capital, walang space
47      if (!isValidReference(referenceNo)) {                     // 2. dapat ganito itsura: E3-2026-004879
48          return { ok: false, referenceNo: referenceNo, error: 'Use the format E3-2026-004879.' };
49      }
50      const application = findApplication(referenceNo);         // 3. binary search sa naka-sort na table
51      return {                                                  // 4. yung result + ilang comparisons yung nagamit
52          ok: application !== null,
53          referenceNo: referenceNo,
54          application: application,
55          comparisons: dsaLastRun.comparisons,
56          n: applications.length,
57          error: application ? '' : 'We couldn't find ' + referenceNo + '. Check the number and try again.',
58      };
59  }

```

1. Tidy the input first, so small letters and spaces don’t matter.
2. Reject anything that doesn’t have the reference shape before searching.
3. `findApplication` is `binarySearch(applications, 'referenceNo', ...)`.
4. The result also carries `dsaLastRun.comparisons` — the number the page shows under the result.

assets/js/dsa/search.js · lines 76–102

```

76  /**
77   * binarySearch - index ng record na yung 'field' ay equal sa 'value', o -1.
78   * DAPAT naka-sort ascending by 'field' yung records. Bawat step titingnan yung
79   * nasa gitna tapos itatapon yung kalahati na imposibleng nandun yung value.
80   * Time: O(log n) - mga 17 steps lang para sa 100,000 records, Space: O(1)
81   */
82  function binarySearch(sortedRecords, field, value) {
83      let low = 0;                                             // 1. buong table muna yung range

```

```

84  let high = sortedRecords.length - 1;
85  let comparisons = 0;
86  while (low <= high) {                                     // 2. ulitin habang may laman pa yung range
87      const middle = Math.floor((low + high) / 2);         // 3. tingnan yung record sa gitna
88      const middleValue = sortedRecords[middle][field];
89      comparisons++;
90      if (middleValue === value) {                          // 4. nahanap na
91          recordRun('Binary search', comparisons, 0);
92          return middle;
93      }
94      if (middleValue < value) {
95          low = middle + 1;    // sa right half lang pwedeng nandun yung value
96      } else {
97          high = middle - 1;   // sa left half lang pwedeng nandun yung value
98      }
99  }
100 recordRun('Binary search', comparisons, 0);
101 return -1;
102 }

```

1. `low` and `high` mark the part of the table that can still contain the target.
2. The loop runs while that part is not empty.
3. `Math.floor((low + high) / 2)` is the middle position; its key is compared with the target.
4. Equal → found. Smaller → the target can only be to the right (`low = middle + 1`). Bigger → to the left (`high = middle - 1`).
5. If the loop ends, the key is not in the table and `-1` is returned. The comparisons are recorded either way.

assets/js/backend/utils.js · lines 543–563

```

543  /**
544   * hasCodeShape - chine-check kung pasok yung text sa shape na tulad ng "E3-####-#####"
545   * ("#" = kahit anong digit, yung iba dapat exact na tugma).
546   * Time: O(n), Space: O(1)
547   */
548  function hasCodeShape(value, shape) {
549      const text = textOf(value);
550      if (text.length !== shape.length) {
551          return false;
552      }
553      for (let i = 0; i < shape.length; i++) {
554          if (shape[i] === '#') {
555              if (!isDigitChar(text[i])) {
556                  return false;
557              }
558          } else if (text[i] !== shape[i]) {
559              return false;
560          }
561      }
562      return true;
563  }

```

1. The shape `"E3-####-####"` uses `#` for "any digit"; every other character must match exactly.
2. A different length fails immediately; otherwise one pass compares each position.

# Justin Banaag

Module 4 Application List · Module 5 Walk-in Override (New Application) · Module 6 Create Account

## 60-second pitch

My modules are the staff side of an application. The **Application List** filters the applications with a *linear search*, searches them with *naive string matching*, and sorts them with the algorithm the staff picks — *insertion*, *selection* or *bubble sort* — showing the real number of comparisons. Pending applications form a *queue*, so the oldest one is reviewed first. The **Walk-in override** lets staff encode an application for a customer at the office, with a custom price and an ID checked in person; every such action can be undone with a *stack*. **Create Account** turns an installed application into a subscriber account: a *binary search (lower bound)* finds where the new account belongs in the sorted subscribers array and the later records shift one place — a *sorted insert*.

## Structures and algorithms I must be able to explain

| Where            | Structure / algorithm               | Time                                            | Space       |
|------------------|-------------------------------------|-------------------------------------------------|-------------|
| Filter by status | Linear search (collect all matches) | $O(n)$                                          | $O(n)$      |
| Search box       | Naive string matching on 5 fields   | $O(n^2)$                                        | $O(n)$      |
| Sort the list    | Insertion / selection / bubble sort | $O(n^2)$ worst (insertion & bubble $O(n)$ best) | $O(n)$ copy |
| Review next      | Queue (circular buffer), peek       | $O(n)$ to build, $O(1)$ peek                    | $O(n)$      |
| Undo a walk-in   | Stack push / pop                    | $O(1)$ push, $O(n)$ removal                     | $O(1)$      |
| Create account   | Lower bound (binary search) + shift | $O(\log n) + O(n) = O(n)$                       | $O(1)$      |

## Likely panel questions

### Why offer three sorting algorithms?

To compare them on real data: the caption shows each one's comparisons and moves. Insertion sort is the default because our lists are almost sorted (best case  $O(n)$ ); selection sort makes the fewest swaps; bubble sort stops early when a pass has no swap.

### Isn't $O(n^2)$ too slow?

For the size of E3's lists (tens to a few hundred records) it takes well under a millisecond — the Algorithms page benchmark sorts 1,000 records in a few milliseconds. We also filter and search first, so only the matching rows are sorted.

### Why a queue for reviewing?

Fairness: applications are reviewed first come, first served. Our queue is a circular buffer, so taking the front is  $O(1)$  — no shifting like `shift()` would do.

### What exactly does the walk-in "override"?

Three online rules: staff may set a custom monthly price (₱300–₱20,000), the ID photo is optional because the original ID is checked in person (a required checkbox), and the application is marked "walk-in". Consent under the Data Privacy Act is still required: staff tick that the customer agreed to the Privacy Notice. Every other rule is the same validator.

### Why not just append the new subscriber at the end?

Installations don't finish in reference-number order. Appending could break the sorted order and binary search would give wrong answers. The sorted insert keeps the array sorted.

### **How does Undo remove the account again?**

Create account pushes one undo entry with two operations (restore the application, remove the subscriber). Undo pops it and reverses both — finding the records by binary search.

# Application List

|         |                                                                                                                                                        |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Admin → Applications (#/admin/applications), application detail                                                                                        |
| Files   | backend/applications.js (listApplications, countApplicationsByStatus, buildReviewQueue) ·<br>views/admin/applications.js · dsa/search.js · dsa/sort.js |
| Data    | applications array (sorted by reference number)                                                                                                        |
| DSA     | Linear search · naive string matching · insertion / selection / bubble sort · queue                                                                    |

## 1 Business process

*What task or problem from the client are you solving?*

The E3 staff need one place to see every application and act on it: which are waiting, which are approved or scheduled, find one applicant fast, order the list by date, name or plan price, and process them in a fair order. Without it, staff had to go through paper forms. The list also shows the next action for each application (Approve / Reject, Schedule, Create account).


## 2 Input

*What data is needed by the module?*

| Input                             | Values                                                              |
|-----------------------------------|---------------------------------------------------------------------|
| Status filter (segmented control) | All · Pending · Approved · Scheduled · Installed · Rejected         |
| Search text                       | matched against name, e-mail, reference number, barangay and mobile |
| Sort                              | Newest / Oldest first · Name A–Z / Z–A · Plan price high / low      |
| Sorting algorithm                 | Insertion sort · Selection sort · Bubble sort                       |
| Stored data                       | the <code>applications</code> array; PLANS for names and prices     |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

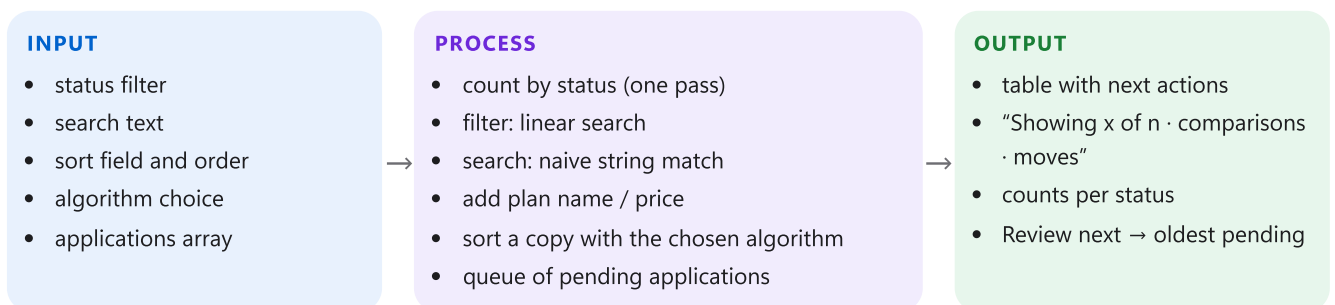

- 1** `countApplicationsByStatus` walks the array once and counts each status (the numbers on the filter buttons and the sidebar badge).
- 2** **Filter** — `linearSearchAll` collects the applications with the chosen status (skipped for "All").
- 3** **Search** — `textSearchRecords`: for every record and each of 5 fields, lower-case the text and look for the query letter by letter (naive string matching); one matching field is enough.
- 4** **Rows** — each match gets its plan name and monthly price (linear search in the 5 plans).
- 5** **Sort** — `sortRecords` sorts a *copy* with the chosen algorithm, counting comparisons and moves; the copy keeps the table in reference order for binary search.
- 6** The cost is shown under the table and logged in the Algorithms page (a ring-buffer queue of the last 40 operations).
- 7** **Review next** — `buildReviewQueue` enqueues the pending applications in arrival order; the button opens the front one (`queuePeek`).

## 4 Output

*What result does the module produce?*

The filtered, searched and sorted table (name, reference, plan, barangay, date, status and the action buttons), the counts on each filter, the caption under the table ("Showing x of n applications · the algorithm used · its comparisons and moves · its average Big-O · time", as in the screenshots below), and the detail page of the application at the front of the review queue.

## 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                        | Time                                   | Space                     |
|--------------------------------------------------|----------------------------------------|---------------------------|
| Count by status                                  | $O(n)$                                 | $O(1)$                    |
| Filter (linear search)                           | $O(n)$                                 | $O(n)$ matches            |
| Search (5 fields, text length L, query length m) | $O(n^2)$                               | $O(n)$                    |
| Insertion sort                                   | best $O(n)$ · average / worst $O(n^2)$ | $O(n)$ copy, $O(1)$ extra |
| Selection sort                                   | $O(n^2)$ always                        | $O(n)$ copy, $O(1)$ extra |
| Bubble sort                                      | best $O(n)$ · average / worst $O(n^2)$ | $O(n)$ copy, $O(1)$ extra |
| Build the review queue / peek                    | $O(n)$ / $O(1)$                        | $O(n)$ pending            |

## 6 Justification


*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **Linear search to filter:** the filter can be any status, and statuses are not the sort key — every record must be looked at once, which is exactly  $O(n)$ .
- **Naive string matching:** staff type part of a name or number ("jua", "4883"), so we need "contains", not "equals"; with short fields the simple algorithm is fast and easy to verify.
- **Three sorts:** insertion sort is the default because the table is stored in date order — "Oldest first" is its best case ( $n-1$  comparisons). Selection sort guarantees the fewest swaps; bubble sort stops early on sorted data. Showing their counts lets us prove the complexity live.
- **Sorting a copy:** the stored table must stay sorted by reference number, otherwise binary search (tracking, detail pages, Undo) would break.
- **Queue:** first come, first served, with  $O(1)$  access to the front.


## 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Sign in as Admin → Applications. Note the counts and the caption under the table.
- 2 Click "Pending", sort "Name A–Z", choose "Bubble sort" → the rows and the caption change.
- 3 Type part of a name in the search box; press "Review next" to open the oldest pending application.

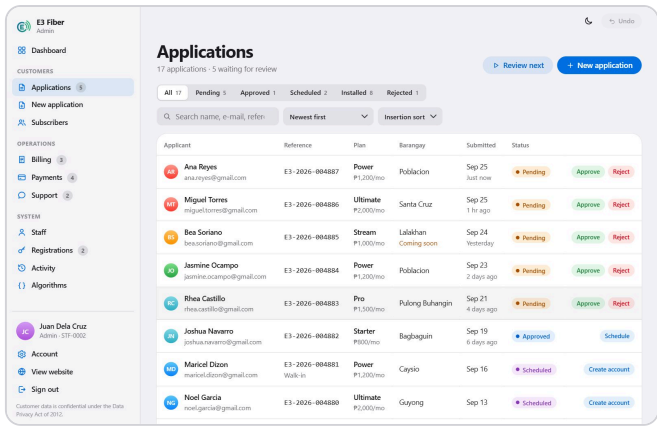

All applications, newest first with insertion sort.

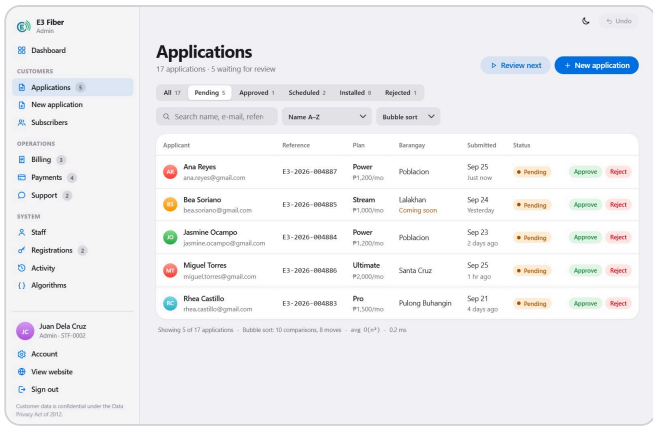

Pending only, Name A-Z with bubble sort — see the caption.

## Trace — the cost of each algorithm (computed by our code)

Sorting all **16** sample applications (the table is stored oldest → newest):

| Algorithm      | Newest first          | Oldest first        | Name A-Z             |
|----------------|-----------------------|---------------------|----------------------|
| Insertion sort | 120 comp. · 120 moves | 15 comp. · 0 moves  | 77 comp. · 66 moves  |
| Selection sort | 120 comp. · 8 moves   | 120 comp. · 0 moves | 120 comp. · 14 moves |
| Bubble sort    | 120 comp. · 120 moves | 15 comp. · 0 moves  | 117 comp. · 66 moves |

“Newest first” reverses the stored order — the **worst case** for insertion and bubble sort:  $n(n-1)/2 = 120$  comparisons. “Oldest first” is already in order — their **best case**,  $n-1 = 15$  comparisons. Selection sort always makes 120 comparisons but the fewest moves (swaps).

**Filter + search example:** status *Pending* (4 of 16 by linear search) + search “poblacion” (naive string matching on 5 fields) → Jasmine Ocampo (E3-2026-004884).

**Review queue (FIFO):** Rhea Castillo (front) → Jasmine Ocampo → Bea Soriano → Miguel Torres — “Review next” opens the front one.

## Code walkthrough

assets/js/backend/applications.js · lines 304–324

```
304  /**
305   * listApplications - i-filter by status (linear search), hanapin yung text
306   * (naive string matching), tapos i-sort gamit yung napiling algorithm.
307   * options: { status, query, sortField, sortOrder, algorithm }
308   * Time: O(n²) search + O(n²) sort, Space: O(n)
309   */
310   function listApplications(options) {
311     const status = options.status || 'all';
312     const base = status === 'all' ? applications : linearSearchAll(applications, 'status', status); // 1. i-filter by status
313     const found = textSearchRecords(base, ['fullName', 'email', 'referenceNo', 'barangay', 'contactNumber'], options.query || ''); // 2. galing sa search box
314     const rows = [];
315     for (let i = 0; i < found.length; i++) { // 3. lagyan ng plan name at presyo bawat row
316       arrayAppend(rows, applicationRow(found[i]));
317     }
318     const started = stopwatchStart();
319     const sorted = sortRecords(rows, options.sortField || 'submittedAt', options.sortOrder || 'desc', options.algorithm || 'insertion'); // 4. i-sort
320     const ms = stopwatchMs(started);
321     const stats = { algorithm: dsalastRun.algorithm, comparisons: dsalastRun.comparisons, moves: dsalastRun.moves, ms: ms, n: rows.length };
322     logOperation(stats.algorithm, 'Applications list', rows.length, stats.comparisons, stats.moves, ms); // 5. ipakita yung cost
323     return { rows: sorted, total: applications.length, stats: stats };
324   }
```

1. If a status is chosen, `linearSearchAll` keeps only those applications.
2. `textSearchRecords` keeps the ones whose name, e-mail, reference, barangay or mobile contains the search text.
3. `applicationRow` adds the plan name and price, so the list can also be sorted by price.
4. `sortRecords` runs the chosen algorithm; `stopwatchStart/Ms` time it and `dsaLastRun` holds its comparisons and moves.
5. `logOperation` adds a line to the Algorithms page log; the function returns the rows and the numbers for the caption.

assets/js/dsa/sort.js · lines 137–166

```

137  /**
138   * insertionSort - pinapalaki yung sorted part sa unahan: kinukuha bawat bagong item
139   * tapos yung mas malalaki uusog ng isang pwesto pakanan hanggang makita yung pwesto niya.
140   * Sobrang bilis sa mga list na halos sorted na (kadalasan ganun yung tables namin).
141   * Time: best O(n) (sorted na), average at worst O(n²)
142   * Space: O(1) extra (plus yung copy), Stable: oo
143   */
144  function insertionSort(records, field, order) {
145      const list = arrayCopy(records);           // copy yung sinosort, para same order pa rin yung table
146      const direction = order === 'desc' ? -1 : 1;
147      let comparisons = 0;
148      let shifts = 0;
149      for (let i = 1; i < list.length; i++) {      // 1. sorted na yung mga item bago ang i
150          const current = list[i];                // 2. kunin yung susunod na item
151          let j = i - 1;
152          while (j >= 0) {
153              comparisons++;
154              if (compareForOrder(list[j][field], current[field], direction) > 0) {
155                  list[j + 1] = list[j];           // 3. yung mas malaking item uusog ng isang pwesto pakanan
156                  shifts++;
157                  j--;
158              } else {
159                  break;                            // nahanap na yung pwesto
160              }
161          }
162          list[j + 1] = current;                    // 4. ilagay yung item sa bakanteng pwesto
163      }
164      recordRun('Insertion sort', comparisons, shifts);
165      return list;
166  }

```

1. Everything before position `i` is already sorted; `current` is the next item to place.
2. While the item on the left is bigger, it slides one place to the right (a “shift” — counted as a move).
3. When a smaller-or-equal item is found, the loop stops (that is why a sorted list costs only  $n-1$  comparisons) and `current` drops into the gap.

assets/js/dsa/search.js · lines 199–225

```

199  /**
200   * textSearchRecords - mga record na kahit isa sa `fields` ay may `query`,
201   * hindi pinapansin yung capital letters ("jua" -> makikita si "Juan Dela Cruz"). Pag empty
202   * yung query, lahat ng record ang balik. Linear search + naive string matching per field.
203   * Time: O(n²) - sinusubukan yung query sa bawat position ng bawat field ng bawat record
204   * Space: O(n) para sa matches
205   */
206  function textSearchRecords(records, fields, query) {
207      const needle = toLowerText(trimText(query));
208      const matches = [];
209      if (needle === '') {
210          for (let i = 0; i < records.length; i++) {
211              arrayAppend(matches, records[i]);
212          }
213          return matches;
214      }
215      for (let i = 0; i < records.length; i++) {      // 1. bawat record (linear search)
216          for (let f = 0; f < fields.length; f++) {    // 2. bawat field nito na pwedeng i-search
217              if (textContains(toLowerText(records[i][fields[f]]), needle)) { // 3. naive string match, walang pakialam
sa capitals
218                  arrayAppend(matches, records[i]);
219                  break; // sapat na yung isang field na tumugma
220              }

```

```

221     }
222   }
223   recordRun('Linear search (text)', records.length, 0);
224   return matches;
225 }

```

1. The query is trimmed and lower-cased once; an empty query keeps every record.
2. For each record, each field is lower-cased and `textContains` (naive string matching) looks for the query.
3. `break` stops checking the other fields as soon as one matches, so a record is added only once.

assets/js/backend/applications.js · lines 338–351

```

338  /**
339   * buildReviewQueue - QUEUE ng mga pending na application, yung pinakaluma una.
340   * Naka-order na by submission yung table, kaya isang loop lang tapos enqueue na (FIFO).
341   * Time: O(n), Space: O(n) para sa mga pending
342   */
343  function buildReviewQueue() {
344    const queue = createQueue(8);
345    for (let i = 0; i < applications.length; i++) {
346      if (applications[i].status === 'Pending') {
347        enqueue(queue, applications[i]);
348      }
349    }
350    return queue;
351  }

```

1. A new circular-buffer queue is created.
2. The table is in submission order, so enqueueing the pending ones in one pass gives first-come-first-served order.

# Walk-in Override (New Application)

|         |                                                                                                                                                     |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Admin → New application (#/admin/applications/new) → application detail                                                                             |
| Files   | views/admin/new-application.js · backend/applications.js (validateApplication with source “walk-in”, submitApplication) · backend/history.js (Undo) |
| Data    | applications array · the Undo <b>stack</b> · the review <b>queue</b>                                                                                |
| DSA     | Same validation and append as Module 2 · stack (Undo) · queue (review order)                                                                        |

## 1 Business process

*What task or problem from the client are you solving?*

Not every customer can apply online — some come to the office, some are seniors without e-mail access at home, some are offered a special price by the owner. Staff need to **encode the application for them**, with a few rules **overridden**: a custom monthly price, the ID checked in person (so no photo upload is required) and the application marked as a walk-in. Because staff type quickly at the counter, every walk-in can be **undone** right after.


## 2 Input

*What data is needed by the module?*

| Input                                                                   | Rule for walk-ins                                                               |
|-------------------------------------------------------------------------|---------------------------------------------------------------------------------|
| Plan                                                                    | one of the 5 plans <b>or</b> “Custom” with a monthly price from ₱300 to ₱20,000 |
| Name, e-mail, mobile, birth date, barangay, address, ID type and number | same rules as the online form (Module 2)                                        |
| Scanned ID                                                              | <b>optional</b> (JPG, PNG or PDF if given)                                      |
| “I checked the original ID”                                             | <b>required</b> checkbox                                                        |
| Customer agreed to the Privacy Notice (RA 10173)                        | <b>required</b> checkbox                                                        |
| Signed-in staff member                                                  | recorded as the author (“Juan Dela Cruz (walk-in)”)                             |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

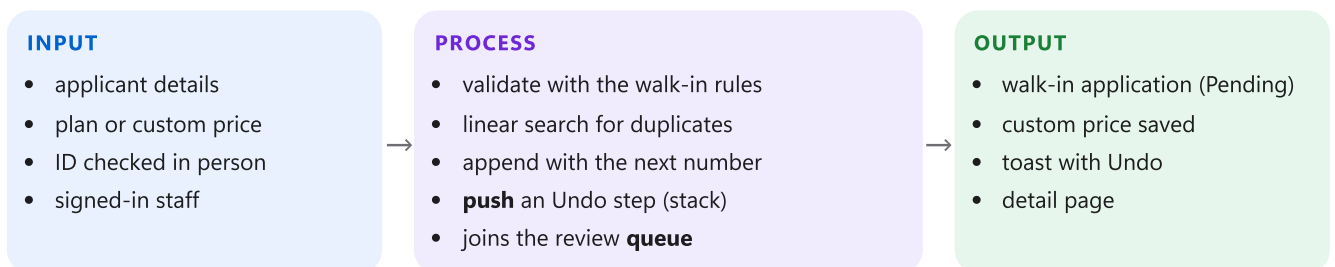

- 1 The summary box shows the price and the **queue position** the application will get (the review queue size + 1).
- 2 `validateApplication(data, 'walk-in')`: for “Custom” it checks the price range instead of looking up a plan; in the walk-in branch the photo is optional and the ID checkbox is required.
- 3 `submitApplication` runs the same duplicate check (linear search), takes the next reference number and **appends** — the array stays sorted.
- 4 The history says “Walk-in application at the office” by the staff member; `pushUndo` puts an “insert” operation on the **Undo stack**.

- If staff press Undo, `undoLastAction` pops the newest entry (LIFO) and removes the record (found by binary search).

#### 4 Output

What result does the module produce?

A new application with `source`: "walk-in" and, if chosen, `customPrice`; it appears in the Applications list (marked "Walk-in") and at the rear of the review queue; a toast "Created walk-in application for ..." with an Undo button; the detail page of the new application.

#### 5 Complexity analysis

What is the time complexity? What is the space complexity?

| Operation                                 | Time                                                          | Space  |
|-------------------------------------------|---------------------------------------------------------------|--------|
| Validation (walk-in rules)                | $O(n)$ per field                                              | $O(n)$ |
| Duplicate check                           | $O(n)$                                                        | $O(1)$ |
| Append the application                    | $O(1)$                                                        | $O(1)$ |
| Push an Undo step                         | $O(1)$ ( $O(n)$ only when the 25-step limit drops the bottom) | $O(1)$ |
| Undo: pop + find (binary search) + remove | $O(1) + O(\log n) + O(n)$                                     | $O(1)$ |
| Queue position (build the review queue)   | $O(n)$                                                        | $O(n)$ |

#### 6 Justification

Why did you choose that data structure or algorithm? Why is it appropriate?

- **One validator with a "source" switch:** online and walk-in applications follow the same rules except the three overrides, so a mistake can never be fixed in one form and forgotten in the other.
- **Stack for Undo:** the action to reverse is always the most recent one — last in, first out. Push, pop and peek (for the button label) are all  $O(1)$ . The stack keeps only 25 steps and is cleared at sign-in, so one person can never undo another person's work.
- **Queue:** a walk-in joins the same first-come-first-served review queue as online applications — fair to both.
- **Append:** the new number is the largest, so the table stays sorted without sorting.

#### 7 Demonstration

Show that the module works correctly — the input, the process and the output.

- Admin → New application: choose "Custom", type ₱950, fill in the applicant, leave the ID box unticked → Create → an error asks to confirm the ID.
- Tick the box → Create → the detail page opens; the application is marked walk-in; press Undo in the toast to remove it again.

Input: custom price ₱950; queue position shown.

Process: the walk-in rule "confirm the original ID".

Output: the walk-in application, ready for review.

## Trace — walk-in rules, queue and Undo (computed by our code)

| Field                               | Walk-in rule                                        | Result for the first try                             |
|-------------------------------------|-----------------------------------------------------|------------------------------------------------------|
| Plan                                | Plan “custom” allowed; price must be ₱300 – ₱20,000 | ✗ Enter a monthly price from ₱300 to ₱20,000.        |
| Scanned ID                          | Optional (the ID is seen in person)                 | ✓ no photo needed                                    |
| “I checked the original ID”         | Required                                            | ✗ Confirm that you checked the original ID.          |
| Customer consent (Data Privacy Act) | Required                                            | ✗ Confirm the customer agreed to the Privacy Notice. |

The same data through the *online* rules would fail on: *idPhoto*, *consent* — that is the “override”.

After fixing the price (₱950) and ticking both boxes: **E3-2026-004887**, source **walk-in**, monthly price ₱950, first history step “Walk-in application at the office” by Juan Dela Cruz (walk-in). Review queue: 4 → 5 (it joined at the rear).

Undo stack top: “Create walk-in application E3-2026-004887” (1 step). Pressing Undo pops it and removes the record: ✓ **application removed**.

## Code walkthrough

assets/js/backend/applications.js · lines 93–99 (part of validateApplication)

```

93   if (source === 'walk-in' && data.planId === 'custom') {
94     const price = Number(data.customPrice);
95     if (!(price >= 300 && price <= 20000)) {
96       errors.customPrice = 'Enter a monthly price from ₱300 to ₱20,000.';
97     }
98   } else if (!findPlan(data.planId)) {
99     errors.planId = 'Choose a plan.';

```

1. For a walk-in with the “Custom” plan, `Number(...)` reads the typed price and it must be from 300 to 20,000.
2. Everyone else must choose a real plan (`findPlan`, linear search).

assets/js/backend/applications.js · lines 145–164 (part of validateApplication)

```

145   if (source === 'online') {
146     if (!data.idPhotoName) {
147       errors.idPhoto = 'Upload a photo of the ID.';
148     } else if (!isAllowedIdPhoto(data.idPhotoName, data.idPhotoType)) {
149       errors.idPhoto = 'Upload a JPG, PNG or PDF file.';

```

```

150     } else if (data.idPhotoSize > MAX_ID_PHOTO_BYTES) {
151         errors.idPhoto = 'The file must be 10 MB or smaller.';
152     }
153     if (!data.consent) {
154         errors.consent = 'Please read the Privacy Notice and give your consent to continue.';
155     }
156 } else {
157     if (data.idPhotoName && !isAllowedIdPhoto(data.idPhotoName, data.idPhotoType)) {
158         errors.idPhoto = 'Upload a JPG, PNG or PDF file.';
159     }
160     if (!data.idChecked) {
161         errors.idChecked = 'Confirm that you checked the original ID.';
162     }
163     if (!data.consent) { // Data Privacy Act: kailangan din ng consent ng mga walk-in
164         errors.consent = 'Confirm the customer agreed to the Privacy Notice.';

```

1. Online: the ID photo and the consent box are required.
2. Walk-in (the else): a photo is optional but must be a JPG, PNG or PDF if given, and staff must confirm they checked the original ID and that the customer agreed to the Privacy Notice (Data Privacy Act).

assets/js/backend/history.js · lines 68–78

```

68  /**
69   * pushUndo - i-save yung action para ma-reverse later. Kung puno na yung stack
70   * (UNDO_LIMIT entries na), tatanggalin muna yung pinakaluma sa bottom.
71   * Time: O(1), O(n) lang pag may tinanggal sa bottom, Space: O(1)
72   */
73  function pushUndo(label, operations, actorName) {
74      if (stackSize(undoStack) >= UNDO_LIMIT) {
75          stackRemoveBottom(undoStack);
76      }
77      stackPush(undoStack, { label: label, operations: operations, at: nowISO(), actor: actorName || 'System' });
78  }

```

1. If the stack already holds 25 steps, the oldest (the bottom) is dropped first.
2. stackPush puts the new step on top: its label ("Create walk-in application ..."), the operations to reverse, the time and who did it.

assets/js/backend/history.js · lines 174–204

```

174  /**
175   * undoLastAction - i-pop yung pinakabagong entry tapos i-reverse yung operations
176   * nito, simula sa huli (kung dalawang table yung nagalaw, pabaliktad yung pag-undo).
177   * Binabalik: yung entry; null kung wala nang ma-undo; step-up error kung account
178   * yung nabago at wala pang na-verify na code; o kaya
179   * { blocked: true, label, error } kung hindi pwedeng i-undo (maiwan lang sa stack).
180   * Time: O(n²) - O(n) bawat operation (pag nag-remove ng record, usog yung iba), Space: O(1)
181   */
182  function undoLastAction(actorName) {
183      const top = stackPeek(undoStack); // 1. silipin muna yung pinakabagong entry
184      if (!top) {
185          return null;
186      }
187      const blocked = undoBlockedReason(top); // 2. masisira ba yung report o request ng customer pag ni-
reverse?
188      if (blocked !== '') {
189          return { blocked: true, label: top.label, error: 'Can't undo "' + top.label + '": ' + blocked };
190      }
191      if (undoTouchesAccounts(top)) { // 3. pag account yung nabago, kailangan ng code kahit undo
lang
192          const stepUp = stepUpRequired();
193          if (stepUp) {
194              return stepUp;
195          }
196      }
197      const entry = stackPop(undoStack); // 4. i-pop na tapos i-reverse yung operations, newest
first
198      for (let i = entry.operations.length - 1; i >= 0; i--) {
199          revertOperation(entry.operations[i]);
200      }
201      logActivity('undo', 'Undid: ' + entry.label, actorName);

```

```
202     markDataChanged();
203     return entry;
204 }
```

1. `stackPop` takes the newest step (last in, first out); nothing to undo  $\rightarrow$  `null`.
2. The operations are reversed from the last to the first; an "insert" is reversed by removing that record (binary search + `arrayRemoveAt`).
3. The undo itself is written to the activity log.

# Create Account

|         |                                                                                                                                                                                                                    |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Application detail → “Installed — create account” sheet → subscriber page                                                                                                                                          |
| Files   | backend/subscribers.js (previewSubscriberAccount, validateAccountDetails, createSubscriberAccount, createSubscriberFromApplication) · backend/applications.js (completeInstallation) · views/admin/applications.js |
| Data    | subscribers — array sorted by accountNo; the application being installed                                                                                                                                           |
| DSA     | Binary search (find the application, check no account exists) · lower bound + array insert (sorted insert) · stack (Undo)                                                                                          |

## 1 Business process

*What task or problem from the client are you solving?*

After the technician installs the fiber, the customer must become a **subscriber**: an account that can be billed every month and can pay online. The account must be created only for an application that is scheduled for installation, only after the connection was tested, and only once. It gets the account number (the same as the reference number, so the customer keeps one number), the billing day (the day it was connected) and, optionally, the modem’s serial number.


## 2 Input

*What data is needed by the module?*

| Input                                                  | Rule                                                                  |
|--------------------------------------------------------|-----------------------------------------------------------------------|
| The application (reference number)                     | must exist and be “For Installation”; no account with that number yet |
| Modem (ONU) serial number                              | optional; 6–24 letters, digits or dashes; saved in capitals           |
| “The fiber is installed and the connection was tested” | required checkbox                                                     |
| Stored data                                            | applications, subscribers (sorted), the plan price, today’s date      |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

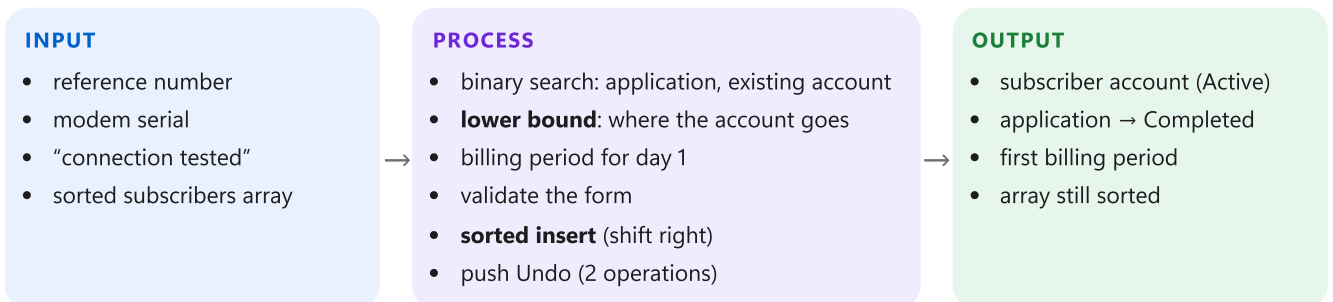

- 1 Preview** (previewSubscriberAccount): binary search finds the application; it must be “For Installation”; a second binary search confirms there is no account with that number yet.
- 2 Lower bound**: a binary search for the first position whose account number is  $\geq$  the new one — the sheet shows that position and the neighbours.
- 3 Billing**: billingPeriod computes the first period (today to the day before the same date next month) and the due date (15 days after the start).
- 4 Validate** the form (validateAccountDetails): the test checkbox and the serial format.
- 5 Create** (completeInstallation): the application becomes Completed; createSubscriberFromApplication builds the record and sortedInsert puts it in place — arrayInsertAt moves the later accounts one slot right.

- 6 One Undo step holds two operations: restore the application and remove the new account.

#### 4 Output

*What result does the module produce?*

A subscriber record { accountNo, fullName, email, contactNumber, barangay, completeAddress, planId, customPrice, status: "Active", since, applicationRef, modemSerial } at the correct position of the sorted array, the application marked "Completed" (its timeline shows "Connected"), the subscriber page (with the modem serial), and a toast with Undo. From now on Billing (Module 12) bills this account and the customer can use Pay Bills.

#### 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                                | Time                                 | Space                                           |
|----------------------------------------------------------|--------------------------------------|-------------------------------------------------|
| Find the application / check the account (binary search) | $O(\log n) + O(\log n)$              | $O(1)$                                          |
| Lower bound (insert position)                            | $O(\log n)$                          | $O(1)$                                          |
| Validate the form (serial of length $n$ )                | $O(n)$                               | $O(1)$                                          |
| Shift the later records (arrayInsertAt)                  | $O(n)$ — only the later records move | $O(1)$                                          |
| <b>Create account overall</b>                            | <b><math>O(n)</math></b>             | <b><math>O(1)</math></b> extra (one new record) |

$a$  = number of applications,  $n$  = number of subscribers.

#### 6 Justification

*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **The subscribers array must stay sorted** by account number: Pay Bills, billing, the subscriber page and Undo all find accounts by binary search.
- **Installations finish in any order** — in our demo Maricel (...4881) is installed before Noel (...4880). Appending Noel would break the order, so we insert him in place.
- **Lower bound + shift ( $O(n)$ )** is cheaper than appending and re-sorting ( $O(n^2)$  with our simple sorts), and finding the spot is only  $O(\log n)$ .
- A linked list could insert without shifting, but finding the spot would then be  $O(n)$  and binary search would be impossible — the array is the better fit because we search far more often than we insert.

#### 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Open Noel Garcia's application (Scheduled) → "Installed — create account". The sheet shows the account number, billing day, first bill and *where* the account goes.
- 2 Press "Create account" without the checkbox → error. Type the serial, tick the box → Create.
- 3 Open the subscriber page: status Active, modem serial saved.

**Create subscriber account** ✕

Noel Garcia · Brgy. Guyong. Creating the account completes the installation — you can undo it right after.

Account number E3-2026-004880 (same as the application)

Plan Ultimate · 300 Mbps · ₱2,000/mo

Billing day The 25th of every month

First bill Sep 25 – Oct 24 · ₱2,000 · due Oct 10, 2026

Pay Bills sign-in Account number + mobile 0998 \*\*\* 0150

**Where the account goes**

... E3-2026-004878 **E3-2026-004880** E3-2026-004881

Subscribers are kept sorted by account number. Binary search found position 9 of 10 in 3 comparisons; the 1 account after it move one place to the right.

**Modem (ONU) serial number (optional)**

☐ The fiber is installed and the connection was tested.

Cancel Create account

Process: the insert position found by binary search.

**Create subscriber account** ✕

Noel Garcia · Brgy. Guyong. Creating the account completes the installation — you can undo it right after.

Account number E3-2026-004880 (same as the application)

Plan Ultimate · 300 Mbps · ₱2,000/mo

Billing day The 25th of every month

First bill Sep 25 – Oct 24 · ₱2,000 · due Oct 10, 2026

Pay Bills sign-in Account number + mobile 0998 \*\*\* 0150

**Where the account goes**

... E3-2026-004878 **E3-2026-004880** E3-2026-004881

Subscribers are kept sorted by account number. Binary search found position 9 of 10 in 3 comparisons; the 1 account after it move one place to the right.

**Modem (ONU) serial number (optional)**

☐ The fiber is installed and the connection was tested.

ⓘ Confirm that the fiber is installed and the connection was tested.

Cancel Create account

Validation: the connection test must be confirmed.

**E3 Fiber Admin**

**Dashboard**

**CUSTOMERS**

Applications 6

New application

**Subscribers**

**OPERATIONS**

Billing 3

Payments 4

Support 2

**SYSTEM**

Staff

Registrations 2

Activity

Algorithms

**Juan Dela Cruz**  
Admin · STF-0002

**Account**

**View website**

**Sign out**

Customer data is confidential under the Data Privacy Act of 2012.

**Application**

**Noel Garcia**

E3-2026-004880 · Since Sep 25, 2026 · Brgy. Guyong · **Active**

Change plan Suspend Terminate

**Account**

E-mail noel.garcia@gmail.com

Mobile 0998 555 0150

Address 45 Rizal Ave., Purok 4, Brgy. Guyong

Landmark Beside Guyong Barangay Hall

Application E3-2026-004880

Modem serial ZTEG-C8A1F2B7

**Billing history**

Newest period first

| Period       | Due | Amount | Status |
|--------------|-----|--------|--------|
| No bills yet |     |        |        |

Create one from Billing.

**Balance**

**₱0**

All paid up · Next period starts Oct 25, 2026

Paid so far ₱0

**Plan**

**Ultimate**

**300** Mbps

**₱2,000/mo**

**Payment reports**

No payment reports.

Output: the new subscriber account.

## Trace — the sorted insert (computed by our code)

Maricel Dizon (E3-2026-004881) was installed first, so her account is already at the end. Now Noel Garcia's account **E3-2026-004880** — an *older* number — must go in front of it.

### 1 · Where does it go? (lowerBound = binary search for the first key ≥ 004880)

| Step | low | high | middle | Account at middle | Decision               |
|------|-----|------|--------|-------------------|------------------------|
| 1    | 0   | 9    | 4      | E3-2026-004875    | smaller → low = 5      |
| 2    | 5   | 9    | 7      | E3-2026-004878    | smaller → low = 8      |
| 3    | 8   | 9    | 8      | E3-2026-004881    | not smaller → high = 8 |

Position **8** (the sheet shows it as "position 9 of 10"), found in 3 comparisons; the real preview reported 3. Neighbours: E3-2026-004878 before, E3-2026-004881 after.

### 2 · Insert (arrayInsertAt shifts the later records one slot right)

|               |               |               |               |               |               |               |               |               |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 004871<br>[0] | 004872<br>[1] | 004873<br>[2] | 004874<br>[3] | 004875<br>[4] | 004876<br>[5] | 004877<br>[6] | 004878<br>[7] | 004880<br>[8] |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|

Before: 9 accounts. The yellow record moves one slot to the right (1 shift).

|               |               |               |               |               |               |               |               |               |               |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|
| 004871<br>[0] | 004872<br>[1] | 004873<br>[2] | 004874<br>[3] | 004875<br>[4] | 004876<br>[5] | 004877<br>[6] | 004878<br>[7] | 004880<br>[8] | 004881<br>[9] |
|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|---------------|

After: 10 accounts, still sorted — Noel at index 8, application status now Completed, modem serial saved as ZTEG-C8A1F2B7.

### 3 • The account details

| Item                      | Value                                                                                                                              |
|---------------------------|------------------------------------------------------------------------------------------------------------------------------------|
| Account number            | E3-2026-004880 (same as the reference number)                                                                                      |
| Billing day               | day 1 of every month — the day the account was created (anniversary billing)                                                       |
| First bill                | 2026-10-01 → 2026-10-31, due 2026-10-16, ₱2,000                                                                                    |
| Form errors if left wrong | Use 6–24 letters, digits or dashes, as printed on the modem.<br>Confirm that the fiber is installed and the connection was tested. |

## Code walkthrough

assets/js/backend/subscribers.js · lines 58–92

```

58  /**
59   * previewSubscriberAccount - pinapakita muna kung ano yung gagawin ng "Create account"
60   * bago pa mangyari: yung account number, billing day at first bill, tsaka KUNG SAAN
61   * mapupunta yung record sa sorted na subscribers array (lowerBound = binary search ng pwesto).
62   * Time: O(log n), Space: O(1)
63   */
64   function previewSubscriberAccount(referenceNo) {
65     const app = findApplication(referenceNo);
66     if (!app) {
67       return { ok: false, error: 'Application not found.' };
68     }
69     if (app.status !== 'For Installation') {
70       return { ok: false, error: 'Schedule the installation first.' };
71     }
72     if (findSubscriber(referenceNo)) {
73       return { ok: false, error: 'This customer already has a subscriber account.' };
74     }
75     const since = nowISO();
76     const position = lowerBound(subscribers, 'accountNo', referenceNo);
77     const comparisons = dsaLastRun.comparisons;
78     const clock = readClock();
79     return {
80       ok: true,
81       application: app,
82       accountNo: referenceNo,
83       monthly: planPrice(app.planId, app.customPrice),
84       billingDay: clock.day,
85       firstPeriod: billingPeriod({ since: since }, clock.year, clock.month),
86       position: position,
87       total: subscribers.length,
88       comparisons: comparisons,
89       before: position > 0 ? subscribers[position - 1].accountNo : '',
90       after: position < subscribers.length ? subscribers[position].accountNo : '',
91     };
92   }

```

1. Three guards: the application exists, it is scheduled for installation, and no account exists yet (two binary searches).
2. `lowerBound` finds the insert position; `dsaLastRun.comparisons` is how many steps it took.
3. `billingPeriod` gives the first period and due date; `before` / `after` are the neighbouring account numbers shown in the sheet.

assets/js/backend/subscribers.js · lines 32–56

```

32  /**
33   * createSubscriberFromApplication - gagawan ng account yung completed na
34   * application ("put" gamit sortedInsert). Binabalik: { subscriber, position }.
35   * Time: O(log n) search + O(n) shift, Space: O(1)

```

```

36  */
37  function createSubscriberFromApplication(app, sinceISO, extras) {
38      const subscriber = {
39          accountNo: app.referenceNo,
40          fullName: app.fullName,
41          email: app.email,
42          contactNumber: app.contactNumber,
43          barangay: app.barangay,
44          completeAddress: app.completeAddress,
45          landmark: app.landmark,
46          planId: app.planId,
47          customPrice: app.customPrice,
48          status: 'Active',
49          since: sinceISO,
50          statusChangedAt: sinceISO,
51          applicationRef: app.referenceNo,
52          modemSerial: extras && extras.modemSerial ? extras.modemSerial : '',
53      };
54      const position = sortedInsert(subscribers, 'accountNo', subscriber);
55      return { subscriber: subscriber, position: position };
56  }

```

1. The subscriber copies the application's details; the account number is the reference number.
2. `sortedInsert` = lower bound + `arrayInsertAt`; it returns the position, which the trace and Undo use.

assets/js/dsa/search.js · lines 129–149

```

129  /**
130   * lowerBound - yung unang position na yung 'field' ay >= 'value' sa sorted array
131   * (records.length kung mas maliit lahat ng key). Dito dapat mapunta yung 'value'.
132   * Time: O(log n), Space: O(1)
133   */
134  function lowerBound(sortedRecords, field, value) {
135      let low = 0; // 1. nasa 0 ... n lang yung sagot
136      let high = sortedRecords.length;
137      let comparisons = 0;
138      while (low < high) { // 2. hatiin yung range hanggang isang position na lang
139          const middle = Math.floor((low + high) / 2);
140          comparisons++;
141          if (sortedRecords[middle][field] < value) {
142              low = middle + 1; // mas maliit yung middle -> nasa kanan yung pwesto
143          } else {
144              high = middle; // mas malaki o equal yung middle -> dito o sa kaliwa yung
145          } // pwesto
146      }
147      recordRun('Binary search (position)', comparisons, 0);
148      return low; // 3. unang position na yung key ay >= value
149  }

```

1. Like binary search, but it looks for the first key  $\geq$  the value, so it also works when the key is not in the array yet.
2. "Smaller" moves `low` past the middle; otherwise `high` becomes the middle. When they meet, that is the position.

assets/js/dsa/arrays.js · lines 69–87

```

69  /**
70   * arrayInsertAt - isingit yung item sa isang position (kapalit ng splice(index, 0, item)).
71   * Yung mga item simula sa 'index' ay uusog ng isang slot pakanan.
72   * Time: O(n) - yung mga record lang after ng index ang gagalaw, Space: O(1)
73   */
74  function arrayInsertAt(array, index, item) {
75      let position = index;
76      if (position < 0) { // siguraduhin na nasa loob ng array yung position
77          position = 0;
78      }
79      if (position > array.length) {
80          position = array.length;
81      }
82      for (let i = array.length; i > position; i--) { // 1. simula sa dulo, iusog pakanan yung bawat item
83          array[i] = array[i - 1];
84      }
85      array[position] = item; // 2. bakante na yung 'position' -> dito isulat yung item

```

```
86     return array.length;  
87 }
```

1. From the end of the array down to the position, each item moves one slot right (our replacement for `splice`).
2. The new item is written into the gap. The number of moves is  $(n - \text{position})$  — zero when inserting at the end.

# Dela Cruz Riceerich

Module 7 Admin Login · Module 8 Accounts Management (Subscribers) · Module 9 Admin/Staff Creation & Management · Module 10 Admin Registration & Approval

## 60-second pitch

My modules decide **who can do what**. **Admin Login** finds the staff member by e-mail in a *hash table* in  $O(1)$  on average, compares a salted password hash, and pauses sign-in after 5 wrong tries. **Accounts Management** lists, searches and sorts subscribers, finds one by *binary search*, changes plans and statuses through a strict set of allowed moves, and settles the oldest bill first with a *queue*. **Staff Management** creates accounts with a one-time temporary password, keeps e-mails unique through the same hash table, and enforces role rules. **Registration & Approval** lets new employees ask for access themselves; the requests wait in a first-in-first-out *queue* until an Owner or Admin approves one, which creates the staff account with the password the person chose.

## Structures and algorithms I must be able to explain

| Where                                      | Structure / algorithm                       | Time                      | Space           |
|--------------------------------------------|---------------------------------------------|---------------------------|-----------------|
| Find staff by e-mail (sign-in, duplicates) | Hash table, djb2, separate chaining         | $O(1)$ average            | $O(n)$          |
| Find staff by id / subscriber by account   | Binary search                               | $O(\log n)$               | $O(1)$          |
| Lists (subscribers, staff, requests)       | Linear filter · string search · chosen sort | $O(n^2)$ worst            | $O(n)$          |
| Oldest bill first                          | Queue (after insertion sort by due date)    | $O(n^2)$                  | $O(n)$          |
| Staff requests                             | Queue (circular buffer)                     | $O(n)$ build, $O(1)$ peek | $O(n)$          |
| Every change                               | Undo stack                                  | $O(1)$ push / pop         | $O(1)$ per step |

## Likely panel questions

### Why a hash table for e-mails?

Sign-in and “is this e-mail taken?” happen often; a hash table answers in  $O(1)$  on average instead of scanning every staff member. The e-mail is lower-cased first, so capital letters don’t matter.

### What is a collision and how do you handle it?

Two keys landing in the same bucket. Each bucket is a small array (a chain); we compare the keys in that chain one by one. The table grows (about  $\times 2$  buckets, rehashing every key) when there are more than 0.75 keys per bucket, so chains stay short.

### Do you store passwords?

No — only a salted hash (the salt is the staff id or the request id). Sign-in hashes what was typed and compares the results. Our hash is a teaching hash; a real system would check passwords on a server with a slow algorithm such as bcrypt.

### Why can’t an Admin suspend the Owner, or you suspend yourself?

Role rules in `canManageMember`: nobody changes their own account (you could lock yourself out) and an Admin can’t change an Owner. Only an Owner can add another Owner.

### Why doesn’t the registration form say “e-mail already has an account”?

That would let strangers test which e-mails exist. The form accepts the request; the reviewer sees the hash-table check fail and rejects it as a duplicate.

**Why is the balance not stored in the subscriber record?**

It is always computed from the bills (sum of unpaid bills), so it can never disagree with them after a payment, an Undo or a new bill.

# Admin Login

|         |                                                                                                                                                                            |
|---------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Staff sign-in (#/admin/login); every admin screen is guarded                                                                                                               |
| Files   | backend/auth.js (signIn, currentStaff) · backend/staff.js (findStaffByEmail, staffPasswordMatches) · dsa/hashtable.js · views/admin/login.js · ui/router.js (route guards) |
| Data    | staffEmailIndex (hash table e-mail → id) · staffMembers (sorted by id) · authState { staffId, failedByEmail (hash table e-mail → wrong tries), pausedUntil }               |
| DSA     | Hash table (djb2 + separate chaining) · binary search · salted password hash · per-e-mail counter (a second hash table) + pause                                            |

## 1 Business process

*What task or problem from the client are you solving?*

Customer data, bills and payments must only be seen and changed by E3 staff. Each employee signs in with their own account and role (Owner, Admin, Support), so the system knows who did what (the activity log and Undo use it). The login must stop password guessing, refuse suspended or archived accounts, let staff who forgot their password reset it with an e-mailed code, force people with a temporary password to choose their own, and tell someone whose registration is still waiting what is happening.


## 2 Input

*What data is needed by the module?*

| Input    | Detail                                                                                                                                                                                                   |
|----------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| E-mail   | any capitals / spaces — tidied before the look-up                                                                                                                                                        |
| Password | compared as a salted hash, never stored as typed                                                                                                                                                         |
| Stored   | the e-mail hash table, the staff records (id, role, status, passwordHash, passwordSalt, mustChangePassword), the registrations (for waiting requests), the wrong-try count per e-mail and the pause time |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

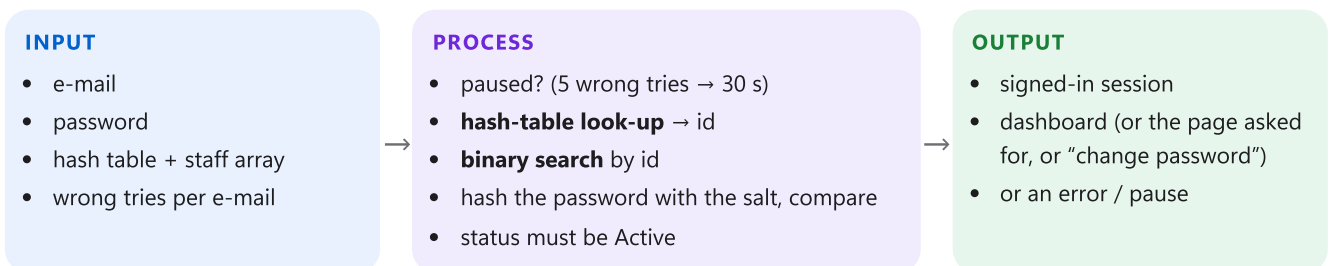

- 1 If sign-in is paused (after 5 wrong passwords in a row), say how many seconds are left.
- 2 `findStaffByEmail`: lower-case and trim the e-mail, **djb2-hash** it to a bucket, compare the keys in that bucket's chain, get the staff id, then **binary search** the staff array by id.
- 3 `staffPasswordMatches`: hash the typed password with the member's salt and compare with the stored hash.
- 4 Not a staff password (or no account)? Check for a waiting or rejected **registration** with the same e-mail and password and explain its status — checked the same way whether or not a staff account exists, so nobody can learn which e-mails are staff. Otherwise count the wrong try for that e-mail in a second **hash table**; the 5th for one e-mail — or the 10th overall, which stops someone trying a few passwords on every e-mail — pauses sign-in for 30 seconds.
- 5 A suspended or archived account is refused ("Ask the owner to reactivate / restore it").
- 6 Success: reset that e-mail's counter, remember the staff id, clear the Undo stack, record the sign-in time and log it. The router then opens the requested page; a temporary password forces the Account page first.

**Forgot password** (backend/recovery.js): the e-mail is found with the same **hash-table look-up**; an Active account gets a random 6-digit code valid for 10 minutes (it arrives as a message banner on the screen). One code can be asked for every 30 seconds, 5 wrong codes pause entry (30 s, doubling up to 15 minutes), and only a verified code lets `completePasswordReset` save the new salted hash. The answer is the same for e-mails without an account, so nobody learns which e-mails are staff.

#### 4 Output

*What result does the module produce?*

A signed-in session (`authState.staffId`) — the sidebar shows the name and role and every guarded screen opens; or a clear message (“The e-mail or password is incorrect.”, “This account is suspended ...”, “Too many attempts ...”, “Your request REG-... is still waiting ...”) with a shake of the card. Signing out clears the session and the Undo stack.

#### 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Step                                                                       | Time                                                                        | Space                                                   |
|----------------------------------------------------------------------------|-----------------------------------------------------------------------------|---------------------------------------------------------|
| Hash the e-mail (n characters)                                             | $O(n)$                                                                      | $O(1)$                                                  |
| Look in the bucket’s chain                                                 | $O(1)$ average, $O(n)$ worst (all keys in one bucket)                       | $O(1)$                                                  |
| Binary search by id                                                        | $O(\log n)$                                                                 | $O(1)$                                                  |
| Password hash (400 rounds over n characters)                               | $O(n)$ — a constant amount of work per try                                  | $O(1)$                                                  |
| Waiting-registration check (n requests)                                    | $O(n)$ (only when the staff password did not match)                         | $O(1)$                                                  |
| Count a wrong try for that e-mail (hash table)                             | $O(1)$ average                                                              | $O(1)$ per e-mail tried                                 |
| Forgot password: find the account / check the code / save the new password | $O(1)$ average / $O(1)$ / $O(n)$ for n characters                           | $O(1)$                                                  |
| <b>signIn overall</b>                                                      | <b><math>O(1)</math> average</b> (plus $O(\log n)$ and the fixed hash cost) | <b><math>O(1)</math></b> ; the hash table itself $O(n)$ |

#### 6 Justification


*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **Hash table:** e-mail is the key people type; staff are stored by id. A hash table maps e-mail  $\rightarrow$  id in  $O(1)$  on average, where a linear search would be  $O(n)$  — and the same table answers “is this e-mail already used?” for Modules 9 and 10.
- **Separate chaining** handles collisions simply (a short array per bucket), and resizing at load 0.75 keeps chains short.
- **Forgot password with a short-lived code:** a 6-digit code that expires in 10 minutes and allows 5 tries proves the person can read the account’s messages without ever showing or e-mailing the password; the same hash table finds the account in  $O(1)$ .
- **Binary search by id** reuses the staff array’s sorted order (ids only grow, records are appended).
- **Salted hash:** passwords are never kept in readable form; the salt makes equal passwords look different.
- **A counter per e-mail + a pause time:** the simplest data that stops unlimited guessing. Keeping the counts in a hash table (e-mail  $\rightarrow$  wrong tries) means signing in to your own account does not reset the count for someone else’s.

## 7 Demonstration

Show that the module works correctly — the input, the process and the output.

- 1 Open a staff page (e.g. `#/admin/applications`) → you are sent to sign-in.
- 2 Type the Admin e-mail with a wrong password → “The e-mail or password is incorrect.” (the card shakes).
- 3 Type the Admin e-mail and password (page 2) → Sign in → you return to the page you asked for.
- 4 Forgot password: on the sign-in page click *Forgot password?*, enter the Admin e-mail → Send code. The code arrives as a banner at the top; tap it to fill the six boxes → choose a new password → sign in with it.

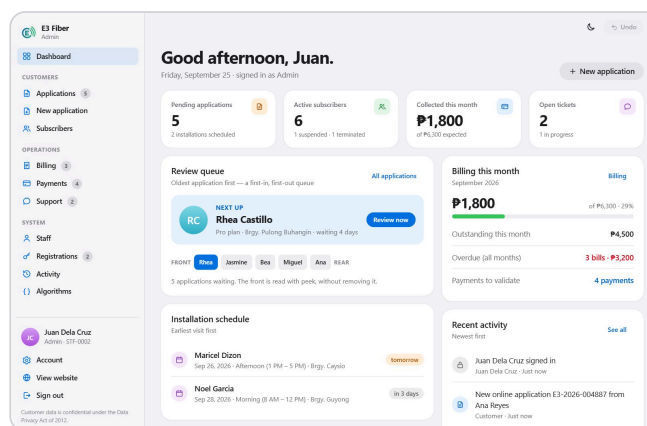

Output: signed in as Juan Dela Cruz (Admin).

Wrong password → error, no hint about which part was wrong.

### Trace — the e-mail hash table and a sign-in (computed by our code)

The staff e-mails are stored in a hash table with 17 buckets (djb2 hash, then remainder):

| E-mail (key)                    | djb2 hash     | Bucket                        | Value = staff id               |
|---------------------------------|---------------|-------------------------------|--------------------------------|
| maria.santos@e3fiberconnect.ph  | 1,390,595,461 | $1,390,595,461 \bmod 17 = 0$  | STF-0001 · Owner · Active      |
| juan.delacruz@e3fiberconnect.ph | 3,956,422,187 | $3,956,422,187 \bmod 17 = 15$ | STF-0002 · Admin · Active      |
| paolo.reyes@e3fiberconnect.ph   | 2,202,796,774 | $2,202,796,774 \bmod 17 = 14$ | STF-0003 · Support · Active    |
| grace.lim@e3fiberconnect.ph     | 714,487,751   | $714,487,751 \bmod 17 = 4$    | STF-0004 · Support · Suspended |
| daniel.tan@e3fiberconnect.ph    | 1,847,100,051 | $1,847,100,051 \bmod 17 = 3$  | STF-0005 · Admin · Archived    |

|               |               |
|---------------|---------------|
| [0] STF-0001  | [1] empty     |
| [2] empty     | [3] STF-0005  |
| [4] STF-0004  | [5] empty     |
| [6] empty     | [7] empty     |
| [8] empty     | [9] empty     |
| [10] empty    | [11] empty    |
| [12] empty    | [13] empty    |
| [14] STF-0003 | [15] STF-0002 |
| [16] empty    |               |

**Signing in as `juan.delacruz@e3fiberconnect.ph`:** hash → bucket **15** → compare with the 1 key(s) in that bucket → id **STF-0002** → binary search on the staff table by id (3 comparisons) → password check:

| Password typed | hashPassword(typed, salt “STF-0002”) | Stored hash | Match?      |
|----------------|--------------------------------------|-------------|-------------|
| e3admin        | 4c11d5e5                             | 4c11d5e5    | ✓ signed in |

| Password typed | hashPassword(typed, salt "STF-0002") | Stored hash | Match?                                   |
|----------------|--------------------------------------|-------------|------------------------------------------|
| wrong-password | 336680c5                             | 4c11d5e5    | X "The e-mail or password is incorrect." |

| Wrong try | Message                                              |
|-----------|------------------------------------------------------|
| 1         | The e-mail or password is incorrect.                 |
| 2         | The e-mail or password is incorrect.                 |
| 3         | The e-mail or password is incorrect.                 |
| 4         | The e-mail or password is incorrect.                 |
| 5         | Too many attempts. Sign-in is paused for 30 seconds. |
| 6         | Too many attempts. Try again in 30 seconds.          |

## Code walkthrough

assets/js/backend/auth.js · lines 28–72

```

28  /**
29   * signIn - i-check yung e-mail (hash table lookup) at yung password hash.
30   * Active na accounts lang ang pwedeng mag-sign in.
31   * Time: O(1) average + isang password hash (400 fixed rounds, O(n) para sa n na characters)
32   */
33  function signIn(email, password) {
34      const now = Date.now();
35      if (authState.pausedUntil > now) { // 1. naka-pause ba after 5 maling try?
36          const seconds = Math.ceil((authState.pausedUntil - now) / 1000);
37          return { ok: false, error: 'Too many attempts. Try again in ' + pluralize(seconds, 'second') + '.' };
38      }
39      const emailKey = toLowerText(trimText(email));
40      const member = findStaffByEmail(email); // 2. hanapin yung e-mail sa hash table, O(1)
41      if (!member || !staffPasswordMatches(member, password)) { // 3. i-compare yung salted password hash
42          // Hindi staff password - baka registration na naghihintay pa o hindi na-approve.
43          // Binabanggit lang ito kapag tugma yung password na pinili nila para dito, at
44          // chine-check ito may staff account man o wala, para hindi malaman sa sagot
45          // kung aling e-mail ang sa staff.
46          const request = registrationForSignIn(email, password);
47          if (request) {
48              return { ok: false, error: registrationStatusMessage(request), registration: request };
49          }
50          const tries = (hashGet(authState.failedByEmail, emailKey) || 0) + 1; // 4. bilangin yung maling tries ng e-mail na ito
51          authState.failedInARow = authState.failedInARow + 1; // ... at yung sunod-sunod sa kahit anong e-mail
52          if (tries >= SIGN_IN_MAX_ATTEMPTS || authState.failedInARow >= SIGN_IN_MAX_TOTAL_ATTEMPTS) { // pause pag pang-5 na sa isang e-mail / pang-10 overall
53              hashPut(authState.failedByEmail, emailKey, 0);
54              authState.failedInARow = 0;
55              authState.pausedUntil = now + SIGN_IN_PAUSE_MS;
56              return { ok: false, error: 'Too many attempts. Sign-in is paused for 30 seconds.' };
57          }
58          hashPut(authState.failedByEmail, emailKey, tries);
59          return { ok: false, error: 'The e-mail or password is incorrect.' };
60      }
61      if (member.status !== 'Active') { // 5. bawal mag-sign in yung Suspended o Archived na account
62          return { ok: false, error: 'This account is ' + toLowerText(member.status) + '. Ask the owner to ' + (member.status === 'Archived' ? 'restore' : 'reactivate') + ' it.' };
63      }
64      hashPut(authState.failedByEmail, emailKey, 0); // 6. success: balik sa zero yung count ng e-mail na ito; tandaan kung sino naka-sign in
65      authState.staffId = member.id;
66      clearUndoHistory(); // sariling actions mo lang sa sign-in na ito ang pwedeng i-undo
67      endStepUp(); // bawat bagong sign-in, kailangan ulit ng sariling Google Authenticator code
68      clearPasswordReset(); // ... at tapusin yung kahit anong "forgot password" na nagaganap sa browser na ito
69      member.lastSignIn = nowISO();
70      logActivity('auth', member.fullName + ' signed in', member.fullName);

```

```

71     return { ok: true, staff: member };
72 }

```

1. Step 1 checks the pause time; `Math.ceil` turns milliseconds into whole seconds for the message.
2. Step 2 is the hash-table look-up (below). Step 3: `staffPasswordMatches` hashes the typed password with the stored salt and compares.
3. When it doesn't match (or there is no account), a waiting or rejected registration is explained — only if *its* password matches. Step 4 then counts the wrong try for that e-mail in `authState.failedByEmail` (`hashGet` / `hashPut`); the 5th for that e-mail, or the 10th overall (`failedInARow`), sets `pausedUntil` 30 seconds ahead. The message never says whether the e-mail or the password was wrong.
4. Step 5 refuses suspended/archived accounts; step 6 records the session, clears Undo and logs the sign-in.

assets/js/backend/staff.js · lines 34–38

```

34  /** findStaffByEmail - hanapin yung staff gamit yung e-mail sa hash table, tapos by id. O(1) average */
35  function findStaffByEmail(email) {
36      const id = hashGet(staffEmailIndex, toLowerText(trimText(email)));
37      return id === null ? null : findStaffById(id);
38  }

```

1. The e-mail is trimmed and lower-cased, then `hashGet` returns the staff id stored under it (or `null`).
2. `findStaffById` is a binary search on the staff array sorted by id.

assets/js/dsa/hashtable.js · lines 97–105

```

97  /**
98   * hashGet - yung value na naka-store sa 'key', o null.
99   * Time: O(1) average, Space: O(1)
100  */
101  function hashGet(table, key) {
102      const bucket = table.buckets[hashText(key, table.buckets.length)]; // 1. diretso agad sa bucket ng key
103      const position = hashFindInBucket(bucket, key);                      // 2. i-check yung ilang keys sa bucket na
yun
104      return position === -1 ? null : bucket[position].value;
105  }

```

1. `hashText` turns the key into a bucket number (djb2: start at 5381, multiply by 33 and add each character, then take the remainder).
2. `hashFindInBucket` compares the few keys in that bucket; a missing key returns `null`.

assets/js/backend/staff.js · lines 45–52

```

45  /**
46   * staffPasswordMatches - i-hash yung tinype na password gamit yung salt ng member
47   * tapos i-compare sa naka-save na hash (hindi talaga sine-save yung mismong password).
48   * Time: O(n) sa hash (400 fixed rounds sa n characters), Space: O(1)
49   */
50  function staffPasswordMatches(member, password) {
51      return hashPassword(password, member.passwordSalt) === member.passwordHash;
52  }

```

1. The same hash function with the same salt always gives the same result, so equal results mean the right password.

# Accounts Management (Subscribers)

|         |                                                                                                                                                                                                                  |
|---------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Admin → Subscribers (#/admin/subscribers) and a subscriber's page (#/admin/subscribers/<account>)                                                                                                                |
| Files   | backend/subscribers.js (listSubscribers, findSubscriber, setSubscriberStatus, changeSubscriberPlan) · backend/billing.js (unpaidBillsQueue, settleOldestBill) · views/admin/subscribers.js, subscriber-detail.js |
| Data    | subscribers (sorted by account number) · bills · the Undo stack                                                                                                                                                  |
| DSA     | Binary search · linear filter + string search · chosen sort · queue (oldest bill first) · stack (Undo)                                                                                                           |

## 1 Business process

*What task or problem from the client are you solving?*

Once customers are connected, the office must manage their accounts: find a subscriber quickly, see who owes the most, look at one account's bills, balance, payments and tickets, **change the plan** (the next bill uses the new price), **suspend** an account for non-payment, **reactivate** it, or **terminate** it — and settle a bill paid at the office, always the oldest one first.


## 2 Input

*What data is needed by the module?*

| Input                                     | Values / rules                                                                                                              |
|-------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------|
| Status filter · search · sort · algorithm | All / Active / Suspended / Terminated · name, e-mail, account, barangay, mobile · newest, oldest, name, balance, plan price |
| Account number (the page address)         | e.g. E3-2026-004876                                                                                                         |
| Status change                             | Active → Suspended; Active or Suspended → Terminated (final)                                                                |
| Plan change                               | another plan, or Custom ₱300–₱20,000; not the same plan                                                                     |
| Stored data                               | subscribers, bills, payment reports, tickets                                                                                |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

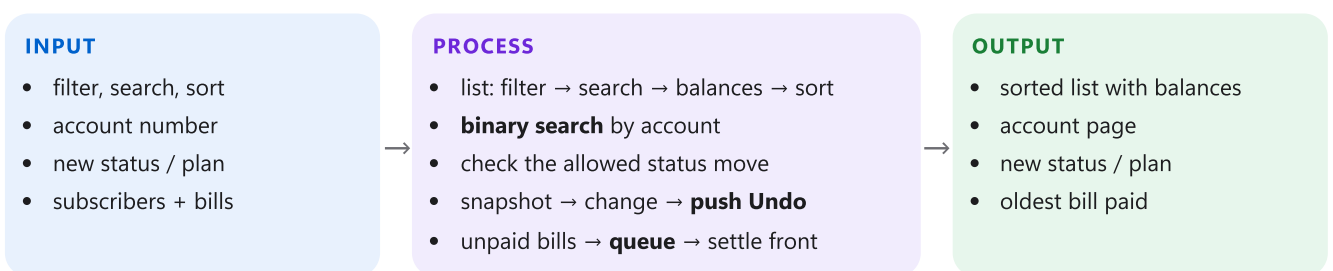

- List** (listSubscribers): filter by status (linear search), search the text, compute each row's **balance** by summing its unpaid bills, then sort with the chosen algorithm.
- Open an account**: findSubscriber = binary search on the sorted account numbers; its bills are collected (linear) and ordered newest first (insertion sort).
- Status change** (setSubscriberStatus): binary search → check the move is allowed → copy the old values → change → push one Undo step → log.
- Plan change** (changeSubscriberPlan): the plan must exist (or the custom price be in range) and differ from the current one; bills already issued keep their amount.
- Settle at the office**: unpaidBillsQueue collects the account's unpaid bills, sorts them by due date and enqueues them; settleOldestBill dequeues the front (the oldest) and marks it paid.

## 4 Output

What result does the module produce?

The subscribers table (plan, balance in red when overdue, status) with the sorting caption; the account page with bills, balance, “next to settle”, payment reports and tickets; updated status or plan with a toast offering Undo; and the oldest unpaid bill marked paid.

## 5 Complexity analysis

What is the time complexity? What is the space complexity?

| Operation                                            | Time                                                 | Space  |
|------------------------------------------------------|------------------------------------------------------|--------|
| List (n subscribers): filter + search + balances     | $O(n^2)$ — each subscriber’s balance scans the bills | $O(n)$ |
| Sort the rows                                        | $O(n^2)$ worst (insertion/bubble $O(n)$ best)        | $O(n)$ |
| Find one account (binary search)                     | $O(\log n)$                                          | $O(1)$ |
| Status or plan change                                | $O(\log n)$                                          | $O(1)$ |
| Oldest-bill queue for one account (its unpaid bills) | $O(n^2)$                                             | $O(n)$ |
| Settle the front bill                                | $O(1)$ dequeue + $O(\log n)$ to update               | $O(1)$ |

## 6 Justification


Why did you choose that data structure or algorithm? Why is it appropriate?

- **Binary search by account number:** every subscriber page, Pay Bills sign-in, bill and payment check looks up one account by its exact number — the array is kept sorted by Module 6, so each look-up is  $O(\log n)$ .
- **Allowed-moves check (a small state machine):** prevents impossible changes such as reactivating a terminated account.
- **Queue for settling:** payments clear the oldest debt first (first in, first out) — fair to the customer and standard accounting practice.
- **Balances computed, not stored:** always correct after payments, new bills or Undo.
- **Undo stack:** a wrong suspension can be reversed immediately.

## 7 Demonstration


Show that the module works correctly — the input, the process and the output.

- 1 Subscribers → sort “Balance: high to low” with selection sort → Patricia Gonzales (suspended, two overdue bills) is first.
- 2 Open Patricia’s page: two unpaid bills, “Next to settle” is the oldest one.
- 3 Open Kristine’s page → Change plan → choose another plan → Save → press Undo.

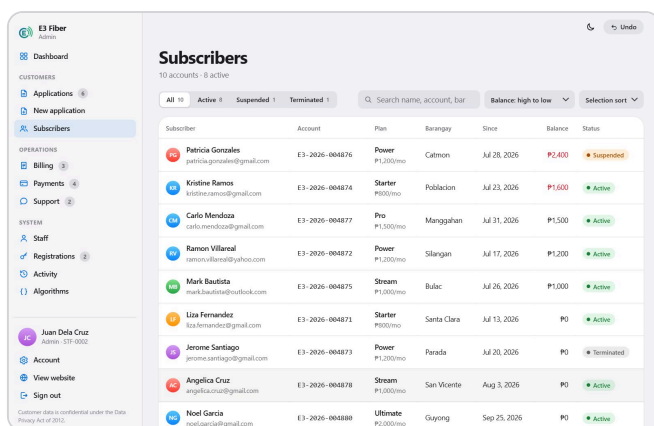

| Subscribers                              |                |                    |             |                |         |            |  |
|------------------------------------------|----------------|--------------------|-------------|----------------|---------|------------|--|
| 10 accounts · 8 active                   |                |                    |             |                |         |            |  |
| All 10 Active 1 Suspended 1 Terminated 1 |                |                    |             |                |         |            |  |
| Q Search name, account, bar              |                |                    |             |                |         |            |  |
| Balance high to low                      |                |                    |             | Selection sort |         |            |  |
| Subscriber                               | Account        | Plan               | Barangay    | Since          | Balance | Status     |  |
| Patricia Gonzales                        | E3-2026-004876 | Power P1,200/mo    | Catmon      | Jul 28, 2026   | P2,400  | Suspended  |  |
| Kristine Ramos                           | E3-2026-004874 | Starter P800/mo    | Poblacion   | Jul 23, 2026   | P1,600  | Active     |  |
| Carlo Mendoza                            | E3-2026-004877 | Pro P1,300/mo      | Manggahan   | Jul 31, 2026   | P1,500  | Active     |  |
| Ramon Villareal                          | E3-2026-004872 | Power P1,200/mo    | Silangan    | Jul 17, 2026   | P1,200  | Active     |  |
| Mark Bautista                            | E3-2026-004875 | Stream P1,000/mo   | Bulac       | Jul 26, 2026   | P1,000  | Active     |  |
| Liza Fernandez                           | E3-2026-004871 | Starter P800/mo    | Santa Clara | Jul 13, 2026   | P0      | Active     |  |
| Jerome Santiago                          | E3-2026-004873 | Power P1,200/mo    | Parada      | Jul 20, 2026   | P0      | Terminated |  |
| Angelica Cruz                            | E3-2026-004878 | Stream P1,000/mo   | San Vicente | Aug 3, 2026    | P0      | Active     |  |
| Noel Garcia                              | E3-2026-004880 | Ultimate P2,000/mo | Guyong      | Sep 25, 2026   | P0      | Active     |  |

Sorted by balance with selection sort.

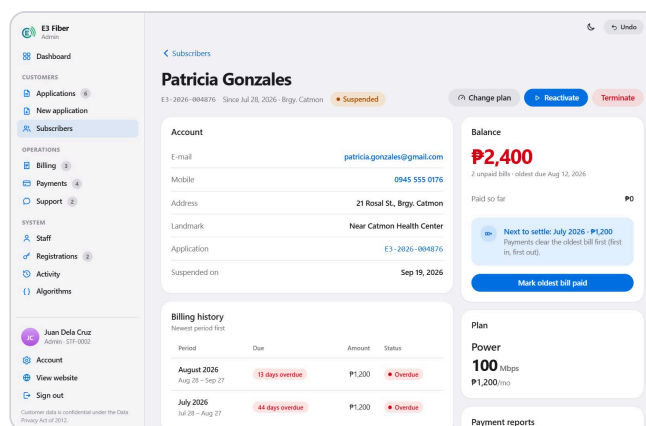

| Patricia Gonzales                                |  |  |  |
|--------------------------------------------------|--|--|--|
| E3-2026-004876 Since Jul 28, 2026 · Brgy. Catmon |  |  |  |
| Change plan Reactivate Terminate                 |  |  |  |
| Account                                          |  |  |  |
| E-mail patricia.gonzales@gmail.com               |  |  |  |
| Mobile 0945 555 0176                             |  |  |  |
| Address 21 Rosal St., Brgy. Catmon               |  |  |  |
| Landmark Near Catmon Health Center               |  |  |  |
| Application E3-2026-004876                       |  |  |  |
| Suspended on Sep 19, 2026                        |  |  |  |
| Billing history                                  |  |  |  |
| Period Due Amount Status                         |  |  |  |
| August 2026                                      |  |  |  |
| Aug 28 - Sep 27 13 days overdue P1,200 Overdue   |  |  |  |
| July 2026                                        |  |  |  |
| Jul 28 - Aug 27 44 days overdue P1,200 Overdue   |  |  |  |
| Plan                                             |  |  |  |
| Power 100 Mbps P1,200/mo                         |  |  |  |
| Payment reports                                  |  |  |  |

One account: status, bills, balance, oldest bill first.

## Change plan

Kristine Ramos is on Starter · 50 Mbps · ₱800/mo. The next bill uses the new price; bills already issued stay the same.

|                                                                     |                                                                   |
|---------------------------------------------------------------------|-------------------------------------------------------------------|
| <b>Starter</b><br><b>50</b> Mbps<br>₱800/mo                         | <b>Stream</b><br><b>70</b> Mbps<br>₱1,000/mo                      |
| <b>MOST POPULAR</b><br><b>Power</b><br><b>100</b> Mbps<br>₱1,200/mo | <b>Pro</b><br><b>200</b> Mbps<br>₱1,500/mo                        |
| <b>Ultimate</b><br><b>300</b> Mbps<br>₱2,000/mo                     | <b>Custom</b><br>₱ any price<br><b>Special offer</b> · staff only |

CancelSave plan

Change plan — the next bill uses the new price.

### Trace — sorting, searching and the bill queue (computed by our code)

Sorting the 8 subscribers by balance, high to low (each row's balance is summed from the bills first):

| Algorithm      | Comparisons | Moves |
|----------------|-------------|-------|
| Insertion sort | 19          | 13    |
| Selection sort | 28          | 5     |
| Bubble sort    | 22          | 13    |

| Top rows          | Account        | Balance | Status    |
|-------------------|----------------|---------|-----------|
| Ramon Villareal   | E3-2026-004872 | ₱2,400  | Active    |
| Kristine Ramos    | E3-2026-004874 | ₱2,400  | Active    |
| Patricia Gonzales | E3-2026-004876 | ₱2,400  | Suspended |
| Carlo Mendoza     | E3-2026-004877 | ₱1,500  | Active    |

Counts by status (one pass): 6 Active · 1 Suspended · 1 Terminated. Opening Patricia's page finds E3-2026-004876 by binary search in 2 comparisons.

**Her unpaid bills as a queue (oldest due date at the front):**

202608-004876 · P1,200  
FRONT · due 2026-09-18

"Mark oldest bill paid" dequeues the front bill, so the oldest debt is always settled first (FIFO).

## Code walkthrough

```

214  /**
215   * setSubscriberStatus - i-suspend, i-reactivate o i-terminate yung account.
216   * Pwede lang: Active -> Suspended, Suspended -> Active, Active/Suspended -> Terminated.
217   * Time: O(log n)
218   */
219  function setSubscriberStatus(accountNo, status, actor) {
220      const stepUp = stepUpRequired(); // 0. two-step verification: dapat may Google Authenticator code sa
huling 5 minutes
221      if (stepUp) {
222          return stepUp;
223      }
224      const subscriber = findSubscriber(accountNo); // 1. binary search gamit account number
225      if (!subscriber) {
226          return { ok: false, error: 'Subscriber not found.' };
227      }
228      if (subscriber.status === 'Terminated') {
229          return { ok: false, error: 'This account is already terminated.' };
230      }
231      const allowed = (subscriber.status === 'Active' && (status === 'Suspended' || status === 'Terminated'))
232          || (subscriber.status === 'Suspended' && (status === 'Active' || status === 'Terminated'));
233      if (!allowed) { // 2. yung mga allowed na lipat lang
234          return { ok: false, error: 'That change is not allowed.' };
235      }
236      const verbs = { Active: 'Reactivate', Suspended: 'Suspend', Terminated: 'Terminate' };
237      const before = snapshotFields(subscriber, ['status', 'statusChangedAt']); // 3. i-save muna yung dating
values
238      subscriber.status = status; // 4. palitan na yung status
239      subscriber.statusChangedAt = nowISO();
240      // 5. isang undo step (push sa stack)
241      pushUndo(verbs[status] + ' ' + subscriber.fullName, [updateOperation('subscribers', accountNo, before)],
nameOfActor(actor));
242      logActivity('subscriber', verbs[status] + 'd ' + subscriber.fullName + ' (' + accountNo + ')',
nameOfActor(actor));
243      markDataChanged();
244      return { ok: true, subscriber: subscriber };
245  }

```

1. Binary search for the account; a terminated account can never change again.
2. Only four moves are allowed: Active → Suspended or Terminated, Suspended → Active or Terminated.
3. snapshotFields copies the old status and date so Undo can restore them.
4. The change is made, one Undo step is pushed and the activity log records who did it.

```

247  /**
248   * changeSubscriberPlan - ilipat yung account sa ibang plan (o custom price).
249   * Yung mga bill na na-issue na, same pa rin yung amount; sa susunod na bill na
250   * gagamitin yung bagong price.
251   * Time: O(log n)
252   */
253  function changeSubscriberPlan(accountNo, planId, customPrice, actor) {
254      const stepUp = stepUpRequired(); // 0. two-step verification: dapat may Google Authenticator code sa
huling 5 minutes
255      if (stepUp) {
256          return stepUp;
257      }
258      const subscriber = findSubscriber(accountNo);
259      if (!subscriber) {
260          return { ok: false, error: 'Subscriber not found.' };
261      }
262      if (subscriber.status === 'Terminated') {
263          return { ok: false, error: 'A terminated account can't change plans.' };
264      }
265      let price = null;
266      if (planId === 'custom') {
267          price = Number(customPrice);
268          if (!(price >= 300 && price <= 20000)) {
269              return { ok: false, error: 'Enter a monthly price from ₱300 to ₱20,000.' };
270          }
271      } else if (!findPlan(planId)) {

```

```

272     return { ok: false, error: 'Choose a plan.' };
273   }
274   if (planId === subscriber.planId && price === subscriber.customPrice) {
275     return { ok: false, error: 'That is already the current plan.' };
276   }
277   const before = snapshotFields(subscriber, ['planId', 'customPrice']);
278   const oldLabel = planName(subscriber.planId);
279   subscriber.planId = planId;
280   subscriber.customPrice = price;
281   pushUndo('Change ' + subscriber.fullName + ' to ' + planName(planId), [updateOperation('subscribers',
accountNo, before)], nameOfActor(actor));
282   logActivity('subscriber', 'Changed ' + subscriber.fullName + ' from ' + oldLabel + ' to ' + planName(planId),
nameOfActor(actor));
283   markDataChanged();
284   return { ok: true, subscriber: subscriber };
285 }

```

1. A custom price must be ₱300–₱20,000; a normal plan must exist (findPlan).
2. Choosing the current plan again is refused; otherwise the old plan is snapshotted for Undo and the new one saved.

assets/js/backend/billing.js · lines 166–184

```

166 /**
167  * unpaidBillsQueue - mga unpaid bill ng account bilang QUEUE, pinakalumang due date
168  * una, para laging yung pinakalumang utang yung unang nababayaran (FIFO).
169  * Time: O(n²), Space: O(n)
170  */
171 function unpaidBillsQueue(accountNo) {
172   const unpaid = [];
173   for (let i = 0; i < bills.length; i++) {
174     if (bills[i].accountNo === accountNo && bills[i].status === 'Unpaid') {
175       arrayAppend(unpaid, bills[i]);
176     }
177   }
178   const ordered = insertionSort(unpaid, 'dueDate', 'asc');
179   const queue = createQueue(4);
180   for (let i = 0; i < ordered.length; i++) {
181     enqueue(queue, ordered[i]);
182   }
183   return queue;
184 }

```

1. One pass collects the account's unpaid bills.
2. Insertion sort orders them by due date (oldest first), then they are enqueued in that order.

assets/js/backend/billing.js · lines 213–223

```

213 /**
214  * settleOldestBill - kunin yung nasa unahan ng unpaid-bills queue (dequeue) tapos bayaran.
215  * Time: O(n²), Space: O(n)
216  */
217 function settleOldestBill(accountNo, actor) {
218   const oldest = dequeue(unpaidBillsQueue(accountNo));
219   if (!oldest) {
220     return { ok: false, error: 'There are no unpaid bills.' };
221   }
222   return settleBill(oldest.billId, actor, 'Office payment');
223 }

```

1. dequeue takes the front of the queue — the oldest unpaid bill — and settleBill marks it paid (with its own Undo step).

# Admin/Staff Creation & Management

|         |                                                                                                                                                              |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Admin → Staff (#/admin/staff) · “Add staff” sheet · temporary-password sheet                                                                                 |
| Files   | backend/staff.js (validateNewStaff, addStaff, generateTempPassword, setStaffStatus, resetStaffPassword, listStaff) · views/admin/staff.js · dsa/hashtable.js |
| Data    | staffMembers (sorted by id) · staffEmailIndex (hash table)                                                                                                   |
| DSA     | Hash table (uniqueness) · array append · binary search · sort by role rank · stack (Undo)                                                                    |

## 1 Business process

*What task or problem from the client are you solving?*

The Owner and Admins must give new employees an account with the right role, reset forgotten passwords, and suspend, reactivate, archive or restore accounts when people leave or come back (accounts are never deleted) — with rules so nobody can take over the system: e-mails are unique, only the Owner can create another Owner, an Admin can’t change the Owner, and nobody can change their own account. The temporary password is shown **once** and must be changed at the first sign-in.


## 2 Input

*What data is needed by the module?*

| Input                    | Rule                                                                          |
|--------------------------|-------------------------------------------------------------------------------|
| Full name                | first and last name, ≤ 80 characters                                          |
| Work e-mail              | valid, and not already used (hash-table look-up, ignoring capitals)           |
| Role                     | Owner (only if you are the Owner), Admin or Support                           |
| Start date               | a real date within the next year                                              |
| Signed-in member (actor) | must be an Owner or Admin                                                     |
| Later actions            | Suspend · Reactivate · Reset password · Archive · Restore (on another member) |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

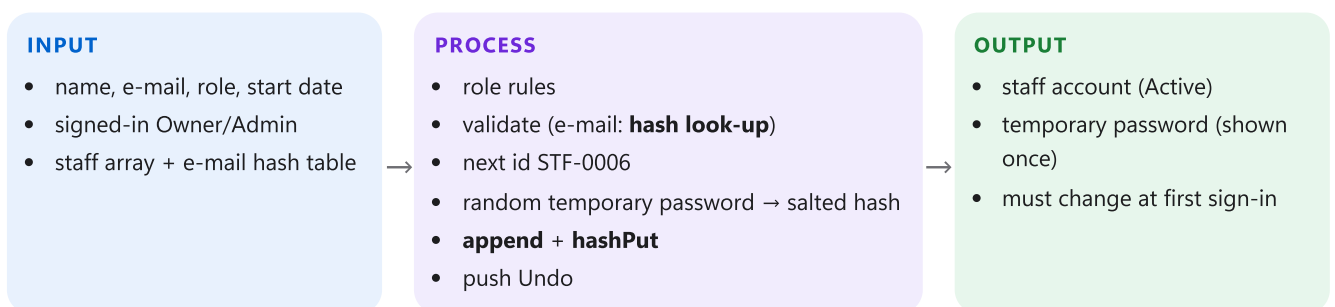

- Only an Owner or Admin may add staff (canManageStaff).
- validateNewStaff checks each field; isStaffEmailTaken is one hash-table look-up.
- The counter gives the next id; ids only grow, so **appending** keeps the array sorted for binary search.
- generateTempPassword picks 10 random characters (no look-alikes such as l, I, O, 0, 1), with at least two digits; only its salted hash is stored.
- hashPut adds e-mail → id to the hash table (it grows when the load passes 0.75); one Undo step can remove the account again.
- Managing:** setStaffStatus finds the member by binary search, applies the role rules and the allowed moves (Active ↔ Suspended, → Archived, Archived → Active), and pushes Undo; resetStaffPassword issues

a new temporary password.

- 7 **Listing:** filter, search and sort (by role rank Owner → Admin → Support, name, start date or last sign-in) with the chosen algorithm.

#### 4 Output

*What result does the module produce?*

A new staff record { id, fullName, email, role, status: "Active", startDate, lastSignIn: null, passwordHash, passwordSalt, mustChangePassword: true }, the e-mail in the hash table, the credential sheet with the one-time password, the updated staff list, and status changes with Undo.

#### 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                        | Time                                      | Space  |
|--------------------------------------------------|-------------------------------------------|--------|
| Validate (e-mail uniqueness by hash)             | $O(1)$ average + $O(n)$ for the text      | $O(1)$ |
| Temporary password (10 characters)               | $O(1)$                                    | $O(1)$ |
| Append the record                                | $O(1)$                                    | $O(1)$ |
| hashPut                                          | $O(1)$ average; $O(n)$ on the rare resize | $O(1)$ |
| Suspend / reactivate / archive / restore / reset | $O(\log n)$                               | $O(1)$ |
| List with sort                                   | $O(n^2)$ worst                            | $O(n)$ |

#### 6 Justification

*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **Hash table for e-mails:** uniqueness must be checked on every new account and every registration, and the same table serves the sign-in —  $O(1)$  average instead of  $O(n)$ .
- **Append with increasing ids:**  $O(1)$  and keeps binary search by id valid.
- **Role rank** (Owner 1, Admin 2, Support 3) turns "sort by role" into a number sort, so the same generic sorting functions work.
- **Temporary password shown once, stored hashed:** the admin never keeps a readable copy, and the employee must replace it.
- Nothing is ever deleted: an archived member keeps their record (status Archived), so the e-mail stays reserved, the history still shows who did what, and the account can be restored.

#### 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Staff → Add staff: Paula Ignacio, paula.ignacio@e3fiberconnect.ph, Support → Add → the one-time password appears.
- 2 Try the same e-mail in capitals → "That e-mail already has an account."
- 3 Sign out and in as Paula with the temporary password → she must choose a new password first.

Add staff

Full name

Paula Ignacio

Work e-mail

paula.ignacio@e3fiberconnect.ph

Role

Support

Start date

09/25/2026

Cancel

Add staff

Account created

Paula Ignacio can now sign in as Support with this temporary password.

E-mail

paula.ignacio@e3fiberconnect.ph

Password

ks4Pm33PUM

Share it privately. It is shown only once, and they'll be asked to choose their own password when they first sign in.

Copy

Done

Output: the temporary password, shown once.

Input: the new member's details.

E3 Fiber Admin

Dashboard

CUSTOMERS

Applications 6

New application

Subscribers

OPERATIONS

Billing 3

Payments 4

Support 2

SYSTEM

Staff

Registrations 2

Activity

Algorithms

Juan Dela Cruz Admin · STF-0002

Account

View website

Sign out

Staff

4 active accounts · e-mails indexed in a hash table for sign-in

2 staff requests waiting for approval

New employees asked for an account. Approving a request creates their sign-in.

Review requests

All 6 Active 4 Suspended 1 Deleted 1

Search name, e-mail, role

Role

Insertion sort

| Name                                              | Role                          | Last sign-in | Status    |
|---------------------------------------------------|-------------------------------|--------------|-----------|
| Maria Santos<br>maria.santos@e3fiberconnect.ph    | Owner<br>Since Nov 3, 2025    | Yesterday    | Active    |
| Juan Dela Cruz<br>juan.delacruz@e3fiberconnect.ph | Admin<br>Since Jan 5, 2026    | 1 min ago    | Active    |
| Daniel Tan<br>daniel.tan@e3fiberconnect.ph        | Admin<br>Since Mar 20, 2026   | Aug 11, 2026 | Deleted   |
| Paolo Reyes<br>paulo.reyes@e3fiberconnect.ph      | Support<br>Since Feb 16, 2026 | 2 days ago   | Active    |
| Grace Lim<br>grace.lim@e3fiberconnect.ph          | Support<br>Since Mar 2, 2026  | Aug 26, 2026 | Suspended |
| Paula Ignacio<br>paula.ignacio@e3fiberconnect.ph  | Support<br>Temporary password | Never        | Active    |

Showing 6 of 6 staff accounts · Insertion sort: 7 comparisons, 2 moves · avg: O(n²) · < 0.01 ms

The staff list with the new member ("Temporary password").

## Trace — adding a member and the role rules (computed by our code)

| Step                                             | Result                                                          |
|--------------------------------------------------|-----------------------------------------------------------------|
| Validate (hash-table look-up for the e-mail)     | ✓ no errors                                                     |
| New id (counter + 1, appended → ids stay sorted) | STF-0006                                                        |
| E-mail stored in lower case                      | paula.ignacio@e3fiberconnect.ph                                 |
| Temporary password                               | 10 random characters, shown once; stored only as hash 78ae1af5  |
| Must change it at first sign-in                  | ✓ yes                                                           |
| hashPut(e-mail → id)                             | bucket 1: paula.ignacio@e3fiberconnect.ph → STF-0006            |
| Hash table size                                  | 5 → 6 keys in 17 buckets (load $0.35 \leq 0.75$ , so no resize) |
| Rule checked                                     | Message                                                         |
| Same e-mail in capitals                          | ✗ That e-mail already has an account.                           |
| An Admin adding an Owner                         | ✗ Only the Owner can add another Owner.                         |
| Changing your own account                        | ✗ You can't change this account.                                |
| An Admin changing the Owner                      | ✗ You can't change this account.                                |

## Code walkthrough

assets/js/backend/staff.js · lines 129–167

```
129 /**
130  * addStaff - gagawa ng account na may temporary password. Isang beses lang
131  * binabalik yung password para maipakita sa admin (hash lang kasi yung naka-save).
132  * Time: O(1) append + O(1) hash put, Space: O(1)
133  */
134 function addStaff(data, actor) {
135   const stepUp = stepUpRequired(); // 0. two-step verification: dapat may Google Authenticator
code sa huling 5 minutes
136   if (stepUp) {
137     return stepUp;
138   }
139   if (!canManageStaff(actor)) { // 1. Owners at Admins lang pwedeng mag-add ng staff
140     return { ok: false, errors: { fullName: 'Only an Owner or Admin can add staff.' } };
141   }
142   const errors = validateNewStaff(data, actor); // 2. i-check yung fields (yung e-mail, sa hash table)
143   if (hasAnyErrors(errors)) {
144     return { ok: false, errors: errors };
145   }
146   counters.staff = counters.staff + 1; // 3. susunod na staff id, halimbawa STF-0006
147   const id = formatStaffId(counters.staff);
148   const tempPassword = generateTempPassword(); // 4. random na temporary password
149   const member = {
150     id: id,
151     fullName: collapseSpaces(data.fullName),
152     email: toLowerText(trimText(data.email)),
153     role: data.role,
154     status: 'Active',
155     startDate: data.startDate,
156     lastSignIn: null,
157     passwordHash: hashPassword(tempPassword, id),
158     passwordSalt: id,
159     mustChangePassword: true,
160   };
161   arrayAppend(staffMembers, member); // 5. pataas yung ids -> naka-sort pa rin yung table
162   hashPut(staffEmailIndex, member.email, id); // 6. i-index yung e-mail para sa sign-in
163   pushUndo('Add staff ' + member.fullName, [insertOperation('staffMembers', id)], nameOfActor(actor)); // 7. undo
step
164   logActivity('staff', 'Added ' + member.fullName + ' as ' + member.role, nameOfActor(actor));
165   markDataChanged();
166   return { ok: true, staff: member, tempPassword: tempPassword };
167 }
```

1. Steps 1–2: permission, then field checks (the e-mail goes through the hash table).
2. Steps 3–4: next id and a random temporary password; the record stores only hashPassword(tempPassword, id).
3. Steps 5–7: append (sorted by id), index the e-mail, push one Undo step, log it, and return the temporary password once so the screen can show it.

assets/js/backend/staff.js · lines 169–199

```
169 /**
170  * setStaffStatus - i-suspend, i-reactivate, i-archive o i-restore yung staff account
171  * (archive lang, hindi kami nagde-delete ng account).
172  * Time: O(log n)
173  */
174 function setStaffStatus(id, status, actor) {
175   const stepUp = stepUpRequired(); // 0. two-step verification: dapat may Google Authenticator code sa
huling 5 minutes
176   if (stepUp) {
177     return stepUp;
178   }
179   const member = findStaffById(id);
180   if (!member) {
181     return { ok: false, error: 'Staff member not found.' };
182   }
183   if (!canManageMember(actor, member)) {
184     return { ok: false, error: 'You can't change this account.' };
185   }
186   const allowed = (member.status === 'Active' && (status === 'Suspended' || status === 'Archived'))
```

```

187     || (member.status === 'Suspended' && (status === 'Active' || status === 'Archived'))
188     || (member.status === 'Archived' && status === 'Active');
189     if (!allowed) {
190         return { ok: false, error: 'That change is not allowed.' };
191     }
192     const verbs = { Active: member.status === 'Archived' ? 'Restore' : 'Reactivate', Suspended: 'Suspend',
Archived: 'Archive' };
193     const before = snapshotFields(member, ['status']);
194     member.status = status;
195     pushUndo(verbs[status] + ' ' + member.fullName, [updateOperation('staffMembers', id, before)],
nameOfActor(actor));
196     logActivity('staff', verbs[status] + 'd ' + member.fullName, nameOfActor(actor));
197     markDataChanged();
198     return { ok: true, staff: member };
199 }

```

1. Binary search for the member; `canManageMember` applies the role rules (not yourself, Admins can't change the Owner; an archived account can only be restored).
2. Only allowed moves pass; the old status is snapshotted for Undo.

assets/js/dsa/hashtable.js · lines 79–95

```

79  /**
80   * hashPut - i-store yung `value` sa ilalim ng `key`; kung meron na yung key, papalitan yung value.
81   * Time: O(1) average, O(n) worst (pag lahat napunta sa isang bucket), Space: O(1)
82   */
83   function hashPut(table, key, value) {
84       const bucket = table.buckets[hashText(key, table.buckets.length)]; // 1. i-hash yung key -> bucket niya
85       const position = hashFindInBucket(bucket, key); // 2. naka-store na ba?
86       if (position !== -1) {
87         bucket[position].value = value; // oo -> palitan yung value
88       }
89       return;
90       arrayAppend(bucket, { key: key, value: value }); // 3. hindi -> idagdag sa chain ng bucket
91       table.size = table.size + 1;
92       if (table.size / table.buckets.length > HASH_MAX_LOAD) { // 4. masyado nang puno -> halos doblehin
yung buckets
93         hashResize(table);
94       }
95   }

```

1. Hash the key to a bucket; if the key is already there, replace its value.
2. Otherwise add it to the bucket's chain; if the table is more than 0.75 full, `hashResize` rebuilds it with about twice as many buckets.

# Admin Registration & Approval of Registration Admins

|         |                                                                                                                                                  |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Sign-in → “Request staff access” (#/admin/register) · Admin → Registrations (#/admin/registrations)                                              |
| Files   | backend/registrations.js · views/admin/register.js · views/admin/registrations.js ·<br>backend/auth.js (sign-in messages)                        |
| Data    | registrations (sorted by registrationId) · staffMembers · staffEmailIndex                                                                        |
| DSA     | Queue (approval order) · hash table (e-mail already a staff account?) · linear search (second pending request) ·<br>binary search · stack (Undo) |

## 1 Business process

*What task or problem from the client are you solving?*

When E3 hires someone, the owner should not have to type the new employee’s details and hand over a temporary password. With **Admin Registration** the employee requests access themselves (name, work e-mail, mobile, the access they need, their own password). With **Approval**, an Owner or Admin reviews the requests **first come, first served**, approves the right people — which creates the staff account with the password they chose — and rejects the rest with a reason the requester sees when trying to sign in.


## 2 Input

*What data is needed by the module?*

| Input                   | Rule                                                                      |
|-------------------------|---------------------------------------------------------------------------|
| Full name               | first and last name, ≤ 80 characters                                      |
| Work e-mail             | valid and ending with @e3fiberconnect.ph; no other pending request for it |
| Mobile                  | 11 digits starting with 09                                                |
| Access                  | Support or Admin (an Owner can never be self-registered)                  |
| Note for the reviewer   | optional, ≤ 150 characters                                                |
| Password + confirmation | 8+ characters with a letter and a digit; both the same                    |
| Agreement               | “this request is for my own E3 account” — required                        |
| Approval                | the reviewer (Owner/Admin), the decision, and a reason when rejecting     |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

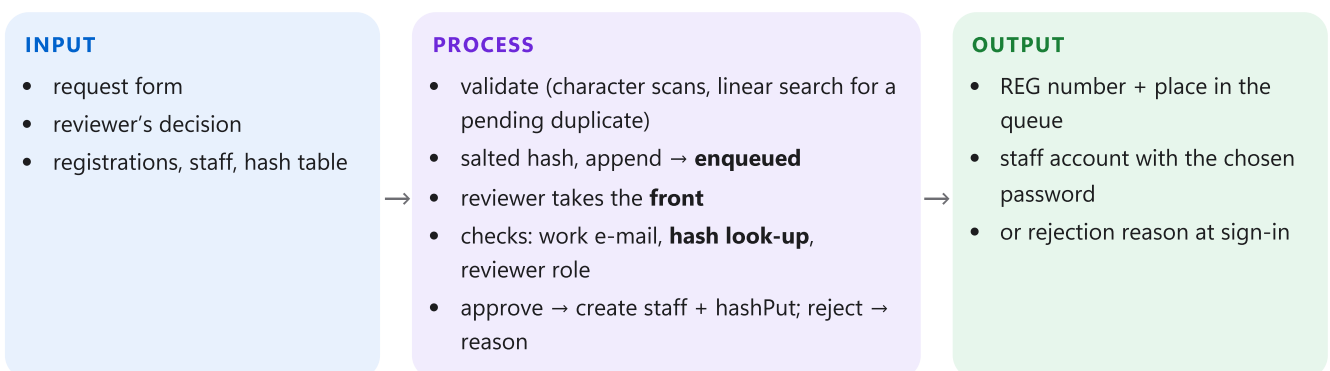

### Registration

- 1** `validateRegistration` checks each field. It does *not* reveal whether the e-mail already has a staff account (privacy); it only blocks a second *pending* request for the same e-mail (linear search).
- 2** `submitRegistration` gives the next id (REG-000005), stores only a salted hash of the password, and **appends** the request — it joins the rear of the approval queue. The screen shows the place in line.

- 3 If the person tries to sign in before approval, sign-in finds the request and says it is still waiting (only with the right password).

## Approval

- 1 **registrationQueue** enqueues the pending requests in arrival order; the page shows the **front** one (**queuePeek**) with its checks.
- 2 **registrationChecks**: work e-mail? no staff account with this e-mail yet (one **hash-table** look-up)? is the reviewer an Owner or Admin?
- 3 **Approve** (**approveRegistration**): binary search for the request, repeat the checks, create the staff record with the *same* password hash and salt, append it, **hashPut** the e-mail, mark the request Approved (it leaves the queue), push one Undo step with both changes.
- 4 **Reject** (**rejectRegistration**): choose a reason (plus a note for "Other"); the requester sees it at sign-in.

## 4 Output

*What result does the module produce?*

For the requester: "Request sent", the request number and "number N in the approval queue"; later a sign-in message (waiting / not approved + reason — except "Duplicate request", which is not repeated because it would hint that the e-mail belongs to staff) or a working staff account. For the reviewer: the approval queue with the front request and its checks, the list of all requests (Pending, Approved with the new staff id, Rejected with the reason), and a new member in the Staff list.

## 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                                   | Time                                  | Space  |
|-------------------------------------------------------------|---------------------------------------|--------|
| Validate a request (pending-duplicate scan over n requests) | $O(n)$                                | $O(1)$ |
| Submit (append)                                             | $O(1)$ + the password hash            | $O(1)$ |
| Build the approval queue / peek the front                   | $O(n)$ / $O(1)$                       | $O(n)$ |
| Checks (hash look-up)                                       | $O(1)$ average                        | $O(1)$ |
| Approve (binary search + append + hashPut)                  | $O(\log n)$ + $O(1)$ + $O(1)$ average | $O(1)$ |
| Reject                                                      | $O(\log n)$                           | $O(1)$ |
| Sign-in message for a request                               | $O(n)$                                | $O(1)$ |

## 6 Justification

*Why did you choose that data structure or algorithm? Why is it appropriate?*


- **Queue**: requests are reviewed in the order they arrived — nobody is skipped; the front is always the oldest.
- **Hash table**: "does this e-mail already have a staff account?" is one  $O(1)$  look-up in the same index the sign-in uses.
- **Linear search for a second pending request**: requests are few and short-lived, so a scan is simplest.
- **Password hash moved unchanged**: the approver never sees or sets the password; the new member signs in with the one they chose.
- **Privacy**: the public form never tells whether an e-mail exists; the status is only explained to someone who knows the password.

## 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Sign-in → "Request staff access" → fill in Nora Dizon (Support) → Send → REG-000005, number 3 in the queue.

- 2 Try to sign in as Nora → “still waiting for an Owner or Admin”.
- 3 Sign in as the Owner → Registrations: the front is Lorenzo (REG-000003) with all checks passed → Approve → he appears in Staff and can sign in with lorenzo2026.

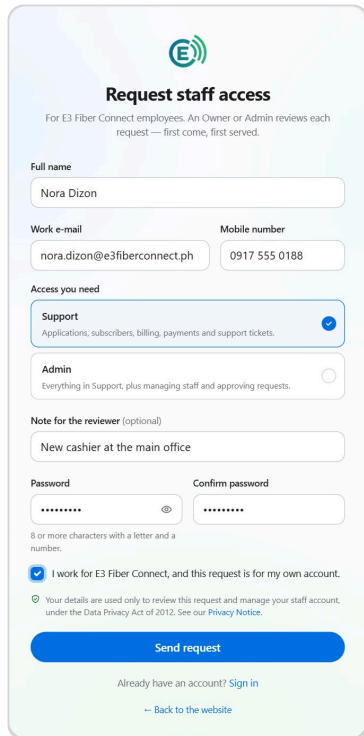

**Request staff access**  
For E3 Fiber Connect employees. An Owner or Admin reviews each request — first come, first served.

Full name  
Nora Dizon

Work e-mail  
nora.dizon@e3fiberconnect.ph

Mobile number  
0917 555 0188

Access you need

**Support**  
Applications, subscribers, billing, payments and support tickets. ☒

**Admin**  
Everything in Support, plus managing staff and approving requests. ☐

Note for the reviewer (optional)  
New cashier at the main office

Password  
8 or more characters with a letter and a number.

Confirm password

☒ I work for E3 Fiber Connect, and this request is for my own account.


☒ Your details are used only to review this request and manage your staff account, under the Data Privacy Act of 2012. See our [Privacy Notice](#).

**Send request**

Already have an account? [Sign in](#)

[Back to the website](#)

Input: the request form.

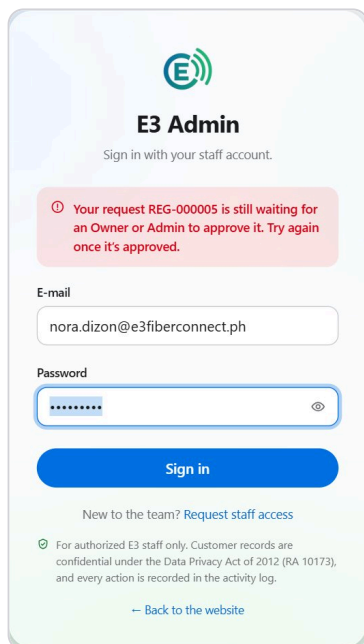

**E3 Admin**  
Sign in with your staff account.

**⚠ Your request REG-000005 is still waiting for an Owner or Admin to approve it. Try again once it's approved.**

E-mail  
nora.dizon@e3fiberconnect.ph

Password


**Sign in**

New to the team? [Request staff access](#)

☒ For authorized E3 staff only. Customer records are confidential under the Data Privacy Act of 2012 (RA 10173), and every action is recorded in the activity log.

[Back to the website](#)

Signing in before approval.

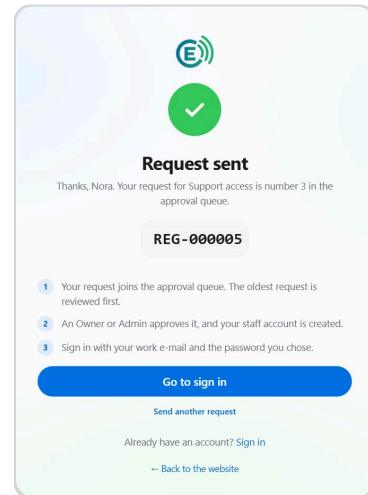

**Request sent**  
Thanks, Nora. Your request for Support access is number 3 in the approval queue.

**REG-000005**

- 1 Your request joins the approval queue. The oldest request is reviewed first.
- 2 An Owner or Admin approves it, and your staff account is created.
- 3 Sign in with your work e-mail and the password you chose.


**Go to sign in**

[Send another request](#)

Already have an account? [Sign in](#)

[Back to the website](#)

Output: request number and place in the queue.

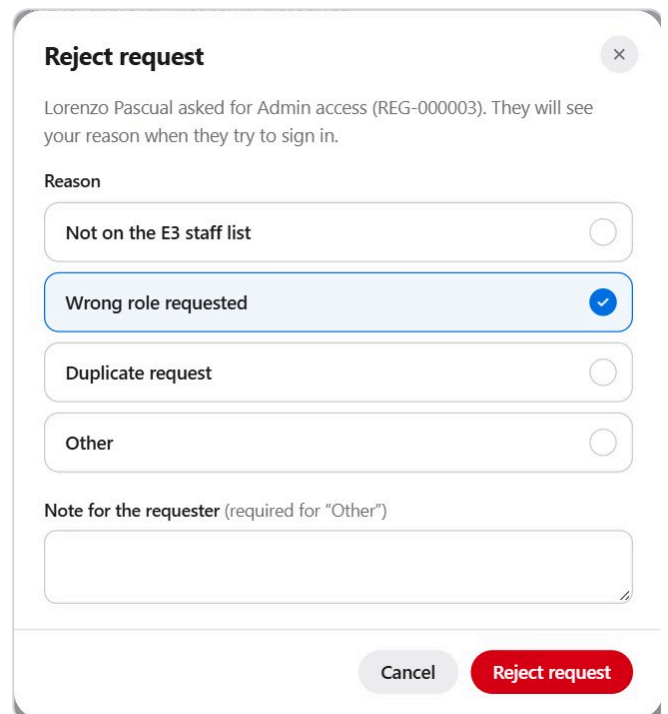

**Reject request**

Lorenzo Pascual asked for Admin access (REG-000003). They will see your reason when they try to sign in.

Reason

☐ Not on the E3 staff list

☒ Wrong role requested

☐ Duplicate request

☐ Other

Note for the requester (required for "Other")

**Cancel** **Reject request**

Rejecting needs a reason.

Dashboard

CUSTOMERS

Applications 6

New application

Subscribers

OPERATIONS

Billing 3

Payments 4

Support 2

SYSTEM

Staff

Registrations 3

Activity

Algorithms

MS

Maria Santos

Owner - STF-0001

Account

View website

Sign out

Customer data is confidential under the Data Privacy Act of 2012.

3 requests waiting for approval · first come, first served

Approval queue

New requests join the back of a first-in, first-out queue. The one at the front is reviewed first.

FRONT

REG-000003

REG-000004

REG-000005

REAR

NEXT TO REVIEW · 1 OF 3

LP

Lorenzo Pascual

lorenzo.pascual@e3fiberconnect.ph · 0918 555 0137

REG-000003 · sent yesterday

Admin access

New branch supervisor for the Poblacion office.

✓

Work e-mail

Ends with @e3fiberconnect.ph.

✓

No staff account yet

Not in the staff e-mail hash table (one look-up among 6 e-mails).

✓

You can approve it

Owners and Admins approve staff requests.

✓

Ready to approve — the account keeps the password they chose.

Reject

Approve

All 5

Pending 3

Approved 1

Rejected 1

Search name, e-mail, request ID

Newest first

The approval queue: the front request and its checks.

## Trace — the approval queue from request to account (computed by our code)

### Validation of a bad request

| Field       | Message                                                               |
|-------------|-----------------------------------------------------------------------|
| Full name   | <b>X Enter your first and last name.</b>                              |
| Work e-mail | <b>X Use your E3 work e-mail (...@e3fiberconnect.ph).</b>             |
| Mobile      | <b>X Enter an 11-digit mobile number like 0917 555 0199.</b>          |
| Access      | <b>X Choose the access you need.</b>                                  |
| Password    | <b>X Use at least 8 characters with a letter and a number.</b>        |
| Confirm     | <b>X The passwords don't match.</b>                                   |
| Agreement   | <b>X Please confirm that this request is for your own E3 account.</b> |

### The approval queue (circular buffer, capacity 4)

Before: REG-000003 Lorenzo Pascual → REG-000004 Trisha Manalo (front = slot 0, count 2)

```

graph LR
    S0["REG-000003  
[0] front"]
    S1["REG-000004  
[1]"]
    S2["·  
[2]"]
    S3["·  
[3]"]
    S0 --> S1
    S1 --> S2
    S2 --> S3
    S3 --> S0
  
```

Nora submits → **REG-000005** is enqueued at the rear (password stored as salted hash b7ad5ed5, salt REG-000005):

```

graph LR
    S0["REG-000003  
[0] front"]
    S1["REG-000004  
[1]"]
    S2["REG-000005  
[2]"]
    S3["·  
[3]"]
    S0 --> S1
    S1 --> S2
    S2 --> S3
    S3 --> S0
  
```

Her sign-in before approval (right password): “Your request REG-000005 is still waiting for an Owner or Admin to approve it. Try again once it’s approved.” — with a wrong password: “The e-mail or password is incorrect.”.


### Review of the front request by the Owner

E3 Fiber Connect · Defense Reviewer

60 / 86

| Check                | Result | Detail                                                            |
|----------------------|--------|-------------------------------------------------------------------|
| Work e-mail          | ✓ yes  | Ends with @e3fiberconnect.ph.                                     |
| No staff account yet | ✓ yes  | Not in the staff e-mail hash table (one look-up among 5 e-mails). |
| You can approve it   | ✓ yes  | Owners and Admins approve staff requests.                         |

Approve → staff account **STF-0006** for Lorenzo Pascual (Admin), same password hash as the request: ✓ yes. The request leaves the queue:



Lorenzo Pascual can now sign in with the password chosen at registration: ✓ signed in.

## Code walkthrough

assets/js/backend/registrations.js · lines 87–118

```

87  /**
88   * submitRegistration - i-save yung request gamit yung susunod na id (append lang -> sorted pa rin).
89   * Time: O(n) sa mga check + O(1) append, Space: O(1)
90   */
91  function submitRegistration(data) {
92    const errors = validateRegistration(data);
93    if (hasAnyErrors(errors)) {
94      return { ok: false, errors: errors };
95    }
96    counters.registration = counters.registration + 1;
97    const id = formatRegistrationId(counters.registration);
98    const request = {
99      registrationId: id,
100     fullName: collapseSpaces(data.fullName),
101     email: toLowerText(trimText(data.email)),
102     mobile: normalizeMobile(data.mobile),
103     role: data.role,
104     note: collapseSpaces(data.note),
105     passwordHash: hashPassword(data.password, id),
106     passwordSalt: id,
107     status: 'Pending',
108     submittedAt: nowISO(),
109     reviewedBy: '',
110     reviewedAt: null,
111     rejectReason: '',
112     staffId: '',
113   };
114   arrayAppend(registrations, request);
115   logActivity('staff', 'Staff registration ' + id + ' from ' + request.fullName + ' (' + request.role + ')',
request.fullName);
116   markDataChanged();
117   return { ok: true, registration: request };
118 }

```

1. Validate first; any message stops the request.
2. The next request id is also the password's salt; only hashPassword(password, id) is stored.
3. The request is appended (ids only grow, so the table stays sorted) and logged.

assets/js/backend/registrations.js · lines 120–133

```

120  /**
121   * registrationQueue - yung mga request na naghihintay ng approval, oldest first (FIFO).
122   * Naka-order na yung table ayon sa pagdating, kaya isang loop lang para ma-enqueue lahat.
123   * Time: O(n), Space: O(n) para sa mga Pending na request
124   */
125  function registrationQueue() {
126    const queue = createQueue(4);
127    for (let i = 0; i < registrations.length; i++) {
128      if (registrations[i].status === 'Pending') {
129        enqueue(queue, registrations[i]);
130      }
131    }
132  }

```

```

131 }
132 return queue;
133 }

```

1. One pass over the requests in arrival order; each pending one is enqueued, so the front is the oldest.

assets/js/backend/registrations.js · lines 144–177

```

144 /**
145  * registrationChecks - mga dapat malaman ng reviewer bago mag-approve:
146  * work e-mail ba, wala pa bang staff account na may ganung e-mail (hash table),
147  * at allowed ba yung reviewer na mag-approve.
148  * Binabalik: { checks, passed, firstFailure }
149  * Time: O(n), Space: O(1)
150  */
151 function registrationChecks(request, actor) {
152   const checks = [];
153   const work = isWorkEmail(request.email);
154   arrayAppend(checks, { key: 'domain', label: 'Work e-mail', ok: work, text: work ? 'Ends with ' +
STAFF_EMAIL_DOMAIN + '.' : 'Not an ' + STAFF_EMAIL_DOMAIN + ' address.' });
155   const taken = isStaffEmailTaken(request.email);
156   arrayAppend(checks, {
157     key: 'email',
158     label: 'No staff account yet',
159     ok: !taken,
160     text: taken ? 'This e-mail already has a staff account - reject it as a duplicate.'
161           : 'Not in the staff e-mail hash table (one look-up among ' + pluralize(staffEmailIndex.size, 'e-mail') +
'.)',
162   });
163   const allowed = canManageStaff(actor);
164   arrayAppend(checks, {
165     key: 'reviewer',
166     label: 'You can approve it',
167     ok: allowed,
168     text: allowed ? 'Owners and Admins approve staff requests.' : 'Only an Owner or Admin can approve requests.',
169   });
170   let firstFailure = null;
171   for (let i = 0; i < checks.length; i++) {
172     if (!checks[i].ok && firstFailure === null) {
173       firstFailure = checks[i];
174     }
175   }
176   return { checks: checks, passed: firstFailure === null, firstFailure: firstFailure };
177 }

```

1. Three checks, each with a plain-language detail for the reviewer; the second is the hash-table look-up.
2. The first failed check becomes the reason the Approve button is disabled.

assets/js/backend/registrations.js · lines 179–229

```

179 /**
180  * approveRegistration - Pending -> Approved. Gagawa ng staff account gamit yung
181  * role at yung (naka-hash na) password galing sa request, tapos ilalagay yung
182  * e-mail sa hash table. Isang undo lang, tanggal yung account at bukas ulit yung request.
183  * Time: O(log n) + O(1) append + O(1) average na hash put, Space: O(1)
184  */
185 function approveRegistration(registrationId, actor) {
186   const stepUp = stepUpRequired(); // 0. two-step verification: kailangan may Google
Authenticator code sa nakaraang 5 minutes
187   if (stepUp) {
188     return stepUp;
189   }
190   const request = findRegistration(registrationId); // 1. binary search gamit yung request id
191   if (!request) {
192     return { ok: false, error: 'Registration not found.' };
193   }
194   if (request.status !== 'Pending') {
195     return { ok: false, error: 'This request was already ' + toLowerText(request.status) + '.' };
196   }
197   const review = registrationChecks(request, actor); // 2. work e-mail, hindi pa gamit yung e-mail (hash
table), allowed yung reviewer
198   if (!review.passed) {

```

```

199     return { ok: false, error: 'Can't approve - ' + review.firstFailure.text };
200 }
201 counters.staff = counters.staff + 1; // 3. buuin yung staff account gamit yung hash ng
pinili niyang password
202 const id = formatStaffId(counters.staff);
203 const member = {
204     id: id,
205     fullName: request.fullName,
206     email: request.email,
207     role: request.role,
208     status: 'Active',
209     startDate: todayISO(),
210     lastSignIn: null,
211     passwordHash: request.passwordHash,
212     passwordSalt: request.passwordSalt,
213     mustChangePassword: false,
214 };
215 arrayAppend(staffMembers, member); // 4. pataas yung id -> sorted pa rin yung table
216 hashPut(staffEmailIndex, member.email, id); // 5. i-index yung e-mail para makapag-sign in na yung bagong
member
217 const before = snapshotFields(request, ['status', 'reviewedBy', 'reviewedAt', 'staffId']);
218 request.status = 'Approved'; // 6. gawing Approved yung request (aalis na siya sa queue)
219 request.reviewedBy = nameOfActor(actor);
220 request.reviewedAt = nowISO();
221 request.staffId = id;
222 pushUndo('Approve ' + request.fullName + ' as ' + request.role, [
223     updateOperation('registrations', registrationId, before),
224     insertOperation('staffMembers', id),
225 ], nameOfActor(actor));
226 logActivity('staff', 'Approved registration ' + registrationId + ' - ' + request.fullName + ' joined as ' +
request.role + ' (' + id + ')', nameOfActor(actor));
227 markDataChanged();
228 return { ok: true, registration: request, staff: member };
229 }

```

1. Binary search, then refuse anything not pending or not passing the checks.
2. The staff record copies the request's password hash and salt, is appended, and its e-mail is put in the hash table.
3. The request is marked Approved with the new staff id; one Undo step reverses both changes.

# Aaron Sebastian

Module 11 Billing: Client Billing List · Module 12 Billing: Bill Generation · Module 13 Payments  
(Payments Validation)

## 60-second pitch

My modules handle the money. Every bill has an id like `BILL-202609-004872` — year, month, account — and the `bills` array is kept sorted by that id. So the **Client Billing List** finds one month's bills with a *binary search* to the first one plus a short scan, then groups them by urgency. **Bill Generation** bills every active subscriber on their connection day ("anniversary billing"), refuses duplicates with a binary search, and puts each new bill in place with a *sorted insert*; the whole batch is one Undo step. **Payments** takes the customers' reported payments in a first-in-first-out *queue* and runs five validation checks on the front one — including a *hash-table* look-up that catches a reference number used twice — before staff may confirm it.

## Structures and algorithms I must be able to explain

| Where                    | Structure / algorithm                     | Time                      | Space  |
|--------------------------|-------------------------------------------|---------------------------|--------|
| One month's bills        | Lower bound (binary search) + scan        | $O(\log n) + O(n)$        | $O(n)$ |
| Group by urgency         | One pass into 4 arrays + insertion sort   | $O(n^2)$                  | $O(n)$ |
| Create one bill          | Binary search (duplicate) + sorted insert | $O(n)$                    | $O(1)$ |
| Generate a month         | Loop over subscribers                     | $O(n^2)$                  | $O(n)$ |
| Payment validation order | Queue (circular buffer)                   | $O(n)$ build, $O(1)$ peek | $O(n)$ |
| Re-used reference number | Hash table (METHOD:REFERENCE → ids)       | $O(1)$ average            | $O(n)$ |

## Likely panel questions

### Why does the bill id start with the year and month?

Because the array is sorted by id, all bills of one month sit next to each other. A binary search jumps to the first one in  $O(\log n)$  and a scan collects only that month's bills, instead of reading every bill ever issued.

### What happens to someone connected on the 31st?

In a month without a 31st the period starts on that month's last day (e.g. February 28), then goes back to the 31st when it exists. The due date is always 15 days after the period starts.

### How do you stop double billing?

The bill id is built from the month and the account, so a second bill for the same month has the same id — `findBill` (binary search) finds it and the bill is refused.

### How do you detect a re-used reference number?

Every payment is stored in a hash table under "METHOD:REFERENCE". Validation looks that key up once; if a confirmed payment, or an earlier report still waiting, is listed there, check 5 fails. Only the *later* report is the duplicate — the first one is not blamed, and declined reports don't count.

### Why doesn't the public form reject a used reference right away?

That would let anyone test other people's reference numbers. The customer's form only checks the format; the duplicate check is done by staff.

### Why can't staff confirm a payment when a check fails?

`confirmPayment` runs the checks again itself and refuses — so a bill can't be marked paid for a wrong amount, a bill that is already paid, or a fake reference, even by mistake.

# Billing: Client Billing List

|         |                                                                                                                                                                                                 |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Admin → Billing (#/admin/billing) — one month at a time                                                                                                                                         |
| Files   | backend/billing.js (billsForMonth, summarizeBills, receivablesSummary, earlierOverdueBills, filterBillRows, groupBills, billDueText) · dsa/search.js (rangeWithPrefix) · views/admin/billing.js |
| Data    | bills sorted by billId "BILL-YYYYMM-ACCOUNT" · subscribers · the payments queue                                                                                                                 |
| DSA     | Lower bound + range scan · one-pass grouping · insertion sort · linear search + string matching · binary search (subscriber names)                                                              |

## 1 Business process

*What task or problem from the client are you solving?*

Each month the office must know how much is expected, how much was collected and how much is still outstanding, **who is overdue** (including debts from earlier months, which must never disappear from view), who is due within a week (to remind them), and which customer payments are waiting to be validated. Staff also need to find one customer's bill quickly and mark a bill paid when the customer pays at the office.


## 2 Input

*What data is needed by the module?*

| Input        | Values                                                           |
|--------------|------------------------------------------------------------------|
| Month        | previous / next arrows, or "This month" (year + month)           |
| Filter       | All · Unpaid · Paid                                              |
| Search text  | subscriber name, account number or bill id                       |
| Today's date | decides overdue / due soon / upcoming                            |
| Stored data  | bills (sorted by id), subscribers (for names), reported payments |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

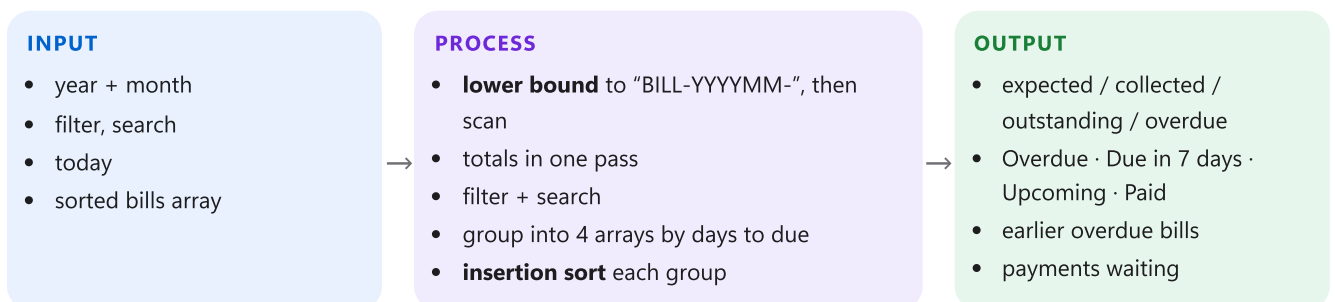

- Month's bills** (billsForMonth → rangeWithPrefix): a lower-bound binary search finds the first id  $\geq$  "BILL-202609-"; a scan collects bills while the id still starts with that prefix.
- Totals** (summarizeBills): one pass adds every amount to "expected" and to "collected" or "outstanding". receivablesSummary adds up overdue bills of all months.
- Earlier overdue** (earlierOverdueBills): unpaid, past-due bills of earlier months, sorted by due date.
- Filter and search** (filterBillRows): keep Unpaid or Paid, add the subscriber's name (binary search by account), then string-search name / account / bill id.
- Group** (groupBills): one pass puts each bill in Paid, Overdue (due date passed), Due within 7 days, or Upcoming; each group is sorted by date with insertion sort.
- The **payments callout** shows the size and the front of the payment-validation queue (Module 13).

## 4 Output

*What result does the module produce?*

Four totals (expected, collected with the percentage, outstanding, overdue in all months), the “payments waiting for validation” callout, the list of overdue bills from earlier months, and the month’s bills in four groups with coloured due labels (“*N* days overdue” in red, “Due in *N* days” in orange, “Paid” + date in green) and a “Mark paid” button on each unpaid bill.

## 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                    | Time               | Space         |
|----------------------------------------------|--------------------|---------------|
| One month’s bills ( <i>n</i> bills in total) | $O(\log n) + O(n)$ | $O(n)$        |
| Month totals                                 | $O(n)$             | $O(1)$        |
| Overdue in all months / earlier overdue      | $O(n) / O(n^2)$    | $O(1) / O(n)$ |
| Filter + names + search                      | $O(n^2)$           | $O(n)$        |
| Group + sort each group                      | $O(n^2)$           | $O(n)$        |
| Mark one bill paid                           | $O(\log n)$        | $O(1)$        |

## 6 Justification

*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **Sorted array + range search:** putting year and month at the front of the id makes each month a contiguous block, so the page jumps there in  $O(\log n)$  and reads only that block instead of every bill ever issued — this matters more every month the business runs.
- **One-pass grouping:** each bill is compared with today once, and the groups match how staff work (collect overdue first, remind the due-soon ones).
- **Insertion sort per group:** the groups are small and almost in order already, the best case for insertion sort; it is also stable.
- **Totals computed on the fly** from the bills, so they are always correct after a payment or an Undo.

## 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Admin → Billing: read the totals, the callout and the overdue panel.
- 2 Scroll to the groups; click “Unpaid”; type a name in the search; use the arrows to change month.
- 3 Press “Mark paid” on one bill → the totals change; press Undo.

Dashboard

CUSTOMERS

Applications 6

New application

Subscribers

OPERATIONS

Billing 3

Payments 4

Support 2

SYSTEM

Staff

Registrations 2

Activity

Algorithms

MS

Maria Santos

Owner - STF-0001

Account

View website

Sign out

Customer data is confidential under the Data Privacy Act of 2012.

Billing

Bills for September 2026 - each is due 15 days after its period starts

September 2026

This month

Expected

₱6,300

6 bills

Collected

₱1,800

29% of expected

Outstanding

₱4,500

4 unpaid bills

Overdue, all months

₱3,200

3 bills past due

4 payments waiting for validation

Next in the queue: Kristine Ramos - ₱800 via GCash, sent yesterday. Confirming a payment marks its bill paid here.

Validate payments

Still overdue from earlier months

Unpaid bills that are past their due date

Patricia Gonzales

July 2026 - ₱1,200 - 44 days overdue

Mark paid

Kristine Ramos

August 2026 - ₱800 - 18 days overdue

Mark paid

Patricia Gonzales

August 2026 - ₱1,200 - 13 days overdue

Mark paid

All

Unpaid

Paid

Search name, account, bill

Due within 7 days

1 bill · ₱1,200

Totals, payments waiting and overdue bills from earlier months.

Dashboard

CUSTOMERS

Applications 6

New application

Subscribers

OPERATIONS

Billing 3

Payments 4

Support 2

SYSTEM

Staff

Registrations 2

Activity

Algorithms

MS

Maria Santos

Owner - STF-0001

Account

View website

Sign out

Customer data is confidential under the Data Privacy Act of 2012.

Billing

All

Unpaid

Paid

Search name, account, bill

Due within 7 days

1 bill · ₱1,200

| Subscriber                        | Period          | Due           | Amount | Status |
|-----------------------------------|-----------------|---------------|--------|--------|
| Ramon Villareal<br>E3-2026-004872 | Sep 17 – Oct 16 | Due in 7 days | ₱1,200 | Unpaid |

Upcoming

3 bills · ₱3,300

| Subscriber                       | Period          | Due        | Amount | Status |
|----------------------------------|-----------------|------------|--------|--------|
| Kristine Ramos<br>E3-2026-004874 | Sep 23 – Oct 22 | Due Oct 8  | ₱800   | Unpaid |
| Mark Bautista<br>E3-2026-004875  | Sep 26 – Oct 25 | Due Oct 11 | ₱1,000 | Unpaid |
| Carlo Mendoza<br>E3-2026-004877  | Sep 30 – Oct 30 | Due Oct 15 | ₱1,500 | Unpaid |

Paid

2 bills · ₱1,800

| Subscriber                       | Period          | Due         | Amount | Status |
|----------------------------------|-----------------|-------------|--------|--------|
| Liza Fernandez<br>E3-2026-004871 | Sep 13 – Oct 12 | Paid Sep 25 | ₱800   | Paid   |
| Angelica Cruz<br>E3-2026-004878  | Sep 3 – Oct 2   | Paid Sep 16 | ₱1,000 | Paid   |

The month's bills grouped by how soon they are due.

## Trace — finding one month's bills (computed by our code)

All **25** bills are sorted by id BILL-YYYYMM-ACCOUNT. This month's ids start with **BILL-202610-**, so they sit next to each other (blue):

|                       |                       |                       |                       |                       |                             |                       |
|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------|-----------------------------|-----------------------|
| 202607-004871<br>[0]  | 202607-004872<br>[1]  | 202607-004873<br>[2]  | 202607-004874<br>[3]  | 202608-004871<br>[4]  | 202608-004872<br>[5]        | 202608-004873<br>[6]  |
| 202608-004874<br>[7]  | 202608-004875<br>[8]  | 202608-004876<br>[9]  | 202608-004877<br>[10] | 202608-004878<br>[11] | 202609-004871<br>[12]       | 202609-004872<br>[13] |
| 202609-004874<br>[14] | 202609-004875<br>[15] | 202609-004876<br>[16] | 202609-004877<br>[17] | 202609-004878<br>[18] | 202610-004871<br>[19] first | 202610-004872<br>[20] |
| 202610-004874<br>[21] | 202610-004875<br>[22] | 202610-004877<br>[23] | 202610-004878<br>[24] |                       |                             |                       |

E3 Fiber Connect · Defense Reviewer

67 / 86

| Step | low | high | middle | Bill id at middle  | Decision                |
|------|-----|------|--------|--------------------|-------------------------|
| 1    | 0   | 25   | 12     | BILL-202609-004871 | smaller → low = 13      |
| 2    | 13  | 25   | 19     | BILL-202610-004871 | not smaller → high = 19 |
| 3    | 13  | 19   | 16     | BILL-202609-004876 | smaller → low = 17      |
| 4    | 17  | 19   | 18     | BILL-202609-004878 | smaller → low = 19      |

Binary search finds the first bill of the month at index **19** in 4 steps; a short scan collects the **6** bills of the month (the code reports 10 comparisons in total instead of reading all 25).

| Group (by days to due date) | Bills                                                                        |
|-----------------------------|------------------------------------------------------------------------------|
| Overdue                     | —                                                                            |
| Due within 7 days           | —                                                                            |
| Upcoming                    | Mark Bautista, Carlo Mendoza, Angelica Cruz, Ramon Villareal, Kristine Ramos |
| Paid                        | Liza Fernandez                                                               |

Totals in one pass: expected ₱6,300 · collected ₱800 · outstanding ₱5,500 (5 unpaid of 6).

## Code walkthrough

assets/js/backend/billing.js · lines 152–159

```

152  /**
153   * billsForMonth - mga bill ng isang buwan. Nagsisimula sa "BILL-YYYYMM-" yung bill ids,
154   * kaya tatalon muna yung binary search sa una, tapos maikling scan para sa iba.
155   * Time: O(log n) + O(n), Space: O(n)
156   */
157  function billsForMonth(year, month) {
158      return rangeWithPrefix(bills, 'billId', 'BILL-' + year + pad2(month) + '-');
159  }

```

1. The prefix "BILL-" + year + two-digit month is exactly how every bill id of that month begins.

assets/js/dsa/search.js · lines 176–197

```

176  /**
177   * rangeWithPrefix - lahat ng record na yung 'field' ay nagsisimula sa 'prefix', galing
178   * sa array na naka-sort by 'field'. Tatalon muna yung binary search sa unang candidate,
179   * tapos maikling scan lang para kunin yung mga katabi. (Yung bill ids nagsisimula sa
180   * "BILL-YYYYMM-", kaya nakukuha nito yung bills ng isang buwan nang hindi binabasa yung buong table.)
181   * Time: O(log n) para sa una + O(n) para kunin yung matches, Space: O(n)
182   */
183  function rangeWithPrefix(sortedRecords, field, prefix) {
184      const matches = [];
185      let position = lowerBound(sortedRecords, field, prefix);
186      let comparisons = dsaLastRun.comparisons; // 1. yung steps ng binary search
187      while (position < sortedRecords.length && textStartsWith(sortedRecords[position][field], prefix)) {
188          arrayAppend(matches, sortedRecords[position]); // 2. kunin habang tugma pa yung prefix
189          position++;
190          comparisons++;
191      }
192      if (position < sortedRecords.length) {
193          comparisons++; // 3. yung check na nagpatigil sa scan (wala nito pag dulo
na ng array)
194      }
195      recordRun('Binary search + scan', comparisons, 0);
196      return matches;
197  }

```

1. lowerBound (binary search) finds the first id that is ≥ the prefix — the first bill of the month.
2. The loop keeps adding bills while their id still starts with the prefix, then stops at the first one that doesn't.
3. The comparisons are recorded (binary-search steps + scan) and shown on the Algorithms page.

```

230  /**
231   * groupBills - hatiin yung bills sa apat na array, base sa due date kumpara sa araw
232   * ngayon; tapos bawat bucket ay sine-sort by due date (insertion sort).
233   * Time: O(n²), Space: O(n)
234   */
235  function groupBills(list, today) {
236    const overdue = [];
237    const dueSoon = [];
238    const upcoming = [];
239    const paid = [];
240    for (let i = 0; i < list.length; i++) {           // 1. isang loop lang sa bills ng buwan
241      const bill = list[i];
242      if (bill.status === 'Paid') {
243        arrayAppend(paid, bill);
244      } else {
245        const daysLeft = daysBetweenISO(today, bill.dueDate); // 2. ilang araw pa bago (o lampas na sa) due
246        if (daysLeft < 0) {
247          arrayAppend(overdue, bill);
248        } else if (daysLeft <= 7) {
249          arrayAppend(dueSoon, bill);
250        } else {
251          arrayAppend(upcoming, bill);
252        }
253      }
254    }
255    return {                                           // 3. i-sort bawat group by date (insertion
256      overdue: insertionSort(overdue, 'dueDate', 'asc'),
257      dueSoon: insertionSort(dueSoon, 'dueDate', 'asc'),
258      upcoming: insertionSort(upcoming, 'dueDate', 'asc'),
259      paid: insertionSort(paid, 'paidOn', 'desc'),
260    };
261  }

```

1. One pass: paid bills go to paid; for the others daysBetweenISO gives the days to the due date (negative = overdue, 0–7 = due soon).
2. Each group is then sorted by date with insertion sort (paid ones newest first).

```

263  /** summarizeBills - total ng expected / collected / outstanding sa isang loop lang. O(n) */
264  function summarizeBills(list) {
265    const totals = { expected: 0, collected: 0, outstanding: 0, count: list.length, paidCount: 0, unpaidCount: 0 };
266    for (let i = 0; i < list.length; i++) {
267      totals.expected += list[i].amount;
268      if (list[i].status === 'Paid') {
269        totals.collected += list[i].amount;
270        totals.paidCount++;
271      } else {
272        totals.outstanding += list[i].amount;
273        totals.unpaidCount++;
274      }
275    }
276    return totals;
277  }

```

1. One loop adds each amount to “expected” and to “collected” (paid) or “outstanding” (unpaid), and counts them.

# Billing: Bill Generation

|         |                                                                                                                                                           |
|---------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Billing → “Generate bills” (all active subscribers) and “New bill” (one subscriber)                                                                       |
| Files   | backend/billing.js (billingPeriod, createBill, generateMonthlyBills, billableSubscribers) ·<br>backend/utils.js (calendar maths) · views/admin/billing.js |
| Data    | subscribers (status, plan, since) · bills (sorted by id) · the Undo stack                                                                                 |
| DSA     | Binary search (subscriber, existing bill) · sorted insert (lower bound + shift) · days-from-civil date arithmetic · stack (one Undo for the batch)        |

## 1 Business process

*What task or problem from the client are you solving?*

Every active subscriber must receive one bill per month, for the right amount (their plan’s price), for the right period, with a due date — and never twice for the same month. E3 bills on each customer’s **connection day** (“anniversary billing”): the period starts on the day of the month they were connected, ends the day before that date next month, and is due 15 days after it starts. Suspended and terminated accounts are not billed. Staff can bill everyone at once or one subscriber, up to one month ahead, and undo the whole batch.


## 2 Input

*What data is needed by the module?*

| Input                      | Detail                                                                 |
|----------------------------|------------------------------------------------------------------------|
| Month and year             | from the month switch or the “New bill” sheet; at most one month ahead |
| Subscriber (New bill only) | chosen from the active subscribers; already-billed ones are disabled   |
| Each subscriber’s data     | status (must be Active), plan / custom price, connection date (since)  |
| Existing bills             | to refuse a second bill for the same month                             |
| Signed-in staff            | recorded in the log and the Undo step                                  |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

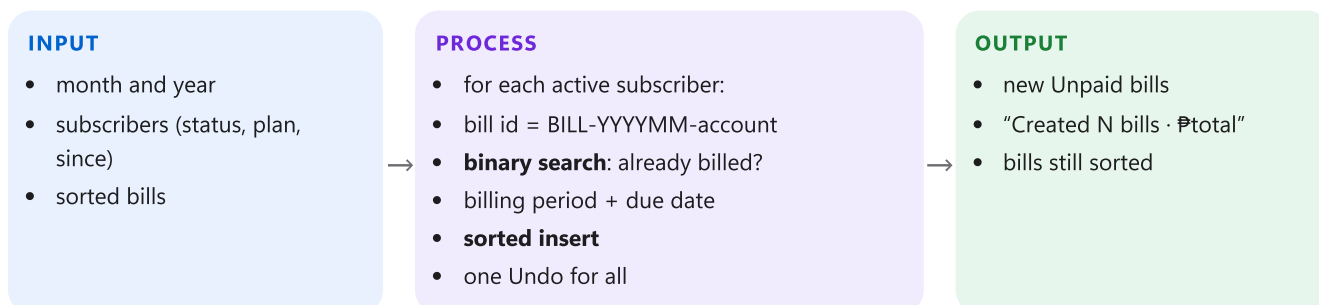

- 1 generateMonthlyBills visits every subscriber and skips those that are not Active or were not connected yet in that month (isBillableIn).
- 2 createBill: binary search for the subscriber; check the month is valid, not before they were connected, and not more than one month ahead.
- 3 Build the id BILL-202610-004872 and **binary search** for it — if it exists, this subscriber is already billed (skipped, or an error for “New bill”).
- 4 billingPeriod: the period starts on the connection day (the month’s last day if the month is shorter), ends the day before the next start, and is due 15 days after the start — all with our day-number calendar maths.
- 5 The amount is the plan price (or the custom price); the bill is put in id order with **sortedInsert** (lower bound + shift).

6 All the new bills are collected into **one** Undo step and one activity line with the total.

#### 4 Output

*What result does the module produce?*

New bill records { billId, accountNo, billingYear, billingMonth, periodStart, periodEnd, dueDate, amount, status: "Unpaid", paidOn: null, paymentRef: "", createdAt } in the sorted bills array; the message "Created  $N$  bills ·  $\text{P}total$ " with Undo; the month's totals and groups updated; or a clear message when there is nothing to do ("Every active subscriber already has a ... bill.").

#### 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                                            | Time                                    | Space                                            |
|----------------------------------------------------------------------|-----------------------------------------|--------------------------------------------------|
| billingPeriod (day-number arithmetic)                                | $O(1)$                                  | $O(1)$                                           |
| createBill: find subscriber + duplicate check                        | $O(\log n) + O(\log n)$                 | $O(1)$                                           |
| createBill: sorted insert                                            | $O(\log n) + O(n) \text{ shift} = O(n)$ | $O(1)$                                           |
| <b>generateMonthlyBills</b> (an $O(n)$ sorted insert per subscriber) | <b><math>O(n^2)</math></b>              | <b><math>O(n)</math></b> for the Undo operations |

#### 6 Justification


*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **The id encodes the uniqueness rule** (one bill per account per month), so the duplicate check is a single binary search instead of scanning all bills.
- **Sorted insert** keeps the bills sorted by id, which the billing list (Module 11), Pay Bills and payment validation depend on. Bills are created in account order, so most inserts land near the end of their month block — few shifts.
- **Day-number calendar maths** (days-from-civil) makes "+15 days" and "next month" exact, including leap years and short months, without the Date object doing hidden work.
- **One Undo step for the batch** (a stack entry holding many insert operations): a mistaken "Generate" is reversed in one click.


#### 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Billing → next month (empty) → "Generate bills" → the confirmation says how many bills will be created → Generate.
- 2 The month now has one bill per active subscriber; press "Generate bills" again → "Every active subscriber already has a ... bill."
- 3 "New bill": already-billed subscribers are disabled.

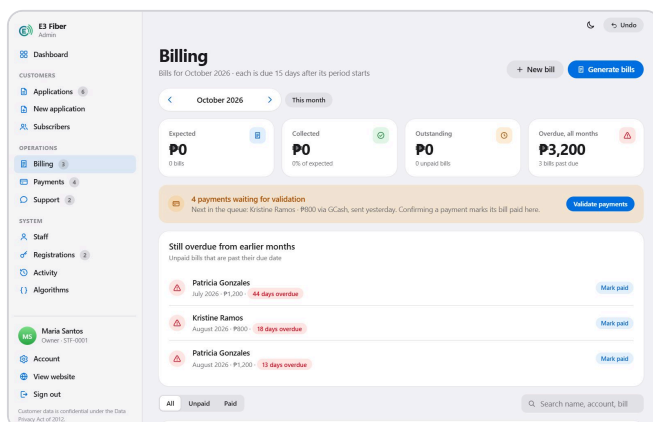

Input: next month, no bills yet.

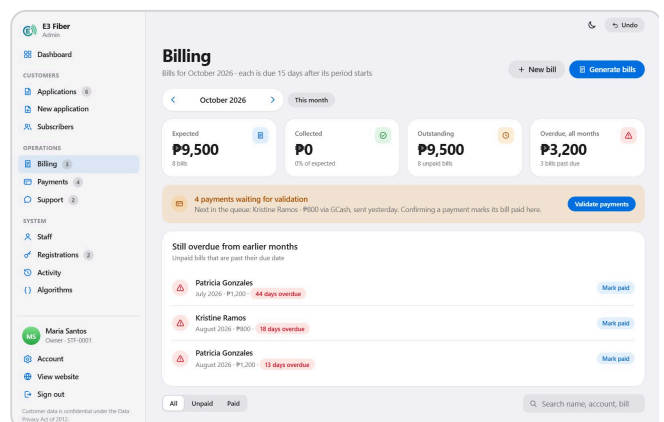

Output: one bill per active subscriber.

Generate 8 bills?

Creates a October 2026 bill for each active subscriber who doesn't have one yet. You can undo this in one step.

Cancel

Generate bills

Confirmation before generating (one Undo step).

New bill

Month

September

Year

2026

Q

Search active subscribers

Angelica Cruz

Already billed for September 2026

Carlo Mendoza

Already billed for September 2026

Kristine Ramos

Already billed for September 2026

Liza Fernandez

Already billed for September 2026

Maricel Dizon

E3-2026-004881 - Power - ₱1,200

Mark Bautista

Already billed for September 2026

Cancel

Create bill

"New bill" — already-billed accounts are disabled.

## Trace — periods and a generation run (computed by our code)

| Connected on | Bill for       | Period                  | Due (start + 15 days) | Why                                         |
|--------------|----------------|-------------------------|-----------------------|---------------------------------------------|
| 2026-08-15   | September 2026 | 2026-09-15 → 2026-10-14 | 2026-09-30            | normal month: same day each month           |
| 2026-01-31   | February 2026  | 2026-02-28 → 2026-03-30 | 2026-03-15            | February has no 31st → its last day is used |

**Generate bills for 2026-11:** 6 bills created, total ₱6,300. Bills table: 25 → 31 records, still sorted by id: **✓ verified**. Skipped (not active): Jerome Santiago (Terminated), Patricia Gonzales (Suspended).

| Example bill              | Value                       |
|---------------------------|-----------------------------|
| Subscriber (connected on) | Liza Fernandez (2026-07-19) |
| Bill id                   | BILL-202611-004871          |
| Period                    | 2026-11-19 → 2026-12-18     |
| Due date                  | 2026-12-04                  |
| Amount (plan price)       | ₱800                        |

Clicking *Generate* again: "Every active subscriber already has a bill for November 2026." (each bill id was found by binary search). Undo stack top: "Generate 6 bills for November 2026" holding **6 insert operations** — one Undo removes all of them.

## Code walkthrough

assets/js/backend/billing.js · lines 23–40

```

23  /**
24   * billingPeriod - start, end at due date ng bill ng subscriber para sa isang buwan.
25   * Na-connect ng 31st? Pag maikli yung buwan, yung huling araw na lang gagamitin.
26   * Time: O(1), Space: O(1)
27   */
28  function billingPeriod(subscriber, year, month) {
29    const anchorDay = parseISODate(subscriber.since).day; // 1. yung araw ng buwan nung na-connect
    sila
30    const startDay = anchorDay <= daysInMonth(year, month) ? anchorDay : daysInMonth(year, month); // 2. maikling
    buwan? gamitin yung huling araw nito
31    const next = addMonths(year, month, 1);
32    const nextDay = anchorDay <= daysInMonth(next.year, next.month) ? anchorDay : daysInMonth(next.year,
    next.month);
33    const periodStart = isoDate(year, month, startDay);
34    const nextStart = isoDate(next.year, next.month, nextDay); // 3. yung start ng susunod na period...

```

```

35     return { // 4. ...bawas isang araw = end nitong
period; due 15 days mula sa start
36     periodStart: periodStart,
37     periodEnd: addDaysISO(nextStart, -1),
38     dueDate: addDaysISO(periodStart, BILL_DUE_AFTER_DAYS),
39 };
40 }

```

1. The anchor is the day of the month the customer was connected.
2. If this month (or next month) is too short for that day, its last day is used instead.
3. The period ends the day before the next period starts; the due date is 15 days after the start (addDaysISO uses our day numbers).

assets/js/backend/billing.js · lines 53–105

```

53  /**
54   * createBill - gumawa ng bill ng isang buwan para sa ACTIVE na subscriber.
55   * Yung bagong bill ay "nilalagay" sa tamang order ng id gamit sortedInsert.
56   * options.quiet -> walang sariling undo/log entry (ginagamit ng generateMonthlyBills).
57   * Time: O(log n) checks + O(n) insert, Space: O(1)
58   */
59  function createBill(accountNo, year, month, actor, options) {
60      const quiet = options && options.quiet;
61      const subscriber = findSubscriber(accountNo); // 1. binary search para hanapin yung account
62      if (!subscriber) {
63          return { ok: false, error: 'Subscriber not found.' };
64      }
65      if (subscriber.status !== 'Active') { // 2. active accounts lang ang bini-bill
66          return { ok: false, error: subscriber.fullName + ' is ' + toLowerText(subscriber.status) + ' - only active
accounts are billed.' };
67      }
68      if (!(month >= 1 && month <= 12) || !(year >= 2000 && year <= 2100)) {
69          return { ok: false, error: 'Choose a valid month.' };
70      }
71      const since = parseISODate(subscriber.since);
72      if (year * 12 + month < since.year * 12 + since.month) {
73          return { ok: false, error: subscriber.fullName + ' was connected on ' + formatDate(subscriber.since) + '.' };
74      }
75      const clock = readClock();
76      if (year * 12 + month > clock.year * 12 + clock.month + 1) {
77          return { ok: false, error: 'Bills can be created up to one month ahead.' };
78      }
79      const billId = makeBillId(year, month, accountNo); // 3. halimbawa BILL-202609-004872
80      if (findBill(billId)) { // 4. binary search: may bill na ba ngayong
buwan?
81          return { ok: false, error: subscriber.fullName + ' already has a bill for ' + formatMonthYear(year, month) +
'.' };
82      }
83      const period = billingPeriod(subscriber, year, month); // 5. period at due date (anniversary billing)
84      const bill = {
85          billId: billId,
86          accountNo: accountNo,
87          billingYear: year,
88          billingMonth: month,
89          periodStart: period.periodStart,
90          periodEnd: period.periodEnd,
91          dueDate: period.dueDate,
92          amount: planPrice(subscriber.planId, subscriber.customPrice),
93          status: 'Unpaid',
94          paidOn: null,
95          paymentRef: '',
96          createdAt: nowISO(),
97      };
98      sortedInsert(bills, 'billId', bill); // 6. "ilagay" sa id order (binary search +
shift)
99      if (!quiet) {
100          pushUndo('Create ' + formatMonthYear(year, month) + ' bill for ' + subscriber.fullName,
[insertOperation('bills', billId)], nameOfActor(actor));
101          logActivity('billing', 'Created ' + formatMonthYear(year, month) + ' bill for ' + subscriber.fullName + ' ('
+ formatPeso(bill.amount) + ')', nameOfActor(actor));
102      }
103      markDataChanged();

```

```

104     return { ok: true, bill: bill };
105 }

```

1. Steps 1–2 and the checks after them: the subscriber must exist (binary search) and be Active; the month must be valid, not before the connection, and at most one month ahead.
2. Steps 3–4: build the id and refuse it if it already exists (binary search).
3. Steps 5–6: compute the period, build the Unpaid bill with the plan price, and put it in id order. When called by “Generate”, quiet skips the per-bill Undo so the batch gets one step.

assets/js/backend/billing.js · lines 113–150

```

113 /**
114  * generateMonthlyBills - gawan ng bill lahat ng active na subscriber na wala pang bill
115  * sa buwan na yun. Lahat ng bagong bill ay ISANG undo step lang.
116  * Time: O(n²) - O(n) na sorted insert bawat subscriber, Space: O(n)
117  */
118 function generateMonthlyBills(year, month, actor) {
119     const operations = [];
120     let created = 0;
121     let total = 0;
122     let firstError = '';
123     let billable = 0;
124     for (let i = 0; i < subscribers.length; i++) { // 1. puntahan isa-isa lahat ng subscriber
125         if (!isBillableIn(subscribers[i], year, month)) { // 2. skip yung inactive at yung mga buwan bago
126             // sila na-connect
127             continue;
128         }
129         billable++;
130         const result = createBill(subscribers[i].accountNo, year, month, actor, { quiet: true }); // 3. hindi tutuloy
131         // kung may bill na
132         if (result.ok) {
133             created++;
134             total += result.bill.amount;
135             arrayAppend(operations, insertOperation('bills', result.bill.billId)); // 4. tandaan para sa iisang Undo
136         } else if (firstError === '' && !hasBill(subscribers[i].accountNo, year, month)) {
137             firstError = result.error; // totoong problema (halimbawa sobrang
138             // advance), hindi yung "already billed"
139         }
140     }
141     if (created === 0) {
142         let error = 'Every active subscriber already has a bill for ' + formatMonthYear(year, month) + '.';
143         if (firstError !== '') {
144             error = firstError;
145         } else if (billable === 0) {
146             error = 'No active subscriber was connected yet in ' + formatMonthYear(year, month) + '.';
147         }
148         return { ok: false, created: 0, total: 0, error: error };
149     }
150     pushUndo('Generate ' + pluralize(created, 'bill') + ' for ' + formatMonthYear(year, month), operations,
151             nameOfActor(actor));
152     logActivity('billing', 'Generated ' + pluralize(created, 'bill') + ' for ' + formatMonthYear(year, month) + '
153     (' + formatPeso(total) + ')', nameOfActor(actor));
154     return { ok: true, created: created, total: total, error: '' };
155 }

```

1. Visit every subscriber, skip the inactive ones, and try to bill each; already-billed ones simply return “not ok”.
2. Every created bill adds one insert operation. If none was created, the message gives the real reason: the first problem found (e.g. more than one month ahead), nobody connected yet that month, or everyone already billed.
3. pushUndo stores all the operations as one step; the log shows the count and total.

# Payments (Payments Validation)

|         |                                                                                                                                                                   |
|---------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Screens | Customer: Pay Bills (#/pay) · Staff: Payments (#/admin/payments) with the validation queue                                                                        |
| Files   | backend/payments.js (reportPayment, paymentsQueue, validatePayment, confirmPayment, declinePayment, listPayments) · views/public/pay.js · views/admin/payments.js |
| Data    | payments (sorted by id) · paymentReferenceIndex (hash table) · bills                                                                                              |
| DSA     | Queue (validation order) · binary search (bill) · character scan (reference format) · hash table (re-used reference) · stack (Undo)                               |

## 1 Business process

*What task or problem from the client are you solving?*

Customers pay through GCash, Maya, a bank or a payment centre and then tell E3 they paid. Before a bill is marked paid, staff must be sure the report is genuine: it is for a real bill of that account, the bill is not already paid, the amount is exactly the bill, the reference number looks like one from that payment method, and **the same reference was not used before** (a common mistake — or fraud). Reports are handled in the order they arrived. Confirmed payments settle the bill; declined ones show the customer a reason.


## 2 Input

*What data is needed by the module?*

| Who                  | Input                                            | Rule                                                                           |
|----------------------|--------------------------------------------------|--------------------------------------------------------------------------------|
| Customer (Pay Bills) | Account number + registered mobile               | both must match (the error never says which part was wrong)                    |
|                      | Bill paid                                        | one of their unpaid bills not already being checked                            |
|                      | Method                                           | GCash · Maya · Bank transfer · Over the counter                                |
|                      | Amount paid                                      | ₱1 – ₱100,000 (filled in from the bill)                                        |
|                      | Reference number                                 | GCash 13 digits · Maya 12 letters/digits · bank or counter 8–20 letters/digits |
| Staff (Payments)     | The front of the queue (or any row → “Validate”) | —                                                                              |
|                      | Decision                                         | Confirm (only if every check passes) or Decline with a reason (≥ 5 characters) |

## 3 Process

*What data structure and/or algorithm did you use? How does it work step by step?*

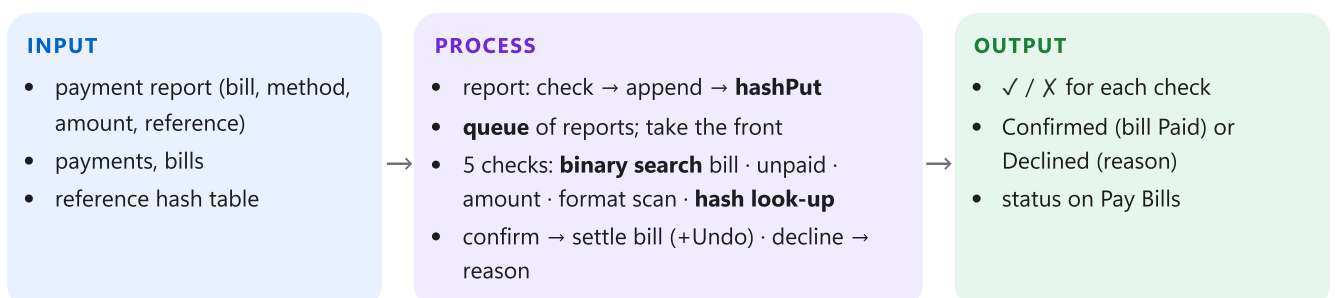

**Customer reports a payment** (reportPayment): check the bill, the method, the reference *format* and the amount; append the payment (ids only grow → sorted) and add its reference to the hash table under “METHOD:REFERENCE”. It joins the rear of the validation queue.

**Staff validate** (paymentsQueue → queuePeek → validatePayment):

**1 Bill belongs to the account** — binary search for the bill id; its account must match.

- 2 **Bill is still unpaid** — e.g. not settled at the office in the meantime.
- 3 **Amount matches the bill** — one comparison; the text says how much short or over.
- 4 **Reference format** — scan the characters: right length for the method, digits only for GCash.
- 5 **Reference not used before** — one hash-table look-up of "METHOD:REFERENCE"; a confirmed payment there, or an earlier report still waiting, means this one is a duplicate (declined reports and later reports don't count).
- 6 **Confirm** (`confirmPayment`) re-runs the checks and refuses if any fails; otherwise the payment becomes Confirmed and the bill Paid — one Undo step reverses both. **Decline** suggests a customer-friendly reason from the first failed check.

## 4 Output

*What result does the module produce?*

For staff: the validation card with ✓/X and a plain explanation for each check, the verdict (all checks passed — safe to confirm, or how many failed — decline it with a reason), Confirm enabled only when all pass, and the list of all payments (filter, search, sort). For the customer: the report under "Payment reports" as For verification, then Confirmed (the bill is paid) or Declined with the reason.

## 5 Complexity analysis

*What is the time complexity? What is the space complexity?*

| Operation                                                               | Time                                                          | Space                    |
|-------------------------------------------------------------------------|---------------------------------------------------------------|--------------------------|
| Report a payment (pending check over n payments, then append + hashPut) | $O(n) + O(1)$ average                                         | $O(1)$                   |
| Build the validation queue / peek the front                             | $O(n) / O(1)$                                                 | $O(n)$                   |
| Check 1 — find the bill (binary search over the bills)                  | $O(\log n)$                                                   | $O(1)$                   |
| Checks 2 and 3                                                          | $O(1)$                                                        | $O(1)$                   |
| Check 4 — format (n characters)                                         | $O(n)$                                                        | $O(1)$                   |
| Check 5 — hash look-up                                                  | $O(1)$ average (+ $O(\log n)$ per earlier use — almost never) | $O(1)$                   |
| <b>validatePayment overall</b>                                          | <b><math>O(\log n) + O(n)</math></b>                          | <b><math>O(1)</math></b> |
| Confirm (validate + settle the bill)                                    | $O(\log n) + O(n)$                                            | $O(1)$                   |

## 6 Justification

*Why did you choose that data structure or algorithm? Why is it appropriate?*

- **Queue:** payments are validated in the order customers reported them — first come, first served — and the front is available in  $O(1)$ .
- **Hash table for references:** checking "was this reference used?" by scanning every payment would be  $O(n)$  for each validation and grow forever; the hash table answers in  $O(1)$  on average. The key includes the method, so a GCash and a bank number that happen to look alike don't clash.
- **Binary search for the bill:** bills are sorted by id (Module 12), so finding the reported bill is  $O(\log n)$ .
- **Character scan** for the format: exact rules per method without regular expressions.
- **Checks repeated inside Confirm:** the rule is enforced by the backend, not just by a disabled button.
- **Privacy:** the public form never reveals whether a reference exists; only staff see duplicates.

## 7 Demonstration

*Show that the module works correctly — the input, the process and the output.*

- 1 Pay Bills → account E3-2026-004872, mobile 0918 555 0172 → GCash with a short reference → the format error; fix it → Send → the report appears as For verification.

- 2 Staff → Payments: the front (Kristine) passes all 5 checks → Confirm → her bill is paid.
- 3 Open the others: Liza's bill was already paid at the office, Patricia sent ₱200 short, Mark re-used Angelica's GCash reference through (found by the hash table) → Decline with the suggested reason.

**Report a payment**  
Paid through GCash, Maya, a bank or at our office? Send the details and we'll confirm within one business day.

**GCash or Maya**  
Send to E3 Fiber Connect using the number printed on your bill.

**Bank transfer**  
Use the bank details printed on your bill.

**Over the counter**  
E3 office, Santa Maria - Mon-Sat, 8 AM - 5 PM.

**Bill you paid**  
October 2026 - ₱800  
Due Oct 28, 2026

**Paid through**  
GCash

**Amount paid (₱)**  
800

**Reference number**  
1234 5678

GCash reference numbers have 13 digits - e.g. 5012 873 246 119.  
GCash reference numbers have 13 digits.

We use these details only to verify your payment. See our [Privacy Notice](#).

**NOW VALIDATING - 1 OF 5**

**Kristine Ramos**  
PAY-000002 - August 2026 bill of ₱800 - sent yesterday  
GCash - 7204519833102

- ✓ **Bill belongs to the account**  
Found the August 2026 bill of E3-2026-004874 with binary search (3 comparisons).
- ✓ **Bill is still unpaid**  
Unpaid - due Sep 7, 2026.
- ✓ **Amount matches the bill**  
₱800 paid for a ₱800 bill.
- ✓ **Reference number format**  
GCash references have 13 digits — 7204519833102 fits.
- ✓ **Reference number not used before**  
No earlier or confirmed payment used it — one hash-table look-up among 5 references on record.

✓ All 5 checks passed — safe to confirm.

Decline Confirm payment

Staff: the front payment passes all 5 checks.

Customer input: the GCash format rule.

**Validate PAY-000005**

**Mark Bautista**  
PAY-000005 - September 2026 bill of ₱1,000 - sent 1 hr ago  
GCash - 5012873246119

- ✓ **Bill belongs to the account**  
Found the September 2026 bill of E3-2026-004875 with binary search (5 comparisons).
- ✓ **Bill is still unpaid**  
Unpaid - due Oct 11, 2026.
- ✓ **Amount matches the bill**  
₱1,000 paid for a ₱1,000 bill.
- ✓ **Reference number format**  
GCash references have 13 digits — 5012873246119 fits.
- ✗ **Reference number not used before**  
Already used by PAY-000001 (Angelica Cruz, confirmed).

⚠ 1 check failed — decline it with a reason.

Close Decline Confirm payment

Check 5 fails: reference already used (hash table).

**Validate PAY-000004**

**Patricia Gonzales**  
PAY-000004 - August 2026 bill of ₱1,200 - sent yesterday  
GCash - 8830146527015

- ✓ **Bill belongs to the account**  
Found the August 2026 bill of E3-2026-004876 with binary search (4 comparisons).
- ✓ **Bill is still unpaid**  
Unpaid - due Sep 12, 2026.
- ✗ **Amount matches the bill**  
Paid ₱1,000 for a ₱1,200 bill — ₱200 short.
- ✓ **Reference number format**  
GCash references have 13 digits — 8830146527015 fits.
- ✓ **Reference number not used before**  
No earlier or confirmed payment used it — one hash-table look-up among 5 references on record.

⚠ 1 check failed — decline it with a reason.

Close Decline Confirm payment

Check 3 fails: ₱200 short.

**Validate PAY-000006**

**Liza Fernandez**  
PAY-000006 - October 2026 bill of ₱800 - sent just now  
GCash - 6130552918447

- ✓ **Bill belongs to the account**  
Found the October 2026 bill of E3-2026-004871 with binary search (2 comparisons).
- ✗ **Bill is still unpaid**  
Unpaid - due Oct 28, 2026.
- ✓ **Amount matches the bill**  
₱800 paid for a ₱800 bill.
- ✓ **Reference number format**  
GCash references have 13 digits — 6130552918447 fits.
- ✓ **Reference number not used before**  
No earlier or confirmed payment used it — one hash-table look-up among 5 references on record.

⚠ All 5 checks passed — safe to confirm.

Close Decline Confirm payment

Check 2 fails: the bill was already paid at the office.

**Decline payment**

Liza Fernandez reported ₱800 via GCash (ref 6130552918447). They will see your reason on the Pay Bills page.

**Reason**

e.g. Reference number not found in GCash

Cancel Decline payment

Decline: the reason is suggested from the failed check.

Trace — the queue, the five checks and the hash table (computed by our code)

The validation queue (circular buffer, front = oldest report):

|                         |                   |                   |                   |
|-------------------------|-------------------|-------------------|-------------------|
| PAY-000002<br>[0] front | PAY-000003<br>[1] | PAY-000004<br>[2] | PAY-000005<br>[3] |
|-------------------------|-------------------|-------------------|-------------------|

| Payment                                           | 1. Bill belongs to the account | 2. Bill is still unpaid | 3. Amount matches the bill | 4. Reference number format | 5. Reference number not used before | Verdict   |
|---------------------------------------------------|--------------------------------|-------------------------|----------------------------|----------------------------|-------------------------------------|-----------|
| PAY-000002<br>Kristine Ramos<br>GCash · ₱800      | ✓ yes                          | ✓ yes                   | ✓ yes                      | ✓ yes                      | ✓ yes                               | ✓ Confirm |
| PAY-000003<br>Liza Fernandez<br>Maya · ₱800       | ✓ yes                          | ✗ no                    | ✓ yes                      | ✓ yes                      | ✓ yes                               | ✗ Decline |
| PAY-000004<br>Patricia Gonzales<br>GCash · ₱1,000 | ✓ yes                          | ✓ yes                   | ✗ no                       | ✓ yes                      | ✓ yes                               | ✗ Decline |
| PAY-000005<br>Mark Bautista<br>GCash · ₱1,000     | ✓ yes                          | ✓ yes                   | ✓ yes                      | ✓ yes                      | ✗ no                                | ✗ Decline |

| Payment                      | The failed check says                                  | Suggested reason for the customer                                                                   |
|------------------------------|--------------------------------------------------------|-----------------------------------------------------------------------------------------------------|
| PAY-000003 Liza Fernandez    | Already paid on Oct 1, 2026 (Office payment).          | "This bill was already paid, so this payment was not applied. Please contact us if you paid twice." |
| PAY-000004 Patricia Gonzales | Paid ₱1,000 for a ₱1,200 bill — ₱200 short.            | "You sent ₱1,000 but the bill is ₱1,200. Please visit our office so we can settle the difference."  |
| PAY-000005 Mark Bautista     | Already used by PAY-000001 (Angelica Cruz, confirmed). | "This reference number was already used for another payment. Please check your receipt."            |

The reference hash table (key METHOD:REFERENCE → payment ids):

| Bucket | Key                 | Payment ids                         |
|--------|---------------------|-------------------------------------|
| 3      | GCASH:7204519833102 | PAY-000002                          |
| 12     | MAYA:4F7K2M9Q1T8B   | PAY-000003                          |
| 13     | GCASH:8830146527015 | PAY-000004                          |
| 15     | GCASH:5012873246119 | PAY-000001, PAY-000005 ✗ used twice |

Reference formats (check 4): GCash — 13 digits (e.g. 5012 873 246 119); Maya — 12 letters or digits (e.g. 4F7K 2M9Q 1T8B); Bank transfer — 8–20 letters or digits (e.g. FT26 0918 8830); Over the counter — 8–20 letters or digits (e.g. BC26 0918 0457).

Code walkthrough

assets/js/backend/payments.js · lines 147–212

```
147 /**
148  * validatePayment - yung limang check na nakikita sa Payments page. Walang binabago
149  * dito; sinasabi lang ng result kung alin ang pumasa at bakit.
150  * Binabalik { checks: [{ key, label, ok, text }], passed, failed, firstFailure, bill }.
```

```

151  * Time: O(log n) + O(n), Space: O(1)
152  */
153  function validatePayment(payment) {
154      const checks = [];
155
156      const bill = findBill(payment.billId); // 1 - binary search
157      const billSteps = dsaLastRun.comparisons;
158      const belongs = bill !== null && bill.accountNo === payment.accountNo;
159      const billName = bill ? formatMonthYear(bill.billingYear, bill.billingMonth) + ' bill' : 'bill' +
payment.billId;
160      arrayAppend(checks, {
161          key: 'bill',
162          label: 'Bill belongs to the account',
163          ok: belongs,
164          text: belongs ? 'Found the ' + billName + ' of ' + payment.accountNo + ' with binary search (' +
pluralize(billSteps, 'comparison') + ')'.
165              : 'There is no ' + billName + ' for account ' + payment.accountNo + '.',
166      });
167
168      const paidByThis = belongs && bill.status === 'Paid' && bill.paymentRef === payment.paymentId;
169      const unpaid = belongs && (bill.status === 'Unpaid' || paidByThis); // 2 - isang field lang (pag confirmed na
yung payment, ito mismo yung nag-settle)
170      let unpaidText = 'No bill to check.';
171      if (paidByThis) {
172          unpaidText = 'Was unpaid - this payment settled it on ' + formatDate(bill.paidOn) + '.';
173      } else if (belongs) {
174          unpaidText = unpaid ? 'Unpaid - due ' + formatDate(bill.dueDate) + '.'
175              : 'Already paid on ' + formatDate(bill.paidOn) + (bill.paymentRef ? ' (' + bill.paymentRef + ')' : '') +
'.';
176      }
177      arrayAppend(checks, { key: 'unpaid', label: 'Bill is still unpaid', ok: unpaid, text: unpaidText });
178
179      const amountOk = belongs && payment.amount === bill.amount; // 3 - isang comparison
180      let amountText = 'No bill amount to compare.';
181      if (belongs) {
182          const difference = payment.amount - bill.amount;
183          amountText = amountOk ? formatPeso(payment.amount) + ' paid for a ' + formatPeso(bill.amount) + ' bill.'
184              : 'Paid ' + formatPeso(payment.amount) + ' for a ' + formatPeso(bill.amount) + ' bill - '
185              + formatPeso(difference < 0 ? -difference : difference) + (difference < 0 ? ' short.' : ' too much. ');
186      }
187      arrayAppend(checks, { key: 'amount', label: 'Amount matches the bill', ok: amountOk, text: amountText });
188
189      const format = checkReferenceFormat(payment.method, normalizePaymentReference(payment.referenceCode)); // 4 -
scan
190      arrayAppend(checks, { key: 'format', label: 'Reference number format', ok: format.ok, text: format.text });
191
192      const duplicate = findDuplicatePayment(payment); // 5 - hash table
193      arrayAppend(checks, {
194          key: 'duplicate',
195          label: 'Reference number not used before',
196          ok: duplicate === null,
197          text: duplicate === null ? 'No earlier or confirmed payment used it - one hash-table look-up among ' +
pluralize(paymentReferenceIndex.size, 'reference') + ' on record.'
198              : 'Already used by ' + duplicate.paymentId + ' (' + duplicate.fullName + ', ' +
toLowerText(duplicate.status) + ')'.
199      });
200
201      let failed = 0;
202      let firstFailure = null;
203      for (let i = 0; i < checks.length; i++) {
204          if (!checks[i].ok) {
205              failed++;
206              if (firstFailure === null) {
207                  firstFailure = checks[i];
208              }
209          }
210      }
211      return { checks: checks, passed: failed === 0, failed: failed, firstFailure: firstFailure, bill: bill };
212  }

```

1. Check 1: findBill is a binary search; dsaLastRun.comparisons right after it is shown in the check's text.

- Checks 2–3 read the bill's status and compare the amounts (the text says how much short or over). A payment that was already confirmed still passes check 2, because the bill was settled by that same payment (`bill.paymentRef`).
- Check 4 normalises the reference (spaces and dashes removed, letters in capitals) and scans it with the method's rule.
- Check 5 asks the hash table for another payment with the same method and reference.
- The last loop counts failures and remembers the first one (used for the verdict and the suggested decline reason).

assets/js/backend/payments.js · lines 108–121

```
108 /**
109  * indexPaymentReference - i-add yung payment sa reference hash table. Yung value na
110  * naka-store sa bawat key ay listahan ng payment ids na gumamit ng reference na yun.
111  * Time: O(1) average, Space: O(1)
112  */
113 function indexPaymentReference(payment) {
114   const key = paymentReferenceKey(payment.method, payment.referenceCode);
115   const ids = hashGet(paymentReferenceIndex, key);
116   if (ids === null) {
117     hashPut(paymentReferenceIndex, key, [payment.paymentId]);
118   } else {
119     arrayAppend(ids, payment.paymentId);
120   }
121 }
```

- The key is "METHOD:REFERENCE", e.g. GCASH:5012873246119.
- The value is a small list of payment ids: a new key gets a new list; an existing key gets the id appended — so a second use is visible in one look-up.

assets/js/backend/payments.js · lines 123–145

```
123 /**
124  * findDuplicatePayment - hanapin yung payment na gumamit ng parehong method at reference
125  * number BAGO ito: confirmed na payment, o mas naunang report na naghihintay pa. Hindi
126  * kasama yung Declined, pati yung mas huling report (yung huli yung duplicate, hindi ito).
127  * Isang hash table lookup, tapos binary search bawat id.
128  * Time: O(1) average, + O(log n) bawat naunang gamit ng reference (halos wala naman), Space: O(1)
129  */
130 function findDuplicatePayment(payment) {
131   const ids = hashGet(paymentReferenceIndex, paymentReferenceKey(payment.method, payment.referenceCode));
132   if (ids === null) {
133     return null; // 1. hindi pa nakikita yung reference na to
134   }
135   for (let i = 0; i < ids.length; i++) {
136     if (ids[i] !== payment.paymentId) {
137       const other = findPayment(ids[i]); // 2. bawat ibang gumamit nito (binary search)
138       if (other && (other.status === 'Confirmed' || (other.status === 'For verification' && other.paymentId < payment.paymentId))) {
139         return other; // 3. confirmed na, o mas naunang ni-report -> duplicate
140       }
141     }
142   }
143   return null;
144 }
145 }
```

- One `hashGet`; no list → never used.
- Otherwise every other id in the list is found by binary search; one that is Confirmed, or still waiting with a *smaller* id (reported earlier), makes this payment the duplicate.

assets/js/backend/payments.js · lines 328–363

```
328 /**
329  * confirmPayment - tanggapin yung payment tapos i-mark na paid yung bill. Hindi to
330  * tutuloy kung hindi pasado lahat ng limang check. Isang undo step lang pang-balik
331  * sa dalawang binago.
332  * Time: O(log n) + O(n), Space: O(1)
333  */
334 function confirmPayment(paymentId, actor) {
335   if (!actor) {
336     return { ok: false, error: 'Please sign in again.' };
337   }
338 }
```

```

338     const payment = findPayment(paymentId);
339     if (!payment) {
340         return { ok: false, error: 'Payment not found.' };
341     }
342     if (payment.status !== 'For verification') {
343         return { ok: false, error: 'This payment was already ' + toLowerText(payment.status) + '.' };
344     }
345     const validation = validatePayment(payment);
346     if (!validation.passed) {
347         return { ok: false, error: 'Can't confirm - "' + validation.firstFailure.label + '" failed. Decline it instead.', validation: validation };
348     }
349     const bill = validation.bill;
350     const beforePayment = snapshotFields(payment, ['status', 'reviewedBy', 'reviewedAt']);
351     const beforeBill = snapshotFields(bill, ['status', 'paidOn', 'paymentRef']);
352     payment.status = 'Confirmed';
353     payment.reviewedBy = nameOfActor(actor);
354     payment.reviewedAt = nowISO();
355     settleBill(bill.billId, actor, payment.paymentId, { quiet: true });
356     pushUndo('Confirm payment ' + paymentId + ' (' + payment.fullName + ')', [
357         updateOperation('payments', paymentId, beforePayment),
358         updateOperation('bills', bill.billId, beforeBill),
359     ], nameOfActor(actor));
360     logActivity('payment', 'Confirmed payment ' + paymentId + ' - ' + payment.fullName + ' paid ' +
formatPeso(payment.amount), nameOfActor(actor));
361     markDataChanged();
362     return { ok: true, payment: payment, bill: bill };
363 }

```

1. Refuse when no staff member is signed in, or the payment is unknown or already handled; then run `validatePayment` again — if any check fails, nothing changes.
2. Snapshot the payment and the bill, mark the payment Confirmed and settle the bill, then push one Undo step containing both changes.

## Complexity summary — all 13 modules

The main operation of each module, written with only the four notations from class:  $O(1)$ ,  $O(\log n)$ ,  $O(n)$  and  $O(n^2)$ .  $n$  is the size of whatever the operation goes through — records in a table, characters of a text, or items in a queue; a loop inside a loop is  $O(n^2)$ . Details are on each module's page.

| #  | Module                            | Member    | Main structure / algorithm                                                                 | Time                                     | Space                 |
|----|-----------------------------------|-----------|--------------------------------------------------------------------------------------------|------------------------------------------|-----------------------|
| 1  | Plan Selection                    | Joshua    | Linear search (recommender) · insertion sort (best case) · selection sort (cards)          | $O(n) \cdot O(n^2)$ cards                | $O(n)$                |
| 2  | Application                       | Joshua    | Character scans · binary search (barangay) · linear duplicate check · append               | $O(n)$                                   | $O(1)$ extra          |
| 3  | Application Tracking              | Joshua    | Binary search on the reference number                                                      | $O(\log n)$                              | $O(1)$                |
| 4  | Application List                  | Justin    | Linear filter · naive string matching · insertion / selection / bubble sort · review queue | $O(n^2)$ worst sort · $O(1)$ peek        | $O(n)$                |
| 5  | Walk-in Override                  | Justin    | Validation · linear duplicate check · append · Undo stack                                  | $O(n)$                                   | $O(1)$                |
| 6  | Create Account                    | Justin    | Binary search · lower bound + shift (sorted insert)                                        | $O(n)$                                   | $O(1)$ extra          |
| 7  | Admin Login                       | Riceerich | Hash table (djb2, chaining) · binary search · salted password hash                         | $O(1)$ average                           | $O(1)$ ; table $O(n)$ |
| 8  | Accounts Management               | Riceerich | Filter + search + sort · binary search · oldest-bill queue                                 | $O(\log n)$ find · $O(n^2)$ worst sort   | $O(n)$                |
| 9  | Admin/Staff Creation & Management | Riceerich | Hash table (unique e-mail) · append · binary search                                        | $O(1)$ average add · $O(\log n)$ actions | $O(1)$                |
| 10 | Admin Registration & Approval     | Riceerich | Approval queue · hash look-up · binary search · append + hashPut                           | $O(1)$ peek · $O(\log n)$ approve        | $O(n)$                |
| 11 | Billing: Client Billing List      | Aaron     | Lower bound + range scan · one-pass grouping · insertion sort                              | $O(\log n) + O(n)$                       | $O(n)$                |
| 12 | Billing: Bill Generation          | Aaron     | Binary search (duplicate) · sorted insert · one Undo step                                  | $O(n^2)$                                 | $O(n)$                |
| 13 | Payments Validation               | Aaron     | Queue · binary search · character scan · hash table                                        | $O(\log n) + O(n)$                       | $O(1)$                |

### Reading Big-O in one minute

#### What it means

Big-O describes how the work **grows** when the data grows, ignoring fixed costs.  $O(\log n)$  grows very slowly (double the data → one more step);  $O(n)$  grows in step with the data;  $O(n^2)$  grows with the square (double the data → four times the work).

#### Time vs. space

**Time** counts the steps (comparisons, moves). **Space** counts the *extra* memory the function needs besides its input — e.g. a sort that copies the list is  $O(n)$  space, a binary search is  $O(1)$ .

## General questions — any member may be asked

### Why is the whole website one HTML page?

Our data lives in JavaScript arrays, and arrays exist only while the page is open — they cannot be carried to another HTML file. So every screen is a section of one `index.html`, and the router shows the section named after the # in the address. The arrays stay alive while you move between screens.

### Where is the data saved? What happens when you refresh?

Only in memory (the arrays in `backend/database.js`). There is no `localStorage`, cookie or server. Refreshing the page loads the sample data again — this is expected for the project rule, and it also makes every demonstration start from the same state.

### Why didn't you use `push`, `sort`, `indexOf`, `filter` and the other built-ins?

It was a project rule, and it shows we understand what they do. Each one has our own version in `assets/js/dsa/`: `arrayAppend` (`push`), `arrayInsertAt` / `arrayRemoveAt` (`splice`), `linearSearch` (`indexOf` / `find`), `linearSearchAll` (`filter`), `insertionSort` and others (`sort`), `textFind` (`includes`), `trimText`, `splitText` and `toLowerCaseText` — and no regular expressions.

### What does “procedural, not OOP” mean in your code?

There are no classes, no `this` and no methods. Data is plain records (e.g. a queue is `{ items, front, count, capacity }`) and every operation is a separate function that receives the record: `enqueue(queue, item)`, `stackPush(stack, item)`, `hashPut(table, key, value)`.

### Aren't $O(n^2)$ sorts too slow?

Not for our data: the lists have tens to hundreds of records, and the tables are usually already in order, which is insertion sort's best case —  $O(n)$ . They are also simple to verify, and insertion and bubble sort are stable. The *Benchmark lab* on the Algorithms page runs the three sorts on the same random data and shows the exact comparison counts, so the difference can be seen live.

### Why keep the arrays sorted instead of sorting when needed?

Records are looked up far more often than they are added. Keeping each array sorted by its key (append when ids only grow, sorted insert otherwise) lets every look-up be a binary search —  $O(\log n)$  — instead of a linear search, and each month of bills becomes one contiguous block (Module 11).

### Why hash tables, when you already have binary search?

Binary search only works on the key the array is sorted by. Staff are sorted by id, but sign-in searches by e-mail; payments are sorted by id, but the duplicate check searches by reference number; wrong sign-in tries are counted per e-mail. A hash table indexes that second key and answers in  $O(1)$  on average, without a second sorted copy that would cost  $O(n)$  per insert.

### How does Undo work?

It is a stack. Every admin action pushes one step holding its operations (insert / update / remove) and the “before” values. Undo pops the newest step and reverses its operations. One step can hold many operations — generating a month of bills, or confirming a payment (payment + bill). Only the last 25 steps are kept, and the stack is cleared at sign-in and sign-out so staff only ever undo their own work. Customers' actions are not on the stack, so Undo refuses a step that would break one — e.g. removing a generated bill a customer already reported a payment for, or re-opening a declined payment after the customer sent a new report. Each toast's Undo only reverses the action that toast announced.

### **How secure is it?**

It is a class project that runs entirely in the browser, so we are honest about the limits. What we did: passwords are stored only as a salted hash (FNV-1a repeated 400 times — a demo, not a real password hash), five wrong passwords in a row for one e-mail (counted in a hash table) pause sign-in for 30 seconds, the sign-in error never says whether the e-mail or the password was wrong — nor, through the registration messages, which e-mails belong to staff — staff screens need a signed-in account, and everything shown on screen is escaped so typed text can't run as code. A real deployment would need a server and database, a proper password hash (bcrypt or Argon2) and HTTPS, because anything in the browser can be read with developer tools.

### **How do you prove the complexities?**

Every search and sort records its comparisons and moves; the Algorithms page shows the last runs, the live sizes of every structure and the benchmark. The traces in this reviewer were produced by running our actual functions on the sample data.

### **Did you use the Date object?**

Only to read the clock: `readClock` reads today's date from the computer, and `Date.now()` / `performance.now()` give timestamps for the sign-in pause, the activity log and the sort stopwatch. All date maths — adding days, next month, days between two dates, leap years — is our own day-number arithmetic in `backend/utils.js`.

### **What would you improve with more time?**

A real server and database so data survives a refresh; sending e-mail or SMS for application updates and bills; online payment through the payment provider's API instead of reported references; and a balanced tree or database index once the tables grow to many thousands of records.

# Glossary

|                       |                                                                                                                                  |
|-----------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Array                 | Items stored in numbered slots (0, 1, 2 ...); reading slot i is O(1). Our “tables”.                                              |
| Key                   | The field an array is sorted and searched by (reference number, account number, bill id ...).                                    |
| Linear search         | Check items one by one until a match. O(n); works on unsorted data.                                                              |
| Binary search         | On a sorted array, compare with the middle and keep one half. O(log n).                                                          |
| Lower bound           | Binary search for the first position whose key is ≥ a value — where a new item belongs, or where a range starts.                 |
| Sorted insert         | Lower bound + shift the later items one slot right. Keeps the array sorted. O(n).                                                |
| Naive string matching | Try the search text at every position of the field. O(n²).                                                                       |
| Stable sort           | Equal items keep their original order (insertion and bubble sort are stable; selection sort is not).                             |
| Stack (LIFO)          | Last in, first out: push and pop at the top. Used for Undo, Back and open dialogs.                                               |
| Queue (FIFO)          | First in, first out: enqueue at the rear, dequeue at the front. Used for review, payments, staff requests, support, oldest bill. |
| Circular buffer       | A queue in a fixed array whose rear wraps to the start, so nothing is shifted: O(1) enqueue and dequeue.                         |
| Hash table            | A hash function turns a key into a bucket number, so a look-up checks one short list. O(1) on average.                           |
| djb2                  | Our string hash function: start at 5381, then hash × 33 + character for every character.                                         |
| Collision / chaining  | Two keys in the same bucket; we keep them in a chain (list) inside that bucket.                                                  |
| Load factor           | Keys ÷ buckets. Above 0.75 the table grows to 2b + 1 buckets and re-inserts every key.                                           |
| Salt                  | Extra text mixed into a password before hashing, so equal passwords get different hashes.                                        |
| Big-O                 | How the work grows with the size of the data (worst case unless stated).                                                         |

## File map — who explains what

| Member    | Backend (rules)                                                                                                                   | Screens (views)                                                                                          |
|-----------|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------|
| Joshua    | backend/plans.js · backend/applications.js (submit, track)                                                                        | views/public/plans.js · apply.js · track.js · submitted.js                                               |
| Justin    | backend/applications.js (list, review queue, completeInstallation) · backend/subscribers.js (create account) · backend/history.js | views/admin/applications.js · application-detail.js · new-application.js                                 |
| Riceerich | backend/auth.js · backend/staff.js · backend/registrations.js · backend/subscribers.js (list, status, plan)                       | views/admin/login.js · subscribers.js · subscriber-detail.js · staff.js · register.js · registrations.js |
| Aaron     | backend/billing.js · backend/payments.js                                                                                          | views/admin/billing.js · payments.js · views/public/pay.js                                               |
| Everyone  | dsa/arrays.js · strings.js · search.js · sort.js · stack.js · queue.js · hashtable.js · stats.js · backend/database.js · utils.js | ui/router.js · sheets.js · toasts.js · forms.js · app.js                                                 |

## Shared screens for the demonstration

E3 Fiber

Admin

Dashboard

CUSTOMERS

Applications

6

New application

Subscribers

OPERATIONS

Billing

2

Payments

4

Support

2

SYSTEM

Staff

Registrations

2

Activity

Algorithms

Maria Santos

Owner · STF-0001

Account

View website

Sign out

Customer data is confidential under the Data Privacy Act of 2012.

Algorithms

Undo

Algorithms

How this website stores and processes its data — every search, sort, stack and queue is written by hand.

Data structures in use right now

Live sizes from the running website

Arrays — the database

Eight tables, each kept sorted by its key so binary search works.

applications 18

subscribers 10

bills 29

payments 6

tickets 4

staff 7

registrations 5

activity 39

Stack — Undo

3 of 25 actions. Push on every change, pop on Undo, peek for the button label.

Confirm payment PAY-000002 (Kristine Ramos)

Generate 8 bills for October 2026

Approve Lorenzo Pascual as Admin

Stack — Back button

28 screens remembered with their scroll position.

Activity

Payments

Pay bills

Billing

Staff

Registrations

Queue — Review

Pending applications, oldest at the front (circular buffer).

004883

004884

004885

004886

004887

004888

Queue — Payment validation

Customer reports, oldest at the front; the front one is checked first.

PAY-000003

PAY-000004

PAY-000005

PAY-000006

Queue — Staff requests

Registrations waiting for an Owner or Admin, first come, first served.

REG-000004

REG-000005

Queue — Support

Open tickets; "Serve next" dequeues the front.

TKT-000101

TKT-000102

Queue — Staff e-mails

7 e-mails in 17 buckets · load 0.41 · longest chain 2 · 1 collision.

djb2 hash

separate chaining

resize at 0.75

Hash table — Payment references

5 references in 17 buckets · load 0.29 · longest chain 1. Finds a re-used reference in one look-up.

key "METHOD:REFERENCE"

value: payment ids

Time and space complexity

n = number of records; m = length of the search text

**E3 Filter**  
Admin

- Dashboard
- CUSTOMERS
- Applications 4
- New application
- Subscribers
- OPERATIONS
- Billing 2
- Payments 4
- Support 2
- SYSTEM
- Staff
- Registrations 2
- Activity
- Algorithms**

### Benchmark lab

Same random data for every algorithm; counts are exact, times depend on your computer.

Records: 100 1,000 3,000 [Run Benchmark](#)

Searching 1,000 records — average comparisons per look-up

| Algorithm     | Comparisons  | Moves | Time |
|---------------|--------------|-------|------|
| Linear search | 518 - O(n)   | -     | -    |
| Binary search | 9 - O(log n) | -     | -    |

Sorting 1,000 records — comparisons

| Algorithm      | Comparisons       | Moves | Time |
|----------------|-------------------|-------|------|
| Insertion sort | 248,879 - 9.4 ms  | -     | -    |
| Selection sort | 496,500 - 20.6 ms | -     | -    |
| Bubble sort    | 498,680 - 19.9 ms | -     | -    |

Moves (pages or shifts): Insertion sort 247,896 - Selection sort 996 - Bubble sort 247,896. Binary search needs the data sorted first; selection sort always makes n\*(n-1)/2 comparisons.

### Recent operations

The last 40 searches and sorts you triggered (a ring-buffer queue)

| Algorithm      | Where                  | n     | Comparisons | Moves   | Time      |
|----------------|------------------------|-------|-------------|---------|-----------|
| Bubble sort    | Benchmark:             | 1,000 | 498,680     | 247,896 | 19.9 ms   |
| Selection sort | Benchmark:             | 1,000 | 499,500     | 996     | 20.6 ms   |
| Insertion sort | Benchmark:             | 1,000 | 248,879     | 247,896 | 9.4 ms    |
| Binary search  | Benchmark (avg of 200) | 1,000 | 9           | 0       | < 0.01 ms |

**Maria Santos**  
Owner - STF-0001

- Account
- View website
- Sign out

Customer data is confidential under the Data Privacy Act of 2012.

Undo

**E3 Filter**  
Admin

- Dashboard
- CUSTOMERS
- Applications 4
- New application
- Subscribers
- OPERATIONS
- Billing 2
- Payments 4
- Support 2
- SYSTEM
- Staff
- Registrations 2
- Activity
- Algorithms**

### Activity

Every staff and customer action, newest first.

Undo last action

#### Activity log

Newest first

- Maria Santos - Just now
- Customer - Just now
- Maria Santos - Just now
- Maria Santos - Just now
- Maria Santos - Just now
- Nora Dixon - Just now
- Juan Dela Cruz - Just now
- Juan Dela Cruz - Just now
-

**Maria Santos**  
Owner - STF-0001

- Account
- View website
- Sign out

Customer data is confidential under the Data Privacy Act of 2012.

Undo

### Undo stack

3 of 25 · top · newest

Last in, first out: Undo always reverses the action of top. Only the latest 25 actions are kept — when the stack is full the bottom one is dropped.

- Confirm payment PAY-000002 (Kristine Ramos) - Just now
- Generate 8 bills for October 2026 - Just now
- Approve Lorenzo Pascual as Admin - Just now

Activity: the log of every action and "Undo last action" (the Undo stack).

86 / 86