Finite-depth Quasi-Phase Matching (QPM) and Converter Efficiency

Abhishek V. Karve
Department of Applied Physics, Stanford University
(Dated: October 15, 2026)

An ensemble of ^{85}Rb atoms couples optical (780 nm) and microwave cavities via an **assumed uniform** blue (480/481 nm) control field and UV (297 nm) dressing [1]. Optical-to-microwave conversion absorbs optical and blue photons and emits microwave and UV photons; reversing the loop reverses conversion. A separate 1188 nm lattice creates periodic density for quasi-phase matching (QPM). Finite site width reduces the overlap between the collective atomic profiles. We derive its effect on coherent photon-number conversion efficiency, accounting for atomic loss, reflection, and port coupling.

I. SPATIAL OVERLAP AND LATTICE LOCALIZATION

Let $\mathbf{u}, \mathbf{v}$ be normalized optical/blue and UV/microwave excitation profiles, including relative coupling magnitudes and phases. Their amplitude overlap is

$$Q = |\mathbf{u}^\dagger \mathbf{v}|, \qquad \mathbf{u}^\dagger \mathbf{u} = \mathbf{v}^\dagger \mathbf{v} = 1, \qquad 0 \le Q \le 1. \tag{1}$$

For traveling-wave fields with matched uniform envelopes, $Q = |\langle e^{i\Delta\mathbf{k}\cdot\mathbf{r}}\rangle|$, averaged over the atomic density, with $\Delta\mathbf{k} = \mathbf{k}_{780} + \mathbf{k}_{\text{blue}} - \mathbf{k}_{\text{UV}} - \mathbf{k}_\mu$. Wavevectors include propagation directions. Thus Q^2 gives the projection onto the useful mode; efficiency also depends on the coupled dynamics and losses.

For lattice period $d = \lambda_{\text{L}}/2$, define $k_{\text{L}} = 2\pi/\lambda_{\text{L}}$ and $K = 2k_{\text{L}}$. For lattice depth U, the harmonic approximation near a minimum gives [2]

$$V(x) = U\sin^2(k_{\text{L}}x) \simeq U k_{\text{L}}^2 x^2, \qquad E_{\text{R}} = \frac{\hbar^2 k_{\text{L}}^2}{2m}, \qquad \omega_t = \frac{2\sqrt{U E_{\text{R}}}}{\hbar}. \tag{2}$$

At temperature T, the position variance and density harmonics are

$$\begin{aligned} \sigma_x^2 &= \frac{\hbar}{2m\omega_t}\coth\!\left(\frac{\hbar\omega_t}{2k_{\text{B}}T}\right), \\ b_n &= |\langle e^{inKx}\rangle| = e^{-(nK)^2\sigma_x^2/2} = \exp\!\left[-n^2\sqrt{\frac{E_{\text{R}}}{U}}\coth\!\left(\frac{\sqrt{U E_{\text{R}}}}{k_{\text{B}}T}\right)\right]. \end{aligned} \tag{3}$$

Here n labels the spatial harmonic. Even at $T = 0$, zero-point motion gives $b_n < 1$ for $n \neq 0$; deeper trapping increases the overlap. The harmonic approximation requires localization near a minimum.

Exact matching, $\Delta\mathbf{k} = \sum_i n_i \mathbf{K}_i$, aligns the phases of occupied site centres. Independent displacements within sites then give

$$Q = \prod_i b_{n_i,i}; \qquad Q = b_{2,x}\, b_{2,y} \quad \text{for two second-order axes.} \tag{4}$$

For example, take optical and blue beams along $+x$, UV along $+y$, and $\mathbf{K}_i = K\hat{\mathbf{i}}$. The target $(n_x, n_y) = (2, -2)$ requires

$$k_{780} + k_{\text{blue}} - k_{\mu,x} = 2K, \qquad -k_{\text{UV}} - k_{\mu,y} = -2K, \qquad k_{\mu,z} = 0. \tag{5}$$

Exact matching depends on the wavelengths and beam angles. Neglecting $\mathbf{k}_\mu$, nominal wavelengths of 780, 1188, and 480 (481) nm give $\delta k_x = -0.01017$ (-0.03738) rad/μm. For Gaussian site-centre rms widths L_i, residual mismatch adds the factor $\exp[-\sum_i (\delta k_i L_i)^2/2]$; negligible suppression requires $|\delta k_i| L_i \ll 1$. Site factors and mode envelopes must also be evaluated for the actual geometry. The benchmark below assumes exact matching.

II. SIX-MODE CONVERTER RESPONSE

A. Collective modes and assumptions

Let $\hat{a}, \hat{b}$ annihilate optical and microwave cavity photons, and let $\hat{e}_j^\dagger, \hat{r}_j^\dagger$ create optical and Rydberg excitations from the prepared UV-dressed state on atom j. UV dressing mixes the ground and auxiliary Rydberg states; the couplings and profiles include this dressing. Weak excitation makes these operators approximately bosonic. Assume frozen positions, uniform blue-control magnitude, identical atomic detunings, and uniform independent amplitude damping. Absorb the blue phase into $\hat{r}_j$ and the global profile phase into $\hat{b}$, so Ω is real and $\mathbf{u}^\dagger\mathbf{v} = Q \geq 0$.

With $s = \sqrt{1-Q^2}$, decompose the microwave profile as

$$\mathbf{v} = Q\mathbf{u} + s\mathbf{w}, \qquad \mathbf{w} = \frac{\mathbf{v} - Q\mathbf{u}}{s}, \qquad \mathbf{u}^\dagger\mathbf{w} = 0, \quad \mathbf{w}^\dagger\mathbf{w} = 1. \tag{6}$$

At $Q = 1$, choose any orthogonal $\mathbf{w}$; its microwave coupling vanishes. The four collective operators are

$$\begin{aligned} \hat{P}^\dagger &= \sum_j u_j \hat{e}_j^\dagger, \quad \hat{R}^\dagger = \sum_j u_j \hat{r}_j^\dagger, \\ \hat{P}_\perp^\dagger &= \sum_j w_j \hat{e}_j^\dagger, \quad \hat{R}_\perp^\dagger = \sum_j w_j \hat{r}_j^\dagger. \end{aligned} \tag{7}$$

Uniform control, detunings, and damping preserve this two-profile subspace, so only these four atomic modes and two cavities are driven. Their coupling chain is

$$a \overset{g_o}{\longleftrightarrow} P \overset{\Omega}{\longleftrightarrow} R \overset{Qg_m}{\longleftrightarrow} b \overset{sg_m}{\longleftrightarrow} R_\perp \overset{\Omega}{\longleftrightarrow} P_\perp. \tag{8}$$

The orthogonal pair is a distinct excitation pattern of the same atoms. It is dark to the optical cavity but couples to the microwave cavity and blue field; atomic decay makes its response dissipative.

The interaction Hamiltonian fixes the coupling convention:

$$\frac{\hat{H}_{\text{int}}}{\hbar} = -\Big[g_o\hat{a}^\dagger\hat{P} + \Omega(\hat{P}^\dagger\hat{R} + \hat{P}_\perp^\dagger\hat{R}_\perp) + g_m\hat{b}^\dagger(Q\hat{R} + s\hat{R}_\perp) + \text{h.c.}\Big]. \tag{9}$$

The collective matrix elements g_o, g_m are held fixed as Q varies. The notebooks use $g_o = G/\sqrt{2}$, $g_m = G_\mu/\sqrt{2}$ [3]; these factors reflect conventions, not finite-depth corrections. Here Ω is the Hamiltonian matrix element; Rabi frequencies defined with an extra $1/2$ require conversion. All rates, detunings, and frequencies are angular frequencies.

B. Damping and driven equations

Let κ_o, κ_m be bare cavity energy decay rates, including ports and internal loss; useful port rates obey $\kappa_{j,\text{ex}} \leq \kappa_j$. Atomic amplitude decay rates are $\Gamma/2, \gamma_r/2$. Additional microwave energy decay $\gamma_{m,\text{f}}$ includes loss from the lower Rydberg state.

Using Fourier amplitudes $e^{+i\omega t}$ and zero optical-cavity detuning, define

$$\begin{aligned} D_a &= \kappa_o/2 + i\omega, & D_e &= \Gamma/2 + i(\omega - \Delta_e), \\ D_r &= \gamma_r/2 + i(\omega - \Delta_r), & D_b &= (\kappa_m + \gamma_{m,\text{f}})/2 + i(\omega - \Delta_\mu). \end{aligned} \tag{10}$$

Lowercase variables denote the corresponding mean amplitudes. For optical input a_{in} with photon flux $|a_{\text{in}}|^2$, the response is

$$\begin{aligned} D_a a - ig_o p &= i\sqrt{\kappa_{o,\text{ex}}}\, a_{\text{in}}, \\ D_e p - ig_o a - i\Omega r &= 0, \\ D_r r - i\Omega p - ig_m Q b &= 0, \\ D_b b - ig_m(Qr + sr_\perp) &= 0, \\ D_r r_\perp - i\Omega p_\perp - ig_m s b &= 0, \\ D_e p_\perp - i\Omega r_\perp &= 0. \end{aligned} \tag{11}$$

With no microwave input, $b_{\text{out}} = \sqrt{\kappa_{m,\text{ex}}}\, b$ up to a port phase. The transfer amplitude $S_{mo} = b_{\text{out}}/a_{\text{in}}$ gives the coherent photon-number efficiency $\eta = |S_{mo}|^2$, not energy efficiency or added noise.

C. Atomic feedback and transfer function

Set $F = D_e D_r + \Omega^2$. Eliminating the orthogonal pair gives

$$r_\perp = \frac{i g_m s D_e}{F}\, b, \qquad \Sigma_\perp = \frac{g_m^2 (1-Q^2) D_e}{F}. \tag{12}$$

This changes D_b to $D_b + \Sigma_\perp$, with frequency-dependent energy-decay contribution $2\,\mathrm{Re}\,\Sigma_\perp$ and dispersion $\mathrm{Im}\,\Sigma_\perp$. This loading does not contribute to the useful output-port rate.

Eliminating all atomic amplitudes gives the exact frequency-domain response

$$\begin{pmatrix} A & iJ \\ iJ & B \end{pmatrix} \begin{pmatrix} a \\ b \end{pmatrix} = \begin{pmatrix} i\sqrt{\kappa_{o,\mathrm{ex}}}\, a_{\mathrm{in}} \\ 0 \end{pmatrix}, \qquad A = D_a + \frac{g_o^2 D_r}{F}, \quad B = D_b + \frac{g_m^2 D_e}{F}, \quad J = \frac{Q g_o g_m \Omega}{F}, \tag{13}$$

without assuming fast atomic relaxation. The transfer function is

$$\boxed{S_{mo}(\omega) = \frac{\sqrt{\kappa_{o,\mathrm{ex}}\kappa_{m,\mathrm{ex}}}\, J}{AB + J^2}, \qquad \eta(\omega) = |S_{mo}(\omega)|^2.} \tag{14}$$

At fixed couplings and linewidths, A, B are independent of Q, whereas $J \propto Q$: the useful and orthogonal contributions to microwave loading sum as $Q^2 + (1-Q^2) = 1$. Replacing g_m by $Q g_m$ incorrectly reduces the total loading as well as the cross coupling. At $Q = 1$ the orthogonal pair decouples; at $Q = 0$ conversion vanishes.

D. On-resonance efficiency

For comparison with the notebooks, define

$$C_o = \frac{2G^2}{\kappa_o \Gamma}, \qquad C_m = \frac{2G_\mu^2}{(\kappa_m + \gamma_{m,\mathrm{f}})\gamma_r}, \qquad C_B = \frac{4\Omega^2}{\Gamma \gamma_r}, \qquad \eta_j = \frac{\kappa_{j,\mathrm{ex}}}{\kappa_j}. \tag{15}$$

At $\omega = \Delta_e = \Delta_r = \Delta_\mu = 0$, Eq. (14) gives

$$\eta(0) = \eta_o \eta_m \frac{\kappa_m}{\kappa_m + \gamma_{m,\mathrm{f}}} \frac{4Q^2 C_o C_m C_B (1+C_B)^2}{[(1+C_B+C_o)(1+C_B+C_m) + Q^2 C_o C_m C_B]^2}. \tag{16}$$

The non-QPM model in `Abhishek_Converter.nb` assumes fully overlapping collective profiles. Finite overlap modifies both the numerator and denominator of Eq. (16); setting $Q = 1$ recovers the non-QPM efficiency for the same couplings, losses, and port fractions.

Port fractions multiply efficiency at fixed total linewidths; changing port coupling requires updated cooperativities. Propagation and detection losses further reduce this port-to-port efficiency.

III. NUMERICAL BENCHMARK AND LOSS BUDGET

A. Lattice and motional scales

Take ^{85}Rb, $\lambda_{\mathrm{L}} = 1188$ nm, waist $w = 200\,\mu$m, and full retroreflection. Adopt the calibration 3 W per beam per axis $\leftrightarrow U/k_{\mathrm{B}} = 15\,\mu$K, without a polarizability calculation. For $E_{\mathrm{R}}/k_{\mathrm{B}} = 0.0799004\,\mu$K, $T = 0$, and two exactly matched second-order axes,

$$b_2 = e^{-4\sqrt{E_{\mathrm{R}}/U}} = 0.746816, \qquad Q = b_2^2 = 0.557734, \qquad Q^2 = 0.311067. \tag{17}$$

The lattice has $U/E_{\mathrm{R}} = 187.7$, $\sigma_x = 36.12$ nm, and $2K\sigma_x = 0.7641$. Thus a deep lattice still leaves substantial phase spread at the second harmonic; the overlap reductions multiply across the two axes. The trap frequency is $\omega_t/(2\pi) = 45.62$ kHz, with $\hbar\omega_t/k_{\mathrm{B}} = 2.190\,\mu$K. The ground-state benchmark requires a temperature well below this scale; at $T = 1\,\mu$K the same harmonic formula gives $Q = 0.48137$.

Treating this density as static requires unresolved motional sidebands and negligible Doppler and recoil phases during τ_{resp}. The Gaussian average retains the full phase spread $nK\sigma_x$; the calculation describes the coherent response, not the inelastic motional spectrum.

B. Conversion efficiency

Use zero detunings, $\gamma_{m,\mathrm{f}} = \gamma_r$, and

$$\frac{(G, G_\mu, \Omega)}{2\pi} = (15.8474565,\ 2.09170145,\ 5.52497339)\,\mathrm{MHz}, \qquad \frac{(\kappa_o, \kappa_m, \Gamma, \gamma_r)}{2\pi} = (10,\ 5,\ 6,\ 0.1)\,\mathrm{MHz}. \tag{18}$$

Dividing every rate and frequency by 2π leaves efficiency unchanged. Figure 1 compares the unit-port spectra. The peak efficiency falls from 82.0957% at $Q = 1$ to 47.0824% at $T = 0$ and 38.15% at $T = 1\,\mu$K. Naive Q^2 scaling instead gives 25.5373% at $T = 0$.

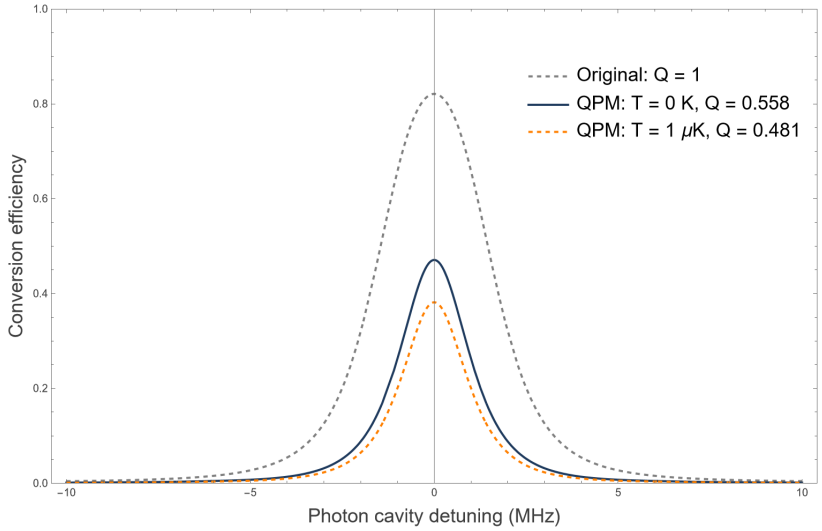


FIG. 1. Conversion spectra from Eq. (14) versus $\omega/(2\pi)$, with parameters in Eq. (18), unit port fractions, and $U/k_\mathrm{B} = 15\,\mu$K per axis. QPM overlaps follow Eqs. (3)–(4).

At $T = 0$ and resonance, $\Sigma_\perp/(2\pi) = 0.147394$ MHz gives an energy-decay contribution $2\,\mathrm{Re}\,\Sigma_\perp/(2\pi) = 0.294787$ MHz. The dressed responses are $A/(2\pi) = 5.20468$ MHz and $B/(2\pi) = 2.76394$ MHz. At $T = 0$, changing only the port fractions to $\eta_o = \eta_m = 0.98$ gives 45.2180%; setting only $\gamma_{m,\mathrm{f}} = 0$ gives 48.54% at unit ports.

The slowest amplitude decay rate of the six-mode drift matrix is $2\pi \times 1.4533$ MHz, so $\tau_\mathrm{resp} = 0.1095\,\mu$s and $\omega_t \tau_\mathrm{resp} = 0.0314$. Combined with the site width, this supports frozen motion; a narrower response requires rechecking these conditions.

C. Reflection and dissipation

With the drive convention of Eq. (11), $a_\mathrm{out} = a_\mathrm{in} + i\sqrt{\kappa_{o,\mathrm{ex}}}\,a$. For incident flux $\Phi = |a_\mathrm{in}|^2$, define

$$\begin{aligned} \mathcal{R}_o &= \left|1 + i\sqrt{\kappa_{o,\mathrm{ex}}}\,a/a_\mathrm{in}\right|^2, \quad \mathcal{L}_\mathrm{at} = \frac{\Gamma(|p|^2 + |p_\perp|^2) + \gamma_r(|r|^2 + |r_\perp|^2)}{\Phi}, \\ \mathcal{L}_o &= \frac{(\kappa_o - \kappa_{o,\mathrm{ex}})|a|^2}{\Phi}, \qquad \mathcal{L}_m = \frac{(\kappa_m - \kappa_{m,\mathrm{ex}} + \gamma_{m,\mathrm{f}})|b|^2}{\Phi}. \end{aligned} \tag{19}$$

The passive model obeys $\mathcal{R}_o + \eta + \mathcal{L}_\mathrm{at} + \mathcal{L}_o + \mathcal{L}_m = 1$. On resonance, the unit-port flux budget (percent) is

Channel	$Q = 1$	$Q = 0.557734$
Microwave output	82.0957	47.0824
Optical reflection	3.4748	37.3236
Total atomic dissipation	12.7875	14.6524
Added microwave dissipation	1.6419	0.9416

With mismatched profiles, the orthogonal pair dissipates 2.7759%, included in the atomic total. Of the 35.0133-percentage-point drop in conversion, 33.8487 points appear as increased reflection. Mode mismatch mainly increases reflection here; the conversion penalty is neither $1 - Q^2$ nor the orthogonal pair's dissipation.

IV. VALIDITY AND NOTEBOOK CONVENTIONS

Anharmonic motion, resolved sidebands, inhomogeneous controls or detunings, and additional independent optical channels require an extended model. The notebooks and direct matrix solutions verify the six-mode reduction, $Q = 1$ limit, benchmark, and flux conservation; they do not validate the geometry.

In `Abhishek_Converter_QPM.nb`, set $\epsilon = 1$ and $\gamma_{m,\mathrm{f}} = \gamma_r$ (the latter is implicit). Its κ, κ_μ denote κ_o, κ_m; the calculator's $G_{\mathrm{opt}}, G_{\mathrm{mm}}$ denote G, G_μ. The notebook uses x, z for the two axes called x, y here. Since `ConverterEfficQ` retains its forcing amplitude `Ein`,

$$S_{mo} = \sqrt{\eta_o \eta_m}\, \frac{\texttt{ConverterEfficQ}}{\texttt{Ein}}, \qquad \eta = \eta_o \eta_m\, \texttt{NormalizedEfficiencyQ}. \tag{20}$$

For real nonzero drive, `NormalizedEfficiencyQ` = `EfficiencyQ`/`Ein`^{2}. `EfficiencyQWithPorts` multiplies the unnormalized expression, so use `Ein=1` or divide its result by `Ein`^{2}. `SigmaPerp` and `OnResonanceEfficiencyQ` implement Eqs. (12) and (16), the latter at unit ports. Use `parmsScreenshot` for Eq. (18); `parmsOriginal` retains the original parameters. Keep Q symbolic until applying `qRule`.

[1] A. Kumar *et al.*, Nature **615**, 614 (2023).

[2] I. Bloch, J. Dalibard, and W. Zwerger, Rev. Mod. Phys. **80**, 885 (2008), sec. II.

[3] (2026), baseline: `Abhishek_Converter.nb`; QPM implementation: `Abhishek_Converter_QPM.nb`. Code and calculator: AVKGitHub1/transduction_calcs, commit `ca24030`. The Q extension is derived here.

[4] A. Kumar *et al.*, Quantum-limited millimeter wave to optical transduction (2022), supplement B.1–B.3, arXiv:2207.10121.