

RetroC - CC Project

Submitted By:

- 1) Amna Khan 23K-0856
- 2) Ataq Ahmed 23K-0901
- 3) Kissa Zehra 23K-0706

Section: BCS-6B

Date: 07/05/26

Submitted To:

Sir Zulfiqar Ali

TRANSITION TABLE

current state	[a-zA-Z]	[0-9]	=	<	+	&	others/space
S0(start)	S1(ID)	S2(NUM)	S3(Asgn)	S5(LT)	S7(Plus)	S9(Amp)	Reject/S0
S1(ID)	S1	S1	Accept	Accept	Accept	Accept	Accept
S2(NUM)	Error	S2	Accept	Accept	Accept	Accept	Accept
S3(=)	Accept	Accept	S4(ES)	Accept	Accept	Accept	Accept
S4(=)	Accept	Accept	Accept	Accept	Accept	Accept	Accept
S5(<)	Accept	Accept	S6(LTE)	Accept	Accept	Accept	Accept
S7(+)	Accept	Accept	Accept	Accept	S8(Inc)	Accept	Accept
S9(&)	Error	Error	Error	Error	Error	S10(And)	Error

SYMBOL TABLE


Program 2 : test4 - multi - functions. c

Name	Type	Kind	Scope
SumTo	int	Function	Global
average	int	Function	Global
main	int	Function	Global
n	int	Parameter	SumTo
sum	int	variable	SumTo
i	int	variable	SumTo → for block
n	int	Parameter	average
total	int	variable	average

main has no local variables since its body is just a single return statement. The two entries both named n are in completely separate function scopes so there is no conflict. Your semantic analyzer would distinguish them by their scope when doing lookups.

Parse Tree # 01

Program 01

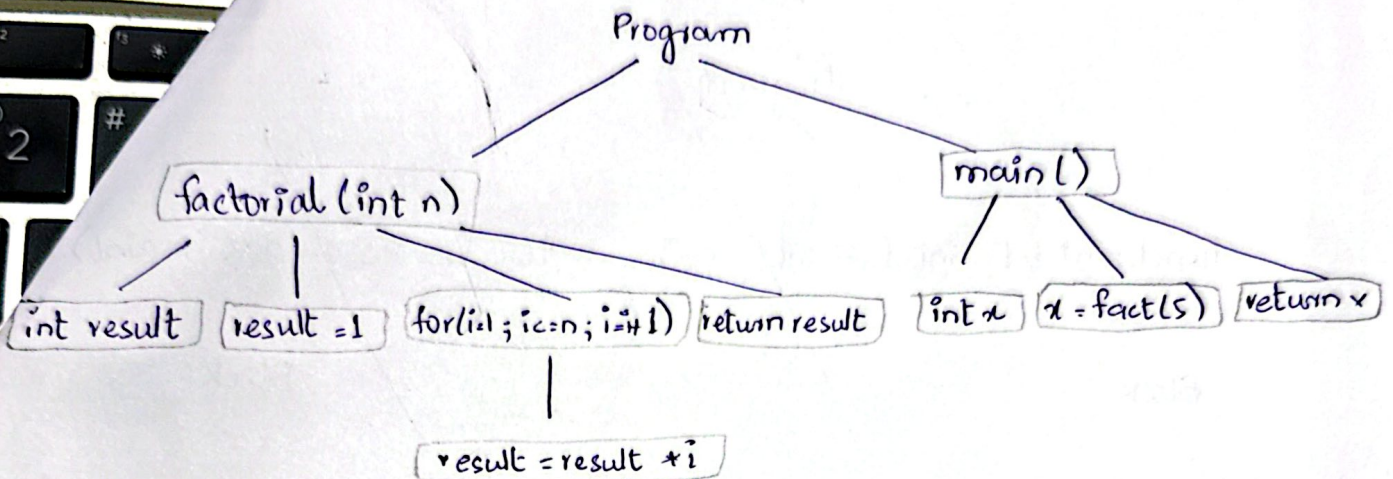

Parse Tree # 02

Program 02

