

Honours Thesis - Simulation of Squeezed Light Generation in an Optical Resonator

Aaron Dayton

Contents

I TODO

- Check if Tong notes are a good reference with MacRae
- Derive three-level semi-classical Hamiltonian
- Write section on interferometric cavities (Fabry-Perot, spherical, etc.)
- Implement and write up Jaynes-Cummings Model

II Project Motivation

MacRae's Outline:

Quantum fluctuations of the electromagnetic field impose a fundamental limit on measurement sensitivity, known as the standard quantum limit (SQL). Exotic quantum optical states known as "squeezed light" can surpass the SQL. Squeezed states are a hot topic in research, particularly in quantum communication, metrology, and optical quantum computing. This project will explore theoretical models predicting strong squeezing when atoms are placed inside an optical cavity. The student will develop and run numerical simulations to investigate the conditions for optimal squeezing, using tools from quantum optics and cavity QED theory. Through this work, the student will gain experience in programming, numerical methods, and the theoretical framework of quantum light-matter interactions.

The past century since the formulation of quantum mechanics has led to unrivaled technological progress, especially in recent years. Methods in material sciences, such as density functional theory for computational modelling of solid state quantum mechanical systems [?], have brought commercial transistors down to the scale of nanometers. With greater understanding of and ability to control quantum phenomena, further possibilities become available. Modern avenues for advancing quantum technologies include quantum key distribution, quantum sensing, and quantum computation, to name a few.

Any emerging technology tends to follow the rule ascribed to increasing system complexity sometimes stated as 'more is different' with reference to the 1972 paper by Physicist Philip W. Anderson [?]. This especially applies to quantum networks. As greater quantum control is achieved, greater quantum networking capabilities will be required to reap maximal benefits, thereby necessitating the development of improved methods for transmitting quantum information.

One near-term threat which looms over modern encryption methods is the threat of the 'harvest now, decrypt later' information gathering strategy by bad actors [?]. Since quantum algorithms like Shor's algorithm [?] (or even brute force GPU techniques at massive scale) have the potential to compromise 'securely' transmitted information, finding alternative quantum-secure methods is considered an issue of national defence. Quantum key distribution in which photonic quantum bits encode information has been proposed as one such method [?] and could be applied to critical information channels in the near-term given a scalable method for building quantum networks.

Currently, there are two main hurdles in developing large scale quantum networks: creating a continent-spanning network compatible with current methods of producing quantum information; and transmitting quantum information with sufficiently low loss/noise such that the information sent may actually be used. There is potential that the first problem has already been solved, however. Fibre optic networks already span the world, but have a limited transparency window to which information can be transmitted with minimal losses, and current quantum techniques do not operate produce photonic quantum information in this range. So if a method of efficiently producing quantum information with minimal losses at fibre optic wavelengths is found, then progress towards both problems would be obtained.

After this, the problem becomes advancing techniques for minimizing losses in quantum coherence during fibre optic transmission [?] and all other forms of efficiency such that amount of information transmitted through the channel may be maximized [?].

Progress has been made on forming quantum-optical networks, such as in America where an advanced quantum network architecture has been developed on Long Island [?], or in China where a 4600 kilometer land-based quantum network [?].

This thesis covers a theoretically viable method for frequency conversion of quantum information encoded in an electromagnetic field (continuous variable quantum information). The technique involves interfering three electromagnetic fields within a sample of Rubidium-87 gas to induce transitions such that one additional field is produced. Rubidium-87 is a widely studied candidate for applications in short-timescale quantum memory [?][?], quantum repeaters [?], and quantum computation [?]. We will focus on a 4-level transition substructure with one transition frequency compatible with modern quantum methods, one transition frequency compatible with telecom frequencies in the conventional band (C-band), and two frequencies which will be leveraged for interference effects in a process known as four wave mixing (FWM) [?].

TODO - Write what the outline of the thesis will be here!!!

III Background Information

This project involves understanding how hot atomic vapours interact with external electromagnetic fields to induce desirable physical phenomena. To convert frequencies, FWM can be applied with the added bonus that it can generate squeezed light [?], which is useful in continuous variable quantum information applications since optical squeezing causes uncertainty in one quadrature (amplitude or phase) to be reduced while being increased in the other. FWM may be enhanced by electromagnetically induced transparency (EIT) [?], a process in which an atomic medium becomes effectively transparent to a frequency of light near-resonance with one of its transition frequencies under certain conditions. We will tackle these topics in reverse order to build up to the idea of optical squeezing.

In order to solve for signal propagation, we must find the steady state system dynamics via the Lindblad master equation, then use the result to solve for the field propagation through the medium step by step using the Maxwell-Bloch equations. The master equation is a function of field strength, so we can produce a combined solution algorithm to obtain the field strength of the converted frequency field at the end of the sample. This result tells us how much of the signal has been converted via FWM.

A. Electromagnetically Induced Transparency

In order to gain an intuition on EIT, we will start with a classical toy model of the atom. As is a common theme in physics, a hydrogenic atom in a time dependent electromagnetic field can be approximately modelled as a driven harmonic oscillator. So rather than dealing with quantized photons, we will consider a classical oscillating electromagnetic fields with frequencies nearly resonant with those of the atomic transitions.

To do this, a few assumptions will be made [?]: first, the wavelengths of the light sources interacting with the atom have wavelengths much greater than the Bohr radius of the atom ($\lambda \gg a_0$); second, the detunings of incoming beams are small in proportion to the transition frequencies considered. These two assumption happen to be consistent with one another.

The first assumption allows for us to approximate the electromagnetic field experienced by the atom as constant in space but varying in time since the change in electromagnetic field strength between the two ends the atom in the transverse wave direction is relatively small.

There exists the relation between the electric and magnetic field strengths of light which arises from Maxwell's equations

$$B = \frac{E}{c}. \quad (1)$$

The Lorentz force is

$$\vec{F} = q \left(\vec{E} + \vec{v} \times \vec{B} \right) \quad (2)$$

where q is charge, and $\vec{v}$ is particle velocity. Using the Bohr model for approximation, we have that quantized electron velocities for a hydrogenic atom have magnitude

$$v_n = \alpha \frac{Z}{n} c \quad (3)$$

where α is the fine structure constant, Z is the atomic number, and n is the principle quantum number [?]. We can therefore see by rough approximation that we have

$$|\vec{v} \times \vec{B}| \lesssim \alpha Z c \frac{E}{c} = \alpha Z E. \quad (4)$$

We are considering Rubidium with atomic number $Z = 37$, but this neglects the effects of screening caused by the electrons in inner shells of the atom. Electron position is distributed in a cloud about the atom for any orbital, though we can expect the 36 electrons of inner shells between the valence electron (singular in its shell) and the nuclear charge of $37e$ to roughly cancel $36e$ of charge such that the valence electron experiences about $1e$. By this line of reasoning we have

$$|\vec{v} \times \vec{B}| \lesssim \alpha E. \quad (5)$$

Thus, the force due to the external magnetic field is about $1/137$ that of the external electric field. So we may neglect the external magnetic field for simplification.

$$\vec{F} \approx q\vec{E} \quad (6)$$

All of these approximations can be justified from the perspective that this model is a first estimate for system behaviour which will be refined and iterated upon.

This brings us to a physicist's favorite abstraction: the harmonic oscillator. The potential of which the valence electron experiences can be expanded in a Taylor series and approximated as quadratic. The mass of the nucleus is much greater than the electron mass, so we may approximate the nucleus to be fixed. So we have a mass with some equilibrium distance from a fixed point under a quadratic potential, i.e. a simple harmonic oscillator. We may then add in our external time-dependent driving force to obtain a driven harmonic oscillator.

When a charge accelerates, it emits photons as its movement produces a changing electric and magnetic field. So when our system is driven on resonance, then an electromagnetic field of that same frequency will be produced. Here lies the idea behind electromagnetically induced transparency: by driving a cloud of these hydrogenic atoms on resonance, the field essentially 'passes through' the medium as the dipole response of the medium matches the driving frequency. This abstraction is known as the Lorentz oscillator [?].

It is helpful to imagine the dipole response of the medium as a vector field coupled to the external driving field of frequency ω . When we quantize the system, this is encapsulated by the expectation value of the dipole moment of the atomic medium $\langle \hat{d} \rangle = -e\langle \hat{r} \rangle$ since the polarization is given by $\vec{P} = N\langle \hat{d} \rangle$, where $\vec{r}$ is the relative position vector and N is the number of atoms in the medium [?].

So far we have considered the atomic system to behave with a linear response to the external field, however, this is not the case. The true polarization of the system actually behaves in a nonlinear fashion with respect to the driving field. This response is medium dependent and encapsulates all the interactions of the system, so it can be quite complicated. For this reason, it is often abstractly written in the expanded polynomial form [?]

$$\vec{P} = \epsilon_0 \left(\chi^{(1)} \vec{E} + \chi^{(2)} \vec{E} \vec{E} + \chi^{(3)} \vec{E} \vec{E} \vec{E} + \dots \right) \quad (7)$$

where $\chi^{(i)}$ is the i^{th} order electric susceptibility rank $i + 1$ tensor. For weak electric fields, the linear approximation may be made to give

$$\vec{P} \approx \epsilon_0 \chi^{(1)} \vec{E} \quad (8)$$

then by $N\langle \hat{d} \rangle = \epsilon_0 \chi^{(1)} \vec{E}$ we have

$$\chi^{(1)} = \frac{N\langle \hat{d} \rangle}{\epsilon_0 E}. \quad (9)$$

What frequencies are allowed to pass through the atomic medium is decided by the linear electric susceptibility of the material $\chi^{(1)}$. For this reason, the above form of Eq. (??) will not actually be applied as the relevant equation is frequency dependent, but in order to obtain any frequency dependent equation for $\chi^{(1)}$ the system must first be defined. Thus, Eq. (??) is merely an illustrative equation to depict the physics in broad detail.

When light travels through some material with complex electric susceptibility (i.e. complex index of refraction), then the light will receive some phase shift due to the real-valued component of susceptibility $Re(\chi^{(1)})$ and some decay due to the imaginary-valued component $Im(\chi^{(1)})$, such that the oscillating electric field will propagate as

$$E = E_0 e^{i(kz - \omega t)} e^{iRe(\chi^{(1)})kz/2} e^{-Im(\chi^{(1)})kz/2} \quad (10)$$

where the rate of decay then grows exponentially with distance traveled z through the medium. The decay term $e^{-Im(\chi^{(1)})kz/2}$ is known as Beer-Lambert law [?].

So, we can say that when the imaginary component of linear susceptibility goes to zero, the medium becomes ‘transparent’ to the driving field. This gives us a mathematical way to determine if EIT is present in a system.

One additional phenomenon which happens in tandem with EIT is slowed light. The index of refraction of a material is

$$n = \sqrt{1 + \chi} \quad (11)$$

and may be approximated by $n = \sqrt{1 + \chi^{(1)}}$ for sufficiently weak electromagnetic fields. $\chi^{(1)}$ for the Lorentz oscillator may be expressed as [?]

$$\chi^{(1)}(\omega) = \frac{Ne^2}{\epsilon_0 m_e} \frac{1}{\omega_0^2 - \omega^2 - i\gamma\omega} \quad (12)$$

where ω_0 is the resonant frequency of the system, ω is the driving frequency, γ is the decay rate (takes on the role of drag in the oscillator approximation), e is the electron charge, and m_e is electron mass. The group velocity of a wave can be written [?]

$$v_g = \frac{\partial\omega}{\partial k} = \frac{c}{n + \omega \frac{\partial n}{\partial \omega}}. \quad (13)$$

Combining the information from these 3 equations tells us that $\chi^{(1)}$ tends to be very sensitive with respect to the driving frequency near $\omega \approx \omega_0$, so if the driving laser is tuned near resonance such that EIT occurs, then the derivative $\partial_\omega n$ may become sufficiently large such that the group velocity of the propagating electromagnetic field is significantly reduced. Thereby, the dipole response of the medium may result in the propagation of slowed light when EIT is present.

Unfortunately, an atom is not a mass on a spring, but this model gives us a good idea of how EIT works as a first step. In reality, we must consider the structure of atomic states and the interference of transition pathways.

1. Structure of atomic spectra

Atomic states for the electron of a hydrogenic atom are enumerated by the quantum numbers n (principle quantum number), l (angular momentum quantum number), m_l (magnetic quantum number), and m_s (spin quantum number) [?].

$$n \in \mathbb{N} \quad (14)$$

$$l \in \{0, 1, \dots, n-1\} \quad (15)$$

$$m \in \{-l, \dots, l\} \quad (16)$$

Notably, there is also the electron spin s quantum number which may take on values $s = \pm 1/2$ for hydrogenic atoms.

The energy levels for an unperturbed hydrogenic atom modelled with just the coulomb potential are quite simple as they just depend on the principal quantum number.

$$E_n = -\frac{(Z\alpha)^2 mc^2}{2n^2} = -\frac{Z^2 Ry}{n^2} \quad (17)$$

where Z is the atomic number, α is the fine structure constant, m is the electron mass, and c is the speed of light [?]. These unperturbed energy levels each have degeneracy of n^2 . The real picture, is more complicated, however. There are fine structure and hyperfine structure perturbations on these energy levels, splitting energy levels and decreasing their degeneracies.

Fine structure corrections arise due to relativistic corrections to the non-relativistic Schrödinger’s equation. In particular, we have a pure relativistic correction from considering electron momentum (which is a non-negligible fraction of the speed of light), a spin-orbit coupling correction, and the Darwin correction [?]. To first order perturbation theory, the combined energy shift of these contributions is

$$\Delta E_{fs} = \frac{(Z\alpha)^4 mc^2}{2} \frac{1}{n^3} \left(\frac{3}{4n} - \frac{2}{2j+1} \right) \quad (18)$$

where $j = |l \pm s| = |l \pm 1/2|$ since we have $s = 1/2$ for hydrogenic atoms [?]. Notice that these perturbations are scaled by a factor of $(Z\alpha)^2$ in comparison to Eq. (??) such that for atoms with a sufficiently large atomic number, these approximate energy shifts arrived at by perturbation theory break down.

There exist yet smaller energy shifts due to the interaction between the internal magnetic fields of the nucleus and the orbital motion of the electron along with its spin [?]. The hyperfine energy splitting term is given as

$$\Delta E_{hfs} = \frac{A}{2} [F(F+1) - I(I+1) - j(j+1)] \quad (19)$$

where A is known as the hyperfine constant, F is the total angular momentum quantum number with operator $\hat{F} = \hat{I} + \hat{S}$, I is the nuclear spin quantum number, and j is defined as before [?][?].

Spectroscopic notation is used to describe atomic levels. It is expressed

$$n^{2s+1}L_j \quad (20)$$

where n , s , and j are atomic numbers as we have defined, $2S+1$ is the multiplicity of states, L is the atomic term symbol ($S, P, D, F, \dots$) [?]. Notice that for a hydrogenic atom we will always have multiplicity of $2s+1=2$ which correspond to the 2 hyperfine states $F=1$ and $F=2$

2. Atomic transitions

In a hydrogenic atom, the transitions between states are mediated by excitations in the electromagnetic field (i.e. photons). It is crucial in atomic physics to understand the probabilities of these atomic state transitions.

The interaction between an atom and the electromagnetic field is not a linear interaction, creating difficulty in finding an exact solution. To obtain approximate behaviour, first order perturbation theory can be applied to dominating effects of this interaction [?]. From this, one obtains the transition dipole matrix with elements

$$\vec{d}_{ji} = \langle j | \hat{\vec{d}} | i \rangle = e \langle j | \hat{\vec{r}} | i \rangle \quad (21)$$

where $\hat{\vec{d}} = e\hat{\vec{r}}$ is the dipole transition operator and $\hat{\vec{r}}$ is the position operator [?].

If $\vec{d}_{ji} = 0$, then the transition between states $|i\rangle$ and $|j\rangle$ is a ‘forbidden’ dipole transition, otherwise the transition is an allowed dipole transition. This criterion enforces the dipole selection rules that [?]

$$\Delta l = \pm 1 \quad (22)$$

$$\Delta m_l = 0, \pm 1 \quad (23)$$

$$\Delta F = 0, \pm 1 \quad (24)$$

$$F = 0 \leftrightarrow F = 0 \text{ is forbidden.} \quad (25)$$

It is important to note that these transition rules are not always perfectly enforced. Since perturbation theory was applied to obtain them, there exist transitions which disobey these rules, however, such transitions occur with significantly decreased probability.

3. Three-level atoms

In order to meaningfully utilize the power of quantum information via quantum states, it is beneficial to work with simplified, yet somewhat abstract, systems. It would be ideal if we could realize any imaginary quantum systems that exactly match our mathematical descriptions. Reality is not so convenient, however. We must work within the constraints enforced by the available quantum systems in terms of allowed states and transitions between those states.

With enough ingenuity, we can use existing systems to approximate useful mathematical abstractions. Enter, the three-level (hydrogenic) atom. All hydrogenic atoms, in theory, have infinitely many states up to ionization ($n \in \mathbb{N}$), and transition probabilities between many of these states can be non-zero. Though by finding a subset of states with

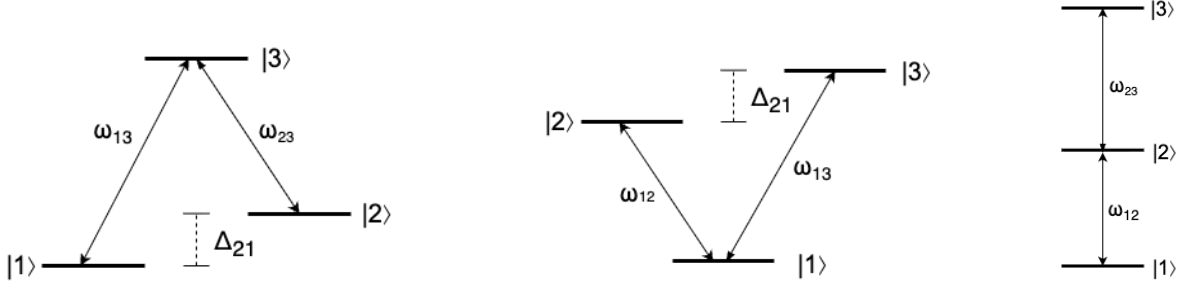


FIG. 1: Three-level atomic configurations: (left) Λ -system, (middle) V-system, and (right) Ξ -system.

desired characteristics and leveraging transition rules where any undesired state transitions are suppressed, a physical atom can be used to approximate a model system. This becomes especially useful in the limit of a large number of atoms where, statistically, the desired transitions are the most probable, and any undesired transitions are vastly outnumbered, such that the system tends towards the desired behaviour in the limit of many particles.

A three-level atom has three distinct states with some set of allowed transitions between those states. There exist Λ -systems, V-systems, and Ξ -systems, each depicted in Fig. ???. An common example of a Λ -system exists in ^{87}Rb with the collection of hyperfine split states $5^2S_{1/2}$ for $F = 1$ and $F = 2$ with energy difference given according to (??) so that they take on the roles of states $|1\rangle$ and $|2\rangle$, respectively, and state $5^2P_{1/2}$ for $F = 1$ acts as the excited state $|3\rangle$ [?].

Some points of note in this system are as follows. State $5^2S_{1/2}$ $F = 1$ is the absolute ground state of the system. The nuclear spin of ^{87}Rb is $3/2$ [?], so states $|1\rangle$ and $|2\rangle$ differ by the direction of electron spin $s = \pm 1/2$, so the energy difference between these states is the result of hyperfine splitting. State $|3\rangle$ has the same principle quantum number of $n = 5$ as states $|1\rangle$ and $|2\rangle$ but a different angular momentum quantum number, indicating that this state is due to fine structure (with a hyperfine energy correction). Since states $|1\rangle$ and $|2\rangle$ have the same l value, the transition between these levels is forbidden as per Eqs. (??), (??), (??), and (??).

Of course, a transition could place the electron into some state outside this state subset (for example, the $5^2P_{1/2}$ $F = 2$ state), so to promote population only between these states driving lasers tuned near the transition frequencies are shone on the system to induce only the desired transitions. Then in the limit of Avogadro's number of atoms the desired system behaviour becomes statistically enforced.

In this Λ -system example, the transition amplitude between states $|1\rangle$ and $|2\rangle$ is suppressed, so if the system is in state $|2\rangle$, then in order to transition back to state $|1\rangle$ the system will likely need to transition through the excited state $|3\rangle$. This makes $|2\rangle$ a quasi-stable state. If there were a way to suppress all transitions to state $|3\rangle$, then we would obtain a system in which the atom is bound to states $|1\rangle$ and $|2\rangle$ such that any photons which would stimulate a transition to the excited state cannot be absorbed.

There is, in fact, a way to do just this. By driving the system with external electromagnetic fields (lasers) at the transition frequencies, destructive quantum interference between the two fields along with specific initial conditions results in zero probability for the system to be in the excited state [?]. This state in which there is no probability of occupying $|3\rangle$ is then called the 'dark state'. In practice, since perfect precision in real-world systems is difficult, both lasers are detuned from the exact transition frequency. The probe laser stimulates transition 13 $\omega_p = \omega_{13} + \Delta$, $\Delta \ll \omega_{13}$, and the control laser stimulates transition 23 $\omega_c = \omega_{23} + \delta$, $\delta \ll \omega_{23}$ (see Fig. ??).

The main idea is that the system then becomes effectively 'transparent' to the probe laser frequency. This is how EIT can be produced in practice.

EIT can also be achieved in a Ξ -system of rubidium between the $|1\rangle = 5^2S_{1/2}$, $|2\rangle = 5^2P_{3/2}$, and $|3\rangle = 5^2D_{5/2}$ states by resonantly driving the $|1\rangle \leftrightarrow |2\rangle$ and $|2\rangle \leftrightarrow |3\rangle$ transitions such that transition pathways interfere to induce transparency [?]. This is sometimes called 'cascade' EIT.

EIT in V-systems is less widely applied and studied in comparison to Λ and cascade EIT since there is no stable dark state in V-systems [?]. Since two excited states may decay to ground, decoherence effects decrease the efficiency of producing EIT.

4. Diamond configuration four-level atoms

In order to convert electromagnetically encoded quantum information to telecom wavelengths we require a structure with a transition wavelength in the telecom band. One candidate of note is the diamond transition structure of ^{87}Rb

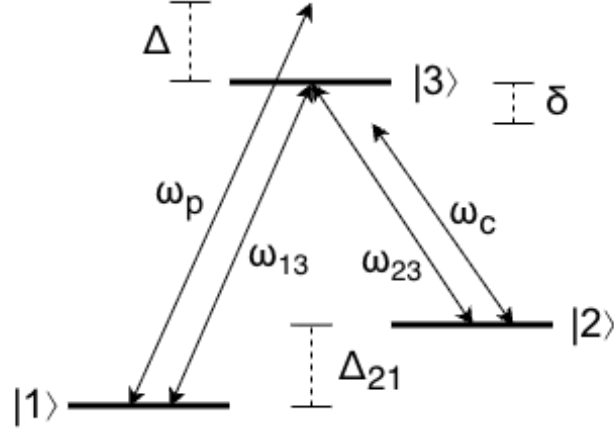


FIG. 2: A three-level Λ -system with natural transition frequencies ω_{13} and ω_{23} which is driven near-resonance by detuned beams operating at ω_p and ω_c

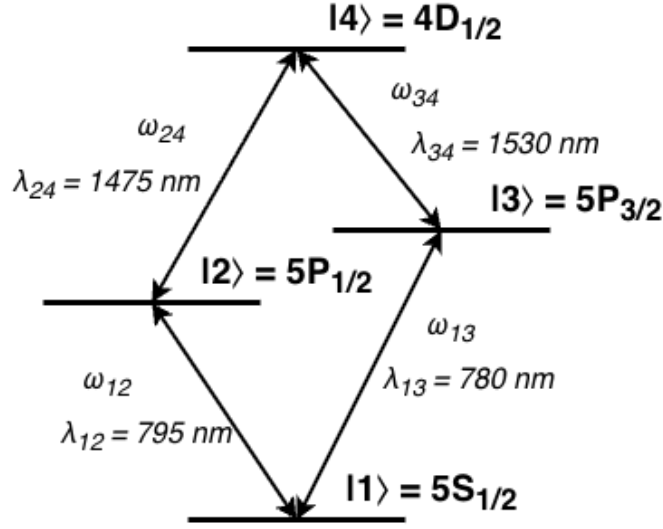


FIG. 3: A diamond configuration atomic system with non-degenerate energy levels $|1\rangle, |2\rangle, |3\rangle, |4\rangle$. The system has allowed transitions $|1\rangle \leftrightarrow |2\rangle$, $|1\rangle \leftrightarrow |3\rangle$, $|2\rangle \leftrightarrow |4\rangle$, and $|3\rangle \leftrightarrow |4\rangle$ with respective energies $\hbar\omega_{12}$, $\hbar\omega_{13}$, $\hbar\omega_{24}$, and $\hbar\omega_{34}$ and corresponding wavelengths λ_{12} , λ_{13} , λ_{24} , and λ_{34} .

depicted in Fig. ???. This transition structure can be thought of like 2 parallel Ξ -systems which meet at the $|1\rangle$ and $|4\rangle$ states, or as a V-system connected with a Λ -system sharing states $|2\rangle$ and $|3\rangle$.

It has been shown that high efficiency frequency conversion to the original band (O-band) using EIT is possible with an alternative diamond configuration transition structure [?]. Chen et al. report that cascade-type and V-type EIT is present in their diamond configuration system, resulting in higher efficiency conversion.

We are instead concerned with conversion to the C-band of range 1530 nm to 1565 nm [?]. Hence, we consider the alternative diamond configuration transition structure depicted in Fig. ??, of which, the $|2\rangle \leftrightarrow |4\rangle$ transition has a wavelength within the C-band. Applying slight detunings to the driving lasers can allow the conversion wavelength to be slightly altered such that minimal losses may be achieved within the C-band window.

5. Electromagnetically induced transparency in hot vapours

Consider a system composed of Avogadro's number of three-level or four-level atoms. In the ideal scenario, all atoms would have the exact same transition frequencies such that when the probe and control beams are fired through the cloud. For hot atomic vapours, this is not the case. When the system is in a gaseous excited state: the electromagnetic

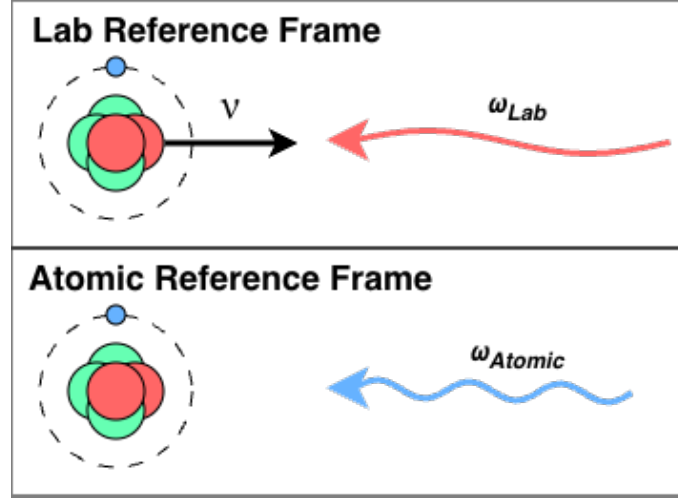


FIG. 4: (Top) the lab frame in which an atom moves towards an electromagnetic wave with velocity v and (bottom) the atomic reference frame in which the atom observes a shift in the field frequency via a Doppler shift.

fields of nearby atoms may interact to induce Stark and Zeeman shifts in their spectra, atoms can collide resulting in state decoherence, and atoms can experience Doppler shifts in the observed frequency of light resulting in a distribution of Doppler shifts throughout the medium in a process known as Doppler broadening. In addition, the laser used will have some bandwidth of emission frequencies. These effects combine to cause spectral broadening such that the transparency window allowed by EIT is suppressed [?].

However, it is known that in Λ -systems composed of ‘hyperfine-split metastable states’ (as described in Section ??) are unaffected by Doppler broadening if the two applied fields are copropagating [?]. This is because for a copropagating pump and control beam (i.e. beams travelling in opposite directions) the Doppler shift observed by any one atom with respect to the pump is equal and opposite to that of the control beam, so they cancel out. This type of system is called Doppler insensitive.

Improved behaviour is achievable for an ultracold atomic system where temperatures are cooled to near-zero-kelvin in order to minimize [?]. This is possible with advanced hardware such as a magneto optical trap [?], however deploying such technology is currently costly and labor-intensive, so application to large scale networks is not economically viable in the near-term. Therefore, for telecom transmission purposes, it would be favorable to deploy hot atomic frequency converters as opposed to ultracold ones.

If it can be shown that a hot atomic vapour composed of four-level diamond-configuration atoms can be made to behave as Doppler insensitive, then this would be a step towards actualizing a hot C-band frequency converter for electromagnetically encoded quantum information. This is because EIT can be applied to improve FWM efficiency [?], and FWM can be used to generate squeezed light [?].

B. Four Wave Mixing

FWM is a nonlinear optical process in which three electromagnetic fields of distinct frequencies interact with some medium to produce quantum coherence and interference effects such that an additional distinct field is produced [?]. In an atomic medium, FWM is a $\chi^{(3)}$ process [?] in which energy conservation and momentum conservation are upheld [?].

$$\hbar\omega_a + \hbar\omega_b = \hbar\omega_c + \hbar\omega_d \quad (26)$$

$$\vec{k}_a + \vec{k}_b + \vec{k}_c + \vec{k}_d = 0 \quad (27)$$

This allows FWM to be used for optical field frequency conversion. We will be considering FWM in a diamond-configuration atom (see Fig. ??) where transitions $|1\rangle \leftrightarrow |2\rangle$, $|1\rangle \leftrightarrow |3\rangle$, and $|2\rangle \leftrightarrow |4\rangle$ are driven by near-resonant beams to produce the emission of photons via the $|3\rangle \leftrightarrow |4\rangle$ transition, as previously discussed.

For an atomic vapour, the $\chi^{(2)}$ term is zero valued such that the polarization becomes

$$\vec{P} \approx \epsilon_0\chi^{(1)}\vec{E} + \epsilon_0\chi^{(3)}\vec{E}\vec{E}\vec{E} \quad (28)$$

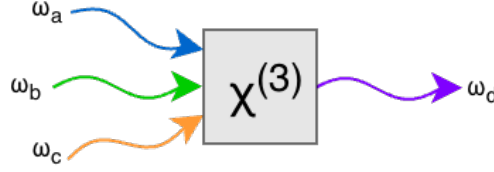


FIG. 5: A cartoon depiction of FWM in a $\chi^{(3)}$ medium involving three beams of frequencies ω_a , ω_b , and ω_c which mix to produce a field of frequency ω_d .

and with three driving fields we have

$$\vec{E} = \vec{E}_a e^{-i\omega_a t} + \vec{E}_b e^{-i\omega_b t} + \vec{E}_c e^{-i\omega_c t} + c.c. \quad (29)$$

such that the nonlinear third order polarization response of the medium becomes

$$\vec{P}^{(3)} = \epsilon_0 \chi^{(3)} \left(\vec{E}_a e^{-i\omega_a t} + \vec{E}_b e^{-i\omega_b t} + \vec{E}_c e^{-i\omega_c t} + c.c. \right)^3 \quad (30)$$

and so it involves the term

$$\epsilon_0 \chi^{(3)} \left(\vec{E}_a \vec{E}_b \vec{E}_c^* e^{-i(\omega_a + \omega_b - \omega_c)t} + c.c. \right) \quad (31)$$

so by the conservation equations Eqs. (??), (??), the polarization response of the medium produces a wave of frequency ω_d and wavevector $\vec{k}_d$ [?]. Of course, there are other terms involved in the expansion as well. For example, consider term $\chi^{(3)} \vec{E}_a \vec{E}_b \vec{E}_c e^{-i(\omega_a + \omega_b + \omega_c)t}$, which generates a polarization response at frequency $\omega_a + \omega_b + \omega_c$ in a process known as sum-frequency generation, or term $\chi^{(3)} \vec{E}_a \vec{E}_a \vec{E}_a e^{-i3\omega_a t}$ which produces a field at frequency $3\omega_a$ in a process called third-harmonic generation [?].

So why is the ω_d field produced so important? What about all the other fields? Well, a photon is emitted when a charge accelerates, so for an electromagnetic field to be produced the valance electron must transition between states. By cleverly selecting the level structure and driving beam frequencies, many undesired transitions pathways can be suppressed and a transition near frequency ω_d can be driven [?]. Rogue transitions may produce photons outside the set of frequencies $\{\omega_a, \omega_b, \omega_c, \omega_d\}$, but their number will be negligible in comparison to that of the ω_d field.

However, this is more of a theoretical hope than a scientific fact. The probability of any given competing non-linear processes is likely to be diminished, but there are many of them. All of these additional non-linear effects compete with FWM [?], turning FWM generation into a parameter optimization problem in which the system must be set up to support the FWM process while other maximally suppressing any other non-linear mixing processes such as third-harmonic generation [?].

For the four-level diamond configuration atom of consideration (see Fig. ??), driving fields of transition frequency ω_{12} , ω_{13} , and ω_{24} will be applied to induce a near- ω_{34} transition within the telecom C-band frequency range.

1. Squeezed states

A significant property of FWM is that the additional field generated can be ‘squeezed’. Optical squeezing gives a way to decrease the noise (i.e. loss in quantum information) of the resulting beam, making it a crucial factor to consider. A frequency converter which produces a signal with excessive noise is not useful in quantum information applications. According to Heisenberg’s uncertainty principle, the product of the standard deviations of two canonically conjugate observables, $\hat{x}$ and $\hat{p}$ where $[\hat{x}, \hat{p}] = i\hbar$, must satisfy

$$\Delta \hat{x} \Delta \hat{p} \geq \frac{\hbar}{2}. \quad (32)$$

For light of sufficient intensity (i.e. for sufficiently many photons), one can consider its amplitude and phase as canonically conjugate variables [?]. For a generically produced beam, one would expect the standard deviations of amplitude and phase to be roughly equal. If measurement were to be performed in a single quadrature (amplitude for example), then reducing the uncertainty in that quadrature would result in a more precise overall reading.

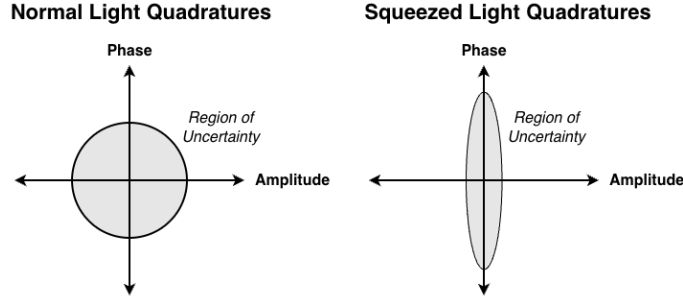


FIG. 6: Cartoon depiction of optical squeezing in the conjugate phase and amplitude quadratures with (left) unmodified light and (right) squeezed light.

When quantum information is stored in the amplitude and phase quadratures of light, it is called continuous variable quantum information [?]. Continuous variable measurements are typically performed with homodyne detectors, compare some input beam against a controlled probe beam and takes the difference between their readings [?].

This leads to the idea of a squeezed state in which one quadrature has its uncertainty decreased at the expense of the other, such that the uncertainty principle is still observed. It has been shown that optical squeezed states can be produced through a FWM process in optical cavities [?][?].

The operators for amplitude $\hat{X}$ and phase $\hat{P}$ are given as

$$\hat{X} = \frac{1}{2} (\hat{a} + \hat{a}^\dagger) \quad (33)$$

$$\hat{P} = \frac{1}{i2} (\hat{a} - \hat{a}^\dagger) \quad (34)$$

with associated uncertainties

$$\Delta\hat{X} = \frac{1}{2} \sqrt{1 + 2\delta(\hat{a}^\dagger\hat{a}) + 2\text{Re}(\delta(\hat{a}\hat{a}))} \quad (35)$$

$$\Delta\hat{P} = \frac{1}{2} \sqrt{1 + 2\delta(\hat{a}^\dagger\hat{a}) - 2\text{Re}(\delta(\hat{a}\hat{a}))} \quad (36)$$

where $\delta(\hat{x}\hat{y}) = \langle\hat{x}\hat{y}\rangle - \langle\hat{x}\rangle\langle\hat{y}\rangle$ [?]. This tells us that the amount of squeezing produced between quadratures is a function of $\text{Re}(\delta(\hat{a}\hat{a})) = \text{Re}(\langle\hat{a}\hat{a}\rangle - \langle\hat{a}\rangle\langle\hat{a}\rangle)$.

There are actually two forms of squeezing: single-mode and two-mode squeezing. Single-mode squeezing is typically the result of a phase relationship between emitted photon pairs of the same frequency, while in two-mode squeezing the two photons produces are of different frequencies such that there are correlations between the phase and amplitude of the two beams [?]. We are specifically concerned with single-mode squeezed states, and so any mention of squeezing will be in reference to single-mode squeezing.

It is crucial to note that any practical implementation of a system in which the production of squeezed light is attempted, that ‘amplitude squeezing is maintained only if classical pump relative-intensity noise (RIN) is suppressed below shot noise’ [?].

2. The effects of optical depth on four wave mixing

TODO - WRITE THIS SECTION REFERENCING PAPER

Recall the Beer-Lambert law of Eq. (??), which says that the field within a medium decays exponentially with $\text{Im}(\chi)$. There is another convention for expressing field decay within a medium, however. It is conventional to take the exponent as the optical depth OD such that

$$e^{-OD} = e^{-\text{Im}(\chi^{(1)})kz/2} \quad (37)$$

such that the optical depth determines the amount of absorption by the medium [?]. However, there is an alternative definition of optical depth which is far more coarse grained. Some define optical depth as

$$OD = rsl \quad (38)$$

where r is the number density of atoms, s is the resonant absorption cross-section of the medium, and l is the length of the medium [?]. By this definition, Zhang et al. state that ‘an increase in [optical depth] indicates an increase in the number density of atoms, which implies an enhanced probability of FWM process occurring between optical fields and atoms’ [?]. The relationship presented is that an increase in the optical depth (by increasing atomic density) is strongly correlated with an increase in the conversion efficiency of FWM.

Atomic density alkali metal vapour in a cell has the well-defined relationship with temperature T

$$r = \frac{1}{T} 10^{A-B/T} \quad (39)$$

where A and B are material dependent constants (for rubidium vapour these are $A = 31.178$ and $B = 4040$) [?]. Therefore, there is a way to significantly increase this measure of optical depth which may be correlated with increased FWM conversion efficiency for our system of interest.

3. Four wave mixing and electromagnetically induced transparency

FWM and EIT tend to be regarded as complementary phenomena since EIT can enhance FWM [?]. If transparency is induced for the generated transmission field, then it can coherently propagate through the medium with minimal losses. In the presence of both phenomena, the polarization response of the medium would oscillate at the desired fourth frequency to coherently produce a field. In theory, quantum information imposed onto one of the input beams could be coherently absorbed by the medium and re-applied to its response field (this idea is also used in rubidium quantum memories) [?].

One dimension of consideration is as follows. Light is quantized, and any beam containing quantum information is typically weak. Individual photons arrive at the detector in a Poisson process, resulting in shot noise for the detector [?]. The random rate at which photons arrive at the detector causes signal noise. It would be highly desirable for the input beam to follow sub-Poissonian statistics (with the same mean as a Poisson distribution but a lower variance) [?] and for the beam to display photon anti-bunching (arrival events are distributed more evenly as opposed to having intensity spikes) [?].

It has been shown that applying cavity EIT to three-level atoms can produce sub-Poissonian light [?], and that applying FWM to three-level systems can produce photon anti-bunching effects [?]. Combining these techniques theoretically allows for the information of continuous variable beams to be more reliably transmitted to some measurement device, such that readings fall below the shot-noise level.

This makes the combination of FWM and EIT processes in hot atomic vapour composed of four-level diamond configuration atoms an attractive possibility. If achievable, then its implementation could lead to an efficient frequency conversion and transmission method for quantum information.

4. Four wave mixing and electromagnetically induced absorption

A less talked about, but relevant phenomenon is that of electromagnetically induced absorption (EIA): the process by which absorption of a medium is significantly increased via coherent quantum interference between driving fields with an atomic ensemble [?]. It has been observed that there is a correlation between EIA and increased FWM efficiency [?][?].

The theory behind EIA is out of the scope of this work, but we may apply the physics intuition built up this far to approximate it. By the Beer-Lambert law (see Eq. (??)), absorption exponentially increases with the imaginary component of electric susceptibility $Im(\chi)$. So by maximizing $Im(\chi)$, it may be possible to find approximate system behaviour corresponding to EIA. However, the spike in absorption is typically quite narrow with respect to a parameter such as field detuning [?][?], so searching for such conditions may be difficult.

Interestingly, the statement that EIA results in greater FWM conversion efficiency is in line with the statement that optical depth has a strong positive correlation with conversion efficiency [?], taking the definition of optical depth to be that which is given by Eq. (??) rather than Eq. (??) here. This confirms the ladder statement across both conventions of defining optical depth, as consistent results have been found for each.

Overall, if EIA can be induced with respect to the input signal field to strengthen the output transmission field produced via FWM, and EIT can be induced to decrease the self-absorption of the transmission field, then conversion efficiency could be maximized. That is, assuming all these phenomena can occur simultaneously in a Doppler broadened medium.

C. Quantum Methods

In order to make any quantitative statements about the systems and phenomena we have been considering thus far, we must have a mathematical framework for describing them. To this end, we may apply the Lindblad master equation to find steady-state solutions for our system, and the Maxwell-Bloch equations to find the electric field strength within the medium. We may algorithmically combine these approaches to find the steady state of each region within a theoretical sample of ^{87}Rb by propagating the electromagnetic fields throughout.

1. Lindblad Master equation

For any quantum system, the total amount of information must be conserved, yet when dealing with atomic systems states can decay and the corresponding photon can be lost to the environment. This type of loss must be accounted for and is not included in typical quantum mechanical descriptions of systems unless the entire environment (i.e. the rest of the universe) is also described. This information would all be contained in the von Neumann density matrix time evolution equation

$$\frac{d\hat{\rho}_T}{dt} = -i [\hat{H}_T, \hat{\rho}_T] \quad (40)$$

where $\hat{\rho}_T$ is the total system density matrix and $\hat{H}_T$ is the total Hamiltonian [?]. Needless to say, solving this is not an option. By tracing out the environment to isolate the subsystem $\hat{\rho}_S = \text{Tr}_E [\hat{\rho}_T]$, applying the Born approximation where all interactions between the system and environment are assumed to be weak such that they may be traced out for simplification, applying the Markov approximation assuming that the system is memoryless (past states do not affect future states), then finally applying the rotating wave approximation where rapidly evolving components are averaged out and neglected (since time evolution can be factored in terms of complex exponentials $e^{-i\omega t}$) such that the resulting density matrix is strictly non-negative [?][?]. Additional simplification yields the Lindblad master equation as

$$\frac{d\hat{\rho}_S}{dt} = -i [\hat{H}_S, \hat{\rho}_S] + \sum_{\alpha} \gamma_{\alpha} \left(\hat{L}_{\alpha} \hat{\rho}_S \hat{L}_{\alpha}^{\dagger} - \frac{1}{2} \{ \hat{L}_{\alpha}^{\dagger} \hat{L}_{\alpha}, \hat{\rho}_S \} \right) \quad (41)$$

where $\hat{L}_{\alpha}$ is the α^{th} dissipative operator (or jump operator), γ_{α} is the corresponding decay rate, and $\{ \hat{a}, \hat{b} \} = \hat{a}\hat{b} + \hat{b}\hat{a}$ is the anti-commutator [?].

By solving for $d\hat{\rho}_S/dt = 0$ one may find the steady state density matrix of the system. For large systems this is typically done via computational methods. We are interested in the steady state regime as we will assume that the timescale of laser pulses is much greater than the transient response time of the medium. For short laser pulses, considering transient dynamics is important [?], but as a first step towards frequency conversion of continuous variable quantum information longer pulses should be used. With refinement, shorter pulse durations may be achievable, and then transient dynamics would become relevant, but that is a future engineering challenge.

2. Maxwell-Bloch equations

There is one problem with solving for the steady state density matrix of an atomic sample alone: it neglects propagation effects [?][?]. Even though the entire system may be in a steady state that does not mean that the field strengths are uniform throughout. Any neighboring regions within the sample may experience different fields. Assume that the system can be broken up into cross-sectional regions which all experience approximately the same field strength, which would be the case if the beams were co-propagating or counter-propagating plane waves under the paraxial approximation [?]. Then one could consider the field strength of neighboring slices, see Fig. ??.

The Maxwell-Bloch equations can be derived and applied to account for propagation through the medium. Under the assumptions that the medium is non-magnetic, has no free charges, and no currents due to free charges, we may use Maxwell's equations to obtain the expression

$$\nabla \times \nabla \times \vec{E} + \frac{n^2}{c^2} \frac{\partial^2}{\partial t^2} \vec{E} = -\mu_0 \frac{\partial^2}{\partial t^2} \vec{P} \quad (42)$$

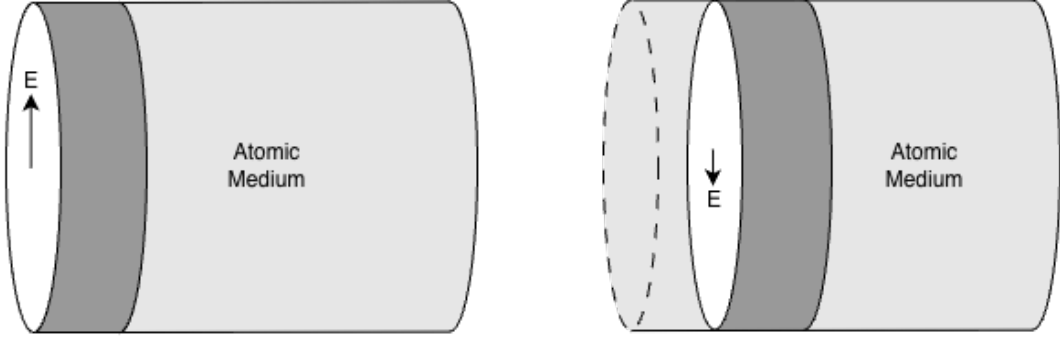


FIG. 7: (Left) the electric field experienced by a point within a region of an atomic medium and (right) a different electric field experienced by a neighboring region.

where n is the index of refraction [?] [?]. We may express $\nabla \times \nabla \times \vec{E} = \nabla (\nabla \cdot \vec{E}) - \nabla^2 \vec{E}$, and apply the slowly varying amplitude approximation such that

$$\vec{E} = \vec{\epsilon}(z, t) e^{-i(\omega t - kz)} + c.c. \quad (43)$$

where the electromagnetic amplitude envelope $\vec{\epsilon}(z, t)$ varies in time and space much slower than the carrier wave such that [?] [?]

$$\left| \frac{\partial^2}{\partial t^2} \vec{\epsilon}(z, t) \right| \ll \left| \omega \frac{\partial}{\partial t} \vec{\epsilon}(z, t) \right| \quad (44)$$

$$\left| \frac{\partial^2}{\partial z^2} \vec{\epsilon}(z, t) \right| \ll \left| k \frac{\partial}{\partial z} \vec{\epsilon}(z, t) \right| \quad (45)$$

$$(46)$$

In this regime, the $\nabla (\nabla \cdot \vec{E})$ term then becomes negligibly small such that we may write [?]

$$\left(\nabla^2 - \frac{n^2}{c^2} \frac{\partial^2}{\partial t^2} \right) \vec{E} = \mu_0 \frac{\partial^2}{\partial t^2} \vec{P}. \quad (47)$$

Then since we are assuming plane wave propagation in the paraxial approximation we have

$$\left(\frac{\partial^2}{\partial z^2} - \frac{n^2}{c^2} \frac{\partial^2}{\partial t^2} \right) \vec{E} = \mu_0 \frac{\partial^2}{\partial t^2} \vec{P}. \quad (48)$$

By evaluating our derivatives we find that

$$\frac{\partial^2}{\partial t^2} \vec{E} = \left(-2i\omega \frac{\partial}{\partial t} \vec{\epsilon}(z, t) + \frac{\partial^2}{\partial t^2} \vec{\epsilon}(z, t) - \omega^2 \vec{\epsilon}(z, t) \right) e^{-i(\omega t - kz)} + c.c. \quad (49)$$

$$\frac{\partial^2}{\partial z^2} \vec{E} = \left(2ik \frac{\partial}{\partial z} \vec{\epsilon}(z, t) + \frac{\partial^2}{\partial z^2} \vec{\epsilon}(z, t) - k^2 \vec{\epsilon}(z, t) \right) e^{-i(\omega t - kz)} + c.c. \quad (50)$$

and by the slowly varying amplitude approximation we have that the $\partial_t^2 \vec{\epsilon}(z, t)$ $\partial_z^2 \vec{\epsilon}(z, t)$ terms are negligible. So we have

$$\begin{aligned} \left(2ik \frac{\partial}{\partial z} \vec{\epsilon}(z, t) - k^2 \vec{\epsilon}(z, t) \right) e^{-i(\omega t - kz)} - \frac{n^2}{c^2} \left(-2i\omega \frac{\partial}{\partial t} \vec{\epsilon}(z, t) - \omega^2 \vec{\epsilon}(z, t) \right) e^{-i(\omega t - kz)} + c.c. &= \mu_0 \frac{\partial^2}{\partial t^2} \vec{P} \\ \left(\frac{2in^2\omega}{c^2} \frac{\partial}{\partial t} \vec{\epsilon}(z, t) + 2ik \frac{\partial}{\partial z} \vec{\epsilon}(z, t) \right) e^{-i(\omega t - kz)} + \left(\frac{n^2\omega^2}{c^2} - k^2 \right) \vec{\epsilon}(z, t) e^{-i(\omega t - kz)} + c.c. &= \mu_0 \frac{\partial^2}{\partial t^2} \vec{P}. \end{aligned}$$

The phase velocity of light may be expressed as

$$v_p = \frac{\omega}{k} = \frac{c}{n} \quad (51)$$

so we have the relation

$$k = \frac{n\omega}{c} \quad (52)$$

$$\frac{n^2\omega^2}{c^2} - k^2 = 0 \quad (53)$$

thus our expression simplifies to

$$\begin{aligned} \left(\frac{2ink}{c} \frac{\partial}{\partial t} \vec{\epsilon}(z, t) + 2ik \frac{\partial}{\partial z} \vec{\epsilon}(z, t) \right) e^{-i(\omega t - kz)} + c.c. &= \frac{1}{\epsilon_0 c^2} \frac{\partial^2}{\partial t^2} \vec{P} \\ \left(\frac{\partial}{\partial t} \vec{\epsilon}(z, t) + \frac{c}{n} \frac{\partial}{\partial z} \vec{\epsilon}(z, t) \right) e^{-i(\omega t - kz)} + c.c. &= -i \frac{1}{2nk\epsilon_0 c} \frac{\partial^2}{\partial t^2} \vec{P} \end{aligned}$$

We can then also apply the slowly varying envelope approximation to $\vec{P}$ such that

$$\vec{P} = \vec{\pi}(z, t) e^{-i(\omega t - kz)} + c.c. \quad (54)$$

$$\frac{\partial^2}{\partial t^2} \vec{P} = \left(-2i\omega \frac{\partial}{\partial t} \vec{\pi}(z, t) + \frac{\partial^2}{\partial t^2} \vec{\pi}(z, t) - \omega^2 \vec{\pi}(z, t) \right) e^{-i(\omega t - kz)} + c.c. \quad (55)$$

then we have that

$$\left| \frac{\partial^2}{\partial t^2} \vec{\pi}(z, t) \right| \ll \left| \omega \frac{\partial}{\partial t} \vec{\pi}(z, t) \right| \ll \left| \omega^2 \vec{\pi}(z, t) \right| \quad (56)$$

so we may neglect the other terms to obtain

$$\frac{\partial^2}{\partial t^2} \vec{P} \approx -\omega^2 \vec{\pi}(z, t) e^{-i(\omega t - kz)} + c.c. \quad (57)$$

Thus, we may write

$$\frac{\partial}{\partial t} \vec{\epsilon}(z, t) + v_p \frac{\partial}{\partial z} \vec{\epsilon}(z, t) = i \frac{\omega^2}{2nk\epsilon_0 c} \vec{\pi}(z, t).$$

All vectors will be aligned in an isotropic gaseous media and $k = n\omega/c$, so we can write

$$\begin{aligned} \frac{\partial}{\partial t} \epsilon(z, t) + v_p \frac{\partial}{\partial z} \epsilon(z, t) &= i \frac{\omega}{2n^2\epsilon_0} \pi(z, t) \\ \frac{1}{v_p} \frac{\partial}{\partial t} \epsilon(z, t) + \frac{\partial}{\partial z} \epsilon(z, t) &= i \frac{1}{v_p} \frac{\omega}{2n^2\epsilon_0} \pi(z, t) \\ \frac{1}{v_p} \frac{\partial}{\partial t} \epsilon(z, t) + \frac{\partial}{\partial z} \epsilon(z, t) &= i \frac{\omega}{2n\epsilon_0 c} \pi(z, t). \end{aligned} \quad (58)$$

This can be simplified even further by moving to a co-moving frame via the transformation $\zeta = z$, $\tau = t - z/v_p$ to obtain [?]]

$$\frac{\partial}{\partial \zeta} \epsilon(\zeta, \tau) = i \frac{\omega}{2n\epsilon_0 c} \pi(\zeta, \tau) \quad (59)$$

If we can find a way to express the polarization strength in terms of the electric field strength for the relevant system, then we may use it to find the electric field strength in the neighboring region, which can then be used to find the polarization, and so on. This would allow us to simulate field propagation through the medium and find the output strength.

3. The iterative Lindblad-Maxwell-Bloch solution method

The Lindblad master equation (Eq. (??)) can be used in tandem with the Maxwell-Bloch equations (Eq. (??)) to solve for the steady state density matrix, which may be applied to find the expected polarization, then find the electric field strength at the next cross-sectional region. This process can be performed iteratively throughout the medium via computational methods in order to find the desired field strength at the end of the medium. For an idler field, this could then tell us how much field intensity is produced as output via FWM. Due to the use of a co-moving frame, no time evolution is required. This all comes together in Alg. ??

Algorithm 1 The Lindblad-Maxwell-Bloch Algorithm

- 1: Initialize the electric field strength, frequency, and propagation direction for each field at location $\zeta = 0$ along the atomic medium. Also initialize step size $\Delta\zeta$ and sample length Z (stopping condition).
 - 2: Solve the Lindblad master equation Eq. (??) for the steady state density matrix satisfying $d\hat{\rho}/dt = 0$.
 - 3: Use the steady state density matrix $\hat{\rho}$ to find the expected polarization amplitude required in Eq. (??) and use it to update the relevant electric field at $\zeta + \Delta\zeta$ as $\varepsilon \rightarrow \varepsilon + \partial_\zeta \varepsilon$ via approximation.
 - 4: Update $\zeta \rightarrow \zeta + \Delta\zeta$.
 - 5: Repeat steps 2 through 4 until $\zeta \geq Z$.
 - 6: Return ε and $\hat{\rho}$.
-

IV Problem Definition

The overarching goal of this research is to find out whether a hot gas composed of four-level diamond configuration atoms (see Fig. ??) can be resonantly driven by three external electromagnetic fields (one of which is a weak signal beam encoded with continuous variable quantum information) such that a FWM process occurs to produce a fourth field with a frequency in the telecom C-band range of 1530 nm to 1565 nm. Specifically, the field produced must be optically squeezed via the FWM process such that quantum information may be converted then transmitted with minimal noise. It would be ideal if the medium experiences EIT with respect to the frequency of the weak signal beam and/or the output telecom beam.

By selecting some system parameterization (such as initial beam strengths, detunings, gas temperature, cell length, etc.) with the output fields strength initially set to zero, then applying the Maxwell-Bloch equations (Eq. (??)) to propagate the fields through the medium in the steady-state limit such that the Lindbladian may be used to find the overall system state (Eq. (??)), the output field strength and conversion efficiency of the input beam may be found. Via the same process, the density matrix describing the output state may be found then applied to obtain a quantifiable measure of squeezing from Eqs. (??), (??). The density matrix may also be used to solve for the dipole moment of the medium, from which the $\chi^{(1)}$ susceptibility can be obtained with respect to a select frequency (Eq. (??)), which can then be applied to the Beer-Lambert law (Eq. (??)) to find the field decay within the cavity. A relatively small value of $Im(\chi^{(1)})$ indicates that there is little decay in the relevant field such that EIT may be present, while a large $Im(\chi^{(1)})$ value gives evidence to the contrary.

A. Doppler Broadening and Doppler Insensitivity

It would be highly advantageous if we could show that the diamond-configuration system can be Doppler insensitive. When driving the three transitions such that a telecom wavelength field is promoted we can depict our system as in Fig. ?. This is essentially the combination of a V-system and a ladder system, or at least that is how some interpret it [?]. Lee et al. [?] state that the two-photon coherence of the V-type and Ξ -type subsystems can be made Doppler insensitive when the (ω_s) and strong pump I (ω_I) co-propagate (for V-type) and when the weak signal (ω_s) and strong pump II (ω_{II}) beams counter-propagate (for Ξ -type). They extend this to line of reasoning to state that both conditions should hold in order to obtain Doppler insensitive three-photon coherence in a Doppler broadened medium. They found that Doppler-free three-photon electromagnetically induced absorption (EIA) of the weak signal beam was present under these conditions. Additionally, they found that increased EIA intensity was strongly correlated with increased FWM field production. It should be noted that Lee et al. used a slightly different atomic configuration in the ^{87}Rb spectrum.

Thus, there is evidence to suggest that the system may be Doppler insensitive by aligning $\vec{k}_s$ and $\vec{k}_I$ to be parallel while aligning $\vec{k}_{II}$ to be antiparallel to both $\vec{k}_s$ and $\vec{k}_I$. The momentum conservation equation then tells us that we

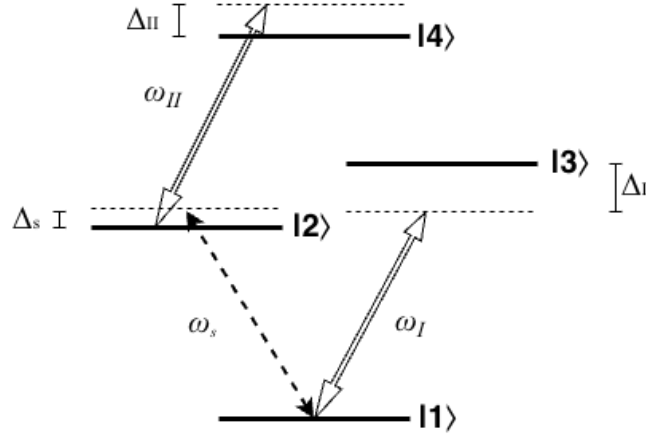


FIG. 8: A four-level diamond configuration atom driven by three external fields where fields ω_I and ω_{II} are strong pump fields and field ω_s is the weak input signal field. These fields have respective detunings Δ_I , Δ_{II} , and Δ_s .

must have

$$|\vec{k}_i| = |\vec{k}_s| + |\vec{k}_I| - |\vec{k}_{II}| \quad (60)$$

where $\vec{k}_i$ is the idler beam field which we wish to induce via FWM. This also tells us that $\vec{k}_i$ would need to co-propagate with $\vec{k}_{II}$.

This setup is mutually beneficial for Maxwell-Bloch solution steps. Consider solving for the change in electric field strength through a slice of an atomic cell. By taking $\vec{k}_s$ (or any k -vector for that matter) as the normal vector of the slice plane we can justify the approximation that the signal, pump I, and pump II field strengths are all uniform about the plane. Additionally, for strong pump I and pump II fields, we can assume that their intensities do not change significantly through propagation (approximately fixed beam strength). Therefore, we can justifiably state that we know the field strength of all three input beams at the location of the first slice. This allows us to then find the field strength for all subsequent slices of the medium in an iterative process.

B. System Hamiltonian

TODO - TALK ABOUT THIS!!!

In Appendix ?? we derive the Hamiltonian for our four-level atom as

$$\tilde{H} = \hbar \begin{pmatrix} 0 & \Omega_s(t)\hat{a}^\dagger & \Omega_I(t) & 0 \\ \Omega_s^*(t)\hat{a} & \Delta_s & 0 & \Omega_{II}(t) \\ \Omega_I^*(t) & 0 & \Delta_I & \Omega_i(t)\hat{b}^\dagger \\ 0 & \Omega_{II}^*(t) & \Omega_i^*(t)\hat{b} & \Delta_{II} + \Delta_s \end{pmatrix} + \hbar\Delta_s\hat{a}^\dagger\hat{a} + \hbar\Delta_i\hat{b}^\dagger\hat{b} \quad (61)$$

where $\Omega_x(t)$, $x \in \{s, i, I, II\}$ are the Rabi frequencies for each, and we have the detunings defined as

$$\Delta_s = \omega_{12} - \omega_s \quad (62)$$

$$\Delta_I = \omega_{13} - \omega_I \quad (63)$$

$$\Delta_{II} = \omega_{24} - \omega_{II} \quad (64)$$

$$\Delta_i = \omega_{34} - \omega_i \quad (65)$$

where ω_s and ω_i are the weak signal and idler beams frequencies, respectively, ω_I and ω_{II} are the strong pump beam frequencies. This Hamiltonian couples the 4-state atomic basis with the distinct electromagnetic field modes of $\hat{a}$ and $\hat{b}$ at respective frequencies ω_{12} and ω_{34} . Note that we choose these frequencies for the $\hat{a}$ and $\hat{b}$ field modes instead of ω_s and ω_i since we are working in the regime of small detunings and energy may not be perfectly conserved among frequencies as it could leak into many other physical processes (such as Doppler cooling). Therefore, ω_{12} and ω_{34} are more like target frequencies, since any actual laser field would have some linewidth. As Δ_s and Δ_i are small relative

to the beam frequencies, we expect that the relevant linewidths would include non-negligent components of both their respective transition frequencies and beam frequencies. Fields $\hat{a}$ and $\hat{b}$ therefore act as representative fields which can be used to predict actual system behaviour. In fact, the choice could be made to make the frequencies of these fields arbitrary such that we instead have the field term in the Hamiltonian expressed as $\hbar\Delta_a\hat{a}^\dagger\hat{a} + \hbar\Delta_b\hat{b}^\dagger\hat{b}$ where $\Delta_a = \omega_a - \omega_s$ and $\Delta_b = \omega_b - \omega_s$ for any ω_a and ω_b , though one should expect the accuracy of the model to decrease with significantly large Δ_a and Δ_b . This approach is taken Du et al. in [?]. However, since the choice is arbitrary, we opt to select the former for the sake of simplicity.

We will be working with this Hamiltonian in the steady-state limit such that we can assume that each Ω_x is constant for all times t . These values will, however, vary in space. Our Hamiltonian may then be expressed

$$\tilde{H} = \hbar \begin{pmatrix} 0 & \Omega_s\hat{a}^\dagger & \Omega_I & 0 \\ \Omega_s^*\hat{a} & \Delta_s & 0 & \Omega_{II} \\ \Omega_I^* & 0 & \Delta_I & \Omega_i\hat{b}^\dagger \\ 0 & \Omega_{II}^* & \Omega_i^*\hat{b} & \Delta_{II} + \Delta_s \end{pmatrix} + \hbar\Delta_s\hat{a}^\dagger\hat{a} + \hbar\Delta_i\hat{b}^\dagger\hat{b} \quad (66)$$

It is important to note that our definition deviates from the conventional definition. To see this, consider a real-valued electromagnetic field

$$\begin{aligned} \vec{E}(z, t) &= \vec{\epsilon}_0 \cos(\omega t - kz) \\ \vec{E}(z, t) &= \frac{\vec{\epsilon}_0}{2} \left(e^{-i(\omega t - kz)} + e^{i(\omega t - kz)} \right). \end{aligned} \quad (67)$$

where $\vec{\epsilon}_0$ acts as a slowly-varying envelope which changes slowly on the timescale of oscillation to allow for steady-state dynamics to occur. In Appendix ??, each $\vec{\epsilon}$ was taken to include the factor of 2 to simplify calculations. However, also by convention, weak quantized fields are expressed with the factor of 2 absorbed where the symbol g takes the place of Ω to represent the atom-field coupling. So the conventional form of the Hamiltonian then becomes

$$\tilde{H} = \hbar \begin{pmatrix} 0 & g_s\hat{a}^\dagger & \frac{\Omega_I}{2} & 0 \\ g_s^*\hat{a} & \Delta_s & 0 & \frac{\Omega_{II}}{2} \\ \frac{\Omega_I^*}{2} & 0 & \Delta_I & g_i\hat{b}^\dagger \\ 0 & \frac{\Omega_{II}^*}{2} & g_i^*\hat{b} & \Delta_{II} + \Delta_s \end{pmatrix} + \hbar\Delta_s\hat{a}^\dagger\hat{a} + \hbar\Delta_i\hat{b}^\dagger\hat{b} \quad (68)$$

TODO - INCLUDE CLASSICAL VERSION OF HAMILTONIAN REPRESENTING A CAVITY-FREE SYSTEM
 TODO - INCLUDE HAMILTONIAN WITH QUANTIZED FIELD NOISE AS WAS DONE BY SOUZA

1. Concerns with cavity enhancement

TODO - TALK ABOUT THE INTRODUCTION OF A CAVITY AND HOW IT WOULD AFFECT OUR SYSTEM (i.e. quantizing fields vs not) THEN MENTION THE ISSUE THIS CAUSES WITH LINING UP k-vectors

C. Lindbladian and Maxwell-Bloch Equations

V Computational Methods

A. Learning to use QuTiP

QuTiP, standing for quantum toolbox in python, is an open source library for simulating quantum systems [?]. Our main uses of this library will be for creating operators of the `Qobj` class in the form of finite-dimensional tensors, applying the Lindblad master equation to find the steady state density matrix satisfying $\partial_t \hat{\rho} = 0$ via the `steadystate` function, and taking the expectation value of various operators $\langle \hat{A} \rangle = \text{Tr}(\rho \hat{A})$ via the `expect` function.

In order to work up to simulating a four-level atom with multiple Fock bases for photons of distinct frequency modes with dissipative Lindbladian operators, we will begin with a simpler model and reproduce known results, then gradually increase complexity towards the target system.

1. The Jaynes-Cummings model

In the Jaynes-Cummings model we consider a two-level atom within a resonant cavity (see Fig. ??) [?]. The field of a single photon within the cavity is quite significant as it will bounce back and forth between cavity walls, building up a non-negligible field. So we must quantize photons in the Fock basis. The cavity is finely tuned to a resonant frequency ω_c such that any other frequency of light destructively interferes with itself. This leads to a simplification for our Fock basis which may be restricted to photons of a single frequency. There can be a detuning between the frequencies, but we will consider the case of perfect resonance here $\omega = \omega_a = \omega_c$.



FIG. 9: Depiction of the system for a Jaynes-Cummings model with (left) a resonant cavity containing a single atom in the presence of a driving electromagnetic field resonant with the cavity frequency of ω , with (right) the atomic system depicted as a two-level atom of transition frequency ω_a .

The states of our system live within the combined Hilbert space $\mathcal{H}_{atom} \otimes \mathcal{H}_{photon}$, and so states are described by $|atom\rangle \otimes |photons\rangle$ where $|atom\rangle$ has two states and $|photon\rangle$ describes all n -photon states. Consider a state containing N photons worth of energy. Then the possible states of the system are $|\downarrow\rangle \otimes |N\rangle$ and $|\uparrow\rangle \otimes |N-1\rangle$.

The Hamiltonian describing this system is given by [?][?]

$$\hat{H}_{JC} = \hat{H}_{Atom} + \hat{H}_{Photon} + \hat{H}_{Interaction}. \quad (69)$$

The atomic term is given by

$$\begin{aligned} \hat{H}_{Atom} &= \frac{\hbar\omega}{2} \hat{\sigma}_z \\ &= \frac{\hbar\omega}{2} \begin{pmatrix} 1 & 0 \\ 0 & -1 \end{pmatrix}. \end{aligned} \quad (70)$$

The photonic term is given by

$$\hat{H}_{Photon} = \hbar\omega \left(\hat{a}^\dagger \hat{a} + \frac{1}{2} \right).$$

where we may shift by the zero-point energy since it is a constant term to obtain

$$\hat{H}_{Photon} = \hbar\omega \hat{a}^\dagger \hat{a}$$

Then finally, the interaction term is given by

$$\begin{aligned} \hat{H}_{Interaction} &= -\frac{\hbar\Omega}{2} (\hat{\sigma}_+ \otimes \hat{a} + \hat{\sigma}_- \otimes \hat{a}^\dagger) \\ &= \frac{\hbar\Omega}{2} \begin{pmatrix} 0 & \hat{a} \\ \hat{a}^\dagger & 0 \end{pmatrix} \end{aligned} \quad (71)$$

where Ω is the Rabi frequency, $\hat{\sigma}_{\pm}$ are the atomic raising and lowering operators, and we have changed the state convention such that we have $-\sigma_z$ as opposed to σ_z in the original work [?].

In order to combine the Hilbert spaces for these two separate quantizes systems, block-operator notation is applied. Notice that $\hat{H}_{Atom}$ acts on the two-state atomic basis, while $\hat{H}_{Photon}$ acts on the infinite Fock basis of photons. We then must combine the two bases in $\hat{H}_{Interaction}$ which describes the creation of a photon in the Fock basis upon atomic emission, and the annihilation of a photon upon absorption. So this Hamiltonian should not be thought of as a two-by-two matrix acting on the atomic basis, but rather an infinite matrix enumerating the interactions between all possible states. All together, the final Hamiltonian is then [?]

$$\begin{aligned}\hat{H}_{JC} &= -\frac{\hbar\omega}{2}\hat{\sigma}_z + \hbar\omega\hat{a}^\dagger\hat{a} + \frac{\hbar\Omega}{2}(\hat{\sigma}_+ \otimes \hat{a} + \hat{\sigma}_- \otimes \hat{a}^\dagger) \\ &= \frac{\hbar}{2} \begin{pmatrix} -\omega & \Omega\hat{a} \\ \Omega\hat{a}^\dagger & \omega \end{pmatrix} + \hbar\omega\hat{a}^\dagger\hat{a}\end{aligned}\quad (72)$$

We may then choose to arbitrarily shift the ground state as to obtain

$$\hat{H}_{JC} = \frac{\hbar}{2} \begin{pmatrix} 0 & \Omega\hat{a} \\ \Omega\hat{a}^\dagger & 2\omega \end{pmatrix} + \hbar\omega\hat{a}^\dagger\hat{a}. \quad (73)$$

This is not the whole story, however. Any real cavity has some photonic decay rate, meaning we must include dissipative operators and apply Lindbladian dynamics to solve for a steady state via the master equation. Our dissipative operator then becomes $L = \sqrt{\gamma}\hat{a}$ where γ gives the decay rate such that our master equation is [?]

$$\dot{\rho} = -i[\hat{H}_{JC}, \rho] + \gamma \left(\hat{a}\rho\hat{a}^\dagger - \frac{1}{2}\hat{a}^\dagger\hat{a}\rho - \frac{1}{2}\rho\hat{a}^\dagger\hat{a} \right). \quad (74)$$

To learn the QuTiP package, the Jaynes-Cummings model was coded (see Code Block. ??) based on an implementation by Robert Johansson [?]. This code differs slightly from the above description in that the atomic Hamiltonian basis is shifted such that it is in the rotating frame $\hat{H}_{Atom} = \hbar\omega|e\rangle\langle e|$.

Code Block 1: Python code for the Jaynes-Cummings Model

```
# Initial Arguments
w_a = 2.0
w_c = 2.0
W = 0.02
gamma = 0.005
xi = 0.0025
eta = 0.05
h = 1.0
N = 10 # Truncate the Fock basis to N photons
times = np.linspace(0, 2500, 10000)

# Set up operators in the relevant basis
a = tensor(qeye(2), destroy(N)) # Acts on photon Fock basis with N states as
    lowering operator
s_minus = tensor(destroy(2), qeye(N)) # Acts on atomic basis with 2 states as
    lowering operator
s_atom = tensor(Qobj([[0, 0], [0, 1]]), qeye(N)) # Acts on atomic basis with a
    shifted ground states

# Set up the Hamiltonian
H = (h * w_a) * s_atom + (h * w_c) * a.dag() * a + (h * W)/2 * (s_minus.dag() *
    a + s_minus * a.dag())

# Set up dissipative operator for a lossy cavity
cavity_decay = np.sqrt(gamma) * a
c_ops = [cavity_decay]
```

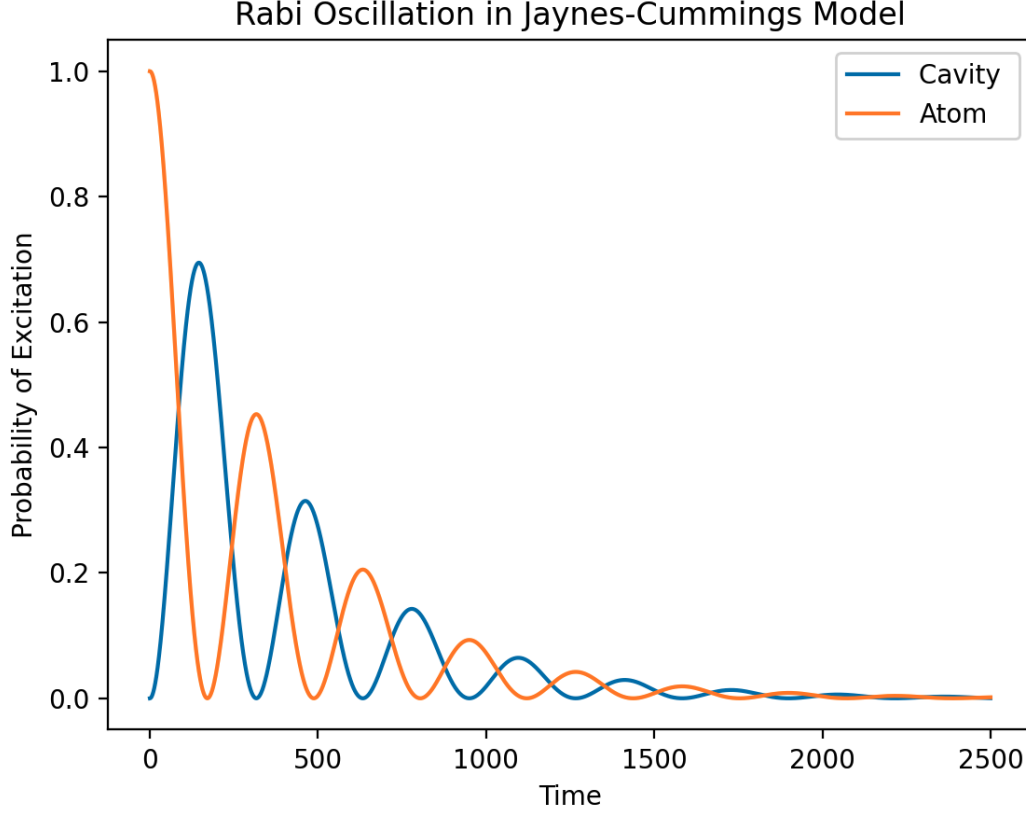


FIG. 10: Decaying Rabi oscillation produced by the Jaynes-Cummings model with initial state $|\psi\rangle_0 = |e\rangle \otimes |0\rangle$.

```
# Set up the expectation value operators
number_operator = a.dag() * a
atomic_state_operator = s_minus.dag() * s_minus
e_ops = [number_operator, atomic_state_operator]

# Start the system in an initially excited state with 0 photons
psi_0 = tensor(basis(2,1), basis(N, 0))

# Time evolve the system using qutip mesolve
result = mesolve(H, psi_0, times, c_ops=c_ops, e_ops=e_ops)
photons = result.expect[0]
```

This code uses the `mesolve` function for time evolving a quantum system such that we may inspect the evolution of the state. For an initial state where the atom is excited and there are no photons present in the cavity, we obtain decaying Rabi oscillations as expected (see Fig. ??).

This code will be a base for all quantum code going forward, but before we can dive any deeper into quantized systems, we must take a step back to look at a semi-classical system.

2. Electromagnetically induced transparency in a Λ -system with classical driving fields

Consider a quantized 3-level Λ -system of states driven by strong external electromagnetic fields. We consider the fields to be so strong that the quantum mechanical nature of the beams is reduced to classical behaviour in accordance with Ehrenfest's theorem (i.e. the correspondence principle). This makes the system semi-classical since the atomic system is quantized while the driving fields are treated classically.

The Hamiltonian for this system in the atomic basis can be obtained by writing down the diagonal atomic Hamiltonian and shifting it such that $\langle 1|\hat{H}|1\rangle = 0$, then adding on the effects of the electromagnetic fields which drive the

allowed transitions $|1\rangle \leftrightarrow |3\rangle$ and $|2\rangle \leftrightarrow |3\rangle$ at frequencies $\omega_s \approx \omega_{13}$ and $\omega_c \approx \omega_{23}$. The rotating wave approximation may then be applied to simplify the off-diagonal transitional entries as Rabi frequencies Ω_s , Ω_c , and a unitary transformation may be applied to write the diagonal entries in terms of the detunings due to the driving beams $\Delta_s = \omega_{13} - \omega_s$ and $\Delta_c = \omega_{23} - \omega_c$. A similar procedure is applied to obtain the Hamiltonian for the 4-level system of focus in the appendix ???. The Λ -system Hamiltonian in this form is well known to be [?]]

$$\hat{H} = -\frac{\hbar}{2} \begin{pmatrix} 0 & 0 & \Omega_s \\ 0 & -2\delta & \Omega_c \\ \Omega_s^* & \Omega_c^* & 2\Delta \end{pmatrix} \quad (75)$$

where $\delta = \Delta_s - \Delta_c$ and for the sake of simplicity we redefine $\Delta = \Delta_s$.

In order to consider the effect of the environment for Lindbladian time evolution, we must mathematically express the decay operators of the system. We have decay operator Γ_{13} which acts on transition σ_{13} and Γ_{23} which acts on σ_{23} . We can then follow the template given by the Jaynes-Cummings model in Code Block ??, changing out the `mesolve` time evolution function for the `steadystate` function which numerically solves the Lindblad master equation for $\hat{\rho}$ when $d\hat{\rho}/dt = 0$.

Now consider the linear electric susceptibility in Eq. (??). It tells us that $\chi^{(1)} \propto \langle \hat{d} \rangle$. We may expand $\langle \hat{d} \rangle$ as

$$\langle \hat{d} \rangle = \sum_{i,j} d_{ij} \langle \hat{\sigma}_{ji} \rangle \quad (76)$$

where removing the zero-valued d_{ij} terms and noticing that $\rho_{ji} = \langle \hat{\sigma}_{ji} \rangle$ leaves us with

$$\langle \hat{d} \rangle = d_{13}\rho_{31} + d_{31}\rho_{13} + d_{23}\rho_{32} + d_{32}\rho_{23}. \quad (77)$$

This expression can then be re-expressed fully in terms of d_{13} as [?]]

$$\chi^{(1)} = \frac{N|d_{13}|^2}{V\hbar\epsilon_0} \left[\frac{4\delta(|\Omega_c| - 4\delta\Delta) - 4\Delta\Gamma_{21}^2}{||\Omega_c|^2 + (\Gamma_{31} + i2\Delta)(\Gamma_{21} + i2\delta)|^2} + i \frac{8\delta^2\Gamma_{31} + 2\Gamma_{21}(|\Omega_c|^2 + \Gamma_{21}\Gamma_{31})}{||\Omega_c|^2 + (\Gamma_{31} + i2\Delta)(\Gamma_{21} + i2\delta)|^2} \right] \quad (78)$$

where V is volume. However, we can get an intuitive sense for how the system behaves making some approximations. Fleischhauer et al. [?]] give an expression where $\rho_{32} \propto \rho_{12}$ (with a prefactor that is not particularly large under typical circumstances), but the $|1\rangle \leftrightarrow |2\rangle$ transition is forbidden such that in the steady-state regime where the system is only driven by beams tuned near the transition resonances ω_{13} and ω_{23} we can expect ρ_{12} to be near-zero valued. This then leads us to suspect that we may have $\rho_{23} \approx 0$. Assume this is the case. Then we may write the much simpler expression

$$\langle \hat{d} \rangle \approx d_{13}\rho_{31} + d_{31}\rho_{13} \quad (79)$$

such that $\chi^{(1)} \propto \rho_{31}$.

By setting Δ_c to be fixed, we can scan over Δ values to find the optimal conditions for EIT at the given Δ_c (and any other necessary parameters). Solving for the steady state and taking the corresponding ρ_{31} value at each detuning produces fig. ??. This plot depicts the real and imaginary components of $\chi^{(1)}$ over a range of detunings where we see $Im(\chi^{(1)})$ decreases on resonance indicating EIT, and in the same region $Re(\chi^{(1)})$ has a large slope indicating slowed light propagation.

We may also check the validity of our approximation $\rho_{12} \approx \rho_{23} \approx 0$ by inspecting the density matrix elements at each detuning. For all detunings applied, both values are near-zero valued, thereby giving further justification to our approximation.

3. Cavity electromagnetically induced transparency in a Λ -system with quantized driving fields

The final stepping stone towards developing system-specific code comes with reproducing a known result of a more advanced and modern system. In the paper ‘Coherent Control of Quantum Fluctuations Using Cavity Electromagnetically Induced Transparency’ by Souza et al. they describe a three-level Λ -system within a resonant cavity of frequency ω_{cav} in the presence of a strong classical pump field of frequency ω_c and a weak quantized probe beam of frequency

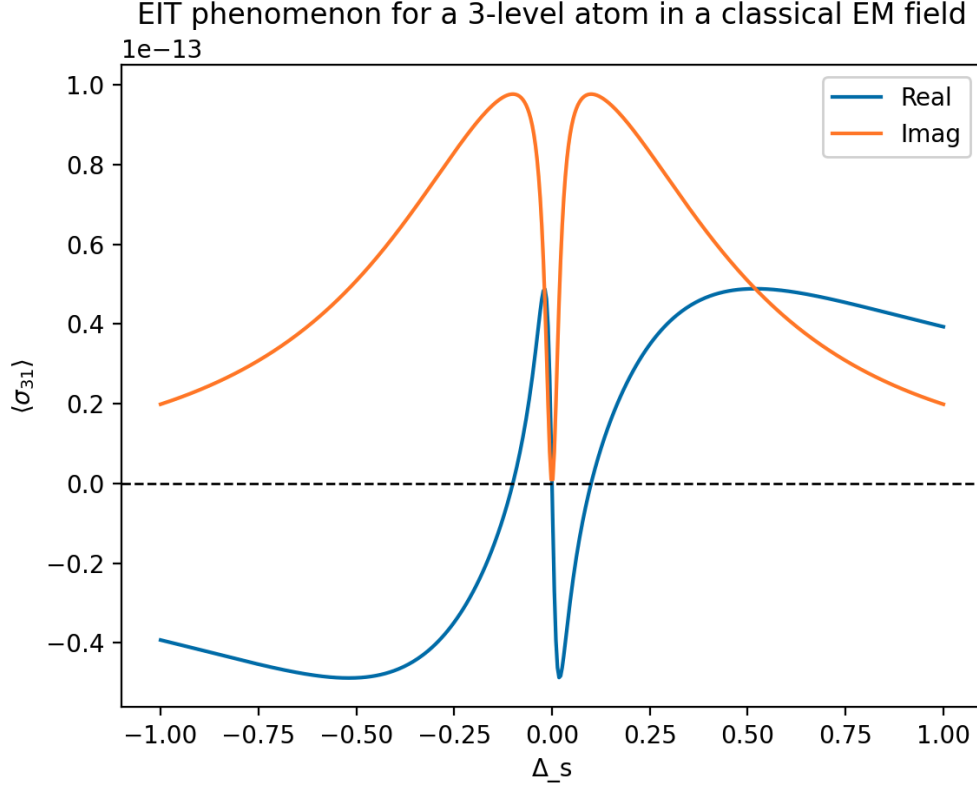


FIG. 11: The real and imaginary components of the density matrix element $\rho_{31} = \langle \hat{\sigma} \rangle$ over a range of detunings Δ_s . The response indicates the presence of EIT and slowed light propagation at resonance.

ω_p and solve for steady state solutions via the Lindblad master equation [?]. This combines all the techniques seen thus far. They give their Hamiltonian as

$$\begin{aligned} \hat{H} &= \Delta \hat{\sigma}_{33} + (\Delta_1 - \Delta_2) \hat{\sigma}_{22} - \Delta \hat{\sigma}_{11} + \Delta \hat{a}^\dagger \hat{a} + (\varepsilon \hat{a} + g \hat{a} \hat{\sigma}_{31} + \Omega_{32} + h.c.) \\ &= \begin{pmatrix} -\Delta & 0 & g^* \hat{a}^\dagger \\ 0 & (\Delta_1 - \Delta_2) & \Omega_c^* \\ g \hat{a} & \Omega_c & \Delta_1 \end{pmatrix} + \varepsilon \hat{a} + \varepsilon^* \hat{a}^\dagger + \Delta \hat{a}^\dagger \hat{a} \end{aligned} \quad (80)$$

where g is the atom-field coupling strength for the weak pump field, Ω_c is the strong pump field dependent Rabi frequency, ε is the weak probe field strength, $\Delta = \omega_{cav} - \omega_p$, $\Delta_1 = \omega_{31} - \omega_{cav}$, and $\Delta_2 = \omega_{32} - \omega_c$.

There is one particular term of note here which has not yet shown up: $\varepsilon \hat{a} + \varepsilon^* \hat{a}^\dagger$. To understand this term, we may take a step back to the Jaynes-Cummings model. By including the $\varepsilon \hat{a} + \varepsilon^* \hat{a}^\dagger$ term to our Hamiltonian with $\varepsilon = 0.5$ we find the introduction of noise to our model as the probe field populates the cavity in Fig. ?? . Notice also, that the total probability of having an excitation in the field and the cavity surpasses 1 since we have introduced an external source.

They then define decay operators for their cavity field mode $\sqrt{\kappa} \hat{a}$, and their atomic states $\sqrt{\Gamma_{13}} \hat{\sigma}_{13}$, $\sqrt{\Gamma_{23}} \hat{\sigma}_{23}$. Implementing this Hamiltonian with QuTiP and solving for the steady-state density matrix via the Lindblad master equation with the specified decay operators allowed us to reproduce some of the results presented by Souza et al. [?]. Fig. ?? reproduces the portion of figure 1(c) depicting the transmission profile over a range of Δ detunings with cavity EIT (CEIT). Fig. ?? reproduces figure 2(b) depicting the state expectation values over the range of detunings, where we have opted to split the original figure into two to avoid overcrowding. Additionally, the expectation value of atomic state $|3\rangle$ was added, where we observe a sharp dip in state population on resonance. This indicates the presence of a dark state, giving evidence to the presence of EIT. Fig. ?? also suggests that the cavity mode becomes more populated on resonance, supporting evidence of EIT; with increases also observed at other detunings corresponding to alternative transition frequencies introduced by ‘Autler-Townes-like’ energy level splitting [?].

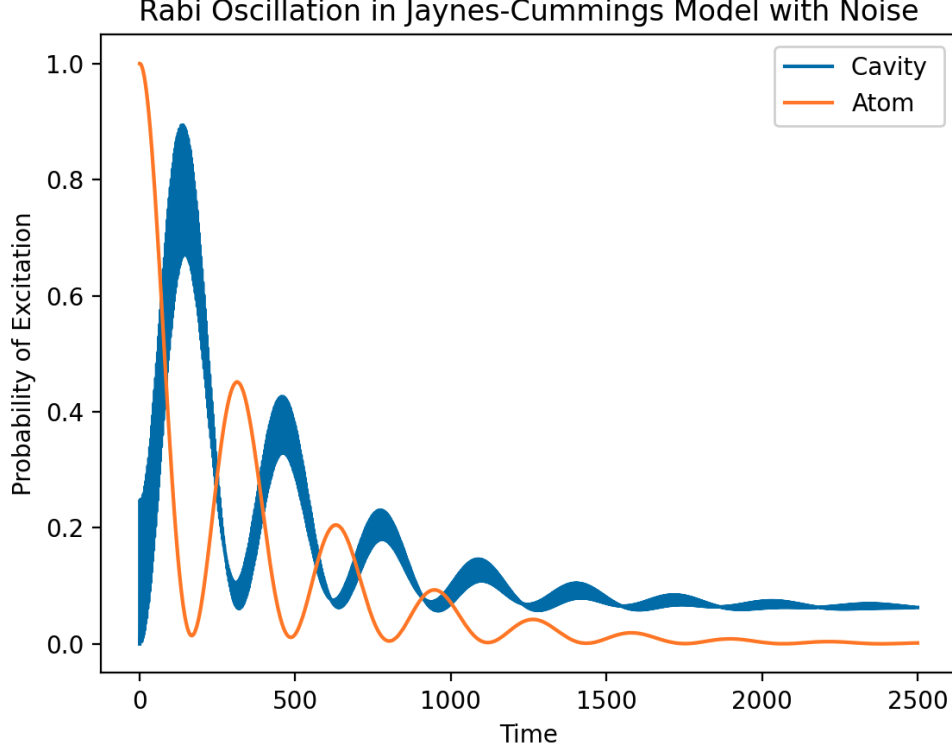


FIG. 12: Decaying Rabi oscillation produced by the Jaynes-Cummings model with initial state $|\psi\rangle_0 = |e\rangle \otimes |0\rangle$ with the introduction of noise by including $\varepsilon\hat{a} + \varepsilon^*\hat{a}^\dagger$ to the Hamiltonian in Eq. (??).

VI Outlook

VII Discussion

A. Conditions for Optical Squeezing

-
- [1] R. O. Jones. Density functional theory: Its origins, rise to prominence, and future. *Rev. Mod. Phys.*, 87:897–923, Aug 2015.
 - [2] P. W. Anderson. More is different - broken symmetry and the nature of the hierarchical structure of science. *Science*, 177:393–396, August 1972.
 - [3] Harvest now, decrypt later (hndl): The quantum-era threat. <https://www.paloaltonetworks.com/cyberpedia/harvest-now-decrypt-later-hndl>. accessed Mar. 19, 2026.
 - [4] P. W. Shor. Polynomial-time algorithms for prime factorization and discrete logarithms on a quantum computer. *SIAM Journal on Computing*, 26(5):1484–1509, October 1997.
 - [5] D. Rusca and N. Gisin. Quantum cryptography: an overview of quantum key distribution, 2024.
 - [6] J. Qin, J. Cheng, S. Liang, Z. Yan, H. Lu, and X. Jia. Noiseless and efficient quantum information transmission for fiber-based continuous-variable quantum networks. *Phys. Rev. Appl.*, 21:064026, Jun 2024.
 - [7] C. E. Shannon. A mathematical theory of communication. *Bell System Technical Journal*, 27(3):379–423, 1948.
 - [8] D. Du, L. Castillo-Veneros, D. Cottrill, G. D. Cui, P. Stankus, D. Katramatos, J. Martínez-Rincón, and E. Figueroa. A long-distance quantum-capable internet testbed, 2024.
 - [9] Y. A. Chen, Q. Zhang, T. Y. Chen, and et al. An integrated space-to-ground quantum communication network over 4,600 kilometres. *Nature*, 589:214–219, January 2021.
 - [10] M. Hosseini, B.M. Sparkes, G. Campbell, P.K. Lam, and B.C. Buchler. High efficiency coherent optical memory with

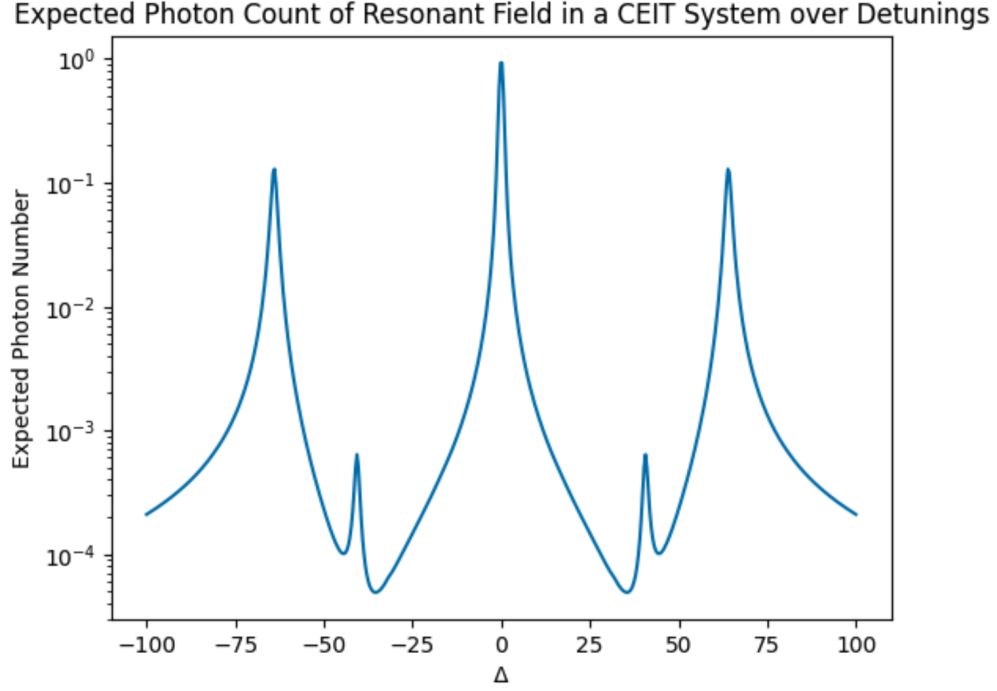


FIG. 13: Reproduction of a portion of figure 1(c) from ‘Coherent Control of Quantum Fluctuations Using Cavity Electromagnetically Induced Transparency’ by Souza et al. [?] depicting the expected photon count within the cavity over a range of frequency Δ detunings.

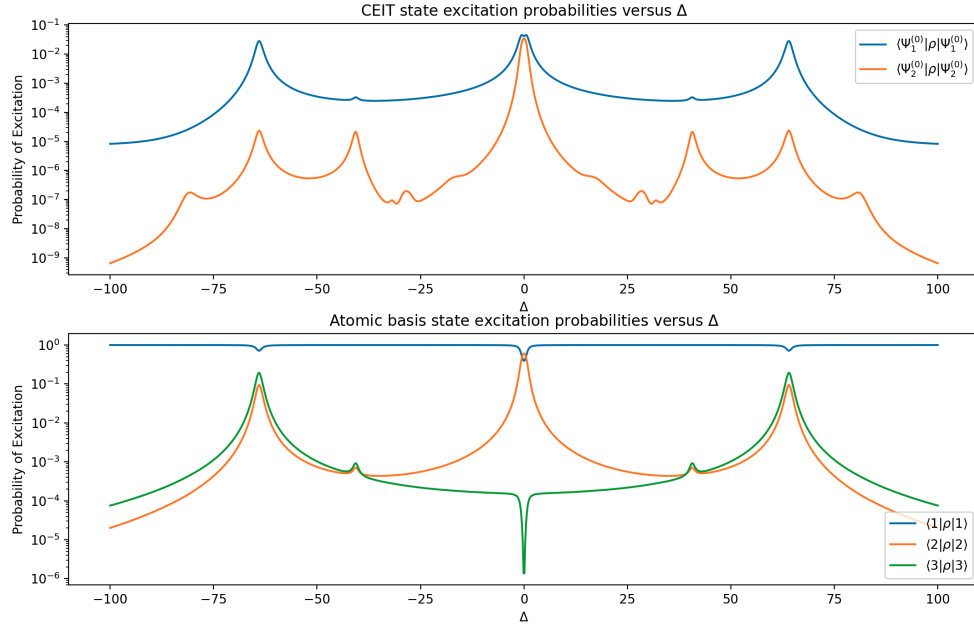


FIG. 14: Reproduction of a portion of figure 1(c) from ‘Coherent Control of Quantum Fluctuations Using Cavity Electromagnetically Induced Transparency’ by Souza et al. [?] — which has been slightly modified and added upon for clarity — depicting (top) the state expectation values of states in an energy split and rotated basis over a range of detunings and (bottom) the state expectation values of states in the atomic basis over a range of detunings.

warm rubidium vapour. *Nature Communications*, 2(1), February 2011.

- [11] T. Strassel. *Quantum Memory with Atomic Ensembles of Rubidium and Single Photons for Long Distance Quantum Communication*. PhD thesis, Ruperto-Carola University of Heidelberg, 2008.

- [12] S. Langenfeld, P. Thomas, O. Morin, and G. Rempe. Quantum repeater node demonstrating unconditionally secure key distribution. *Phys. Rev. Lett.*, 126:230506, Jun 2021.
- [13] M. Saffman, T. G. Walker, and K. Mølmer. Quantum information with rydberg atoms. *Rev. Mod. Phys.*, 82:2313–2363, Aug 2010.
- [14] L. C. Chen, M. Y. Lin, J. S. Shiu, X. Q. Zhong, P. H. Tseng, and Y. F. Chen. High-efficiency telecom frequency conversion via a diamond-type atomic ensemble. *Phys. Rev. A*, 112:013709, Jul 2025.
- [15] R. E. Slusher, L. W. Hollberg, B. Yurke, J. C. Mertz, and J. F. Valley. Observation of squeezed states generated by four-wave mixing in an optical cavity. *Phys. Rev. Lett.*, 55:2409–2412, Nov 1985.
- [16] Y. Li and M. Xiao. Enhancement of nondegenerate four-wave mixing based on electromagnetically induced transparency in rubidium atoms. *Optics Letters*, 21:1064–1066, Jul 1996.
- [17] David Tong. *Quantum Mechanics*. Cambridge University Press, 2025.
- [18] J. Peatross and M. Ware. *Physics of light and Optics*. Brigham Young University, 2023.
- [19] E. Hecht. *Optics*. Pearson, fifth edition, 2017.
- [20] R. W. Boyd. *Nonlinear Optics*. Elsevier Science and Technology, 2020.
- [21] MacRae A. and Kupchak C. Propagation dynamics and transient amplification in warm and cold atomic eit systems. *Optics Communications*, 606:132893, 2026.
- [22] Rüdiger Paschotta. Group velocity. https://www.rp-photonics.com/group_velocity.html, 2021. accessed: Mar. 20, 2026.
- [23] D. H. McIntyre. *Quantum Mechanics: A Paradigms Approach*. Cambridge University Press, 2023.
- [24] M. Fox. *A Students Guide to Atomic Physics*. Cambridge University Press, 2018.
- [25] S. Millman and M. Fox. Nuclear spins and magnetic moments of rb^{85} and rb^{87} . *Phys. Rev.*, 50:220–225, Aug 1936.
- [26] M. Fleischhauer, A. Imamoglu, and J. P. Marangos. Electromagnetically induced transparency: Optics in coherent media. *Rev. Mod. Phys.*, 77:633–673, Jul 2005.
- [27] D. E. Jones, J. D. Franson, and T. B. Pittman. Ladder-type electromagnetically induced transparency using nanofiber-guided light in a warm atomic vapor. *Phys. Rev. A*, 92:043806, Oct 2015.
- [28] C. R. Higgins and I. G. Hughes. Electromagnetically induced transparency in a v-system with 87rb vapour in the hyperfine paschen-back regime. *Journal of Physics B: Atomic, Molecular and Optical Physics*, 54, Sept 2021.
- [29] Conventional band (c-band). <https://www.fiberlabs.com/glossary/conventional-band/>. accessed Mar. 23, 2026.
- [30] J. Geng, G. T. Campbell, J. Bernu, D. B. Higginbottom, B. M. Sparkes, S. M. Assad, W. P. Zhang, N. P. Robins, P. K. Lam, and B. C. Buchler. Electromagnetically induced transparency and four-wave mixing in a cold atomic ensemble with large optical depth. *New Journal of Physics*, 16:113053, Nov 2014.
- [31] Q. Glorieux, T. Aladjidi, P. D. Lett, and R. Kaiser. Hot atomic vapors for nonlinear and quantum optics. *New Journal of Physics*, 25:051201, May 2023.
- [32] S. D. Patel, S. Doan, C. Shang, F. Grillot, F. Jahnke, J. E. Bowers, G. Moody, and W. W. Chow. Microscopic theory of squeezed light in quantum-dot systems. *Phys. Rev. A*, 113:013712, Jan 2026.
- [33] S. Kim and A. M. Marino. Generation of 87rb resonant bright two-mode squeezed light with four-wave mixing. *Opt. Express*, 26(25):33366–33375, Dec 2018.
- [34] G. S. Agarwal, T. N. Dey, and D. J. Gauthier. Competition between electromagnetically induced transparency and raman processes. *Phys. Rev. A*, 74:043805, Oct 2006.
- [35] T. Sonoyama, T. Sano, T. Suzuki, K. Takahashi, T. Nomura, A. Kawasaki, A. Inoue, T. Kashiwazaki, T. Umeki, M. Yabuno, S. Miki, H. Terai, K. Takase, W. Asavanant, M. Endo, and A. Furusawa. Hybridization of pulse and continuous-wave based optical quantum computation, 2025.
- [36] U.L. Andersen, G. Leuchs, and C. Silberhorn. Continuous-variable quantum information processing. *Laser and Photonics Reviews*, 4(3):337–354, 2010.
- [37] W. H. Zhang, Y. H. Ye, L. Zeng, M. X. Dong, E. Z. Li, J. Y. Peng, Y. Li, D. S. Ding, and B. S. Shi. Telecom-wavelength conversion in a high optical depth cold atomic system. *Opt. Express*, 31(5):8042–8048, Feb 2023.
- [38] Y. Li, S. Tian, J. Zhao, G. Zhou, X. Dong, X. Gao, and X. Liu. Internal dynamic temperature measurement of alkali metal vapor cell by kalman filter. *Photonics*, 10(5), 2023.
- [39] J. A. Souza, E. Figueroa, H. Chibani, C. J. Villas-Boas, and G. Rempe. Coherent control of quantum fluctuations using cavity electromagnetically induced transparency. *Phys. Rev. Lett.*, 111:113602, Sep 2013.
- [40] S. Du, E. Oh, J. Wen, and M. H. Rubin. Four-wave mixing in three-level systems: Interference and entanglement. *Phys. Rev. A*, 76:013803, Jul 2007.
- [41] A. Lezama, S. Barreiro, and A. M. Akulshin. Electromagnetically induced absorption. *Phys. Rev. A*, 59:4732–4735, Jun 1999.
- [42] C. Goren, A. D. Wilson-Gordon, M. Rosenbluh, and H. Friedmann. Electromagnetically induced absorption due to transfer of coherence and to transfer of population. *Phys. Rev. A*, 67:033807, Mar 2003.
- [43] Y. S. Lee and H. S. Moon. Doppler-free three-photon coherence in doppler-broadened diamond-type atomic system. *Opt. Express*, 25(5):5316–5326, Mar 2017.
- [44] D. Manzano. A short introduction to the lindblad master equation. *AIP Advances*, 10(2), Feb 2020.
- [45] C. A. Brasil, F. F. Fanchini, and R. D. J. Napolitano. A simple derivation of the lindblad equation. *Revista Brasileira de Ensino de Física*, 35(1):01–09, March 2013.
- [46] D. A. Lidar. Lecture notes on the theory of open quantum systems, 2020.
- [47] N. B. Phillips, A. V. Gorshkov, and I. Novikova. Slow light propagation and amplification via electromagnetically induced transparency and four-wave mixing in an optically dense atomic vapor. *Journal of Modern Optics*, 56(18-19):1916–1925,

2009.

- [48] L. A. Lugiato, Prati F., and Brambilla M. *Nonlinear Optical Systems*. Cambridge University Press, 2015.
- [49] Qutip. <https://github.com/qutip>. accessed Mar. 19, 2026.
- [50] M. Scala, B. Militello, A. Messina, J. Piilo, and S. Maniscalco. Microscopic derivation of the jaynes-cummings model with cavity losses. *Phys. Rev. A*, 75:013811, Jan 2007.
- [51] Johansson Robert. qutip-lectures. <https://github.com/jrjohansson/qutip-lectures>, 2021. Accessed: 2025-11-11.

A Hamiltonian Formulation

The first step in Hamiltonian formulation is system definition. We are modelling a 4-level diamond system as depicted in Fig. ?? . For this system, the choice of the ground state energy is arbitrary, and all other energies can be defined in terms of their differences as $\omega_2 = \omega_1 + \omega_{12}$, $\omega_3 = \omega_1 + \omega_{13}$, and $\omega_4 = \omega_2 + \omega_{24} = \omega_3 + \omega_{34}$.

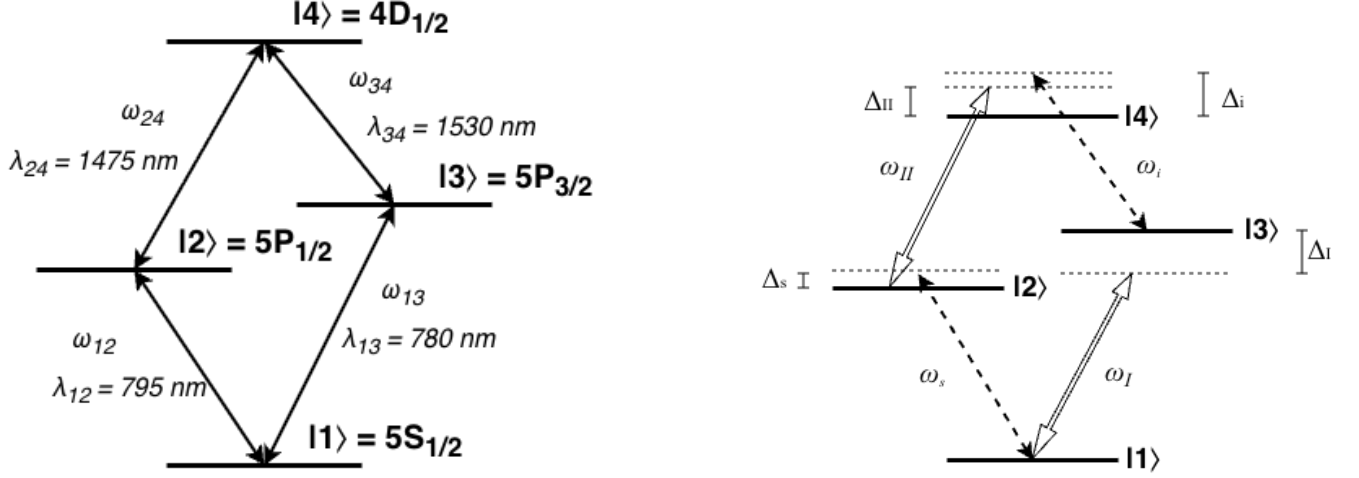


FIG. 15: Diamond configuration atom diagrams. (Left) Duplicate of Fig. ?? placed for convenience. A diamond configuration atomic system with non-degenerate energy levels $|1\rangle, |2\rangle, |3\rangle, |4\rangle$. The system has allowed transitions $|1\rangle \leftrightarrow |2\rangle$, $|1\rangle \leftrightarrow |3\rangle$, $|2\rangle \leftrightarrow |4\rangle$, and $|3\rangle \leftrightarrow |4\rangle$ with respective energies $\hbar\omega_{12}$, $\hbar\omega_{13}$, $\hbar\omega_{24}$, and $\hbar\omega_{34}$ and corresponding wavelengths λ_{12} , λ_{13} , λ_{24} , and λ_{34} . (Right) A strong pump drives transition $|1\rangle \leftrightarrow |3\rangle$ at frequency ω_I with detuning $\Delta_I = \omega_I - \omega_{13}$, a separate strong pump drives transition $|2\rangle \leftrightarrow |4\rangle$ with detuning $\Delta_{II} = \omega_{II} - \omega_{24}$, a weak signal beam drives transition $|1\rangle \leftrightarrow |2\rangle$ with detuning $\Delta_s = \omega_s - \omega_{12}$, and a weak idler field (undriven) is induced by the presence of the other fields through a FWM process, resulting in transition $|3\rangle \leftrightarrow |4\rangle$ with emission detuning $\Delta_i = \omega_i - \omega_{34}$.

These states can be described without any interactions by the simple Hamiltonian

$$\hat{H}_0 = \hbar\omega_1\hat{\sigma}_{11} + \hbar\omega_2\hat{\sigma}_{22} + \hbar\omega_3\hat{\sigma}_{33} + \hbar\omega_4\hat{\sigma}_{44} \quad (\text{A1})$$

$$= \hbar \begin{pmatrix} \omega_1 & 0 & 0 & 0 \\ 0 & \omega_2 & 0 & 0 \\ 0 & 0 & \omega_3 & 0 \\ 0 & 0 & 0 & \omega_4 \end{pmatrix} \quad (\text{A2})$$

The reason we are attempting to obtain optical squeezing in the up-converted idler field is to transmit quantum information at telecom wavelengths. Therefore, we care about the quantized fields of the signal (input carrier of quantum information) and idler (output of frequency-converted quantum information) beams. Apply the theoretical resonant cavity approximation such that we consider photons in the Fock bases of the exact frequencies of the signal and idler beams to obtain the Hamiltonian

$$\hat{H}_{photon} = \hbar\omega_{12}\hat{a}^\dagger\hat{a} + \hbar\omega_{34}\hat{b}^\dagger\hat{b} \quad (\text{A3})$$

We then have the Hamiltonian describing these separate systems as

$$\hat{H}_S = \hat{H}_0 + \hat{H}_{photon} \quad (\text{A4})$$

$$= \hbar\omega_1\hat{\sigma}_{11} + \hbar\omega_2\hat{\sigma}_{22} + \hbar\omega_3\hat{\sigma}_{33} + \hbar\omega_4\hat{\sigma}_{44} + \hbar\omega_{12}\hat{a}^\dagger\hat{a} + \hbar\omega_{34}\hat{b}^\dagger\hat{b} \quad (\text{A5})$$

Each transition is driven by a laser as depicted in Fig. ?? . These driving fields cause significant coupling between states, requiring the definition of an interaction Hamiltonian. Under the dipole approximation following the procedure used in [?], this interaction Hamiltonian takes the form **NOTE - We do things slightly different than in the Du paper. They assume the dipole elements are all real-valued and swap $\sigma_{ij} \leftrightarrow \sigma_{ji}$ without swapping phases. This does not make any sense to me and seems like a hack or a mistake. We do not do this and end up with the addition of frequencies rather than detunings for the diagonal entries. I feel more confident with this because their method**

$$\hat{H}_{Int} = -\hat{\mathbf{d}} \cdot \mathbf{E} \quad (\text{A6})$$

$$\hat{\mathbf{d}} = \vec{d}_{12}\hat{\sigma}_{12} + \vec{d}_{13}\hat{\sigma}_{13} + \vec{d}_{24}\hat{\sigma}_{24} + \vec{d}_{34}\hat{\sigma}_{34} + h.c. \quad (\text{A7})$$

$$\mathbf{E} = \vec{E}_s + \vec{E}_I + \vec{E}_{II} + \vec{E}_i \quad (\text{A8})$$

where $\vec{d}_{ij}$ is the dipole operator between states i and j , the strong pump fields $\vec{E}_I$ and $\vec{E}_{II}$ are treated as classical fields, and the weak fields $\vec{E}_s$ and $\vec{E}_i$ are treated as quantized fields. Each field can be separated into a rapidly oscillating component and a slowly-varying envelope $\vec{\varepsilon}(t)$ as

$$\vec{E}_s = \vec{\varepsilon}_s(t)\hat{a}e^{i\vec{k}_s \cdot \vec{r}} + h.c. \quad (\text{A9})$$

$$\vec{E}_I = \vec{\varepsilon}_I(t)e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} + c.c. \quad (\text{A10})$$

$$\vec{E}_{II} = \vec{\varepsilon}_{II}(t)e^{-i\omega_{II} t + i\vec{k}_{II} \cdot \vec{r}} + c.c. \quad (\text{A11})$$

$$\vec{E}_i = \vec{\varepsilon}_i(t)\hat{b}e^{i\vec{k}_i \cdot \vec{r}} + h.c. \quad (\text{A12})$$

$$(\text{A13})$$

where $\hat{a}$ is the annihilation operator for the signal field, $\hat{b}$ is that of the idler field, $\vec{k}_j$ is the wavevector for each plane wave, and $\vec{r}$ is the position at which the field is experienced by the atom.

1. Classical Field Simplification via Rotating Wave Approximation

Consider some coupled classical electric field $\vec{E}_c$ and dipole operator $\hat{d}$

$$\vec{E}_c = \vec{\varepsilon}(e^{i\phi} + e^{-i\phi}), \quad \phi = kz - \omega t \quad (\text{A14})$$

$$\hat{d} = \vec{d}_{ij}\hat{\sigma}_{ij} + \vec{d}_{ji}\hat{\sigma}_{ji} \quad (\text{A15})$$

where we may arbitrarily take $\vec{\varepsilon} = \vec{\varepsilon}^*$ and $\vec{d}_{ij} = \vec{d}_{ji}$ (real-valued vectors). We can then expand

$$\vec{E}_c \cdot \hat{d} = \vec{\varepsilon} \cdot \vec{d}_{ij} (\hat{\sigma}_{ij}e^{i\phi} + \hat{\sigma}_{ij}e^{-i\phi} + \hat{\sigma}_{ji}e^{i\phi} + \hat{\sigma}_{ji}e^{-i\phi}) \quad (\text{A16})$$

Go to the interaction picture where we have transition operators evolve as

$$\hat{\sigma}_{ij}(t) = \hat{\sigma}_{ij}e^{-i\omega_0 t} \quad (\text{A17})$$

$$\hat{\sigma}_{ji}(t) = \hat{\sigma}_{ji}e^{i\omega_0 t} \quad (\text{A18})$$

where ω_0 is the atomic transition frequency. We then have

$$\vec{E}_c \cdot \hat{d} = \vec{\varepsilon} \cdot \vec{d}_{ij} (\hat{\sigma}_{ij}e^{-i\omega_0 t}e^{i\phi} + \hat{\sigma}_{ij}e^{-i\omega_0 t}e^{-i\phi} + \hat{\sigma}_{ji}e^{i\omega_0 t}e^{i\phi} + \hat{\sigma}_{ji}e^{i\omega_0 t}e^{-i\phi})$$

$$\vec{E}_c \cdot \hat{d} = \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{\sigma}_{ij}e^{i(kz - (\omega + \omega_0)t)} + \hat{\sigma}_{ij}e^{i(-kz + (\omega - \omega_0)t)} + \hat{\sigma}_{ji}e^{i(kz - (\omega - \omega_0)t)} + \hat{\sigma}_{ji}e^{i(-kz + (\omega + \omega_0)t)} \right) \quad (\text{A19})$$

Assuming that the driving field of frequency ω is near-resonant with the transition, we may apply the rotating wave approximation. Oscillations at frequency $\omega + \omega_0$ are so rapid in comparison to those at frequency $\omega - \omega_0$ that we may neglect them as they average to zero on optical timescales. Thus, we have

$$\vec{E}_c \cdot \hat{\vec{d}} \approx \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{\sigma}_{ij} e^{i(-kz + (\omega - \omega_0)t)} + \hat{\sigma}_{ji} e^{i(kz - (\omega - \omega_0)t)} \right) \quad (\text{A20})$$

We may then go back to the Schrödinger picture of state evolution and write

$$\vec{E}_c \cdot \hat{\vec{d}} \approx \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{\sigma}_{ji} e^{i(kz - \omega t)} + \hat{\sigma}_{ij} e^{i(-kz + \omega t)} \right) \quad (\text{A21})$$

2. Quantum Field Simplification via Rotating Wave Approximation

Similar to the classical field approach, consider some coupled quantized electric field $\vec{E}_q$ and dipole operator $\hat{\vec{d}}$

$$\vec{E}_q \cdot \hat{\vec{d}} = \vec{\varepsilon} \cdot \left(\hat{a} e^{i\vec{k} \cdot \vec{r}} + \hat{a}^\dagger e^{-i\vec{k} \cdot \vec{r}} \right) \cdot \left(\vec{d}_{ij} \hat{\sigma}_{ij} + \vec{d}_{ji} \hat{\sigma}_{ji} \right) \quad (\text{A22})$$

$$= \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{a} \hat{\sigma}_{ij} e^{i\vec{k} \cdot \vec{r}} + \hat{a}^\dagger \hat{\sigma}_{ij} e^{-i\vec{k} \cdot \vec{r}} + \hat{a} \hat{\sigma}_{ji} e^{i\vec{k} \cdot \vec{r}} + \hat{a}^\dagger \hat{\sigma}_{ji} e^{-i\vec{k} \cdot \vec{r}} \right) \quad (\text{A23})$$

We again go to the interaction picture in which we have operators evolve as

$$\hat{a}(t) = \hat{a} e^{-i\omega t} \quad (\text{A24})$$

$$\hat{a}^\dagger(t) = \hat{a}^\dagger e^{i\omega t} \quad (\text{A25})$$

$$\hat{\sigma}_{ij}(t) = \hat{\sigma}_{ij} e^{-i\omega_0 t} \quad (\text{A26})$$

$$\hat{\sigma}_{ji}(t) = \hat{\sigma}_{ji} e^{i\omega_0 t} \quad (\text{A27})$$

So we have

$$\begin{aligned} \vec{E}_q \cdot \hat{\vec{d}} &= \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{a} e^{-i\omega t} e^{-i\omega_0 t} \hat{\sigma}_{ij} e^{i\vec{k} \cdot \vec{r}} + \hat{a}^\dagger e^{i\omega t} e^{-i\omega_0 t} \hat{\sigma}_{ij} e^{-i\vec{k} \cdot \vec{r}} + \hat{a} e^{-i\omega t} e^{i\omega_0 t} \hat{\sigma}_{ji} e^{i\vec{k} \cdot \vec{r}} + \hat{a}^\dagger e^{i\omega t} e^{i\omega_0 t} \hat{\sigma}_{ji} e^{-i\vec{k} \cdot \vec{r}} \right) \\ &= \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{a} e^{-i(\omega + \omega_0)t} \hat{\sigma}_{ij} e^{i\vec{k} \cdot \vec{r}} + \hat{a}^\dagger e^{-i(\omega - \omega_0)t} \hat{\sigma}_{ij} e^{-i\vec{k} \cdot \vec{r}} + \hat{a} e^{-i(\omega - \omega_0)t} \hat{\sigma}_{ji} e^{i\vec{k} \cdot \vec{r}} + \hat{a}^\dagger e^{i(\omega + \omega_0)t} \hat{\sigma}_{ji} e^{-i\vec{k} \cdot \vec{r}} \right) \end{aligned} \quad (\text{A28})$$

Then again by the rotating wave approximation we have

$$\vec{E}_q \cdot \hat{\vec{d}} = \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{a}^\dagger e^{-i(\omega - \omega_0)t} \hat{\sigma}_{ij} e^{-i\vec{k} \cdot \vec{r}} + \hat{a} e^{-i(\omega - \omega_0)t} \hat{\sigma}_{ji} e^{i\vec{k} \cdot \vec{r}} \right) \quad (\text{A29})$$

Going back to Schrödinger picture then yields

$$\vec{E}_q \cdot \hat{\vec{d}} = \vec{\varepsilon} \cdot \vec{d}_{ij} \left(\hat{a}^\dagger \hat{\sigma}_{ij} e^{-i\vec{k} \cdot \vec{r}} + \hat{a} \hat{\sigma}_{ji} e^{i\vec{k} \cdot \vec{r}} \right) \quad (\text{A30})$$

$$(\text{A31})$$

3. Hamiltonian Simplification

Putting this all together, we obtain our interaction Hamiltonian as

$$\begin{aligned} \hat{H}_{Int} &= \left(\vec{d}_{12} \cdot \vec{\varepsilon}_s(t) \hat{\sigma}_{12} \hat{a}^\dagger e^{i\vec{k}_s \cdot \vec{r}} + h.c. \right) \\ &+ \left(\vec{d}_{13} \cdot \vec{\varepsilon}_I(t) \hat{\sigma}_{13} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} + c.c. \right) \\ &+ \left(\vec{d}_{24} \cdot \vec{\varepsilon}_{II}(t) \hat{\sigma}_{24} e^{-i\omega_{II} t + i\vec{k}_{II} \cdot \vec{r}} + c.c. \right) \\ &+ \left(\vec{d}_{34} \cdot \vec{\varepsilon}_i(t) \hat{\sigma}_{34} \hat{b}^\dagger e^{i\vec{k}_i \cdot \vec{r}} + h.c. \right) \end{aligned} \quad (\text{A32})$$

The Rabi frequency (scaled by a factor of 2 here for simplicity) is the rate at which probability amplitudes between states oscillates in the presence of an electromagnetic field [?] and is defined as

$$\Omega = \frac{\vec{d} \cdot \vec{\epsilon}}{\hbar} \quad (\text{A33})$$

so we have **TODO - Quantum internet paper has g instead of Ω for weak field-atom coupling. Should we have this instead?**

$$\begin{aligned} \hat{H}_{Int} = & \left(\hbar\Omega_s(t)\hat{\sigma}_{12}\hat{a}^\dagger e^{-i\vec{k}_s \cdot \vec{r}} + h.c. \right) \\ & + \left(\hbar\Omega_I(t)\hat{\sigma}_{13}e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} + c.c. \right) \\ & + \left(\hbar\Omega_{II}(t)\hat{\sigma}_{24}e^{i\omega_{II} t - i\vec{k}_{II} \cdot \vec{r}} + c.c. \right) \\ & + \left(\hbar\Omega_i(t)\hat{\sigma}_{34}\hat{b}^\dagger e^{-i\vec{k}_i \cdot \vec{r}} + h.c. \right) \end{aligned} \quad (\text{A34})$$

where we can notice the utility of the slowly-varying envelop approximation as the Rabi oscillations change on the timescale of the envelope rather than the rapidly oscillating carrier field. This is analogous to the logic of the rotating wave approximation where the carrier field oscillates so rapidly that we can take its average effect on the dipole to be zero. This allows us to approximately separate the Rabi frequencies from the field frequencies in the above. **TODO - Check this line of reasoning with MacRae.**

Combining this with $\hat{H}_S$ we obtain a Hamiltonian coupling atomic states with the weak signal and idler fields as

$$\hat{H} = \hat{H}_S + \hat{H}_{Int} \quad (\text{A35})$$

$$\begin{aligned} & = \hbar\omega_1\hat{\sigma}_{11} + \hbar\omega_2\hat{\sigma}_{22} + \hbar\omega_3\hat{\sigma}_{33} + \hbar\omega_4\hat{\sigma}_{44} \\ & \quad + \hbar\omega_{12}\hat{a}^\dagger\hat{a} + \hbar\omega_{34}\hat{b}^\dagger\hat{b} \\ & \quad + \left(\hbar\Omega_s(t)\hat{\sigma}_{12}\hat{a}^\dagger e^{-i\vec{k}_s \cdot \vec{r}} + h.c. \right) \\ & \quad + \left(\hbar\Omega_I(t)\hat{\sigma}_{13}e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} + c.c. \right) \\ & \quad + \left(\hbar\Omega_{II}(t)\hat{\sigma}_{24}e^{i\omega_{II} t - i\vec{k}_{II} \cdot \vec{r}} + c.c. \right) \\ & \quad + \left(\hbar\Omega_i(t)\hat{\sigma}_{34}\hat{b}^\dagger e^{-i\vec{k}_i \cdot \vec{r}} + h.c. \right) \end{aligned} \quad (\text{A36})$$

Then define the unitary transformation which rotates with state $|1\rangle$ as reference

$$\hat{U}_{atom} = \hat{\sigma}_{11} + e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}}\hat{\sigma}_{22} + e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}}\hat{\sigma}_{33} + e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}}\hat{\sigma}_{44} \quad (\text{A37})$$

and the unitary transform rotating at the driving field frequencies which acts on the Fock photon bases

$$\hat{U}_{photon} = e^{-i(\omega_s\hat{a}^\dagger\hat{a} + \omega_i\hat{b}^\dagger\hat{b})t} \quad (\text{A38})$$

we then have the total unitary transformation of the coupled system as

$$\hat{U} = \hat{U}_{atom} \otimes \hat{U}_{photon} = \left(\hat{\sigma}_{11} + e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}}\hat{\sigma}_{22} + e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}}\hat{\sigma}_{33} + e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}}\hat{\sigma}_{44} \right) \otimes e^{-i(\omega_s\hat{a}^\dagger\hat{a} + \omega_i\hat{b}^\dagger\hat{b})t}. \quad (\text{A39})$$

The total Hamiltonian can then be unitarily transformed as

$$\tilde{H} = \hat{U}^\dagger \hat{H} \hat{U} + i\hbar(\partial_t \hat{U}^\dagger) \hat{U}. \quad (\text{A40})$$

Since the bases are independent in this transformation, we may compute the corresponding components independently

$$\hat{U}_{atom} = \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} & 0 & 0 \\ 0 & 0 & e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} & 0 \\ 0 & 0 & 0 & e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \end{pmatrix} \quad (A41)$$

$$\begin{aligned} \partial_t \hat{U}_{atom}^\dagger &= \partial_t \begin{pmatrix} 1 & 0 & 0 & 0 \\ 0 & e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} & 0 & 0 \\ 0 & 0 & e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} & 0 \\ 0 & 0 & 0 & e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \end{pmatrix} \\ &= \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & i\omega_s U_{22}^* & 0 & 0 \\ 0 & 0 & i\omega_I U_{33}^* & 0 \\ 0 & 0 & 0 & i(\omega_{II} + \omega_s) U_{44}^* \end{pmatrix} \end{aligned}$$

$$\begin{aligned} i\hbar(\partial_t \hat{U}_{atom}^\dagger) \hat{U}_{atom} &= i\hbar \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & i\omega_s U_{22}^* U_{22} & 0 & 0 \\ 0 & 0 & i\omega_I U_{33}^* U_{33} & 0 \\ 0 & 0 & 0 & i(\omega_{II} + \omega_s) U_{44}^* U_{44} \end{pmatrix} \\ &= \hbar \begin{pmatrix} 0 & 0 & 0 & 0 \\ 0 & -\omega_s & 0 & 0 \\ 0 & 0 & -\omega_I & 0 \\ 0 & 0 & 0 & -(\omega_{II} + \omega_s) \end{pmatrix} \\ &= -\hbar\omega_s \hat{\sigma}_{22} - \hbar\omega_I \hat{\sigma}_{33} - \hbar(\omega_{II} + \omega_s) \hat{\sigma}_{44} \end{aligned} \quad (A42)$$

$$\partial_t \hat{U}_{photon}^\dagger = i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b}) e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t}$$

$$\begin{aligned} i\hbar(\partial_t \hat{U}_{photon}^\dagger) \hat{U}_{photon} &= i^2 \hbar(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b}) e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \\ &= -\hbar(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b}) \end{aligned} \quad (A43)$$

$$i\hbar(\partial_t \hat{U}^\dagger) \hat{U} = -\hbar\omega_s \hat{\sigma}_{22} - \hbar\omega_I \hat{\sigma}_{33} - \hbar(\omega_{II} + \omega_s) \hat{\sigma}_{44} - \hbar\omega_s \hat{a}^\dagger \hat{a} - \hbar\omega_i \hat{b}^\dagger \hat{b} \quad (A44)$$

Then expanding the other term we have

$$\begin{aligned} \hat{U}^\dagger \hat{H} \hat{U} &= \left(\hat{\sigma}_{11} + e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \otimes e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \\ &\cdot \left[\hbar\omega_1 \hat{\sigma}_{11} + \hbar\omega_2 \hat{\sigma}_{22} + \hbar\omega_3 \hat{\sigma}_{33} + \hbar\omega_4 \hat{\sigma}_{44} \right. \\ &\quad + \hbar\omega_{12} \hat{a}^\dagger \hat{a} + \hbar\omega_{34} \hat{b}^\dagger \hat{b} \\ &\quad + \hbar \left(\Omega_s(t) \hat{\sigma}_{12} \hat{a}^\dagger e^{-i\vec{k}_s \cdot \vec{r}} + \Omega_s^*(t) \hat{\sigma}_{21} \hat{a} e^{i\vec{k}_s \cdot \vec{r}} \right) \\ &\quad + \hbar \left(\Omega_I(t) \hat{\sigma}_{13} e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} + \Omega_I^*(t) \hat{\sigma}_{31} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \right) \\ &\quad + \hbar \left(\Omega_{II}(t) \hat{\sigma}_{24} e^{i\omega_{II} t - i\vec{k}_{II} \cdot \vec{r}} + \Omega_{II}^*(t) \hat{\sigma}_{42} e^{-i\omega_{II} t + i\vec{k}_{II} \cdot \vec{r}} \right) \Big] \\ &\quad + \hbar \left(\Omega_i(t) \hat{\sigma}_{34} \hat{b}^\dagger e^{-i\vec{k}_i \cdot \vec{r}} + \Omega_i^*(t) \hat{\sigma}_{43} \hat{b} e^{i\vec{k}_i \cdot \vec{r}} \right) \\ &\cdot \left(\hat{\sigma}_{11} + e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \otimes e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \end{aligned} \quad (A45)$$

Since $\hat{U}_{atom}$ commutes with $\hat{U}_{photon}$, and $\hat{U}_{atom}$ commutes with $\hat{H}_{photon}$ such that

$$\hat{U}_{atom}^\dagger \hat{H}_{photon} \hat{U}_{atom} = \hat{U}_{atom}^\dagger \hat{U}_{atom} \hat{H}_{photon} = \hat{H}_{photon} \quad (\text{A46})$$

we have

$$\begin{aligned} \frac{\hat{U}^\dagger \hat{H} \hat{U}}{\hbar} &= e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \\ &\quad \otimes \left(\hat{\sigma}_{11} + e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \\ &\quad \cdot \left[\omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \right. \\ &\quad + \omega_{12} \hat{a}^\dagger \hat{a} + \omega_{34} \hat{b}^\dagger \hat{b} \\ &\quad + \left(\Omega_s(t) \hat{\sigma}_{12} \hat{a}^\dagger e^{-i\vec{k}_s \cdot \vec{r}} + \Omega_s^*(t) \hat{\sigma}_{21} \hat{a} e^{i\vec{k}_s \cdot \vec{r}} \right) \\ &\quad + \left(\Omega_I(t) \hat{\sigma}_{13} e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} + \Omega_I^*(t) \hat{\sigma}_{31} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \right) \\ &\quad + \left(\Omega_{II}(t) \hat{\sigma}_{24} e^{i\omega_{II} t - i\vec{k}_{II} \cdot \vec{r}} + \Omega_{II}^*(t) \hat{\sigma}_{42} e^{-i\omega_{II} t + i\vec{k}_{II} \cdot \vec{r}} \right) \\ &\quad \left. + \left(\Omega_i(t) \hat{\sigma}_{34} \hat{b}^\dagger e^{-i\vec{k}_i \cdot \vec{r}} + \Omega_i^*(t) \hat{\sigma}_{43} \hat{b} e^{i\vec{k}_i \cdot \vec{r}} \right) \right] \\ &\quad \cdot \left(\hat{\sigma}_{11} + e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \\ &\quad \otimes e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \\ &\quad + e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \left(\omega_{12} \hat{a}^\dagger \hat{a} + \omega_{34} \hat{b}^\dagger \hat{b} \right) e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \end{aligned} \quad (\text{A47})$$

Separate the terms as

$$\begin{aligned} \hat{A} &= \left(\hat{\sigma}_{11} + e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \\ &\quad \cdot \left[\omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \right. \\ &\quad + \omega_{12} \hat{a}^\dagger \hat{a} + \omega_{34} \hat{b}^\dagger \hat{b} \\ &\quad + \left(\Omega_s(t) \hat{\sigma}_{12} \hat{a}^\dagger e^{-i\vec{k}_s \cdot \vec{r}} + \Omega_s^*(t) \hat{\sigma}_{21} \hat{a} e^{i\vec{k}_s \cdot \vec{r}} \right) \\ &\quad + \left(\Omega_I(t) \hat{\sigma}_{13} e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} + \Omega_I^*(t) \hat{\sigma}_{31} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \right) \\ &\quad + \left(\Omega_{II}(t) \hat{\sigma}_{24} e^{i\omega_{II} t - i\vec{k}_{II} \cdot \vec{r}} + \Omega_{II}^*(t) \hat{\sigma}_{42} e^{-i\omega_{II} t + i\vec{k}_{II} \cdot \vec{r}} \right) \\ &\quad \left. + \left(\Omega_i(t) \hat{\sigma}_{34} \hat{b}^\dagger e^{-i\vec{k}_i \cdot \vec{r}} + \Omega_i^*(t) \hat{\sigma}_{43} \hat{b} e^{i\vec{k}_i \cdot \vec{r}} \right) \right] \\ &\quad \cdot \left(\hat{\sigma}_{11} + e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \end{aligned} \quad (\text{A48})$$

$$\hat{B} = e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \hat{A} e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \quad (\text{A49})$$

$$\hat{C} = \left(e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \right) \left(\omega_{12} \hat{a}^\dagger \hat{a} + \omega_{34} \hat{b}^\dagger \hat{b} \right) \left(e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \right) \quad (\text{A50})$$

Let us compute $\hat{A}$ using the facts that

$$\hat{\sigma}_{ij} \hat{\sigma}_{kl} = \hat{\sigma}_{il} \hat{\sigma}_{jk}, \quad (\text{A51})$$

$$\hat{\sigma}_{ij}\hat{\sigma}_{jk}\hat{\sigma}_{kl} = \hat{\sigma}_{il}, \quad (\text{A52})$$

and

$$[\hat{\sigma}_{ij}, \hat{a}] = [\hat{\sigma}_{ij}, \hat{a}^\dagger] = [\hat{\sigma}_{ij}, \hat{b}] = [\hat{\sigma}_{ij}, \hat{b}^\dagger] = 0. \quad (\text{A53})$$

First notice that

$$\begin{aligned} & \left(\hat{\sigma}_{11} + e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \\ & \cdot \left[\omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \right] \\ & \cdot \left(\hat{\sigma}_{11} + e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \end{aligned} \quad (\text{A54})$$

$$= \left[\omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \right] \quad (\text{A55})$$

So we have

$$\begin{aligned} \hat{A} &= \omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \\ &+ \left(\hat{\sigma}_{11} + e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \\ &\cdot \left[\left(\Omega_s(t) \hat{\sigma}_{12} \hat{a}^\dagger e^{-i\vec{k}_s \cdot \vec{r}} + \Omega_s^*(t) \hat{\sigma}_{21} \hat{a} e^{i\vec{k}_s \cdot \vec{r}} \right) \right. \\ &+ \left(\Omega_I(t) \hat{\sigma}_{13} e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} + \Omega_I^*(t) \hat{\sigma}_{31} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \right) \\ &+ \left(\Omega_{II}(t) \hat{\sigma}_{24} e^{i\omega_{II} t - i\vec{k}_{II} \cdot \vec{r}} + \Omega_{II}^*(t) \hat{\sigma}_{42} e^{-i\omega_{II} t + i\vec{k}_{II} \cdot \vec{r}} \right) \\ &\left. + \left(\Omega_i(t) \hat{\sigma}_{34} \hat{b}^\dagger e^{-i\vec{k}_i \cdot \vec{r}} + \Omega_i^*(t) \hat{\sigma}_{43} \hat{b} e^{i\vec{k}_i \cdot \vec{r}} \right) \right] \\ &\cdot \left(\hat{\sigma}_{11} + e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} + e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} + e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \right) \\ &= \omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \\ &+ \left(\Omega_s(t) \hat{\sigma}_{11} \hat{\sigma}_{12} \hat{\sigma}_{22} e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} \hat{a}^\dagger e^{-i\vec{k}_s \cdot \vec{r}} + \Omega_s^*(t) e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} \hat{\sigma}_{21} \hat{\sigma}_{11} \hat{a} e^{i\vec{k}_s \cdot \vec{r}} \right) \\ &+ \left(\Omega_I(t) \hat{\sigma}_{11} \hat{\sigma}_{13} \hat{\sigma}_{33} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} + \Omega_I^*(t) e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} \hat{\sigma}_{31} \hat{\sigma}_{11} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \right) \\ &+ \left(\Omega_{II}(t) e^{i\omega_s t - i\vec{k}_s \cdot \vec{r}} \hat{\sigma}_{22} \hat{\sigma}_{24} \hat{\sigma}_{44} e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} e^{i\omega_{II} t - i\vec{k}_{II} \cdot \vec{r}} \right. \\ &\quad \left. + \Omega_{II}^*(t) e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \hat{\sigma}_{42} \hat{\sigma}_{22} e^{-i\omega_s t + i\vec{k}_s \cdot \vec{r}} e^{-i\omega_{II} t + i\vec{k}_{II} \cdot \vec{r}} \right) \\ &+ \left(\Omega_i(t) e^{i\omega_I t - i\vec{k}_I \cdot \vec{r}} \hat{\sigma}_{33} \hat{\sigma}_{34} \hat{\sigma}_{44} e^{-i(\omega_{II} + \omega_s)t + i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{b}^\dagger e^{-i\vec{k}_i \cdot \vec{r}} \right. \\ &\quad \left. + \Omega_i^*(t) e^{i(\omega_{II} + \omega_s)t - i(\vec{k}_{II} + \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{44} \hat{\sigma}_{43} \hat{\sigma}_{33} e^{-i\omega_I t + i\vec{k}_I \cdot \vec{r}} \hat{b} e^{i\vec{k}_i \cdot \vec{r}} \right) \\ &= \omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \\ &+ \left(\Omega_s(t) e^{-i\omega_s t} \hat{\sigma}_{12} \hat{a}^\dagger + \Omega_s^*(t) e^{i\omega_s t} \hat{\sigma}_{21} \hat{a} \right) \\ &+ \left(\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31} \right) \\ &+ \left(\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42} \right) \\ &+ \left(\Omega_i(t) e^{i(\omega_I - \omega_{II} - \omega_s)t - i(\vec{k}_I + \vec{k}_i - \vec{k}_{II} - \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{34} \hat{b}^\dagger + \Omega_i^*(t) e^{-i(\omega_{II} + \omega_s - \omega_I)t + i(\vec{k}_I + \vec{k}_i - \vec{k}_{II} - \vec{k}_s) \cdot \vec{r}} \hat{\sigma}_{43} \hat{b} \right) \end{aligned} \quad (\text{A56})$$

We can then impose the energy conservation condition and phase match condition (in that order as follows)

$$\omega_I + \omega_i = \omega_s + \omega_{II} \quad (\text{A57})$$

$$k_I + k_i = k_s + k_{II} \quad (\text{A58})$$

$$\begin{aligned} \hat{A} = & \omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \\ & + (\Omega_s(t) e^{-i\omega_s t} \hat{\sigma}_{12} \hat{a}^\dagger + \Omega_s^*(t) e^{i\omega_s t} \hat{\sigma}_{21} \hat{a}) \\ & + (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\ & + (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\ & + (\Omega_i(t) e^{-i\omega_i t} \hat{\sigma}_{34} \hat{b}^\dagger + \Omega_i^*(t) e^{i\omega_i t} \hat{\sigma}_{43} \hat{b}) \end{aligned} \quad (\text{A59})$$

Now we may compute $\hat{B}$ from Eq. (??) as

$$\begin{aligned} \hat{B} = & e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \hat{A} e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \\ = & e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \\ & \cdot \left[\omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \right. \\ & + (\Omega_s(t) e^{-i\omega_s t} \hat{\sigma}_{12} \hat{a}^\dagger + \Omega_s^*(t) e^{i\omega_s t} \hat{\sigma}_{21} \hat{a}) \\ & + (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\ & + (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\ & \left. + (\Omega_i(t) e^{-i\omega_i t} \hat{\sigma}_{34} \hat{b}^\dagger + \Omega_i^*(t) e^{i\omega_i t} \hat{\sigma}_{43} \hat{b}) \right] \\ & \cdot e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b})t} \end{aligned} \quad (\text{A60})$$

which, via commutation relations, simplifies to

$$\begin{aligned} \hat{B} = & \omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \\ & + (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\ & + (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\ & + e^{i\omega_s \hat{a}^\dagger \hat{a} t} (\Omega_s(t) e^{-i\omega_s t} \hat{\sigma}_{12} \hat{a} + \Omega_s^*(t) e^{i\omega_s t} \hat{\sigma}_{21} \hat{a}^\dagger) e^{-i\omega_s \hat{a}^\dagger \hat{a} t} \\ & + e^{i\omega_i \hat{b}^\dagger \hat{b} t} (\Omega_i(t) e^{-i\omega_i t} \hat{\sigma}_{34} \hat{b} + \Omega_i^*(t) e^{i\omega_i t} \hat{\sigma}_{43} \hat{b}^\dagger) e^{-i\omega_i \hat{b}^\dagger \hat{b} t} \end{aligned} \quad (\text{A61})$$

We must then compute

$$e^{i\omega_s \hat{a}^\dagger \hat{a} t} \hat{a} e^{-i\omega_s \hat{a}^\dagger \hat{a} t} \quad (\text{A62})$$

which we can do via the Baker-Campbell-Hausdorff formula

$$e^{\hat{X}} \hat{Y} e^{-\hat{X}} = \sum_{n=0}^{\infty} \frac{[X, Y]_n}{n!} = Y + [X, Y] + \frac{1}{2!} [X, [X, Y]] + \dots \quad (\text{A63})$$

where

$$[X, Y]_n = \underbrace{[X, [X, \dots, [X, [X, Y]], \dots]]}_{n \text{ times}} \quad (\text{A64})$$

$$\begin{aligned}
e^{i\omega_s \hat{a}^\dagger \hat{a} t} \hat{a} e^{-i\omega_s \hat{a}^\dagger \hat{a} t} &= \sum_{n=0}^{\infty} \frac{[i\omega_s \hat{a}^\dagger \hat{a} t, \hat{a}]_n}{n!} \\
e^{i\omega_s \hat{a}^\dagger \hat{a} t} \hat{a} e^{-i\omega_s \hat{a}^\dagger \hat{a} t} &= \sum_{n=0}^{\infty} \frac{[i\omega_s \hat{a}^\dagger \hat{a} t, \hat{a}]_n}{n!} \\
&= \hat{a} + [i\omega_s \hat{a}^\dagger \hat{a} t, \hat{a}] + \frac{1}{2!} [i\omega_s \hat{a}^\dagger \hat{a} t, [i\omega_s \hat{a}^\dagger \hat{a} t, \hat{a}]] + \frac{1}{3!} [i\omega_s \hat{a}^\dagger \hat{a} t, [i\omega_s \hat{a}^\dagger \hat{a} t, [i\omega_s \hat{a}^\dagger \hat{a} t, \hat{a}]]] + \dots \\
&= \hat{a} + i\omega_s t [\hat{a}^\dagger \hat{a}, \hat{a}] + \frac{(i\omega_s t)^2}{2!} [\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, \hat{a}]] + \frac{(i\omega_s t)^3}{3!} [\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, \hat{a}]]] + \dots
\end{aligned} \tag{A65}$$

To move forward we must then compute the commutators

$$[\hat{a}^\dagger \hat{a}, \hat{a}] = \hat{a}^\dagger \hat{a} \hat{a} - \hat{a} \hat{a}^\dagger \hat{a}$$

use the commutation relation

$$\begin{aligned}
[\hat{a}, \hat{a}^\dagger] &= \hat{a} \hat{a}^\dagger - \hat{a}^\dagger \hat{a} = 1 \\
\hat{a} \hat{a}^\dagger &= 1 + \hat{a}^\dagger \hat{a}
\end{aligned} \tag{A66}$$

to obtain

$$\begin{aligned}
[\hat{a}^\dagger \hat{a}, \hat{a}] &= \hat{a}^\dagger \hat{a} \hat{a} - (1 + \hat{a}^\dagger \hat{a}) \hat{a} \\
&= \hat{a}^\dagger \hat{a} \hat{a} - \hat{a} - \hat{a}^\dagger \hat{a} \hat{a} \\
&= -\hat{a}
\end{aligned} \tag{A67}$$

Then we have that

$$\begin{aligned}
[\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, \hat{a}]] &= [\hat{a}^\dagger \hat{a}, -\hat{a}] \\
&= -[\hat{a}^\dagger \hat{a}, \hat{a}] \\
&= \hat{a}
\end{aligned} \tag{A68}$$

Assume this pattern holds until the k^{th} application

$$[\hat{a}^\dagger \hat{a}, \hat{a}]_k = (-1)^k \hat{a} \quad (\text{Induction Hypothesis}) \tag{A69}$$

then consider the $(k+1)^{th}$ step

$$\begin{aligned}
[\hat{a}^\dagger \hat{a}, \hat{a}]_{k+1} &= [\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, \hat{a}]_k] \\
&= [\hat{a}^\dagger \hat{a}, (-1)^k \hat{a}] \\
&= (-1)^k [\hat{a}^\dagger \hat{a}, \hat{a}] \\
&= (-1)^k (-\hat{a}) \\
&= (-1)^{k+1} \hat{a}
\end{aligned}$$

Thus, by induction we have that

$$[\hat{a}^\dagger \hat{a}, \hat{a}]_n = (-1)^n \hat{a} \tag{A70}$$

So we may write

$$\begin{aligned}
e^{i\omega_s \hat{a}^\dagger \hat{a} t} \hat{a} e^{-i\omega_s \hat{a}^\dagger \hat{a} t} &= \hat{a} + i\omega_s t [\hat{a}^\dagger \hat{a}, \hat{a}] + \frac{(i\omega_s t)^2}{2!} [\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, \hat{a}]] + \frac{(i\omega_s t)^3}{3!} [\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, [\hat{a}^\dagger \hat{a}, \hat{a}]]] + \dots \\
&= \hat{a} + i\omega_s t (-\hat{a}) + \frac{(i\omega_s t)^2}{2!} (\hat{a}) + \frac{(i\omega_s t)^3}{3!} (-\hat{a}) + \dots \\
&= \hat{a} \left(1 - i\omega_s t + \frac{(i\omega_s t)^2}{2!} - \frac{(i\omega_s t)^3}{3!} + \dots \right) \\
&= \hat{a} \left(1 + (-i\omega_s t) + \frac{(-i\omega_s t)^2}{2!} + \frac{(-i\omega_s t)^3}{3!} + \dots \right) \\
&= \hat{a} \sum_{n=0}^{\infty} \frac{(-i\omega_s t)^n}{n!} \\
&= \hat{a} e^{-i\omega_s t}
\end{aligned} \tag{A71}$$

Then we can find

$$\begin{aligned}
(\hat{a}e^{-i\omega_s t})^\dagger &= (e^{i\omega_s \hat{a}^\dagger \hat{a} t} \hat{a} e^{-i\omega_s \hat{a}^\dagger \hat{a} t})^\dagger \\
\hat{a}^\dagger e^{i\omega_s t} &= \left(e^{-i\omega_s \hat{a}^\dagger \hat{a} t} \right)^\dagger \hat{a}^\dagger \left(e^{i\omega_s \hat{a}^\dagger \hat{a} t} \right)^\dagger \\
\hat{a}^\dagger e^{i\omega_s t} &= e^{i\omega_s (\hat{a}^\dagger \hat{a})^\dagger t} \hat{a}^\dagger e^{i\omega_s (\hat{a}^\dagger \hat{a})^\dagger t} \\
\hat{a}^\dagger e^{i\omega_s t} &= e^{i\omega_s \hat{a}^\dagger (\hat{a}^\dagger)^\dagger t} \hat{a}^\dagger e^{i\omega_s \hat{a}^\dagger (\hat{a}^\dagger)^\dagger t} \\
\hat{a}^\dagger e^{i\omega_s t} &= e^{i\omega_s \hat{a}^\dagger \hat{a} t} \hat{a}^\dagger e^{-i\omega_s \hat{a}^\dagger \hat{a} t}
\end{aligned} \tag{A72}$$

Similarly

$$e^{i\omega_i \hat{b}^\dagger \hat{b} t} \hat{b} e^{-i\omega_i \hat{b}^\dagger \hat{b} t} = \hat{b} e^{-i\omega_i t} \tag{A73}$$

$$e^{i\omega_i \hat{b}^\dagger \hat{b} t} \hat{b}^\dagger e^{-i\omega_i \hat{b}^\dagger \hat{b} t} = \hat{b}^\dagger e^{i\omega_i t} \tag{A74}$$

So we can simplify Eq. (??) to

$$\begin{aligned}
\hat{B} &= \omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \\
&+ (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\
&+ (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\
&+ (\Omega_s(t) e^{-i\omega_s t} \hat{\sigma}_{12} \hat{a}^\dagger e^{i\omega_s t} + \Omega_s^*(t) e^{i\omega_s t} \hat{\sigma}_{21} \hat{a} e^{-i\omega_s t}) \\
&+ \left(\Omega_i(t) e^{-i\omega_i t} \hat{\sigma}_{34} \hat{b}^\dagger e^{i\omega_i t} + \Omega_i^*(t) e^{i\omega_i t} \hat{\sigma}_{43} \hat{b} e^{-i\omega_i t} \right)
\end{aligned}$$

$$\begin{aligned}
\hat{B} &= \omega_1 \hat{\sigma}_{11} + \omega_2 \hat{\sigma}_{22} + \omega_3 \hat{\sigma}_{33} + \omega_4 \hat{\sigma}_{44} \\
&+ (\Omega_s(t) \hat{a}^\dagger \hat{\sigma}_{12} + \Omega_s^*(t) \hat{a} \hat{\sigma}_{21}) \\
&+ (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\
&+ (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\
&+ \left(\Omega_i(t) \hat{b}^\dagger \hat{\sigma}_{34} + \Omega_i^*(t) \hat{b} \hat{\sigma}_{43} \right)
\end{aligned} \tag{A75}$$

$$\hat{B} = \begin{pmatrix} \omega_1 & \Omega_s(t) \hat{a}^\dagger & \Omega_I(t) & 0 \\ \Omega_s^*(t) \hat{a} & \omega_2 & 0 & \Omega_{II}(t) \\ \Omega_I^*(t) & 0 & \omega_3 & \Omega_i(t) \hat{b}^\dagger \\ 0 & \Omega_{II}^*(t) & \Omega_i^*(t) \hat{b} & \omega_4 \end{pmatrix} \tag{A76}$$

Now consider the next component from Eq. (??)

$$\begin{aligned}
\hat{C} &= \left(e^{i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b}) t} \right) \left(\omega_{12} \hat{a}^\dagger \hat{a} + \omega_{34} \hat{b}^\dagger \hat{b} \right) \left(e^{-i(\omega_s \hat{a}^\dagger \hat{a} + \omega_i \hat{b}^\dagger \hat{b}) t} \right) \\
&= \omega_{12} e^{i\omega_s \hat{a}^\dagger \hat{a} t} \hat{a}^\dagger \hat{a} e^{-i\omega_s \hat{a}^\dagger \hat{a} t} + \omega_{34} e^{i\omega_i \hat{b}^\dagger \hat{b} t} \hat{b}^\dagger \hat{b} e^{-i\omega_i \hat{b}^\dagger \hat{b} t}
\end{aligned} \tag{A77}$$

using the commutation relation for the distinct fields

$$[\hat{a}^\dagger \hat{a}, \hat{b}^\dagger \hat{b}] = 0 \tag{A78}$$

Then we may expand the exponentials as

$$\begin{aligned}
e^{i\omega\hat{a}^\dagger\hat{a}t}\hat{a}^\dagger\hat{a}e^{-i\omega\hat{a}^\dagger\hat{a}t} &= \left[\sum_{n=0}^{\infty} \frac{(i\omega\hat{a}^\dagger\hat{a}t)^n}{n!} \right] \hat{a}^\dagger\hat{a} \left[\sum_{n=0}^{\infty} \frac{(-i\omega\hat{a}^\dagger\hat{a}t)^n}{n!} \right] \\
&= \left[\sum_{n=0}^{\infty} \frac{(i\omega t)^n (\hat{a}^\dagger\hat{a})^{n+1}}{n!} \right] \left[\sum_{n=0}^{\infty} \frac{(-i\omega\hat{a}^\dagger\hat{a}t)^n}{n!} \right] \\
&= \hat{a}^\dagger\hat{a} \left[\sum_{n=0}^{\infty} \frac{(i\omega\hat{a}^\dagger\hat{a}t)^n}{n!} \right] \left[\sum_{n=0}^{\infty} \frac{(-i\omega\hat{a}^\dagger\hat{a}t)^n}{n!} \right] \\
&= \hat{a}^\dagger\hat{a} e^{i\omega\hat{a}^\dagger\hat{a}t} e^{-i\omega\hat{a}^\dagger\hat{a}t} \\
&= \hat{a}^\dagger\hat{a}
\end{aligned} \tag{A79}$$

which follows similarly for

$$e^{i\omega\hat{b}^\dagger\hat{b}t}\hat{b}^\dagger\hat{b}e^{-i\omega\hat{b}^\dagger\hat{b}t} = \hat{b}^\dagger\hat{b} \tag{A80}$$

yielding

$$\hat{C} = \omega_{12}\hat{a}^\dagger\hat{a} + \omega_{34}\hat{b}^\dagger\hat{b} \tag{A81}$$

Thus, we have

$$\begin{aligned}
\frac{\hat{U}^\dagger \hat{H} \hat{U}}{\hbar} &= \hat{B} + \hat{C} \\
&= \omega_1\hat{\sigma}_{11} + \omega_2\hat{\sigma}_{22} + \omega_3\hat{\sigma}_{33} + \omega_4\hat{\sigma}_{44} \\
&\quad + (\Omega_s(t)\hat{a}^\dagger\hat{\sigma}_{12} + \Omega_s^*(t)\hat{a}\hat{\sigma}_{21}) \\
&\quad + (\Omega_I(t)\hat{\sigma}_{13} + \Omega_I^*(t)\hat{\sigma}_{31}) \\
&\quad + (\Omega_{II}(t)\hat{\sigma}_{24} + \Omega_{II}^*(t)\hat{\sigma}_{42}) \\
&\quad + (\Omega_i(t)\hat{b}^\dagger\hat{\sigma}_{34} + \Omega_i^*(t)\hat{b}\hat{\sigma}_{43}) \\
&\quad + \omega_{12}\hat{a}^\dagger\hat{a} + \omega_{34}\hat{b}^\dagger\hat{b}
\end{aligned} \tag{A82}$$

Then we have the unitary transformation as

$$\begin{aligned}
\tilde{H} &= \hat{U}^\dagger \hat{H} \hat{U} + i\hbar(\partial_t \hat{U}^\dagger)\hat{U} \\
&= \hbar \left[\omega_1\hat{\sigma}_{11} + \omega_2\hat{\sigma}_{22} + \omega_3\hat{\sigma}_{33} + \omega_4\hat{\sigma}_{44} \right. \\
&\quad + (\Omega_s(t)\hat{a}^\dagger\hat{\sigma}_{12} + \Omega_s^*(t)\hat{a}\hat{\sigma}_{21}) \\
&\quad + (\Omega_I(t)\hat{\sigma}_{13} + \Omega_I^*(t)\hat{\sigma}_{31}) \\
&\quad + (\Omega_{II}(t)\hat{\sigma}_{24} + \Omega_{II}^*(t)\hat{\sigma}_{42}) \\
&\quad + (\Omega_i(t)\hat{b}^\dagger\hat{\sigma}_{34} + \Omega_i^*(t)\hat{b}\hat{\sigma}_{43}) \\
&\quad \left. + \omega_{12}\hat{a}^\dagger\hat{a} + \omega_{34}\hat{b}^\dagger\hat{b} \right] \\
&\quad + \hbar \left[-\omega_s\hat{\sigma}_{22} - \omega_I\hat{\sigma}_{33} - (\omega_{II} + \omega_s)\hat{\sigma}_{44} - \omega_s\hat{a}^\dagger\hat{a} - \omega_i\hat{b}^\dagger\hat{b} \right]
\end{aligned}$$

$$\begin{aligned}
\tilde{H} = \hbar & \left[\omega_1 \hat{\sigma}_{11} + (\omega_2 - \omega_s) \hat{\sigma}_{22} + (\omega_3 - \omega_I) \hat{\sigma}_{33} + (\omega_4 - \omega_{II} + \omega_s) \hat{\sigma}_{44} \right. \\
& + (\Omega_s(t) \hat{a}^\dagger \hat{\sigma}_{12} + \Omega_s^*(t) \hat{a} \hat{\sigma}_{21}) \\
& + (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\
& + (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\
& + (\Omega_i(t) \hat{b}^\dagger \hat{\sigma}_{34} + \Omega_i^*(t) \hat{b} \hat{\sigma}_{43}) \\
& \left. + (\omega_{12} - \omega_s) \hat{a}^\dagger \hat{a} + (\omega_{34} - \omega_i) \hat{b}^\dagger \hat{b} \right] \tag{A83}
\end{aligned}$$

We can then choose to arbitrarily shift the energy levels of the Hamiltonian by

$$\begin{aligned}
\tilde{H} & \rightarrow \tilde{H} - \hbar \omega_1 \hat{\mathbb{1}} \\
& \rightarrow \hbar \left[(\omega_2 - \omega_1 - \omega_s) \hat{\sigma}_{22} + (\omega_3 - \omega_1 - \omega_I) \hat{\sigma}_{33} + (\omega_4 - \omega_1 - \omega_{II} - \omega_s) \hat{\sigma}_{44} \right. \\
& + (\Omega_s(t) \hat{a}^\dagger \hat{\sigma}_{12} + \Omega_s^*(t) \hat{a} \hat{\sigma}_{21}) \\
& + (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\
& + (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\
& + (\Omega_i(t) \hat{b}^\dagger \hat{\sigma}_{34} + \Omega_i^*(t) \hat{b} \hat{\sigma}_{43}) \\
& \left. + (\omega_{12} - \omega_s) \hat{a}^\dagger \hat{a} + (\omega_{34} - \omega_i) \hat{b}^\dagger \hat{b} \right] \tag{A84}
\end{aligned}$$

Apply the relations

$$\omega_{12} = \omega_2 - \omega_1 \tag{A85}$$

$$\omega_{13} = \omega_3 - \omega_1 \tag{A86}$$

$$\omega_{24} = \omega_4 - \omega_2 \tag{A87}$$

$$\omega_{34} = \omega_4 - \omega_3 \tag{A88}$$

$$\Delta_s = \omega_{12} - \omega_s \tag{A89}$$

$$\Delta_I = \omega_{13} - \omega_I \tag{A90}$$

$$\Delta_{II} = \omega_{24} - \omega_{II} \tag{A91}$$

$$\Delta_i = \omega_{34} - \omega_i \tag{A92}$$

$$\tag{A93}$$

we have

$$\begin{aligned}
\omega_{34} + \omega_{13} & = (\omega_4 - \omega_3) + (\omega_3 - \omega_1) \\
& = \omega_4 - \omega_1 \tag{A94}
\end{aligned}$$

$$\begin{aligned}
\tilde{H} = \hbar & \left[\Delta_s \hat{\sigma}_{22} + \Delta_I \hat{\sigma}_{33} + (\Delta_{II} + \Delta_s) \hat{\sigma}_{44} \right. \\
& + (\Omega_s(t) \hat{a}^\dagger \hat{\sigma}_{12} + \Omega_s^*(t) \hat{a} \hat{\sigma}_{21}) \\
& + (\Omega_I(t) \hat{\sigma}_{13} + \Omega_I^*(t) \hat{\sigma}_{31}) \\
& + (\Omega_{II}(t) \hat{\sigma}_{24} + \Omega_{II}^*(t) \hat{\sigma}_{42}) \\
& + (\Omega_i(t) \hat{b}^\dagger \hat{\sigma}_{34} + \Omega_i^*(t) \hat{b} \hat{\sigma}_{43}) \\
& \left. + \Delta_s \hat{a}^\dagger \hat{a} + \Delta_i \hat{b}^\dagger \hat{b} \right] \tag{A95}
\end{aligned}$$

$$\tilde{H} = \hbar \begin{pmatrix} 0 & \Omega_s(t)\hat{a}^\dagger & \Omega_I(t) & 0 \\ \Omega_s^*(t)\hat{a} & \Delta_s & 0 & \Omega_{II}(t) \\ \Omega_I^*(t) & 0 & \Delta_I & \Omega_i(t)\hat{b}^\dagger \\ 0 & \Omega_{II}^*(t) & \Omega_i^*(t)\hat{b} & \Delta_{II} + \Delta_s \end{pmatrix} + \hbar\Delta_s\hat{a}^\dagger\hat{a} + \hbar\Delta_i\hat{b}^\dagger\hat{b} \quad (\text{A96})$$

B Maxwell-Bloch Equation Derivation

TODO - THE WORRYING DERIVATIVE GOES TO ZERO AS WE USE A STEADY STATE!! WE'RE GOOD
 I am confused here. Operator time evolution in the Heisenberg picture is

$$\frac{d}{dt}A_H(t) = \frac{i}{\hbar} [H_H(t), A_H(t)] + \left(\frac{\partial A_S}{\partial t} \right)_H \quad (\text{B1})$$

We would want to do this with the weak quantized electric fields $\hat{\vec{E}}_s(t) = \vec{\varepsilon}_s(t)\hat{a}e^{i\vec{k}_s \cdot \vec{r}} + h.c.$, so we would have

$$\left(\frac{\partial \hat{\vec{E}}_s}{\partial t} \right)_H = \left(\hat{a}e^{i\vec{k}_s \cdot \vec{r}} \frac{\partial \vec{\varepsilon}_s(t)}{\partial t} + h.c. \right)_H \quad (\text{B2})$$

So we end up with

$$\frac{d}{dt}\hat{\vec{E}}_{H,s}(t) = \frac{i}{\hbar} [\tilde{H}(t), \hat{\vec{E}}_{H,s}(t)] + \left(\hat{a}e^{i\vec{k}_s \cdot \vec{r}} \frac{\partial \vec{\varepsilon}_s(t)}{\partial t} + h.c. \right)_H \quad (\text{B3})$$

This then couples $(d/dt)\hat{\vec{E}}_{H,s}(t)$ and $\partial_t \vec{\varepsilon}_s(t)$. This differs from Kupchak's approach where $\partial_t \vec{\varepsilon}_s(t)$ is not involved as he takes $\left(\partial_t \hat{\vec{E}}_s \right)_H = 0$. Am I incorrect in my equation for $\hat{\vec{E}}_s(t) = \vec{\varepsilon}_s(t)\hat{a}e^{i\vec{k}_s \cdot \vec{r}} + h.c.$? Should it not be time dependent yet? This would solve this discrepancy, and then we should be able to use Kupchak's approach.

TODO - Use the Glorieux reference to do Kupchak's pressure equations