

LOW-TOP 00

Asset Datasheet

SPONSORED BY




Barefoot style last with zero drop and zero insole allowance, making it an ideal candidate for flexible 3d printed shoes.

ASSET

Name: **Low-Top 00**

Size: **280-104-71**

File: **The Low-Top 80 (280-104-71).obj**

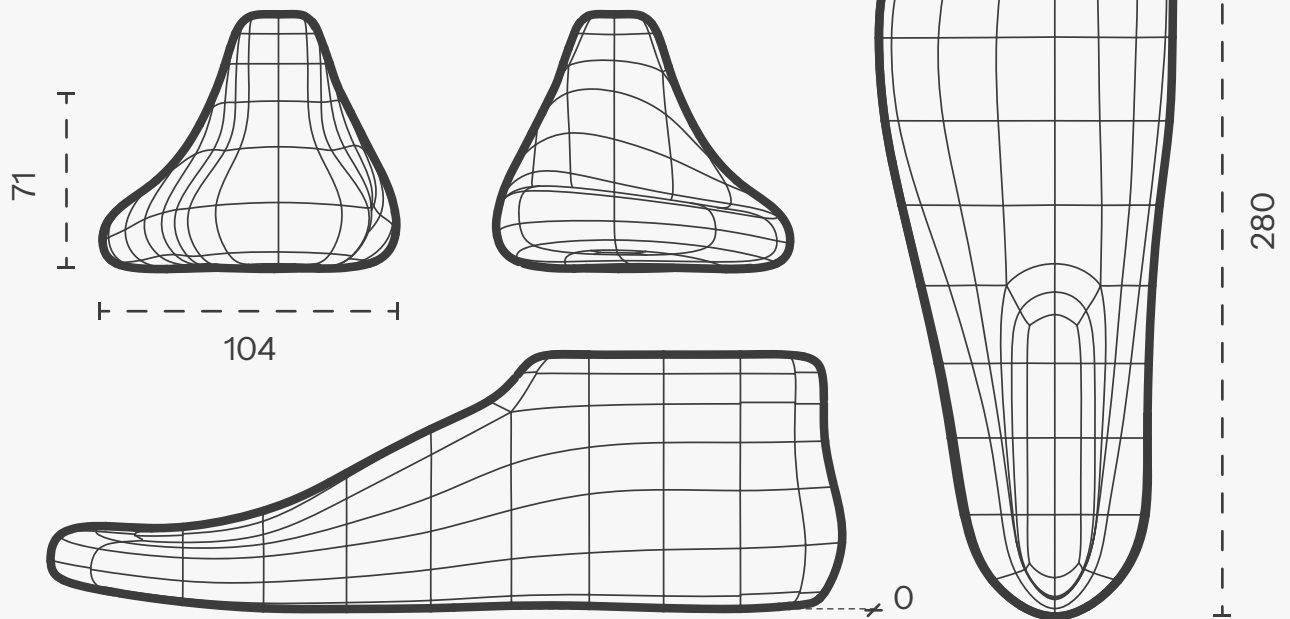

FIT AND USE

The shape is thought for recovery and activity at the same time. Is more supportive in the rear foot to allow for some athletic movements while allowing natural toe splay and the use of toe spacers. Minimal toe spring and anatomically sculpted bottom for natural movement in the foot-ground contact.

Best for shoes without socks

Forefoot: wide fit with a generous toe splay

Midfoot: snug fit for sock-less wear with contoured arch

Heel: zero stack height and snug fit for responsive movements

Ankle: low-top height with a tighter fit to avoid ankle slip



GET IT HERE

access to the 3d model is granted free of charge, under MIT license, allowing designers, artisans and manufacturers to integrate it into their design and production workflows.

CHART DROP

Mondo-point	Last Dimensions			Conversion	
	Length	Width	Instep Height	EU	US (M)
220	235	92.0	60.5	35	4
225	240	93.3	61.8	36	4.5
230	245	94.7	63.1	36.5	5
235	250	96.1	64.4	37	5.5
240	255	97.5	65.7	38	6.5
245	260	98.8	67.0	38.5	7
250	265	100.2	68.3	39.5	7.5
255	270	101.6	69.6	40	8
260	275	103.0	70.9	41	8.5
265	280	104.3	71.3	41.5	9
270	285	105.7	71.7	42.5	9.5
275	290	107.1	72.1	43	10
280	295	108.5	72.5	44	10.5
285	300	109.8	72.9	44.5	11
290	305	111.2	73.3	45.5	11.5
295	310	112.6	73.7	46	12
300	315	114.0	74.1	47	13
305	320	115.3	74.5	47.5	13.5
310	325	116.7	74.9	48	14
315	330	118.1	75.3	48.5	14.5
320	335	119.5	75.7	49	15

The chart above provides complete dimensional specifications for the **Low-Top 00** last from foot length **220mm to 320mm**. Each size includes three critical measurements: last length , last width at ball girth position, and **instep height at 55%** foot length, all specified in **millimeters**. For convenience, equivalent EU and US men's sizes are provided in the conversion columns. Dimensions are based on international anthropometric standards (ISO 9407:2019) and represent the actual last measurements, not foot measurements. The highlighted reference size (265mm) serves as the baseline for grading validation.