

# Build an EF and ASP.NET Core App HOL

Welcome to the Build an Entity Framework Core and ASP.NET Core Application in a Day Hands On Lab. This lab walks you through creating custom validation attributes and the related client side scripts.

Prior to starting this lab, you must have completed Lab 4.

All labs and files are available at [https://github.com/skimediv/dotnetcore\\_hol](https://github.com/skimediv/dotnetcore_hol).

## Part 1: Create the Server Side validation attributes

### Step 1: Create the MustBeGreaterThanZeroAttribute attribute

- 1) Create a new folder in the MVC project named Validation.
- 2) Add a new class named MustBeGreaterThanZeroAttribute.cs.
- 3) Add the following using statements:

```
using System.ComponentModel.DataAnnotations;  
using Microsoft.AspNetCore.Mvc.ModelBinding.Validation;
```

- 4) Update the code to the following:

```
public class MustBeGreaterThanZeroAttribute : ValidationAttribute, IClientModelValidator  
{  
    public MustBeGreaterThanZeroAttribute() : this("{0} must be greater than 0") { }  
    public MustBeGreaterThanZeroAttribute(string errorMessage) : base(errorMessage) { }  
    public override string FormatErrorMessage(string name)  
    {  
        return string.Format(ErrorMessageString, name);  
    }  
    protected override ValidationResult IsValid(object value, ValidationContext validationContext)  
    {  
        if (!int.TryParse(value.ToString(), out int result))  
        {  
            return new ValidationResult(FormatErrorMessage(validationContext.DisplayName));  
        }  
        if (result > 0)  
        {  
            return ValidationResult.Success;  
        }  
        return new ValidationResult(FormatErrorMessage(validationContext.DisplayName));  
    }  
    public void AddValidation(ClientModelValidationContext context)  
    {  
        string propertyDisplayName = context.ModelMetadata.DisplayName ?? context.ModelMetadata.PropertyName;  
        string errorMessage = FormatErrorMessage(propertyDisplayName);  
        context.Attributes.Add("data-val-greaterthanzero", errorMessage);  
    }  
}
```

All files copyright Phil Japikse (<http://www.skimediv.com/blog>)

## Step 2: Create the MustNotBeGreaterThanAttribute attribute

- 1) Add a new class named MustNotBeGreaterThanAttribute.cs.
- 2) Add the following using statements to the top of the file:

```
using System;
using System.ComponentModel.DataAnnotations;
using System.Linq;
using System.Reflection;
using Microsoft.AspNetCore.Mvc.ModelBinding.Validation;
```

- 3) Update the class to match the following:

```
[AttributeUsage(AttributeTargets.Property, AllowMultiple = true)]
public class MustNotBeGreaterThanAttribute : ValidationAttribute, IClientModelValidator
{
    readonly string _otherPropertyName;
    string _otherPropertyDisplayName;
    readonly string _prefix;
    public MustNotBeGreaterThanAttribute(string otherPropertyName, string prefix = "")
        : this(otherPropertyName, "{0} must not be greater than {1}", prefix) { }
    public MustNotBeGreaterThanAttribute(string otherPropertyName, string errorMessage, string prefix)
        : base(errorMessage)
    {
        _otherPropertyName = otherPropertyName;
        _otherPropertyDisplayName = otherPropertyName;
        _prefix = prefix;
    }
    public override string FormatErrorMessage(string name)
    {
        return string.Format(ErrorMessageString, name, _otherPropertyDisplayName);
    }
    internal void SetOtherPropertyName(PropertyInfo otherPropertyInfo)
    {
        var displayAttribute = otherPropertyInfo.GetCustomAttributes<DisplayAttribute>().FirstOrDefault();
        _otherPropertyDisplayName = displayAttribute?.Name ?? _otherPropertyName;
    }
    protected override ValidationResult IsValid(object value, ValidationContext validationContext)
    {
        var otherPropertyInfo = validationContext.ObjectType.GetProperty(_otherPropertyName);
        SetOtherPropertyName(otherPropertyInfo);
        if (!int.TryParse(value.ToString(), out int toValidate))
        {
            return new ValidationResult($"{validationContext.DisplayName} must be numeric.");
        }
        var otherValue = (int)otherPropertyInfo.GetValue(validationContext.ObjectInstance, null);
        return toValidate > otherValue
            ? new ValidationResult(FormatErrorMessage(validationContext.DisplayName))
            : ValidationResult.Success;
    }
    public void AddValidation(ClientModelValidationContext context)
    {
        string propertyDisplayName = context.ModelMetadata.GetDisplayName();
        All files copyright Phil Japikse (http://www.skimedic.com/blog)
    }
}
```

```

var propertyInfo = context.ModelMetadata.ContainerType.GetProperty(_otherPropertyName);
SetOtherPropertyName(propertyInfo);
string errorMessage = FormatErrorMessage(propertyDisplayName);
context.Attributes.Add("data-val-notgreaterthan", errorMessage);
context.Attributes.Add("data-val-notgreaterthan-otherpropertyname", _otherPropertyName);
context.Attributes.Add("data-val-notgreaterthan-prefix", _prefix);
}
}

```

## Part 2: Create the Client Side validation scripts

### Step 1: Create the Validators

- 1) Add a new folder named validations under the wwwroot/js folder.
- 2) Add a new JavaScript file named validators.js in the new folder.
- 3) Update the code to match the following:

```

$.validator.addMethod("greaterthanzero", function (value, element, params) {
    return value > 0;
});

$.validator.unobtrusive.adapters.add("greaterthanzero", function (options) {
    options.rules["greaterthanzero"] = true;
    options.messages["greaterthanzero"] = options.message;
});

$.validator.addMethod("notgreaterthan", function (value, element, params) {
    return +value <= +$(params).val();
});

$.validator.unobtrusive.adapters.add("notgreaterthan", ["otherpropertyname", "prefix"], function (options) {
    options.rules["notgreaterthan"] = "#" + options.params.prefix + options.params.otherpropertyname;
    options.messages["notgreaterthan"] = options.message;
});

```

### Step 2: Create the formatter code

- 1) Create a new JavaScript file named errorFormatting.js in the valdiations folder.
- 2) Update the code to match the following:

```

$.validator.setDefaults({
    highlight: function (element, errorClass, validClass) {
        if (element.type === "radio") {
            this.findByName(element.name).addClass(errorClass).removeClass(validClass);
        } else {
            $(element).addClass(errorClass).removeClass(validClass);
            $(element).closest('.form-group').addClass('has-error'); //removeClass('has-success');
        }
    },
    unhighlight: function (element, errorClass, validClass) {
        if (element.type === "radio") {
            this.findByName(element.name).removeClass(errorClass).addClass(validClass);
        } else {

```

All files copyright Phil Japikse (<http://www.skimedic.com/blog>)

```

    $(element).removeClass(errorClass).addClass(validClass);
    $(element).closest('.form-group').removeClass('has-error'); //addClass('has-success');
  }
}
});

```

## Part 3: Bundle and Minify the JavaScript

### Step 1: Update the bundleconfig.json

- 1) Open the bundleconfig.json file and add the following to the end of the file (make sure to add a comma after the last block before adding the new code):


```

{
  "outputFileName": "wwwroot/js/validations/validations.min.js",
  "inputFiles": [
    "wwwroot/js/validations/*.js"
  ],
  "minify": {
    "enabled": true,
    "renameLocals": true
  },
  "sourceMap": false
}


```

### Step 2: Update the Task Runner Explorer

- 1) Open the Task Runner Explorer by select View -> Other Windows -> Task Runner Explorer.
- 2) Right click on Update All Files, select Bindings -> After Build

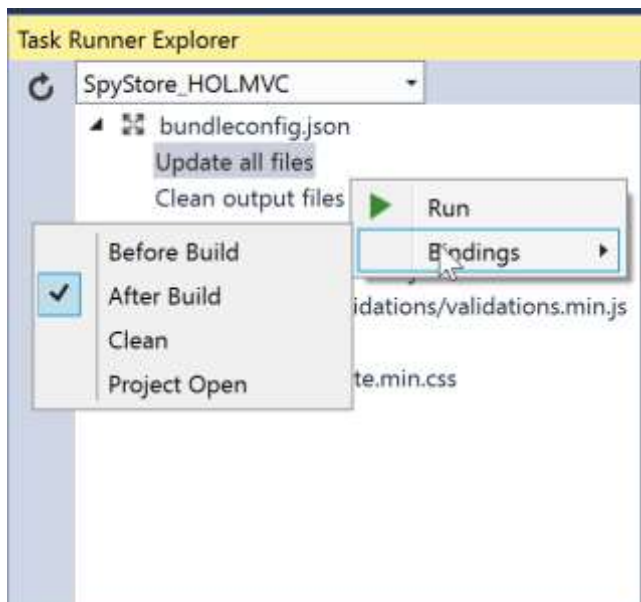

- 3) Right click on Clean Output Files, and select Bindings -> Before Build and Bindings -> Clean:

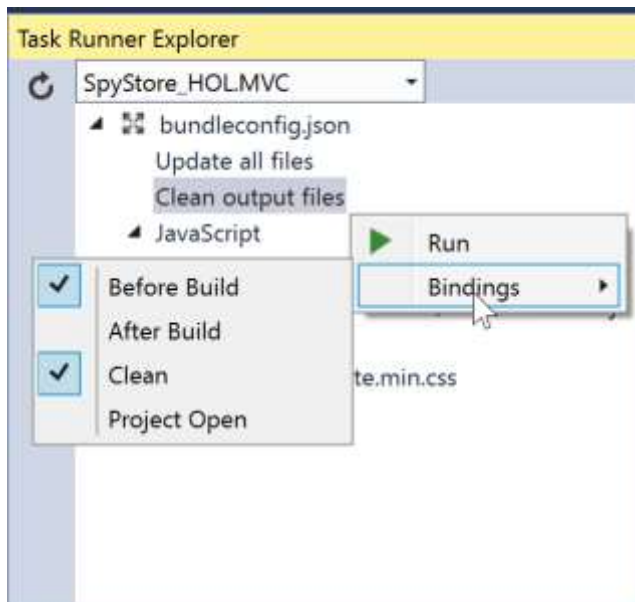

## Part 4: Update the `_ValidationScriptsPartial.cshtml`

- 1) Open `Views\Shared\_ValidationScripts.cshtml`.
- 2) Add the following to the block defined as the “Development” environment:

```
<script src="~/js/validations/validators.js" asp-append-version="true"></script>  
<script src="~/js/validations/errorFormatting.js" asp-append-version="true"></script>
```

- 3) Add the following to the block defined as the “Staging,Production” environment:

```
<script src="~/js/validations/validations.min.js"></script>
```

## Summary

The lab created the custom validation attribute, client side validation scripts and formatting, bundled and minified the scripts, and updated the validation partial view.

## Next steps

In the next part of this tutorial series, you will create a View Component to create the menu items.