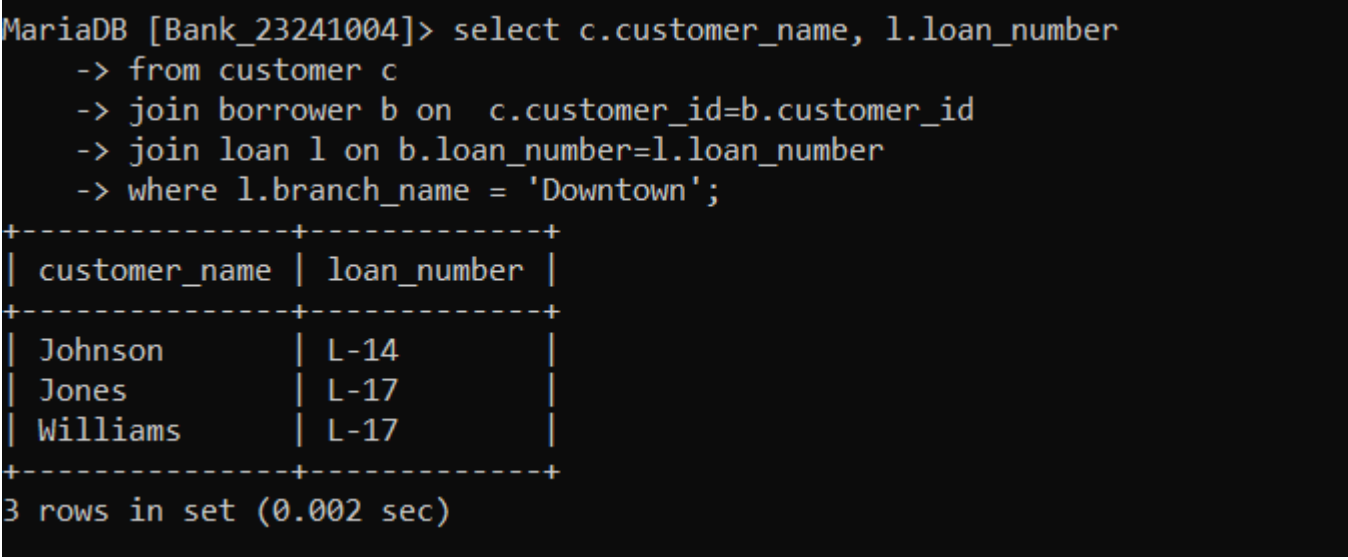


CSE370 : Database Systems

Assignment 01/02/03 | Spring 2026

ID : 23241004 | Name : Afnan Mohammad Hafiz

No 1 Query (as Plain Text)	select c.customer_name, l.loan_number from customer c join borrower b on c.customer_id=b.customer_id join loan l on b.loan_number=l.loan_number where l.branch_name = 'Downtown';
No 1 SS (of Query & Output in Shell)	 <pre>MariaDB [Bank_23241004]> select c.customer_name, l.loan_number -> from customer c -> join borrower b on c.customer_id=b.customer_id -> join loan l on b.loan_number=l.loan_number -> where l.branch_name = 'Downtown'; +-----+-----+ customer_name loan_number +-----+-----+ Johnson L-14 Jones L-17 Williams L-17 +-----+-----+ 3 rows in set (0.002 sec)</pre>
No 2 Query (as Plain Text)	select distinct c.customer_name from customer c join borrower b ON c.customer_id=b.customer_id;

No 2 SS (of Query & Output in Shell)	<pre> MariaDB [Bank_23241004]> select distinct c.customer_name -> from customer c -> join borrower b ON c.customer_id=b.customer_id; +-----+ customer_name +-----+ Jones Smith Hayes Curry Williams Adams Johnson +-----+ 7 rows in set (0.116 sec) </pre>
No 3 Query (as Plain Text)	<pre> select c.customer_name from customer c left join borrower b on c.customer_id = b.customer_id where b.loan_number is null; </pre>

No 3 SS (of Query & Output in Shell)	<pre> MariaDB [Bank_23241004]> select c.customer_name -> from customer c -> left join borrower b on c.customer_id = b.customer_id -> where b.loan_number is null; +-----+ customer_name +-----+ Lindsay Turner Glenn Brooks Green +-----+ 5 rows in set (0.001 sec) </pre>
No 4 Query (as Plain Text)	<pre> select c1.customer_name as Customer1, c2.customer_name as Customer2, c1.customer_city as City from customer c1 join customer c2 on c1.customer_city=c2.customer_city and c1.customer_id < c2.customer_id; </pre>

No 4 SS
(of Query & Output
in Shell)

```
MariaDB [Bank_23241004]> select c1.customer_name as Customer1, c2.customer_name as Customer2, c1.customer_city as City
-> from customer c1
-> join customer c2
-> on c1.customer_city=c2.customer_city
-> and c1.customer_id < c2.customer_id;
+-----+-----+-----+
| Customer1 | Customer2 | City      |
+-----+-----+-----+
| Jones     | Hayes     | Harrison  |
| Smith     | Curry     | Rye       |
| Lindsay   | Adams     | Pittsfield|
| Turner    | Green     | Stamford  |
+-----+-----+-----+
4 rows in set (0.002 sec)
```

No 5 Query
(as Plain Text)

```
select branch_name,
round(sum(balance * 0.04), 2) as Total_Interest
from account
group by branch_name;
```

No 5 SS
(of Query & Output
in Shell)

```
MariaDB [Bank_23241004]> select branch_name,  
-> round(sum(balance * 0.04), 2) as Total_Interest  
-> from account  
-> group by branch_name;  
+-----+-----+  
| branch_name | Total_Interest |  
+-----+-----+  
| Brighton   |          66.00 |  
| Downtown   |          20.00 |  
| Mianus      |          28.00 |  
| Perryridge |          16.00 |  
| Redwood     |          28.00 |  
| Round Hill  |          14.00 |  
+-----+-----+  
6 rows in set (0.006 sec)
```

No 6 Query
(as Plain Text)

```
select c.customer_city, a.account_number, a.balance  
from account a  
inner join depositor d on d.account_number = a.account_number  
inner join customer c on c.customer_id = d.customer_id  
where a.balance =(  
select max(a2.balance)  
from account a2  
inner join depositor d2 on d2.account_number = a2.account_number  
inner join customer c2 on c2.customer_id = d2.customer_id  
where c2.customer_city = c.customer_city  
);
```

No 6 SS
(of Query & Output
in Shell)

```
MariaDB [Bank_23241004]> select c.customer_city, a.account_number, a.balance  
-> from account a  
-> inner join depositor d on d.account_number = a.account_number  
-> inner join customer c on c.customer_id = d.customer_id  
-> where a.balance =(  
-> select max(a2.balance)  
-> from account a2  
-> inner join depositor d2 on d2.account_number = a2.account_number  
-> inner join customer c2 on c2.customer_id = d2.customer_id  
-> where c2.customer_city = c.customer_city  
-> );
```

```
+-----+-----+-----+  
| customer_city | account_number | balance |  
+-----+-----+-----+  
| Harrison      | A-217          | 750     |  
| Rye           | A-215          | 700     |  
| Pittsfield    | A-222          | 700     |  
| Stamford      | A-305          | 350     |  
| Palo Alto     | A-201          | 900     |  
+-----+-----+-----+  
5 rows in set (0.002 sec)
```

No 7 Query
(as Plain Text)

```
select l.loan_number, l.amount, c.customer_name  
from loan l  
inner join borrower b on l.loan_number=b.loan_number  
inner join customer c on b.customer_id=c.customer_id  
order by l.amount desc, l.loan_number desc  
limit 5;
```

No 7 SS
(of Query & Output
in Shell)

```
MariaDB [Bank_23241004]> select l.loan_number, l.amount, c.customer_name  
-> from loan l  
-> inner join borrower b on l.loan_number=b.loan_number  
-> inner join customer c on b.customer_id=c.customer_id  
-> order by l.amount desc, l.loan_number desc  
-> limit 5;
```

```
+-----+-----+-----+  
| loan_number | amount | customer_name |  
+-----+-----+-----+  
| L-23       | 2000  | Smith         |  
| L-15       | 1500  | Hayes         |  
| L-14       | 1500  | Johnson       |  
| L-16       | 1300  | Adams         |  
| L-17       | 1000  | Jones         |  
+-----+-----+-----+  
5 rows in set (0.011 sec)
```

No 8 Query
(as Plain Text)

```
select distinct c.customer_name  
from customer c  
inner join depositor d on c.customer_id=d.customer_id  
inner join account a on d.account_number=a.account_number  
inner join borrower b on c.customer_id=b.customer_id  
inner join loan l on b.loan_number=l.loan_number  
where a.branch_name='Perryridge'  
and l.branch_name='Perryridge';
```

No 8 SS (of Query & Output in Shell)	<pre> -MariaDB [Bank_23241004]> select distinct c.customer_name -> from customer c -> inner join depositor d on c.customer_id=d.customer_id -> inner join account a on d.account_number=a.account_number -> inner join borrower b on c.customer_id=b.customer_id -> inner join loan l on b.loan_number=l.loan_number -> where a.branch_name='Perryridge' -> and l.branch_name='Perryridge'; +-----+ customer_name +-----+ Hayes +-----+ 1 row in set (0.002 sec) </pre>
No 9 Query (as Plain Text)	<pre> select c.customer_name, sum(l.amount) as total_loan from customer c inner join borrower b on c.customer_id=b.customer_id inner join loan l on b.loan_number=l.loan_number group by c.customer_name having count(l.loan_number)>=2; </pre>

No 9 SS (of Query & Output in Shell)	<pre> MariaDB [Bank_23241004]> select c.customer_name, sum(l.amount) as total_loan -> from customer c -> inner join borrower b on c.customer_id=b.customer_id -> inner join loan l on b.loan_number=l.loan_number -> group by c.customer_name -> having count(l.loan_number)>=2; +-----+-----+ customer_name total_loan +-----+-----+ Smith 2900 +-----+-----+ 1 row in set (0.002 sec) </pre>
No 10 Query (as Plain Text)	<pre> select d.customer_id, sum(a.balance) as total_balance from depositor d inner join account a on d.account_number=a.account_number group by d.customer_id having count(d.account_number)>1; </pre>

No 10 SS
(of Query & Output
in Shell)

```
MariaDB [Bank_23241004]> select d.customer_id, sum(a.balance) as total_balance  
-> from depositor d  
-> inner join account a on d.account_number=a.account_number  
-> group by d.customer_id  
-> having count(d.account_number)>1;
```

```
+-----+-----+  
| customer_id | total_balance |  
+-----+-----+  
| C-226      |          1400 |  
+-----+-----+  
1 row in set (0.001 sec)
```