

NWAM Phase 1 UI Spec v1.8

9 Mar 2009




Panel Icon	2
Editable Tables	7
Rules Dialog	9
Network Preferences Window : Overview	12
Network Preferences : Connection Status View	13
Network Preferences : Network Profile View	15
Network Preferences : Connection Properties Overview	18
Connection Properties : IP Address (IPv4)	19
Connection Properties : IP Address (IPv6)	21
Connection Properties : Wireless	22
Location Preferences	24
Edit Location : Proxies - NOT IN PHASE 1	26
Edit Location : Name Services	28
Edit Location : Security	29
Edit Location: Network Services	30
Add/Join/Edit Wireless Network	31
Wireless Network Chooser	33
VPN Application Preferences	34

(This page intentionally blank)




Panel Icon

The *Location* panel icon is shown in the panel's status notification area at all times, and is the primary means by which you will interact with NWAM. It is the focus for information messages about changes to your network status, and its menu allows quick access to essential network functionality.

The icon's appearance indicates the overall health of the network (via the emblem overlaid on the icon):

	All enabled connections in the current location are disconnected
	One or more (but not all) enabled connections in the current location are connected; the others are disconnected or pending
	All enabled connections in the current location are connected

If one or more wireless interfaces are active, the main part of the icon shows the current wireless signal strength instead of the generic network icon. If multiple wireless interfaces are active, the average signal strength is indicated. The emblem is still used to represent the overall health of the network, for example:

	All enabled connections in the current location are disconnected.
	Current (or average) signal strength good; one or more (but not all) enabled connections in the current location are connected; the others are disconnected or pending
	Current (or average) signal strength fair; all enabled connections in the current location are connected

TBD: especially for the wireless case, might be better to show no emblem rather than the 'green' one.

Clicking the panel icon opens the [Location Preferences dialog](#) (p??).

When you hover the mouse over the icon, the tooltip shows the name of the currently active location and the status of enabled connections:

Location: Automatic
Wired (eth0): Cable unplugged
Wired (eth1): Connected
Wireless (ath0): Connected to Rover (86%)


Connection Names

Connection names are shown in the GUI in the format *InterfaceType (LinkName)*, where:

- InterfaceType* is “Wired N” for wired NICs (where N is not shown for the first wired NIC, and N>=1 for subsequent NICs), or “Wireless N” for wireless NICs (again, N is either not shown or >=1).
- LinkName* is the link’s vanity name (e.g. ‘net0’), or default device name if no vanity name is defined.


Panel Icon Context Menu

This menu is posted by right-clicking the panel icon:

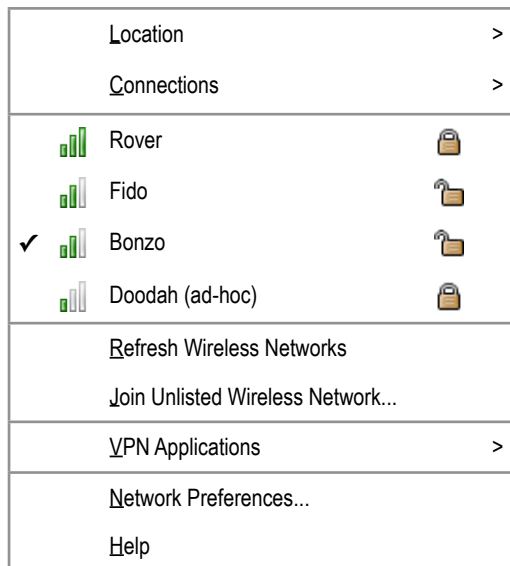


The function of the menu items is as follows:

- *Location* reveals a submenu:

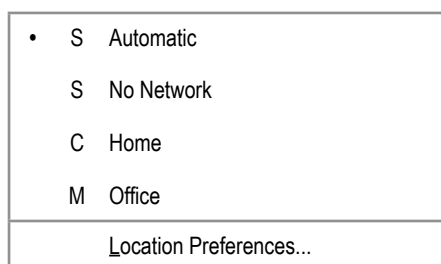


- First section lists each available location, with an icon *TBD-shown here as a letter* representing its activation type: system, manual or conditional. The current location is represented by a radio button indicator (•). Selecting a manual location other than the current location attempts to activate that location. Conditional and system locations are greyed-out since you cannot manually switch to these locations. *TBD: or should it be possible to select conditional locations? Would this attempt to change their type to manual and activate them?*
- *Location Preferences* opens the [Location Preferences dialog](#) (p??).
- *Connections* reveals a submenu:

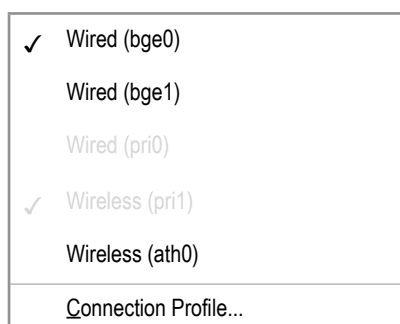

- First section lists each connection in the current network profile, in the same order they are listed in the [Network Profile view](#) (p??). Enabled connections are shown with a check mark. Selecting an enabled connection attempts to disable it, and vice versa. Connections of activation type Prioritized (pri0 and pri1 in example) are greyed-out, since they cannot be manually enabled or disabled.
- *Connection Profile* opens the [Network Preferences dialog](#) (p??), with the [Network Profile view](#) (p??) selected.

- The next section of the menu is a combined list of available [favorite wireless networks](#), and any other currently available networks that are broadcasting their ESSID. The list is ordered by current signal strength, strongest first. Signal strength indicator is shown first, then ESSID followed by “(ad-hoc)” for ad-hoc networks, then secure/open indicator (right-aligned).

If you have $N > 1$ active wireless interfaces, each wireless network is shown N times, with the link name appended in parentheses, and each connection marked with a check mark. For example:

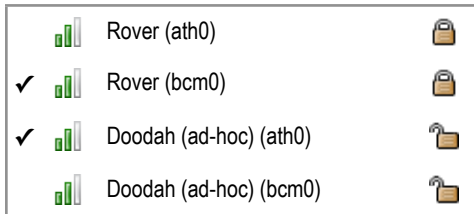


Any network to which you are currently connected is indicated with a check mark indicator (✓) to the left of the signal strength indicator. If no networks are available to be listed in this section, a single disabled menu item is shown: “No wireless networks detected”

Selecting the ESSID of a network to which you are not currently connected attempts to connect to that network. If connection fails, you are re-connected to your previous wireless network, if any. This manual switching of networks does not affect any stored network configuration, and lasts until the next manual or automatic switch of locations occurs.

Selecting the ESSID of a network to which you are already connected has no effect.

- Join Unlisted Wireless Network...* opens the [Join Wireless Network dialog](#) (p??) with no details pre-filled, to allow you to connect to a network that is not broadcasting its ESSID. Once connected to any such network, it appears on this context menu in the list of favorite and available networks. If the network was not added to the list of favorites when connecting, it will disappear from this list again after the next disconnection.
- VPN Applications* submenu has one menu entry for each VPN application defined in the [VPN Preferences dialog](#) (p??) if any, in the same order as they are defined there, followed by a *VPN Preferences* menu item. E.g:

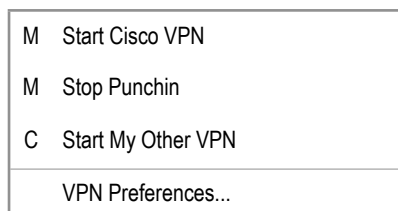

- Each entry in the first section contains an icon *TBD-shown here as a letter* indicating the VPN application's activation type: manual or conditional, followed by *Start <name>* for VPN apps that are not running, and *Stop <name>* for those that are currently running. The entries for conditional VPN applications are greyed-out since you cannot manually start/stop a conditional ENM. *TBD: or should it be possible to select conditional ENMs? Would this attempt to change their type to manual and activate them? See email from mph.*
- The *VPN Preferences* menu item opens the [VPN Preferences dialog](#) (p??).
- Network Preferences* opens the [Network Preferences dialog](#) (p??).
- Help* opens the help browser at a page appropriate to this context menu.

Animation

Animation is Low Priority for Phase 1, may be dropped.

The panel icon should animate (simply, perhaps 2 or 4 frames/sec) when a status change is pending but not complete, in particular when:

- a scan for available wireless networks is in progress
- an attempted connection to a wired or wireless network is in progress but not yet established

This animation should be controlled by the `/desktop/gnome/interface/enable_animations` gconf key so that system administrators can disable it if desired.

Notification messages

A notification message appears when a significant change of network status occurs. All messages are shown for the system default length of time before disappearing again. The following events should trigger a notification message:

Event	Message format	Example
A wired connection is established.	InterfaceType (LinkName) connected Address: IPv4 and/or IPv6 address Speed: Connection speed *	Wired (eth0) connected Address: 192.168.1.1 Speed: 100Mb/s
A wireless connection is established.	InterfaceType (LinkName) connected to ESSID Address: IPv4 and/or IPv6 address Signal strength: 0-100% Speed: Connection speed *	Wireless (ath1) connected to Rover Address: FEBC:A574:382B:23C1:AA49:4592:4EFE:9982 Signal strength: 87% Speed: 11 Mb/s
A wired connection is dropped.	InterfaceType (LinkName) disconnected Reason *	Wired (eth0) disconnected Cable unplugged
A wireless connection is dropped.	InterfaceType (LinkName) disconnected from ESSID Click this message to view other available networks**	Wireless (ath1) disconnected from Rover Click this message to view other available networks
The location has changed.	Switched to location 'name'	Switched to location 'Home'
No wireless networks were found.	No wireless networks found Click this message to join an unlisted network***	No wireless networks found Click this message to join an unlisted network

* Clicking the message opens the [Connection Properties window](#) (p??) for the interface in question

* * Clicking the message opens the [Wireless Network Chooser dialog](#) (p??)

* * * Clicking the message opens an empty [Join Wireless Network dialog](#) (p??)


Editable Tables

The remainder of this document describes the *Network Preferences* and *Locations* dialogs, both of which include, in various places, tables whose contents can be edited by the user.

The general specification for editable tables is described here, and will be referenced as required from elsewhere in the document.

Initial State


Editable tables have adjacent **Add** and **Remove** buttons, and inline help text that reads “Double click table cells to edit”. An empty table will therefore look something like this:

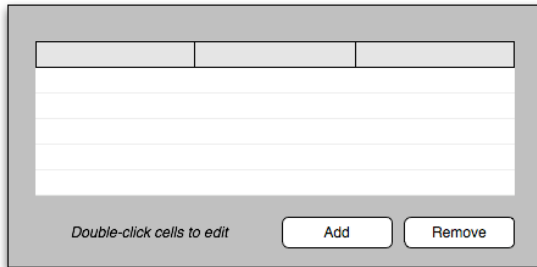

Entering a new row


User initiates entry of a new row by clicking the **Add** button, or by double-clicking any cell on any empty row. The **Add** button is enabled at all times, except while a row is already being added.

When a row is added, an input control is shown overlaying the first cell in the first empty row, and given keyboard focus. This control will usually be a text field, but it may also be a combo box or a popup menu:

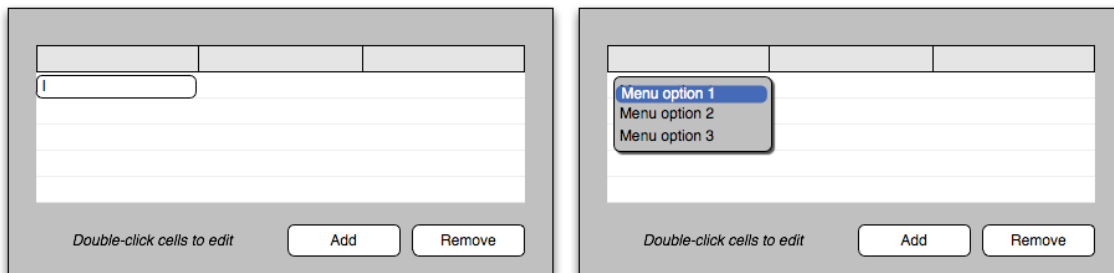


At this point, the user has three choices:

1. **Complete the entry for this cell:** enter text and press *Return* or *Tab* (for a text field), or select a menu item using up/down arrows and press *Return* (for a menu choice), or click the desired menu choice with the mouse. The overlaid control is replaced by the text that was entered/chosen, and focus moves to the next cell in the row:

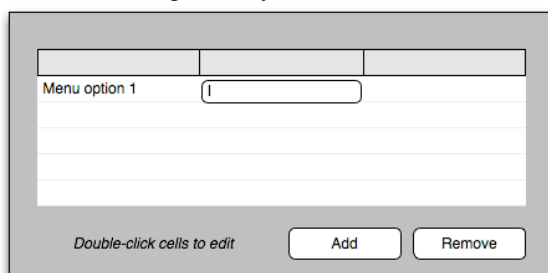

When the last cell in a row is entered, focus moves to the first cell of the next row, allowing entry of another row, unless otherwise specified for a particular table.

2. **Move to another cell:** press *Tab* to move focus to the next cell in the row, or *Shift+Tab* to move focus to the previous cell in the row. If the user enters any text before pressing *Tab*, the text is retained. Focus wraps between rows, but not between the first

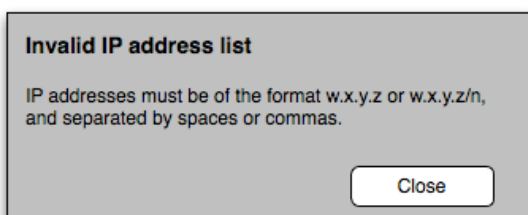


cell and the last cell in the table.

3. **Cancel entry for the entire row:** press *Esc*. All cells in the row are cleared, and keyboard focus returns to the **Add** button in the dialog.

Editing a cell

Double-clicking a non-empty cell causes its input field to be displayed and focused, with the current cell contents pre-selected:

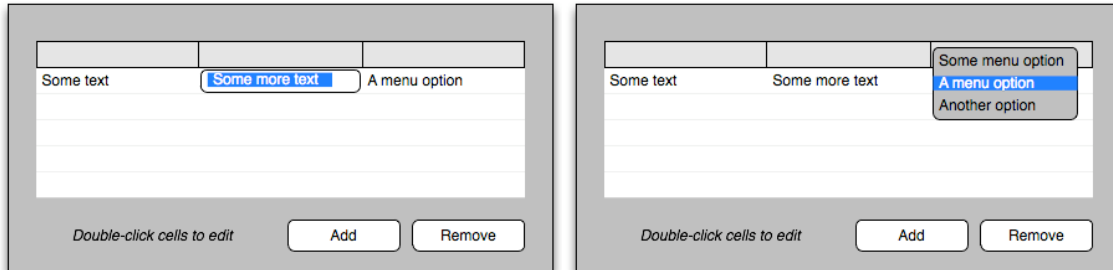


From here, behaviour proceeds as though the user were part way through entering a new row, except that pressing *Esc* does not clear the row. Instead, *Esc* cancels any pending changes to that cell, and returns focus to the **Add** button.

Removing a row

A row can be removed in two ways.

1. Select the row, then click the **Remove** button. A row is selected by clicking any cell in the row, causing the entire row to be highlighted. Multiple row selection is allowed in the usual way (using *Ctrl* and/or *Shift*) unless otherwise specified for a particular table. Empty rows cannot be selected.

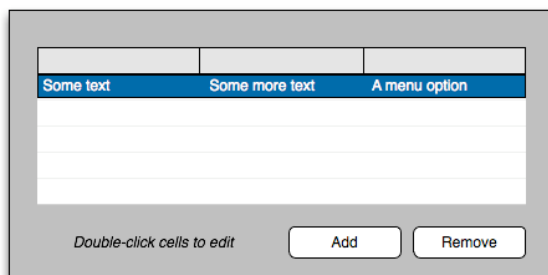


2. Click the **Remove** button while any cell is being edited. That cell's entire row will be removed.

The **Remove** button is disabled at all other times.

Other behaviour

Table cells whose contents are not fully visible are ellipsised, and given a tooltip that shows the entire cell contents.

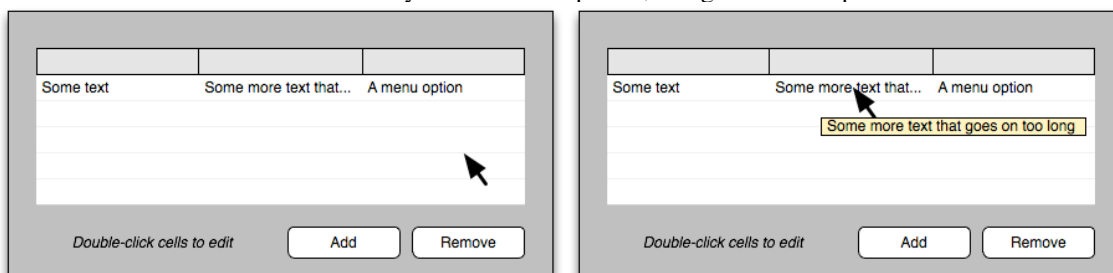

Input validation is performed whenever focus leaves a cell that is being edited, either explicitly (e.g. by pressing *Enter*) or implicitly (e.g. by clicking the dialog's **OK** button whilst editing a cell). If validation fails, an alert is shown that indicates the problem and the input required. Closing the alert returns focus to the invalid cell in the table.

Rules Dialog

The Rules Dialog is accessed from the [Network Profile pane](#), [Location Preferences dialog](#) and [VPN Preferences dialog](#).

The specific rules available differ for each of those purposes, and are listed in the appropriate section. This section describes the general behaviour of the Rules Dialog, regardless of the specific rules provided.

Components

The dialog has three components: the condition text, the rule combination radio buttons, and the condition table.

By default, the condition text is “If the following conditions are true:”. This text can be changed for any given instantiation of the dialog, typically to “Do <something> if the following conditions are true:”.

The rule combination radio buttons are a group of two radio buttons labelled **Match any** and **Match all**. The radio buttons may be hidden for any given instantiation of the dialog.

The conditions themselves comprise a dynamic table (explained below).

Initial State

The title of the Rules Dialog is “Edit Rules : <Purpose>”. For example, “Edit Rules : Home” for a conditional location, or “Edit Rules : Punchin” for a conditional VPN application.

The initial state of the conditions table is as follows:

Specifically:

- **Match any** radio button is selected by default, if the radio buttons are present
- One row of controls is initially visible, the first of which is a dropdown menu showing the entry *Select condition....*. The remaining controls in the row are disabled.

The user proceeds by selecting a condition from the first dropdown list. When any item other than *Select condition* is selected, all the remaining controls in the row become active, and the *Select condition* item is removed from the list so it can no longer be directly selected. Also, one or more of the intermediate controls may change type, e.g. from a dropdown list to a text field, to accommodate the chosen condition:

At this point, the user can either return to the initial *Select Condition* state by clicking the **Remove** (“-”) button, or add a new rule row by clicking the **Add** (“+”) button:

The user need not complete any blank fields before clicking the **Add** button; rule validation will not be performed until later.

Each new condition added begins with the first unspecified item in the first dropdown list, where possible. For example, if the available conditions are *Current location*, *Any system domain name* and *Any IP address*:

- User adds an initial rule, “Current location is Home”, then clicks **Add**
- The first dropdown of the new rule is set to the first item on its list that hasn't been used yet, *Any system domain name*
- User edits new rule to read “Any IP address is 192.168.1.1”, then clicks **Add**
- At this point, *Any system domain name* is still the first unused item on the list, so the first dropdown of the new rule is set to *Any system domain name*.

When all rule types have been exhausted, clicking **Add** adds another rule of the same type, if two rules of the same type are permissible for that component. If they are not permissible, a rule of the first permissible type on the list is added.

Removing Rows

The user can remove any row at any time by clicking its **Remove** (“-”) button. When the **Remove** button of the last remaining row is clicked, the component is returned to its initial *Select Condition...* state.

Validation

Rule validation is performed whenever the user closes the dialog containing the component. If validation fails, an alert is shown that indicates the problem and the input required:

Closing the alert returns focus to the invalid entry field in the rule construction component.

Revert

The dialog has a **Revert** button in addition to the usual **OK** and **Cancel** buttons. Clicking **Revert** causes any changes made since the dialog was opened to be discarded, but the dialog remains open for further editing.

Available Conditions

In Phase 1, the following conditions are available. Not all will be required/available for each instantiation of the dialog.

Active connections	DL: include, do not include	DL: list of all available NCUs
Any IP address	DL: is, is not, is in range, is not in range	<string>
Any advertised domain name	DL: is, is not, contains, does not contain	<string>
Any system domain name	DL: is, is not, contains, does not contain	<string>
Current location	DL: is, is not	DL: list of all defined locations
Running VPN applications	DL: include, do not include	DL: list of all available ENMs
Wireless network name	DL: is, is not, contains, does not contain	EC: list of favorite networks
Wireless network BSSID	DL: is, is not	<string>


DL=dropdown list

EC=editable combo, into which user can either type or select from dropdown

<string> = text field

Network Preferences Window : Overview

This window is where you can configure individual network connections, and view the current state of each network connection. It offers access to various views, between which you switch using a dropdown list at the top of the window:

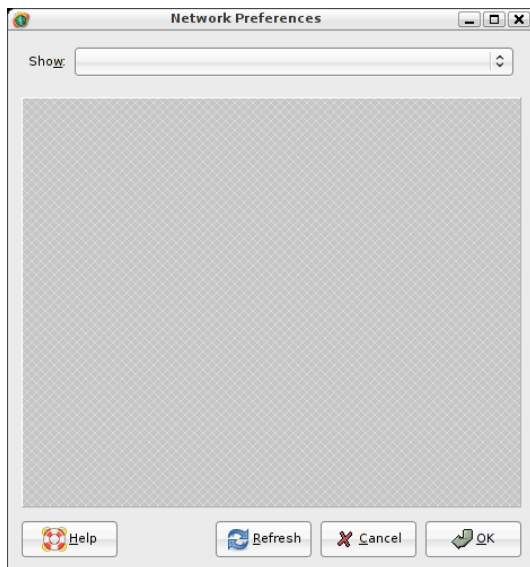

You open this dialog by either:

- Selecting *Launch->Administration->Network*, or
- Selecting *Network Preferences...* from the [panel icon context menu](#).

The *Show* dropdown list comprises *Connection Status*, *Network Profile*, and a list of all connections defined in each network profile, grouped by profile name. For example:

Connection Status
Network Profile
<i>Automatic Profile</i>
Wired (hme0)
Wired 1 (hme1)
Wireless (bcm0)
<i>User Profile</i>
Wired 1 (hme1)
Wireless (bcm0)

The header items (“Automatic Profile” and “User Profile”) are disabled items in italic text.

Default view is [Connection Status View](#) (p??).

Selecting *Connection Status* from the dropdown list switches to the [Connection Status View](#) (p??)

Selecting *Network Profile* switches to the [Network Profile View](#) (p??)

Selecting a connection name from the dropdown list, or double-clicking it in connection status view, switches to the [Connection Properties View](#) (p??)

Refresh causes the NWAM subsystem to be refreshed, wireless networks rescanned, and the dialog updated if required.

Cancel closes the dialog without applying any pending changes.

OK closes the dialog and applies any pending changes, causing the NWAM subsystem to be refreshed.

Network Preferences : Connection Status View

Show this view by selecting *Connection Status* in the dropdown list at the top. Shows information about each enabled connection in the current profile (NCP), as configured in the [Network Profile view](#) (p??). Connections disabled there are not shown in this view.



Enabled Connections lists enabled connections in the same order as in the [Network Profile View](#) (p??); that is, the order in which connections are attempted. The order cannot be changed here, however, but only in the Network Profile View.

Icon indicates type of connection (wired or wireless; in later project phases, tunnel, aggregation etc.) and current status (connected/disconnected for wired or wireless, plus signal strength and security type for wireless).

Bold text for each connection shows *InterfaceType (LinkName)*. Current status is shown on the same line, right-aligned. Status is one of:

Connecting	A wired interface is attempting to connect, but is not yet connected
Connected	A wired interface is connected
Connecting to ESSID [icon]	A wireless link is attempting to connect to the network with the given ESSID. Icon indicates whether network is open or secured.
Connected to ESSID [icon]	A wireless interface is connected to the network with the given ESSID. Icon indicates whether network is open or secured.
Network unavailable	Wired or wireless interface is up but non-functional, e.g. unable to contact DHCP server or gateway.
Cable unplugged	Wired link is enabled but cable is unplugged.
Not connected	Wired or wireless interface is enabled but down.

Secondary text for each active connection consists of three elements, separated by spaces:

"Address: IPv4/IPv6 address / CIDR subnet mask" or "Multiple IPs" or "DHCP"	"Signal: n%"	"Speed: n Mb/s"
--------------------------------------------------------------------------------------------	--------------	-----------------

Double-clicking a connection switches the status view to that connection's [properties view](#) (p??)

Profile shows the current network configuration profile (NCP), and allows you to switch between them. In Phase I, there are only two profiles available: *Automatic* and *User*.


Current Location shows the currently active location. **Edit Locations...** button opens the [Location Preferences dialog](#) (p??)

VPN lists any currently-running VPN application, e.g. "CiscoVPN active" if a single application is active, "*n* active" if two or more applications are running, or "None active". Click the **Edit VPN...** button to open the [VPN Preferences dialog](#) (p??) where applications can be configured, started and stopped.

Advanced expander, collapsed by default, reveals a **Repair Selected** button that is enabled for interfaces that are reporting connectivity problems (except those for which the cause is physical, e.g. unplugged cable). Clicking the button attempts to re-establish the connection by whatever means available, e.g. renewing the DHCP lease. *TBD: May need to hide this expander/button for Phase 1 if it's not possible to implement yet.*

Network Preferences : Network Profile View

This view allows inspection, switching and editing of the current network configuration profile (NCP), of which there are two in NWAM Phase I: *Automatic* and *User*. Show this view by selecting Network Profile in the dropdown list at the top of the window.

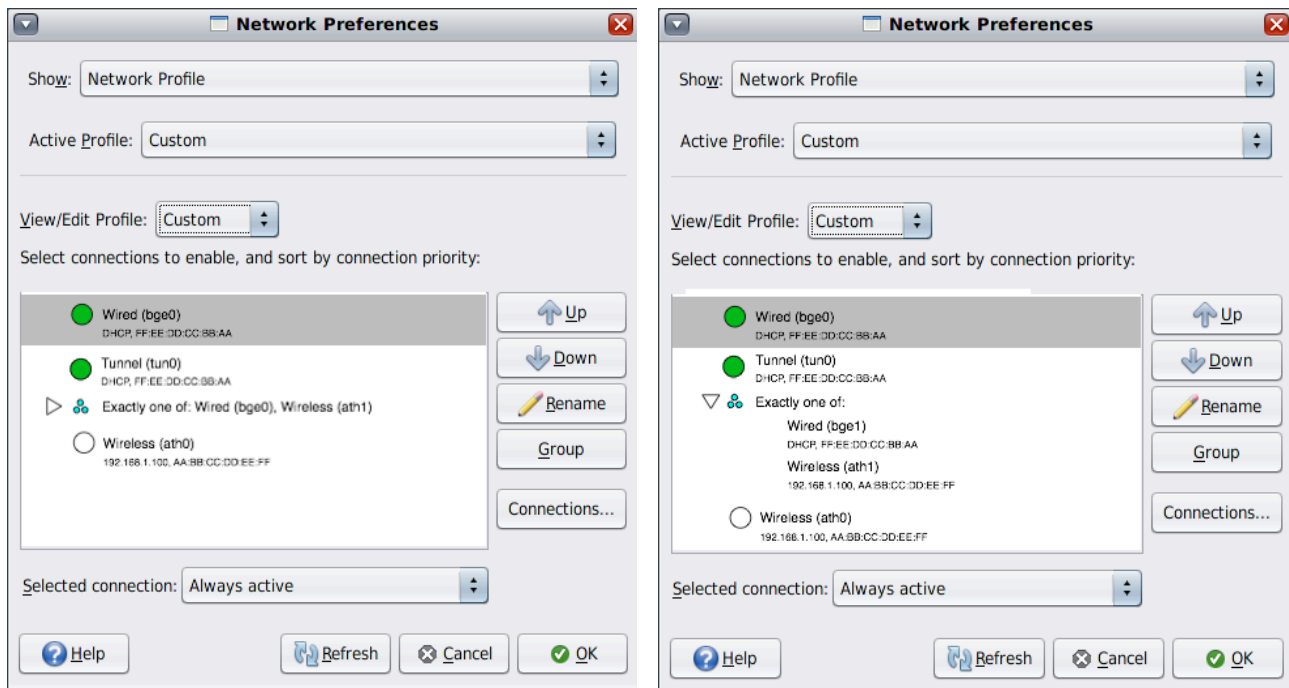

Active Profile dropdown lists all available network profiles, and shows the current active network profile. You can make a different network profile active by selecting it from the list, then clicking **OK**.

The *View/Edit Profile* dropdown lists all available network profiles, and shows the current active network profile by default. The connections (NCUs) of the selected profile are shown in the list below, where they may be viewed or edited. Note that the *Automatic* profile is read-only, so when that profile is selected, the connection list, **Up**, **Down**, **Rename**, **Group** and **Connections...** buttons are disabled.

The icon beside each connection in the tree view *final visuals TBD* represents its activation mode:

	Manual-enabled: the NCU should be activated whenever possible
	Manual-disabled: the NCU should not be activated.
	Prioritized: a group of prioritized NCUs with the same priority value. Such groups are shown in a branch of the tree, collapsed by default—see image above left. When expanded, they appear as shown above right.

The activation mode of the selected NCU or group is also shown by the *Selected connection* dropdown list under the tree view. When a group is selected, the label text changes to *Selected group*.

Primary text for Manual and Conditional NCUs, and for those in expanded prioritized groups, is *InterfaceType (LinkName)*. Secondary text consists of two items, separated by spaces:

"Address: IPv4/IPv6 address / CIDR subnet mask" or "Multiple IPs" or "DHCP"	MAC address
--------------------------------------------------------------------------------------------	-------------

Primary text for prioritized groups depends on the priority group mode of its NCUs:

- *Exclusive*: text is “Exactly one of:”
- *Shared*: text is “One or more of:”
- *All*: text is “All of:”

When the group entry is collapsed, the text is followed by a comma separated list of the NCUs in the group, each of the format *InterfaceType (LinkName)*. If the list of NCUs is too wide to fit the dialog, it is truncated with an ellipsis (...).

Double-clicking a connection switches the status view to that connection's [properties view](#) (p??).

Changing Activation Mode

The dropdown list below the connection list changes the activation mode for the selected NCU or prioritized group. When an NCU is selected in the list, the dropdown's label reads *Selected connection:*, and its list contains the following items:

- *Always active*: the NCU should always be activated when this profile is active
- *Never active*: the NCU should never be activated while this profile is active

When a prioritized group is selected in the list, the dropdown's label reads *Selected group:*, and its list contains the following items:

- *Only one connection may be active*: NWAM will randomly activate one available NCU within the group, and ignore the others
- *One or more connections may be active*: Multiple NCUs in the group may be active at the same time
- *All connections must be active*: All NCUs in the group must be available for the group to be considered available.

Re-ordering connections

The *Automatic* network profile is not editable. When the *User* network profile is selected, however, the list is re-orderable by drag and drop, or by using the **Up** and **Down** buttons to move the selected items. The order reflects the order in which connections are attempted, when required. The **Up/Down** buttons behave as follows:

- The **Up** button is disabled when the first item in the list is selected, and the **Down** button is disabled when the last item in the list is selected. Both buttons are disabled when multiple items are selected.
- If a non-prioritized NCU is selected, and the adjacent item in the desired direction is also non-prioritized, then the items simply swap positions in the list.
- If an expanded or unexpanded group entry is selected, the **Up/Down** buttons move the whole group up or down the list. This corresponds to increasing/decreasing the priority of that group.
- If a prioritized NCU is selected (which can only happen in an expanded branch), the **Up/Down** buttons move the NCU out of its current group, changing its activation mode to manual-disabled. If the adjacent item in the list in the desired direction is also a group, then the NCU is placed in the list between the two groups.
- If a non-prioritized NCU is selected, and the adjacent item in the desired direction (up/down) is a prioritized group, then the **Up/Down** button moves the NCU into that prioritized group.


Creating/Deleting Prioritized Groups

When one or more NCUs are selected (none, one or more of which may already be in an existing group), the **Group** button is enabled. Click the **Group** to create a new priority group containing those NCUs, with a default priority mode of EXCLUSIVE. The newly-created group heading is automatically selected in the list.

When a group heading is selected, the Group button label becomes **Ungroup**. Clicking the **Ungroup** button sets the activation mode of each NCU in the group from PRIORITIZED to ALWAYS, effectively deleting the group.

Renaming Connections

To change a link's vanity name, select it and click **Rename**. This opens an embedded text field in the list, the contents of which are the link's current (possibly default) name. Text is selected, ready for overtyping:

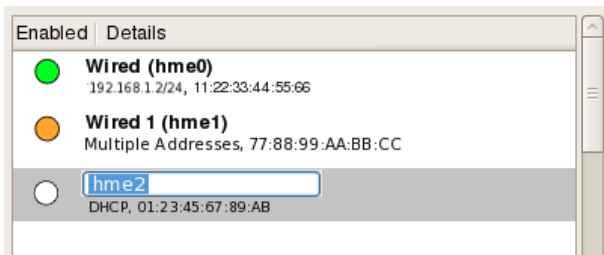

Specify a new vanity name by entering new text and pressing *Return*. Press *Esc* to dismiss the text field with no changes to the vanity name.

Adding and Removing Connections from a Profile

Editing a profile allows you to change its name (*not Phase 1*) and select which network connections it comprises. You cannot edit the *Automatic* profile, therefore the **Connections...** button is disabled when the *Automatic* profile is selected.

Clicking **Connections...** opens the *Edit Connections* dialog:




The list shows all the connections that are currently available in the *Automatic* profile. (Rationale: It is assumed that any connections not available in the *Automatic* profile have not been correctly configured/installed, so that must be rectified before they can be added to user-defined profiles.)

Check a connection to include it in the profile being edited, uncheck it to remove it from the profile being edited. It is not possible to uncheck a connection if it is currently the only checked connection in the profile. (*Or would it be better just to verify that you had at least one connection checked when you clicked OK? Or is it valid/useful to allow a user-defined profile with no NCUs?*)

Network Preferences : Connection Properties Overview

This view allows you to choose how the IP address for a specific network interface is obtained, and for wireless interfaces, how and when wireless connections are automatically attempted. The network interface is selected from the *Show* dropdown list at the top of the window.

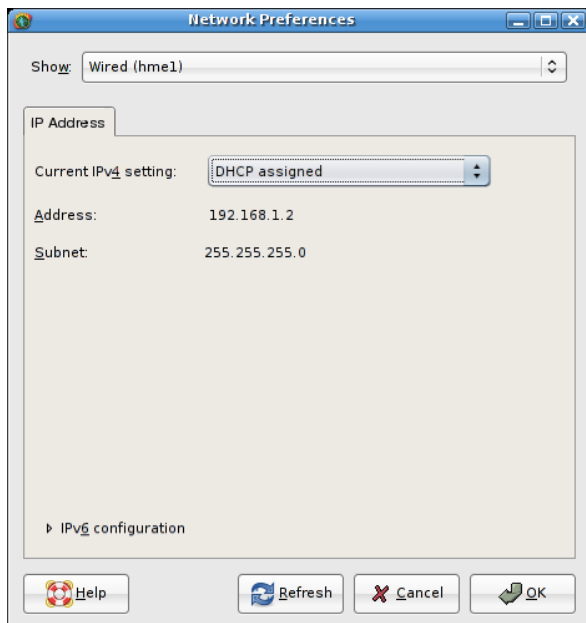

When you select a network interface, a tabbed view appears allowing you to edit its properties. For all connection types, the first tab is the *IP Address* tab, on which you choose its IPv4 and IPv6 addresses. For wireless connections, a *Wireless* tab also appears, on which you choose the way in which the wireless interface connects to available wireless networks.

Connection Properties : IP Address (IPv4)

IPv4 addresses can be assigned automatically, manually or disabled for each network interface. The controls shown vary dynamically based on the selection made from the *Current IPv4 setting* dropdown list:

Current IPv4 setting: Disabled

Disabled: No IPv4 address is assigned to this network interface.

Current IPv4 setting: DHCP assigned

Address: 192.168.1.2

Subnet: 255.255.255.0

DHCP assigned: when this option is selected, the *Address* and *Subnet* fields are provided via DHCP and shown as static labels.

Current IPv4 setting: Manually assigned

Address:

Subnet:

Manually Assigned: when this option is selected, the *Address* and *Subnet* fields are editable.

Current IPv4 setting: Multiple addresses

Address	Subnet
192.143.24.45	192.143.23.0
192.143.24.32	192.143.90.0
<input type="text"/>	

Double-click table cells to edit + Add - Remove

Multiple Addresses: This is an [editable table](#) as defined on p??. The overlaid control used for both the *Address* and *Subnet* cells in each row is a text box.

Persistence


When switching between *DHCP assigned*, *Manually assigned* and *Multiple addresses*, any data that was entered is stored in case you later switch back to that view. This data is also remembered between sessions.

Address format and validation

For the *Manually Assigned* and *Multiple Addresses* input modes, you may enter the IP addresses and subnets separately in their respective text boxes, in the format `w.x.y.z`.

Alternatively, you may enter the address in the format `w.x.y.z/n`. In this case, when keyboard focus is moved out of the *Address* field, the input will be converted to separate address and subnet values, with each value shown in its corresponding text box. Keyboard focus will move to the next control *after* the subnet field.

Address and subnet syntax is checked when you switch to a different tab, click **OK**, or select a different item from the *Show* dropdown at the top of the dialog. An appropriate alert is shown if any of the fields are invalid, for example:

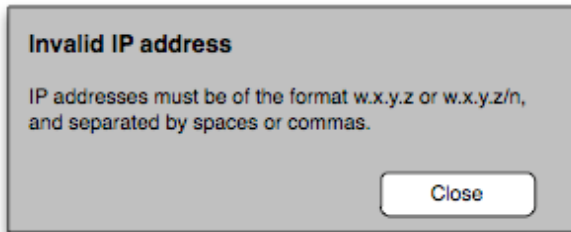

Dismissing the alert focuses the offending field ready for input.

Connection Properties : IP Address (IPv6)

IPv6 addresses can be assigned automatically, manually or disabled for each network interface. The controls shown vary dynamically based on the selection made from the *Current IPv6 setting* dropdown list, which is one of the controls in the *IPv6 Configuration* expander.

The expander is collapsed by default for interfaces for which IPv6 is disabled, and expanded by default for interfaces for which IPv6 is enabled.

The left screenshot shows the 'IPv6 configuration' section with the 'Current IPv6 IP setting' dropdown set to 'Disabled'. The right screenshot shows the same section with the setting set to 'Enabled'. Below the setting, the 'Static addresses' checkbox is checked. A table with two columns, 'Address' and 'Prefix Length', is visible. The table contains one row with the address '2001:0db8:3c4d:0015:0000:0000:abcd:ef12' and a prefix length of '16'. Below the table are 'Add' and 'Remove' buttons. A note at the bottom of the table says 'Double-click table cells to edit'.

Address	Prefix Length
2001:0db8:3c4d:0015:0000:0000:abcd:ef12	16

Disabled: No IPv6 addresses will be assigned to this network interface.


Enabled: when this option is selected, the network interface attempts to obtain an IPv6 address via DHCP, unless the *Static Addresses* checkbox is also checked.

Static Addresses: When checked, the table below the checkbox is enabled to allow assignment of additional, manual IPv6 addresses to the network interface. The table is an [editable table](#) as defined on p??, with text fields used as the overlaid input controls for both the *Address* and *Prefix Length* fields. Their syntax is checked when you switch to a different tab, click **OK**, or select a different item from the *Show* dropdown at the top of the dialog. An appropriate alert is shown if any of the fields are invalid.

When the *Static Addresses* box is unchecked, the table is disabled but remains visible.

Connection Properties : Wireless

This tab only appears when a wireless network interface is selected from the *Show* dropdown list at the top of the window.

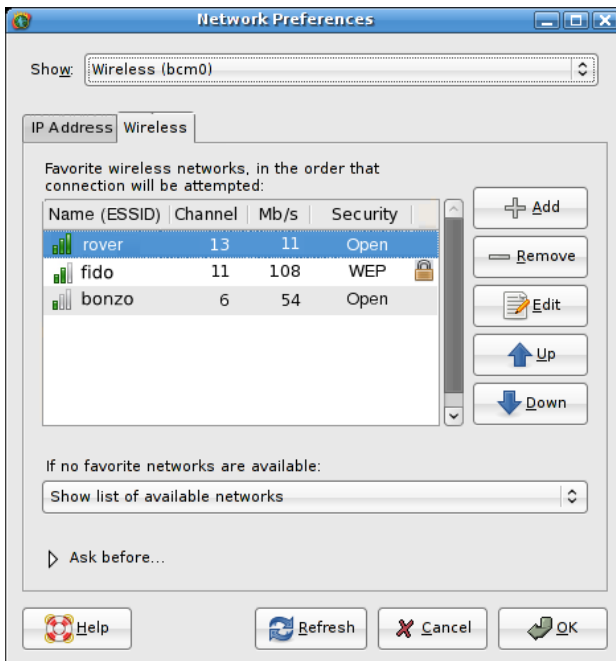

The list shows your current favourite (or “bookmarked”) networks, in the order in which any automatic connection will be attempted.

First column shows signal strength and name (ESSID). Second column shows wireless channel, third column shows speed, fourth column shows security type, with a right-aligned 'secure' icon for secure networks. List is re-orderable using drag and drop, or the **Up** and **Down** buttons.

If no favorite networks are available when a wireless connection is attempted for this interface, a dropdown list offers the choice of what to do:

- *Show list of available networks*: opens the [wireless network chooser dialog](#) (p??) to ask which other network to join.
- *Join an open network*: attempt to join any available unsecured wireless network, starting with the one with the strongest signal. If the *Ask before joining a new open network* preference is checked (see next page), you will be asked to confirm before joining any open networks.
- *Do not connect*: do not attempt to join any other wireless network until new networks are detected, or a different Network Profile or Location is selected.


Add opens the [Add Wireless Network dialog](#) (p??), but with its *Add to favorite networks* checkbox hidden.

Remove deletes the selected network from the list.

Edit opens the [Edit Wireless Network dialog](#) (p??), preloaded with the the selected network's details, and with its *Add to favorite networks* checkbox hidden. The **Edit** button is disabled if no network is selected in the list.

Up/Down buttons move the selected network up/down in the list. **Up** is disabled when the selected network is at already at the top, likewise **Down** is disabled when the selected network is already at the bottom.

The *Ask before...* expander controls how many questions you are asked when joining wireless networks. It is collapsed by default. *TBD: Not sure which of these can be implemented for Phase 1.*

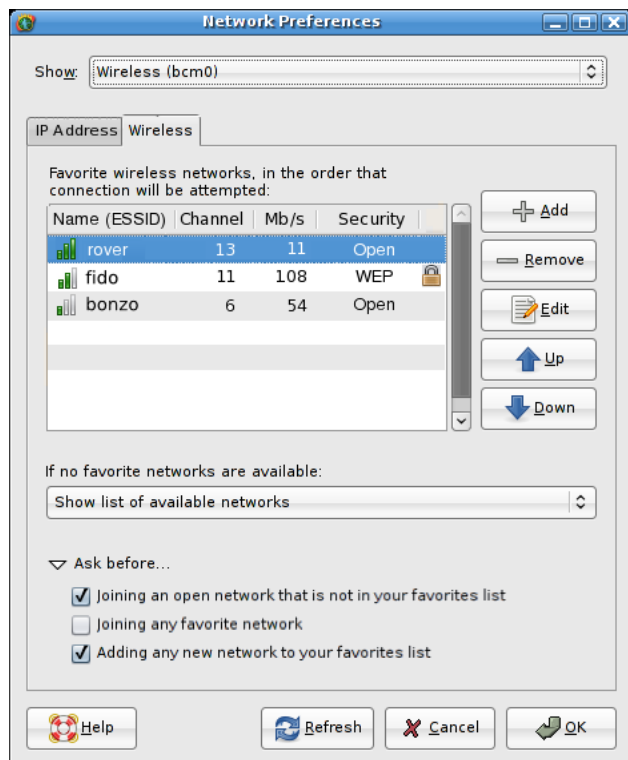

- *Joining an open network that is not in your favorites list (default=yes):* If checked, causes the [Join Wireless Network dialog](#) (p??) to appear when an attempt is made to join an open network because no favorite networks were available. The dialog is pre-filled with the network's name and security type (which will always be “None” in this case).

If unchecked, open networks are joined automatically when no favorite networks are available, with no interaction necessary.

- *Joining any favorite network (default=no):* If checked, causes the [Join Wireless Network dialog](#) (p??) to appear when an attempt is made to join a favorite network (either open or secure). The dialog is pre-filled with the network's name, security type and any saved password information.


If unchecked, favorite networks are joined automatically as required, provided any necessary credentials have previously been entered and saved.

- *Adding any new network to your favorites list (default=yes):* If checked, causes the *Add to favorite networks* checkbox to appear in the [Add Wireless Network](#) (p??) and [wireless network chooser](#) dialogs (p??), whenever they are shown.

If unchecked, new networks will be added to the favorites list automatically on first connection, with no interaction necessary.

Location Preferences

This dialog allows you to switch locations, edit their properties, and create new locations. Open this dialog by choosing *Location Preferences* from the panel applet's right-click menu, or from *Launch->Preferences->Locations*.

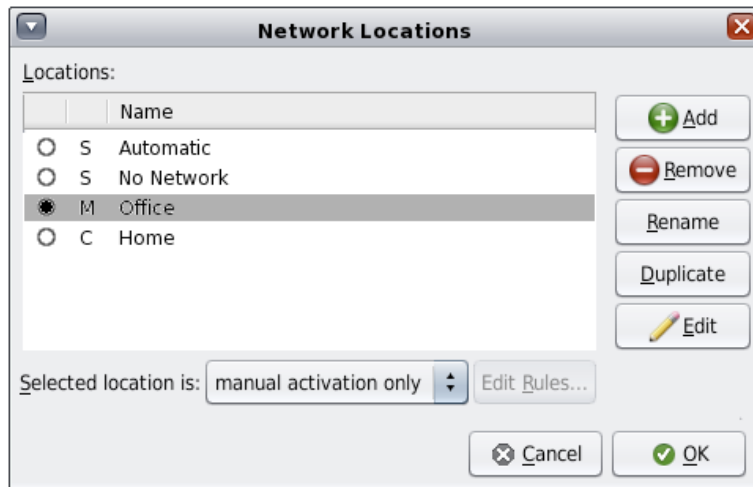

The *Locations* list is analogous to that on the [panel icon context menu](#); it lists each available location, with an icon *TBD-shown here as a letter* representing its activation type: *system*, *manual* or *conditional*. The mode of the selected location is also shown by the *Selected location* dropdown list.

The current location is represented by a radio button indicator. Selecting the radio button of a manual location other than the current location attempts to activate that location when the **OK** button is clicked.

Conditional and system locations are greyed-out since you cannot manually switch to these locations. *TBD: or should it be possible to select conditional locations? Would this attempt to change their type to manual and activate them?*

Changing activation modes

To change the activation mode of a location, select it in the list, and select the new mode from the *Selected location* dropdown below the list. Note that when a system location is selected, the dropdown list and **Edit Rules** button are disabled, and the dropdown list entry *activated by system* is shown.

When a manual or conditional location is selected, the dropdown list options are:


- *manual activation only*: this location is only enabled when it is manually selected. When this option is selected, the **Edit Rules** button is disabled.
- *activated by Rules*: the location will be automatically selected when certain network conditions occur. When this option is selected, the **Edit Rules** button is enabled. Clicking the button opens a [Rule Editing](#) dialog (p??), with the following parameters:
 - Condition Text: default ("If the following conditions are true:")
 - Match any/all radio buttons: shown
 - Conditions: Active connections, Any IP address, Any advertised domain name, Any system domain name, Current location, Running VPN applications, Wireless network name. (See [available conditions](#), p??)

Adding locations

To add a new location with default settings, click the **Add** button. A new location (of activation type Manual) will be created with the name "Unnamed Location *N*". The "*N*" is not shown for the first unnamed location, and is the lowest numerical value ≥ 1 that would make the location name unique. The new location is selected (but not activated) in the list, and is placed into editing mode as if the user had clicked the **Rename** button (see below).

Removing locations

To delete the current location, click the **Remove** button. A confirmation alert appears:

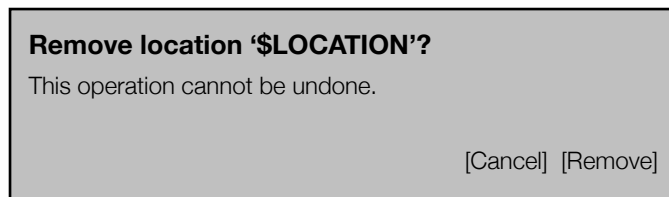

The **Remove** button is disabled when a system location (*Automatic* or *No Network*) is selected, as they cannot be deleted.

Renaming locations

To rename the selected location, click the **Rename** button. This causes the location name to be replaced by an in-place text field in the list, whose contents are the current name, fully selected. This allows immediate overtyping of a new name. The user can press *Enter* to accept the new name and exit the editing mode, or *Esc* to revert to the previous name and exit the editing mode.


Duplicating locations

To duplicate the selected location, click the **Duplicate** button. A new location will be created with the name “Copy of *LOCATION*” if that name is unique, otherwise “Copy of *LOCATION N*” where *N* is the lowest numerical value ≥ 1 that would make the location name unique. The new location is selected (but not activated) in the list, and is placed into editing mode as if the user had clicked the **Rename** button (see above).

Editing locations

To edit the properties of a location, select it in the list and click the **Edit** button. This opens the [Edit Location dialog](#) (p??).

You are not allowed to edit System locations (currently *Automatic* and *No Network*). Rather than disabling the majority of the dialog when this location is selected, however, the Edit button remains enabled when a system location is selected. Clicking it causes an alert box to be displayed, explaining that the location is not editable but may first be duplicated instead:

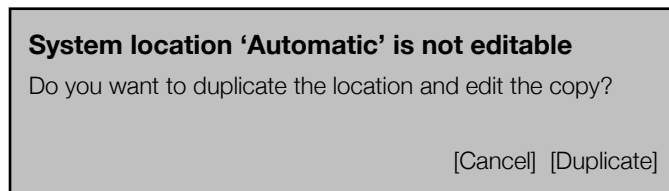


Clicking **Duplicate** creates a new location with the default name “Copy of *LOCATION N*” (see above for value of *N*).

Clicking **Cancel** discards the alert box with no further action.

Edit Location : Proxies - NOT IN PHASE 1

The Location Properties dialog is opened by clicking the **Edit** button in the [Location Preferences dialog](#). It allows you to edit the Proxies, Name Services, Security and Network Services for the selected location.


The *Proxies* tab is the first in the dialog, and selected by default.

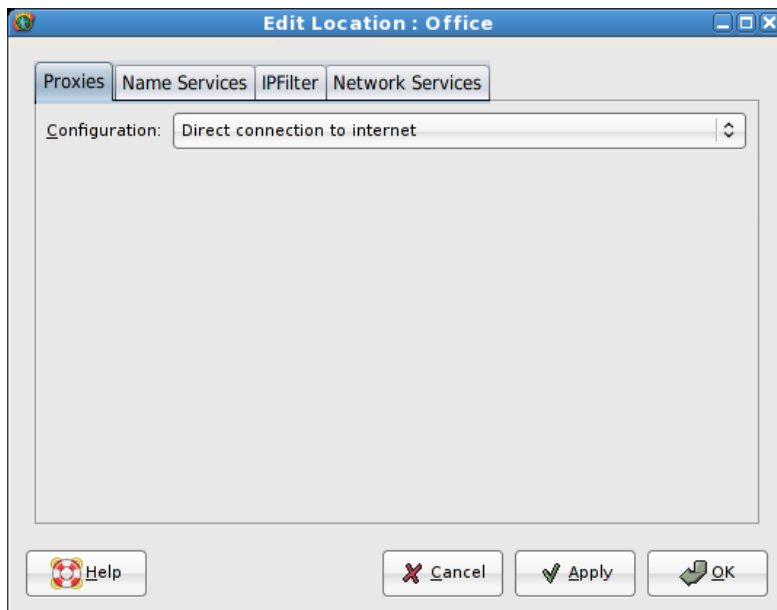


If no proxy is required for this location, select *Direct connection to internet* from the *Configuration* dropdown. This is the default setting for new locations. No other controls are visible on the tab when this setting is chosen.

Using a manual proxy

To manually assign a proxy, select *Manually assigned* from the *Configuration* dropdown. The tab contents change to show the manual proxy controls:

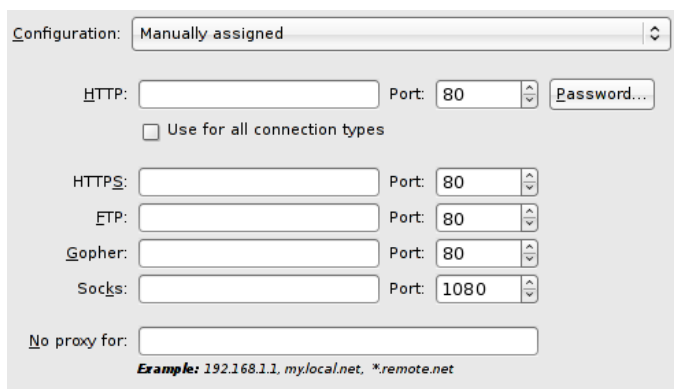

Fill in the HTTP proxy hostname (default is blank) in the HTTP field, and port number (default is 80) in the Port field. If the HTTP proxy requires authentication, click **Password** to open a dialog where you can enter a username and password:

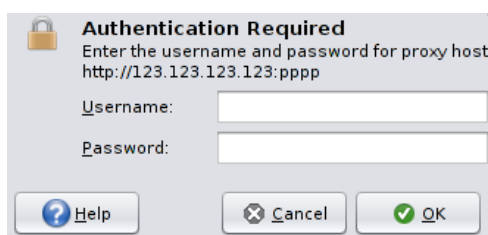


To use the same proxy host and port number for all other services, check the *Use for all connection types* checkbox. The *HTTPS*, *FTP*, *Gopher* and *Socks* text fields and spin boxes are then populated with the same information as in the HTTP field and spin box, and are greyed out to disallow editing. Unchecking the box re-enables the controls, and replaces their contents with their last contents before *Use for all connection types* was checked, so you can now enter a proxy host and port number for each connection type individually.

To bypass the proxy for connections to certain hosts, enter their names or IP addresses in the No proxy for field, separated by spaces or commas. (See equivalent Firefox dialog for allowed syntax.)

Using a Proxy Configuration (PAC) file


To use a proxy configuration file, choose *From configuration (PAC) file* from the *Configuration* dropdown. The only other control now visible will be a file chooser button (default selection: the last-selected PAC file, or (None) if no file has previously been chosen):

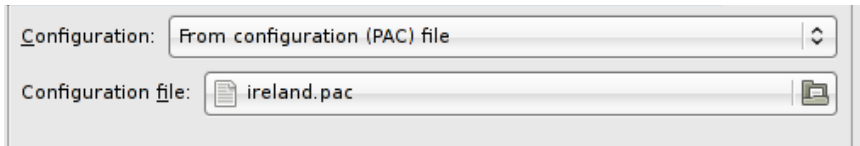

Clicking the button opens a standard gtk file chooser dialog, filtered on .pac files. If an existing .pac file is already in force, the dialog opens in its containing directory, otherwise in the user's home directory.

Edit Location : Name Services

This tab allows you to configure name services that are used when the location is active.

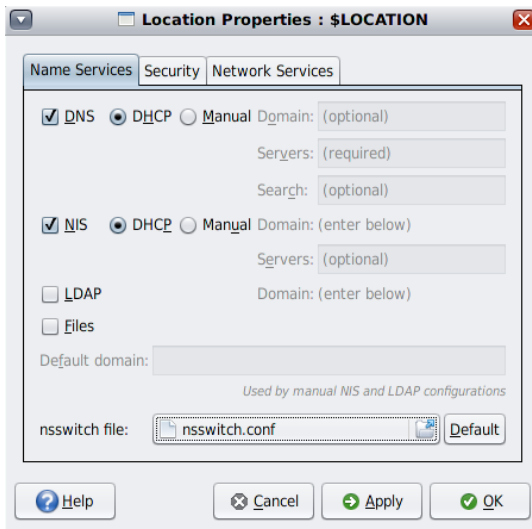

Check one or more of the *DNS*, *NIS*, *LDAP* or *Files* checkboxes to specify which services should be configured for this location.

- **DNS:** When checked, the *DHCP* and *Manual* radio buttons are enabled. When unchecked, the radio buttons are disabled. When the *DHCP* radio button is selected (default), the *Domain*, *Servers*, and *Search* fields are disabled, and the DNS service is configured via DHCP. When the *Manual* radio button is selected, the *Domain*, *Servers*, and *Search* fields are enabled.

Domain (optional): type one or more DNS domain names into the text field, separated by spaces or commas.

Servers (required): type one or more DNS server names into the text field, separated by spaces or commas.

Search (optional): type one or more DNS search domain names into the text field, separated by spaces or commas.

- **NIS:** When checked, the *DHCP* and *Manual* radio buttons are enabled. When unchecked, the radio buttons are disabled. When the *DHCP* radio button is selected (default), the *Domain* and *Servers* fields are disabled, and the NIS service is configured via DHCP. When the *Manual* radio button is selected, the *Domain* and *Servers* fields are enabled.

Domain: a static text label that reflects the contents of the *Default domain* field below. To specify an NIS domain, you must type it into the Default domain field. While the *Default domain* field is empty, the text “(enter below)” is shown as the NIS domain.

Servers (optional): type one or more server names into the text field, separated by spaces or commas.

- **LDAP:** When checked, the *Domain* text is enabled. When unchecked, the *Domain* text is disabled. The text is a static label that reflects the contents of the *Default domain* field below. While the *Default domain* field is empty, the text “(enter below)” is shown as the LDAP domain.
- **Files:** no further configuration options available.

Nsswitch File is a file selection button that allows you to choose the name service configuration file that is used for this location. Note that editing the values in this dialog do not cause any changes to be written to this file, so you may still need to edit the selected configuration file by hand to achieve the exact behaviour you require.


The default value of the file selection button depends on how many name services are checked above:

- if more than one name service is checked, the default value is `/etc/nsswitch.conf`
- if more than one name service is checked, the default value is the nsswitch file for that service (e.g. `/etc/nsswitch.dns` if only the DNS service is checked)

The **Default** button is enabled only when one service is checked, and when the current value of the file selection button is *not* the default nsswitch file for that service. Clicking the **Default** button changes the selected file to the appropriate default for that service. For example, `/etc/nsswitch.dns` if only the DNS service is checked, or `/etc/nsswitch.files` if only the Files service is checked.

Edit Location : Security

This tab allows you to select configuration files to be used by IPfilter and IPsec features when the location is active.

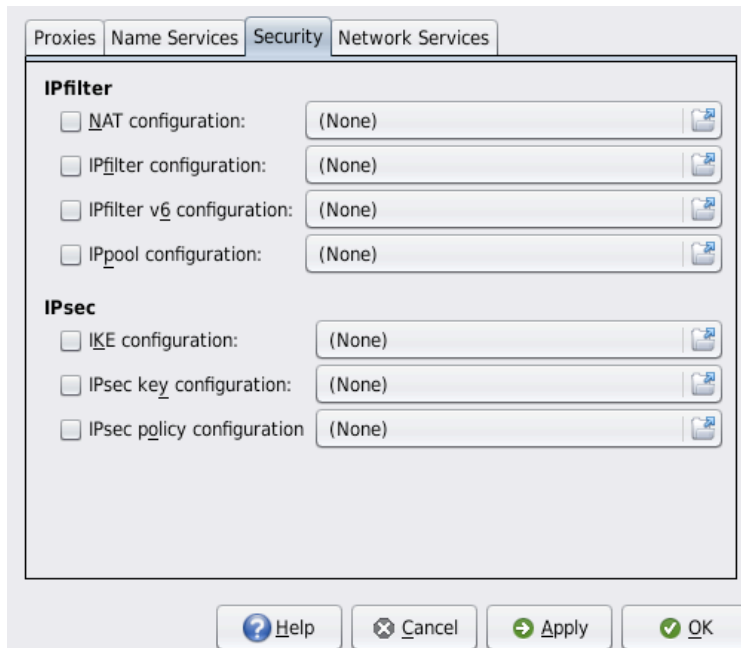


Each checkbox / file chooser button combination behaves the same way:

- When you check a box, the corresponding file chooser button is enabled. If no filename is currently associated (i.e. the file chooser button is showing “(None)”), a file selection dialog is opened immediately, allowing you to choose the configuration file. (If you cancel this dialog, the box is automatically unchecked again.) Otherwise, the filename that was already showing in the button will be used until you click the file chooser button.
- When you uncheck a box, the corresponding file chooser button is disabled, and the filename shown in the button will no longer be associated with that feature when the location is active. However, the last-used filename remains visible in the disabled control, and is remembered between sessions. This allows the filename to be quickly re-associated with the feature simply by checking the corresponding box.

No changes are made to running IPfilter, NAT or IPsec services until you click the **Apply** or **OK** button.

Edit Location: Network Services


This dialog allows you to specify specific SMF services that should be enabled or disabled when the location becomes active.

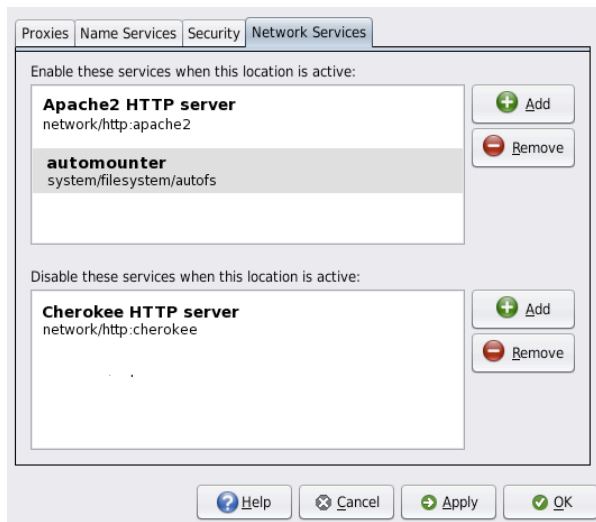


The first list, labelled *Enable these services when this location is active*, is a list of SMF services to be explicitly enabled when the location becomes active. The primary bold text for each list entry shows the name of the service, the smaller secondary text shows its FMRI.

Similarly, the second list, labelled *Disable these services when this location is active*, is a list of SMF services to be explicitly disabled when the location becomes active.

Both lists are empty by default for a newly-created location. To add a service to either list, click the **Add** button beside the list. This opens a sub-dialog into which the FMRI of the desired service can be entered:

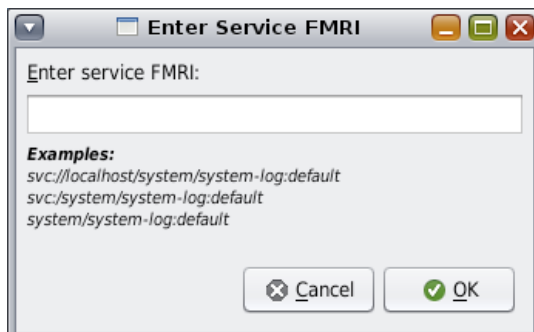

An FMRI can be entered in one of three ways: first as an absolute path including a location path such as "localhost"; second as a path relative to the local machine; and third as simply the service identifier with the string prefixes implied. Clicking the **OK** button checks the validity of the FMRI, and adds the service to the list if it exists. Otherwise, an alert is shown which, when dismissed, returns focus to the FMRI field for amendment.

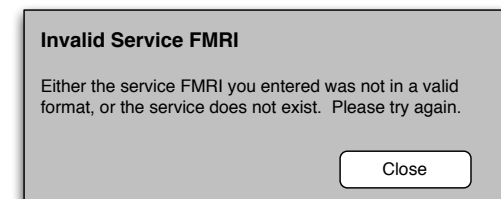

TBD: Should probably really have a separate alert for each case (invalid format, and non-existent service).

To remove a service from either list, select the service and click the **Remove** button.

Add/Join/Edit Wireless Network

This dialog asks for information about a specific wireless network.



The dialog is opened in several ways:

- Manually, by selecting *Join Unlisted Wireless Network* on the [panel icon context menu](#) (p??). The title bar text in this case is “Join Wireless Network”
- Manually, by clicking **Add** or **Edit** in the [Connection Properties, Wireless tab](#) (p??). As much information as is already known about the network (its ESSID, and any previously-entered username and passwords that have been stored locally) will be pre-filled when the dialog appears. The title bar text in this case is “Add Wireless Network” or “Edit Wireless Network”, accordingly.
- Manually, by clicking the “No wireless networks found” [notification message](#) (p??)
- Automatically, if any of the “Ask Before” criteria in the [Connection Properties, Wireless tab](#) are satisfied (p??). The title bar text in this case is “Join Wireless Network” or “Add Wireless Network” accordingly.

Network Name (ESSID): The name of the wireless network you wish to connect to. This is an editable combo box whose dropdown lists the currently available wireless networks that are broadcasting their ESSID.

Security Type: A dropdown list of supported security protocols. When connecting to an access point that is broadcasting its ESSID, the security type is pre-selected when the dialog opens or when the ESSID is entered in the field above. Password fields vary according to selection, see next page.

Show passwords while typing: If unchecked (default), typing will be masked in password fields. If checked, the password field will be shown in plain text while it has focus, and revert to mask characters when focus is lost.

Add to favorite networks list: This checkbox is:

- Visible, if the dialog is opened from the [panel icon context menu](#), and the *Ask before adding any new network to favorites* checkbox in the connection's [Connection Properties, Wireless tab](#) (p??) is also checked.
- Hidden, if the dialog is opened from the [panel icon context menu](#), and the *Ask before adding any new network to favorites* checkbox in the connection's [Connection Properties, Wireless tab](#) (p??) is *not* checked.
- Hidden, if the dialog is opened from the **Add** button on the [Connection Properties, Wireless tab](#).

If the box is checked, the specified network is added to the [Favourites list](#) once a successful connection is made.

The *More Options* expander is collapsed by default. It expands to show:

- *Known BSSIDs* : A list of MAC addresses of the access points that are known to be associated with this ESSID, which is used by NWAM to identify known wireless networks. This is an [editable table](#) as defined on p??.

The **OK** button is disabled until a network name is entered. When the user clicks **OK**, an alert is displayed if:

- The two passwords entered do not match
- The passwords match but are an invalid format/length
- A BSSID is provided but is an invalid format (should be MAC address format)

When the alert is dismissed, the offending field is focused ready for input.

Security type *None*:

The screenshot shows a configuration window with two fields: 'Network name (SSID):' with the value 'rover' and a dropdown arrow, and 'Security type:' with the value 'None' and a dropdown arrow.

- Open network, no password fields displayed. *Show passwords while typing* field is disabled.

Security type *WEP Hex*:

The screenshot shows the configuration window with 'Network name (SSID):' set to 'rover', 'Security type:' set to 'WEP Hex', and a 'Password:' field containing ten black dots, indicating a masked password.

- *Password*: String required to join specified network, initially blank.

Security types *WEP ASCII* and *WPA Personal*:

The screenshot shows the configuration window with 'Network name (SSID):' set to 'rover', 'Security type:' set to 'WEP ASCII', a 'Password:' field with five black dots, and a 'Key index:' field with the value '1' and a dropdown arrow.

- *Password*: 5- or 13-character passphrase required to join specified network, initially blank.
- *Key Index*: Which of the WEP keys generated from the passphrase should be used. Valid Range: 1-4.


Security type: *WPA Enterprise (not supported in Phase 1)*:

The screenshot shows the configuration window with 'Network name (SSID):' set to 'rover', 'Security type:' set to 'WPA Enterprise (Radius)', a 'Username:' field with the value 'xyzzy', a 'Password:' field with ten black dots, a 'Configuration:' field with the value 'PEAP/MSCHAPv2', and a 'Certificate File:' field with the value '(None)' and a file icon button.

- *Username, Password*: WPA username and password
- *Configuration*: LEAP or PEAP/MSCHAPv2
- *Certificate File*: Click to open a file chooser from which the certificate file can be selected *TBD is there a file extension on which we could/should filter?*. Only valid for PEAP/MSCHAPv2 configuration; button is disabled if LEAP configuration is selected.

Wireless Network Chooser

This dialog shows the wireless networks that are currently available, and allows you to connect to one of them.

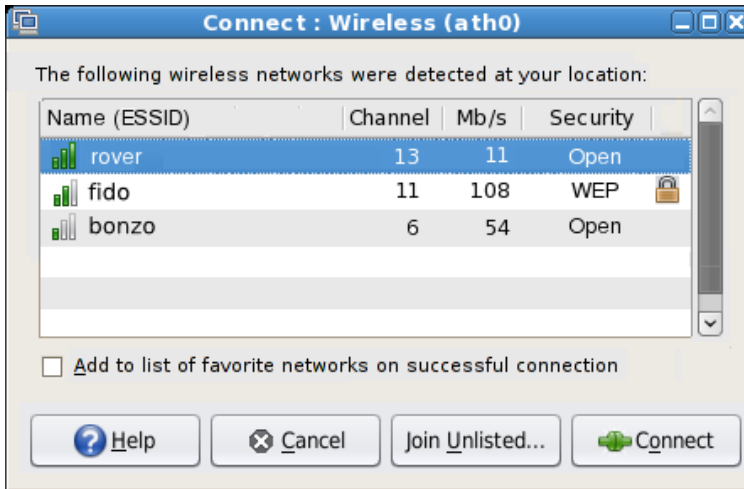

The dialog is shown if any of the following happen:

- The user clicks the “InterfaceType (LinkName) disconnected from ESSID” [notification message](#) (p??)
- A wireless connection is attempted when the user's favorite wireless networks list is empty
- No favorite networks have been found, and the *Show available networks* preference has been set on the [Connection Properties, Wireless tab](#) (p??).

The dialog title includes the name of the interface attempting to connection: “Connect: *InterfaceType (LinkName)*”. Wireless networks are listed in descending order of signal strength.

The *Add to favorite networks list* checkbox is shown only if the *Ask before adding any networks to favorites* preference is checked on the [Connection Properties, Wireless tab](#) (p??). If it is not checked, the network is not added to your favorites list upon connection.


If no wireless networks are in range, the list consists of a single entry, “No wireless networks available”.

Clicking **Connect** attempts to join the selected network immediately, if no further input is required. Otherwise, the [Join Wireless Network dialog](#) (p??) is opened with the network's details pre-filled, to allow input of passwords and other security credentials.

Clicking **Join Unlisted...** is equivalent to selecting *Join Unlisted Wireless Network* from the [panel icon context menu](#) (p??). That is, it opens the [Join Wireless Network dialog](#) (p??) with no details pre-filled, to allow you to connect to a network that is not broadcasting its ESSID. Once connected to any such network, it appears in the context menu and in the list of favorite and available networks. If the network was not added to the list of favorites when connecting, it will disappear from this list again after the next disconnection.

VPN Application Preferences

This dialog allows you to edit and monitor applications (ENMs) that alter the behaviour of your network connection; typically, applications that start/stop a VPN tunnel.

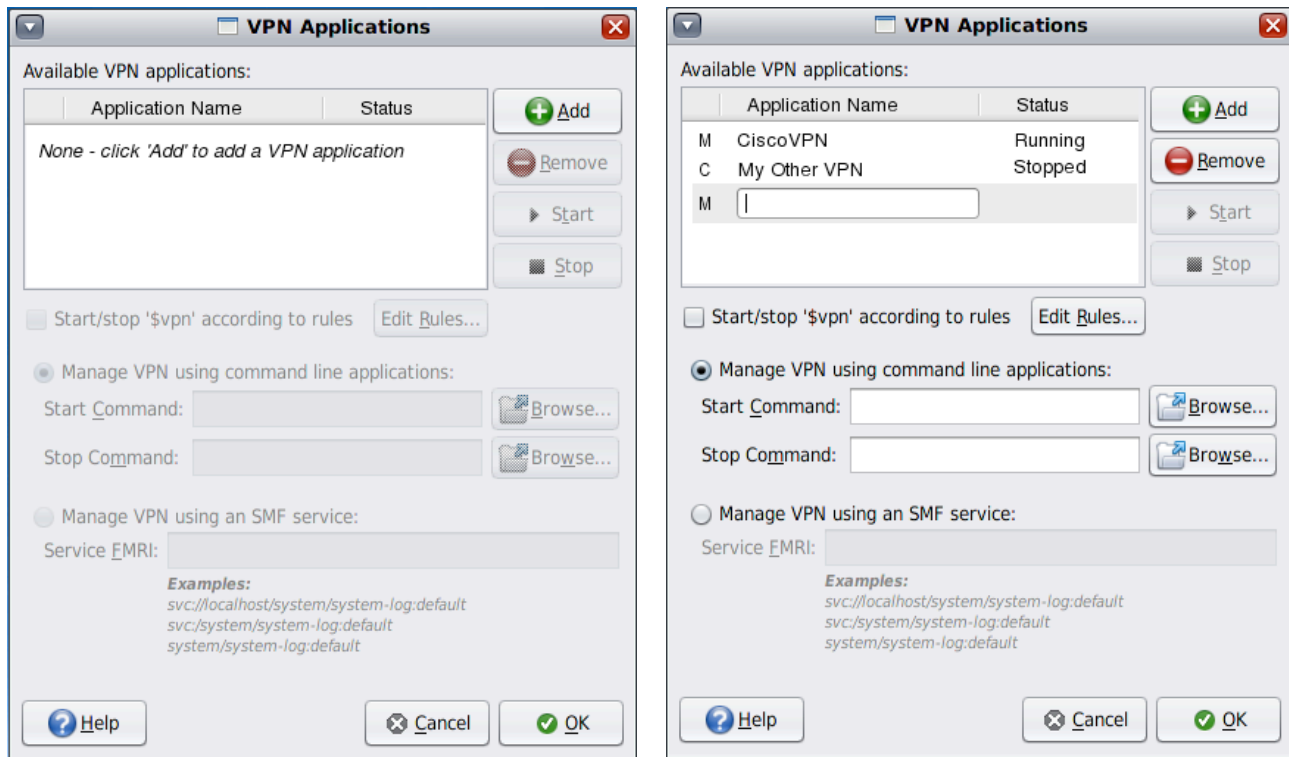

Open this dialog by clicking the **VPN** button on the [Network Preferences, Status View](#) (p??), or the *VPN Applications...* menu item on the [panel icon's context menu](#) (p??).

The main part of the dialog is a three column list, which shows, for each application:

- Activation state (manual or conditional) *TBD: state shown by “M” and “C” here, may use icons instead*
- User-defined name, e.g. “Cisco VPN”
- Current status, “Running” or “Stopped”

The Start/Stop according to rules checkbox below the list is checked if the selected VPN application has an activation type of Conditional, and unchecked if the type is Manual. You can change the type by toggling the checkbox.

The initial dialog state is shown above left, when no VPN applications have been added. Only the **Add** button is enabled.

Adding a new VPN application

Clicking **Add** switches focus to an embedded text field in the table, where the user can type a name for the new VPN application. At this point:

- Pressing *Enter* or *Tab* adds the new entry (of activation type *Manual* by default), and enables the two *Manage VPN* radio buttons. The first of these radio buttons (*command line applications*) is selected by default.
- Pressing *Esc* cancels the typing and no new application is added.

Adding a command line-controlled VPN application

When the *Manage VPN using command line applications* radio button is selected, the *Start Command* and *Stop Command* text fields, and the two *Browse* buttons are also enabled. The *Service FMRI* field and example text is disabled.

Type the command that starts the VPN process into the *Start Command* text field, or look for it using the **Browse** button, which opens a file chooser dialog. The **Start** button remains disabled for this VPN application until a valid command has been typed into this text field.

Type the command that starts the VPN process into the *Stop Command* text field, or look for it using the **Browse** button, which opens a file chooser dialog. The **Stop** button remains disabled for this VPN application until a valid command has been typed into this text field.

Adding an SMF service as a VPN application

When the *Manage VPN using an SMF service* radio button is selected, the *Service FMRI* field and example text is enabled. The *Start Command* and *Stop Command* text fields, and the two *Browse* buttons are disabled.

Type the FMRI of the VPN service into the text field. The **Start** and **Stop** buttons remain disabled for this VPN application until a valid FMRI has been typed into this text field.

Removing a VPN application

You can remove any (stopped) application from the list by selecting it, then clicking **Remove**. If the selected VPN application is running, the **Remove** button is disabled, and the application must be stopped first.

Starting and Stopping VPN applications

You can start a VPN application manually by selecting it in the list, then clicking **Start**. The **Start** button is only enabled for applications that are not currently running. *TBD: or should it be possible to select conditional ENMs? Would this attempt to change their type to manual and activate them? See email from mph.*

You can stop a VPN application manually by selecting it in the list, then clicking **Stop**. The **Stop** button is only enabled for applications that are not currently running. *TBD: or should it be possible to select conditional ENMs? Would this attempt to change their type to manual and activate them? See email from mph.*

You can have a VPN application start and stop automatically by setting its activation type to Conditional. You do this by checking the *Start/Stop according to rules* checkbox when the application is selected in the list.

When the box is checked, the **Edit Rules** button is enabled. This button opens a [Rule Editing dialog](#) (p??), with the following parameters:

- Condition Text: “‘\$appname’ will run while the following conditions are true:”
- Match any/all radio buttons: shown
- Conditions: Active connections, Any IP address, Any advertised domain name, Any system domain name, Current location, Running VPN applications, Wireless network name. (See [available conditions](#), p??)