

Browser tabs: Login / Register, Login / Register, LeetCode - Th, Binary Search, Settings - Leet, Settings - Leet, +, Ask Gemini

Address bar: leetcode.com/problems/binary-search/

Problem List, Submit, Premium

```
1 int search(int* nums, int numsSize, int target) {
2     int low=0;
3     int high=numsSize-1;
4     int mid;
5
6
7     while(low<=high)
8     {
9         mid=(low+high)/2;
10
11        if(target==nums[mid])
12        {
13            return mid;
14        }
15        else if(nums[mid]>target)
16        {
17            high=mid-1;
18        }
19        else if(nums[mid]<target)
20        {
21            low=mid+1;
22        }
23    }
24 }
25 return -1;
26
27
```

Saved Ln 25, Col 2

23°C Mostly sunny Search ENG IN 09:33 09-09-2026

LeetCode - The World's Leading... Binary Search - LeetCode HackerRank Arrays - DS | HackerRank Ask Gemini

leetcode.com/problems/binary-search/

Problem List Submit

Description Accepted Editorial Solutions Submissions

All Submissions

```
1 int search(int* nums, int numsSize, int target) {
2     int low=0;
3     int high=numsSize-1;
4     int mid;
5
6     while(low<=high)
7     {
8         mid=(low+high)/2;
9
10        if(target==nums[mid])
11        {
12            return mid;
13        }
14        else if(nums[mid]>target)
15        {
16            high=mid-1;
17        }
18        else if(nums[mid]<target)
19        {
20            low=mid+1;
21        }
22    }
23    return -1;
24 }
```

Code

```
1 int search(int* nums, int numsSize, int target) {
2     int low=0;
3     int high=numsSize-1;
4     int mid;
5
6     while(low<=high)
7     {
8         mid=(low+high)/2;
9
10        if(target==nums[mid])
11        {
12            return mid;
13        }
14        else if(nums[mid]>target)
15        {
16            high=mid-1;
17        }
18        else if(nums[mid]<target)
19        {
20            low=mid+1;
21        }
22    }
23
24 }
```

Testcase Test Result

23°C Mostly sunny Search 09:41 09-09-2026


LeetCode - The World's Leading
Binary Search - LeetCode
HackerRank
Arrays - DS | HackerRank
Ask Gemini

leetcode.com/problems/binary-search/

Problem List
Accepted
Editorial
Solutions
Submissions

Submit

10.13 MB | Beats 8.52%

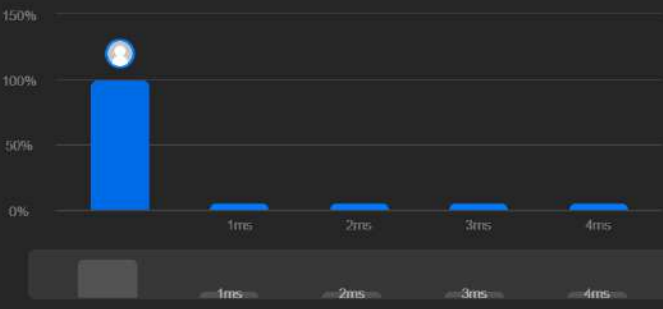

Code | C

```
1 int search(int* nums, int numsSize, int target) {
2     int low=0;
3     int high=numsSize-1;
4     int mid;
5
6
7 while(low<=high)
```

Code

```
1 int search(int* nums, int numsSize, int target) {
2     int low=0;
3     int high=numsSize-1;
4     int mid;
5
6
7 while(low<=high)
8 {
9     mid=(low+high)/2;
10
11     if(target==nums[mid])
12     {
13         return mid;
14     }
15
16     else if(nums[mid]>target)
17     {
18         high=mid-1;
19     }
20     else if(nums[mid]<target)
21     {
22         low=mid+1;
23     }
24 }
25
```

Saved

Ln 29, Col 1

Testcase | Test Result

23°C
Mostly sunny

Search

ENG
IN

09:41
09-09-2026

LeetCode - The World's Leading Online Platform for Programmers

Binary Search - LeetCode

HackerRank

Arrays - DS | HackerRank

Ask Gemini

leetcode.com/problems/binary-search/

Problem List

Submit

Testcase | Test Result

Accepted Runtime: 0 ms

Case 1 Case 2

Input

nums =

`[-1,0,3,5,9,12]`

target =

9

Output

4

Expected

4

Contribute a testcase