



```
[2]: class Animal:
      def sound(self):
          return 'Some sound'
      class Dog(Animal):
          def sound(self):
              return 'bark'
      class cat(Animal):
          def sound(self):
              return 'mew'
      animals = [Dog(), cat()]
      for a in animals:
          print(a.sound())
```

```
bark
mew
```

```
]: class Employees:
      def calculate_salary(self):
          return 'Basic Salary'
      class Managers(Employees):
          def calculate_salary(self):
              return 'Basic Salary + Manager allowance'
      class interns(Employees):
          def calculate_salary(self):
              return 'Stipend only'
      workers = [Employees(), Managers(), interns()]
      for w in workers:
          print(w.calculate_salary())
```

```
Basic Salary
Basic Salary + Manager allowance
Stipend only
```

```

#class Employee define work in the method function so that it will state that the manager
class Employee:
    def work(self):
        return 'Working for the company'
class Managers(Employee):
    def work(self):
        return 'Managers is planning and executing'
class Interns(Employee):
    def work(self):
        return 'Interns is learning'
workers = [Employee(), Managers(), Interns()]
for w in workers:
    print(w.work())

```

Working for the company
Managers is planning and executing
Interns is learning

```

]: class Shapes:
    def area(self):
        return 0
class Rectangle(Shapes):
    def __init__(self, l, w):
        self.l = l
        self.w = w
    def area(self):
        return self.l*self.w
class Circle(Shapes):
    def __init__(self, r):
        self.r = r
    def area(self):
        return 3.142*self.r*self.r
Shapes = [Rectangle(10, 6), Circle(7)]
for Shapes in Shapes:
    print(Shapes.area())

```

60
153.958

```


# Protecting a bank balance
class BankAccount:
    def __init__(self, balance):
        self.__balance = balance
    def deposit(self, amount):
        self.__balance += amount
    def get_balance(self):
        return self.__balance
acc = BankAccount(100)
acc.deposit(50)
print(acc.get_balance())

```

150

```
# _var for protected variable
class Car:
    def __init__(self, brand):
        self._brand = brand
c = Car('Toyota')
print(c._brand)
```

Toyota

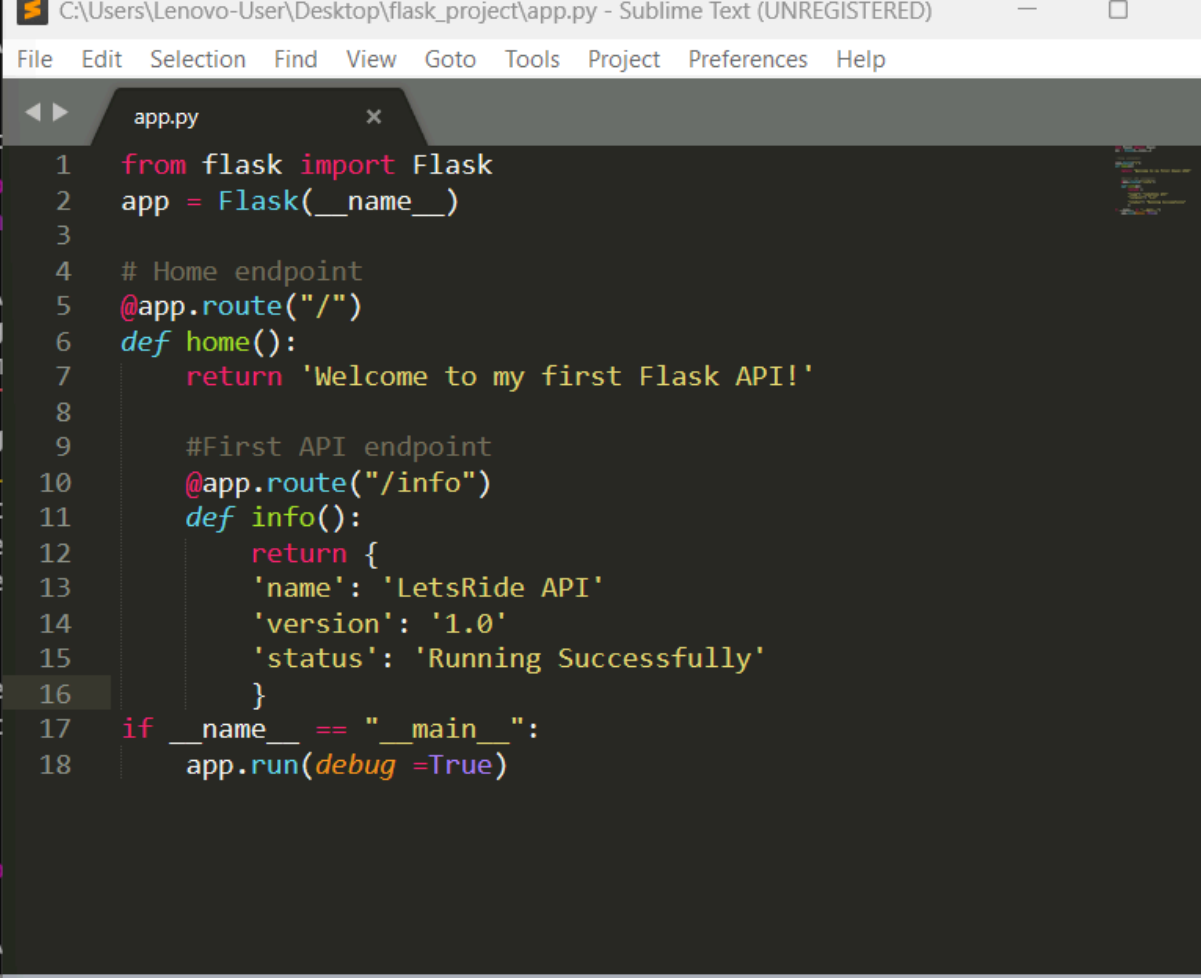

The screenshot shows a Sublime Text editor window with the title bar "C:\Users\Lenovo-User\Desktop\flask_project\app.py - Sublime Text (UNREGISTERED)". The menu bar includes "File", "Edit", "Selection", "Find", "View", "Goto", "Tools", "Project", "Preferences", and "Help". The editor displays the following Python code in a dark theme:

```
1  from flask import Flask
2  app = Flask(__name__)
3
4  # Home endpoint
5  @app.route("/")
6  def home():
7      return 'Welcome to my first Flask API!'
8
9      #First API endpoint
10     @app.route("/info")
11     def info():
12         return {
13             'name': 'LetsRide API'
14             'version': '1.0'
15             'status': 'Running Successfully'
16         }
17 if __name__ == "__main__":
18     app.run(debug =True)
```

```
Command Prompt
[notice] A new release of pip is available: 25.3 -> 26.0.1
[notice] To update, run: python.exe -m pip install --upgrade pip

(venv) C:\Users\Lenovo-User\Desktop\flask_project>python app.py
Traceback (most recent call last):
  File "C:\Users\Lenovo-User\Desktop\flask_project\app.py", line 1, in <module>
    from flask import flask
ImportError: cannot import name 'flask' from 'flask' (C:\Users\Lenovo-User\Desktop\flask_project\flask\__init__.py). Did you mean: 'Flask'?

(venv) C:\Users\Lenovo-User\Desktop\flask_project>python app.py
* Serving Flask app 'app'
* Debug mode: on
WARNING: This is a development server. Do not use it in a production deployment. Use Werkzeug's WSGI server or a production web server.
* Running on http://127.0.0.1:5000
Press CTRL+C to quit
* Restarting with stat
* Debugger is active!
* Debugger PIN: 117-184-794
127.0.0.1 - - [18/Mar/2026 15:31:13] "GET / HTTP/1.1" 200 -
127.0.0.1 - - [18/Mar/2026 15:31:13] "GET /favicon.ico HTTP/1.1" 404 -
* Detected change in 'C:\Users\Lenovo-User\Desktop\flask_project\app.py', reloading
* Restarting with stat
File "C:\Users\Lenovo-User\Desktop\flask_project\app.py", line 14
    'version': '1.0'
    ^
```

```
C:\Users\Lenovo-user\Desktop\flask_project\home.html - Sublime Text (UNREGISTERED)
File Edit Selection Find View Goto Tools Project Preferences Help

app.py home.html x
8 <meta name="description" content="A simple, professional
9 home page for the LetsRide Flask API with links and live
10 info." />
11 <!-- Inline CSS for a clean, professional look -->
12 <style>
13 :root{
14 --bg: #0c0f14;
15 --panel: #12161d;
16 --text: #e6e8ec;
17 --muted: #9aa3af;
18 --primary: #3b82f6; /* blue */
19 --primary-700: #1d4ed8;
20 --accent: #22c55e; /* green */
21 --radius: 12px;
22 --container: 960px;
23 --border: 1px solid rgba(255,255,255,.08);
24 --shadow: 0 10px 30px rgba(0,0,0,.25);
25 }
26 * { box-sizing: border-box; }
27 html, body { margin: 0; padding: 0; }
28 body {
font-family: system-ui, -apple-system, Segoe UI,
Roboto, "Helvetica Neue", Arial, sans-serif;
```

Welcome to the LetsRide API

This is a clean Flask starter with a proper HTML landing page. Use the buttons below to explore JSON endpoints, or view live API info right on this page.

[View **JSON** /info](#)[Load Info Here](#)

Live API Information (via JavaScript)

Click "Load Info Here" to fetch `/info` and render it below.

No data loaded yet.

About this App

A minimal, production-friendly starter. Clean structure, clear endpoints, and professional defaults.

JSON Endpoints

`GET /info` → API metadata