



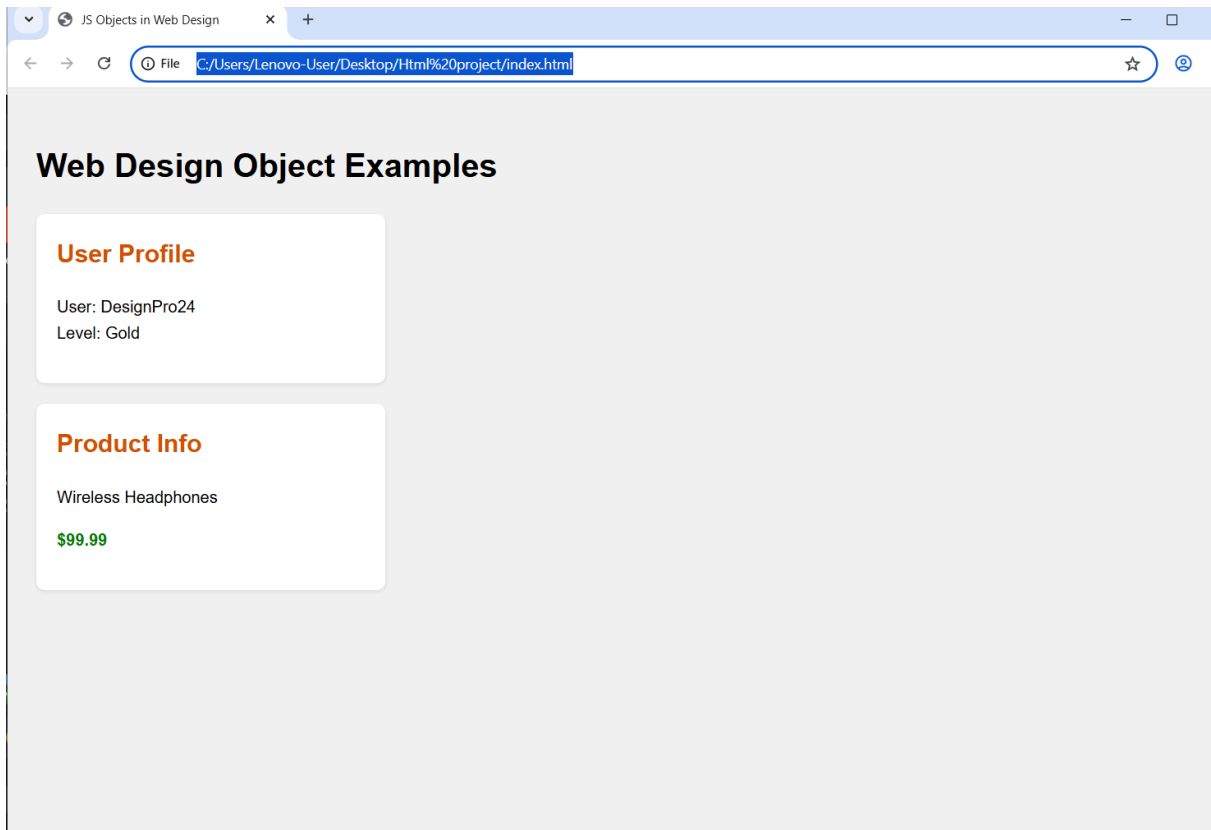
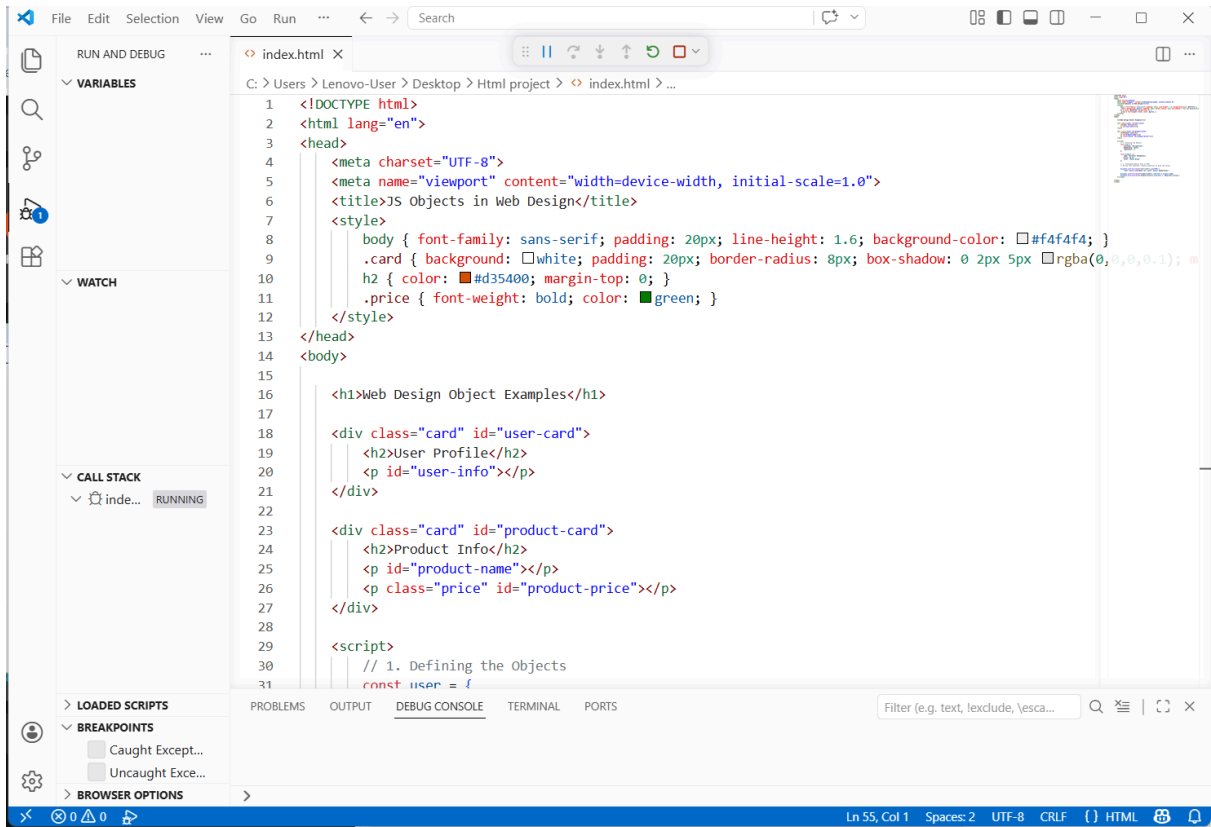
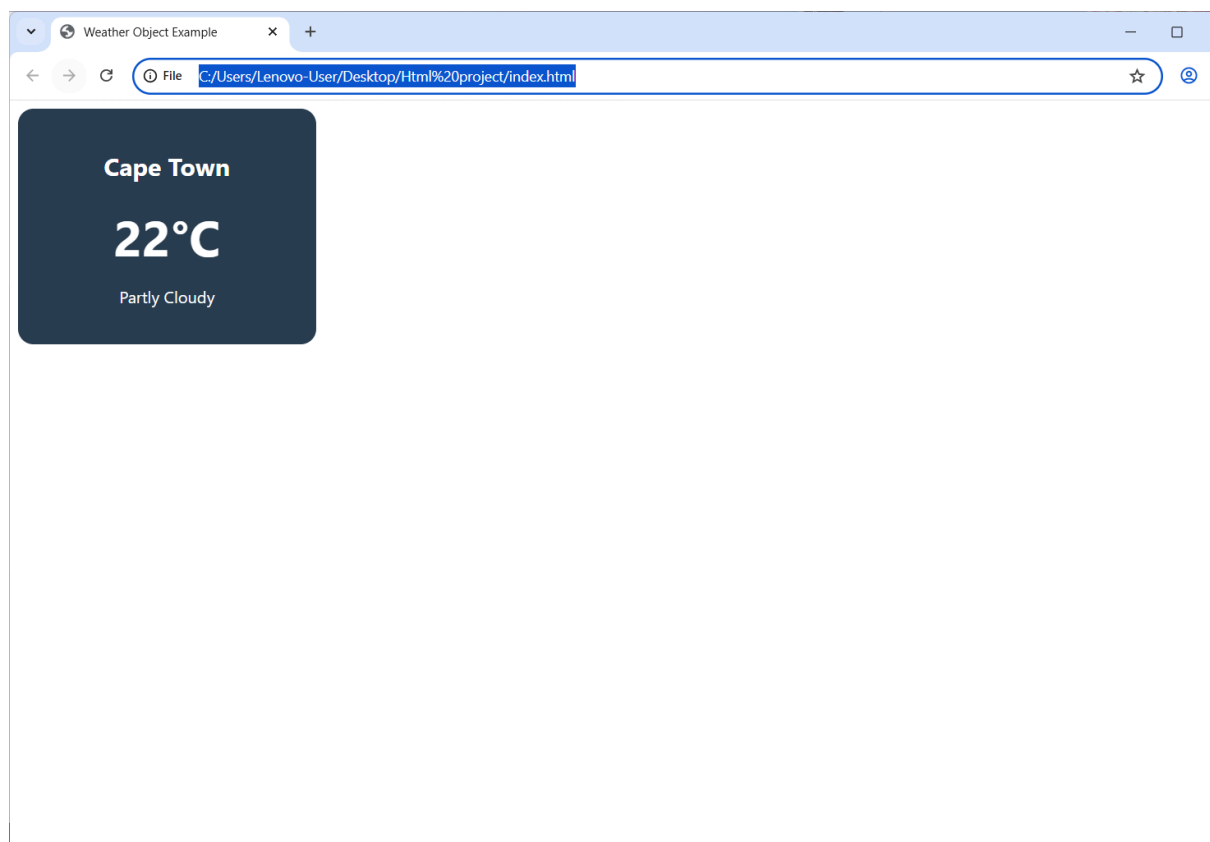


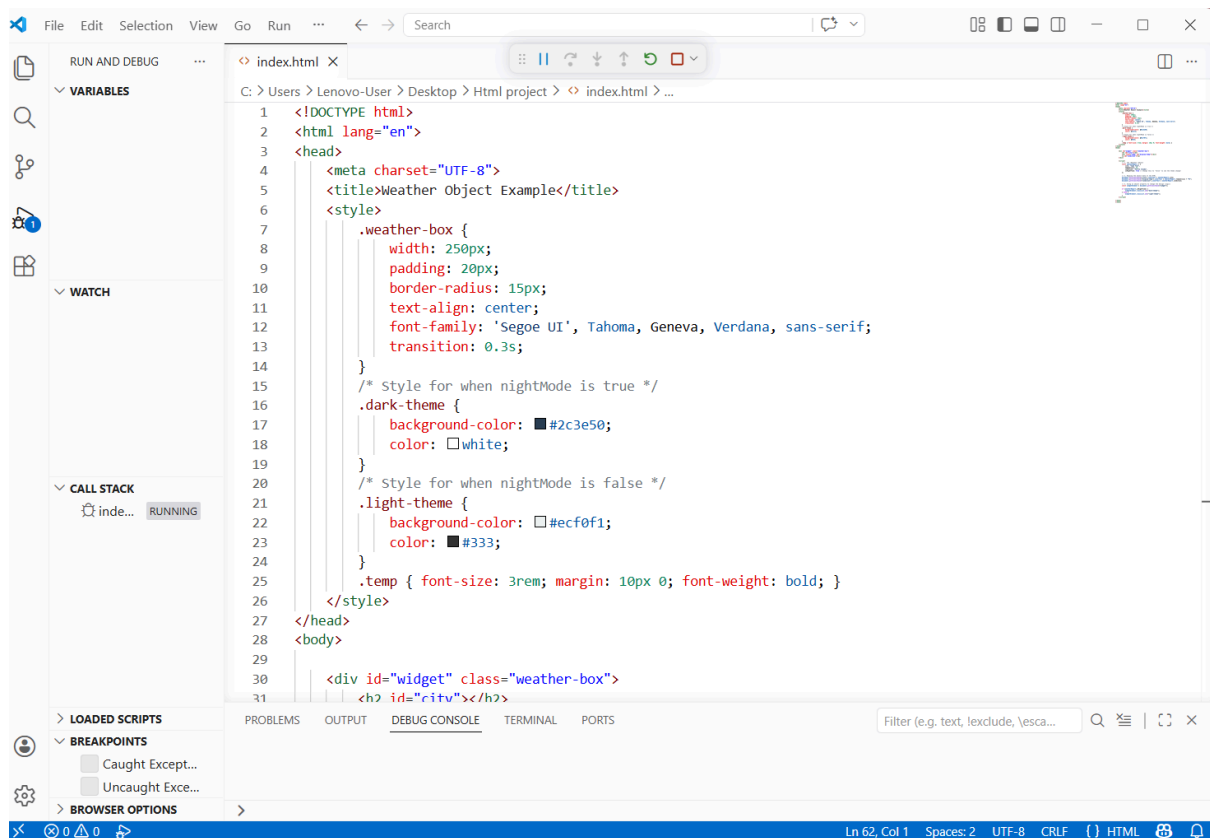

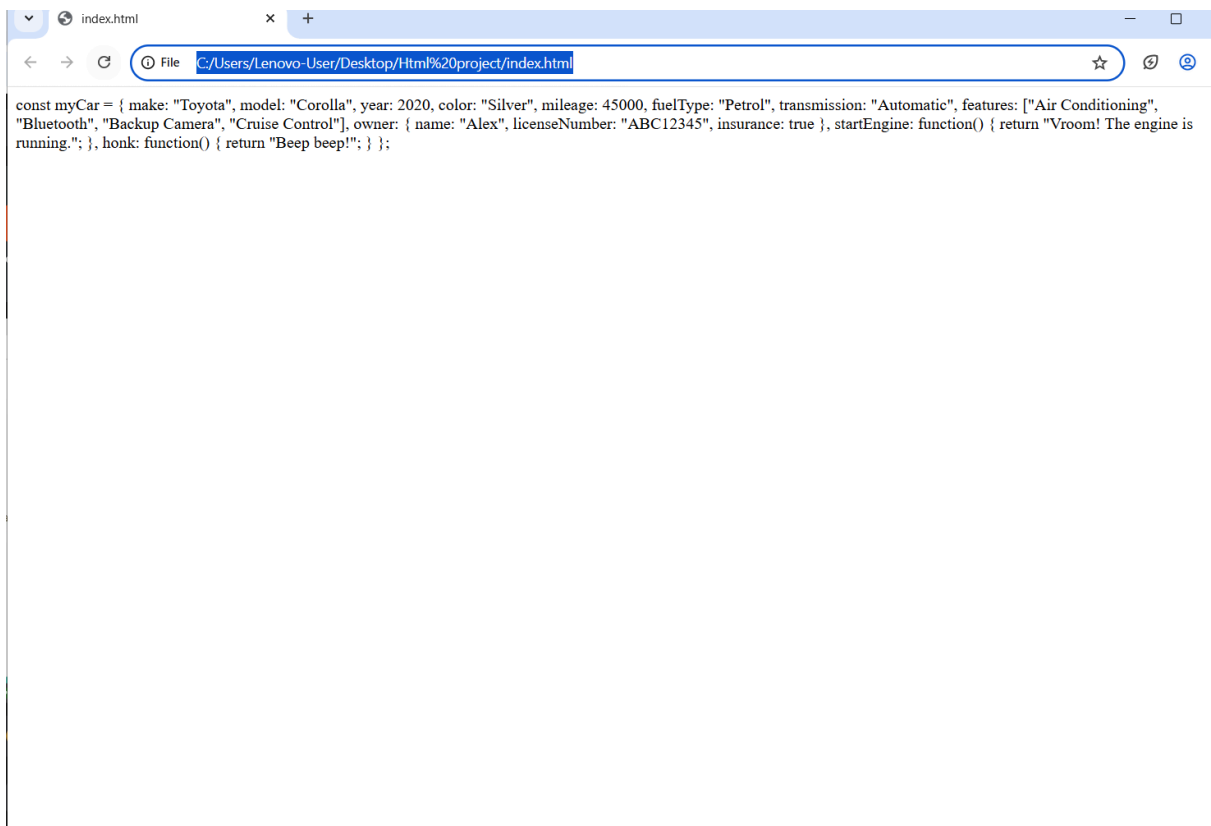

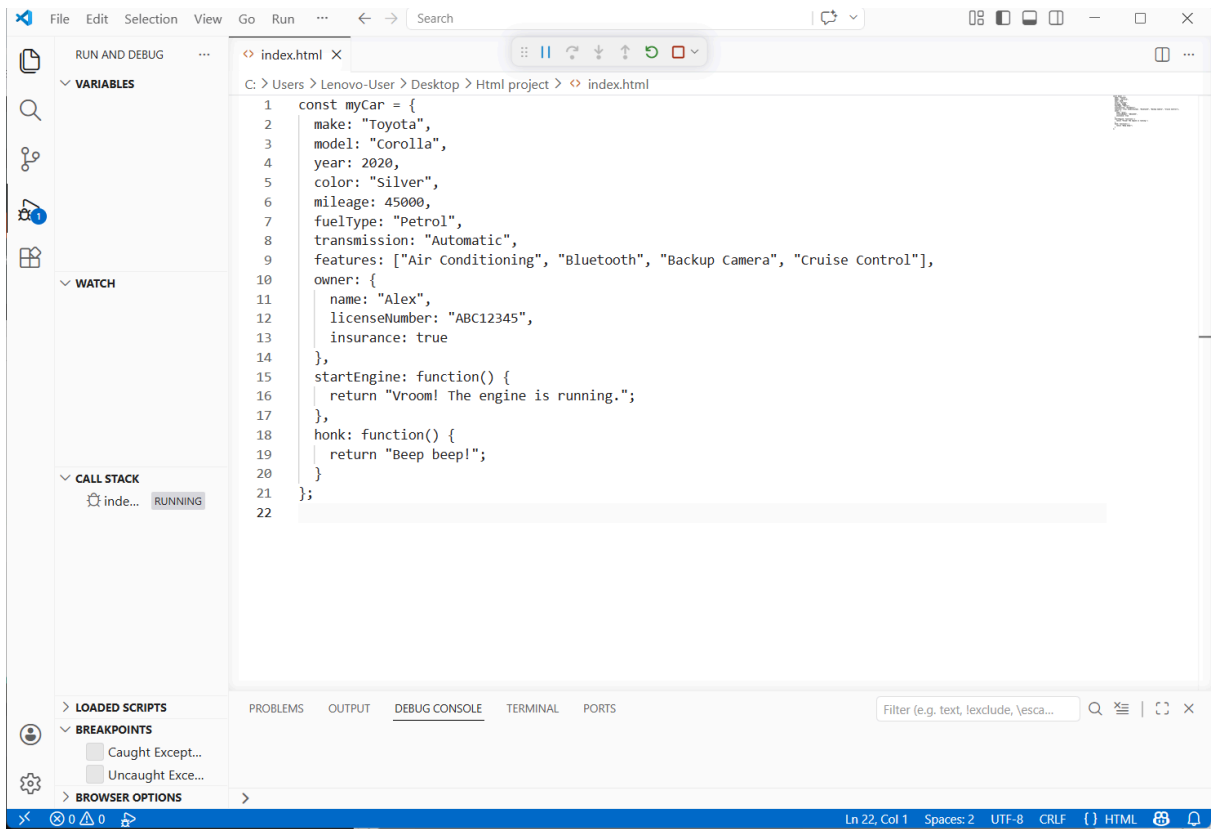



Menu

[Home](#) | [About](#) | [Contact](#) | [Blog](#)

VS Code

Search

index.html

index.html

C: > Users > Lenovo-User > Desktop > Html project > index.html > ...

1

<!DOCTYPE html>

2

<html>

3

<body>

4

5

<h2>Student Marks</h2>

6

<p id="result"></p>

7

8

<script>

9

let marks = [50, 60, 70];

10

11

// Add a new mark

12

marks.push(80);

13

14

// Calculate total

15

let total = 0;

16

17

for (let i = 0; i < marks.length; i++) {

18

total += marks[i];

19

}

20

21

document.getElementById("result").innerHTML = "Total Marks: " + total;

22

</script>

23

24

</body>

25

</html>

26

27

VARIABLES

WATCH

CALL STACK

LOADED SCRIPTS

BREAKPOINTS

BROWSER OPTIONS

inde... RUNNING

PROBLEMS

OUTPUT

DEBUG CONSOLE

Filter (e.g. text, lexclude,...)


Ln 26, Col 1

Spaces: 2

UTF-8

CRLF

() HTML



Student Marks

Total Marks: 260

VS Code

Search

index.html

C: > Users > Lenovo-User > Desktop > Html project > index.html > html

1 <!DOCTYPE html>

2 <html>

3 <body>

4

5 <h2>Login Status</h2>

6 <p id="message"></p>

7

8 <script>

9 let isLoggedIn = true;

10

11 if (isLoggedIn) {

12 | document.getElementById("message").innerHTML = "Welcome back!";

13 } else {

14 | document.getElementById("message").innerHTML = "Please log in";

15 }

16 </script>

17

18 </body>

19 </html>

20

21

VARIABLES

WATCH

CALL STACK

LOADED SCRIPTS

BREAKPOINTS

BROWSER OPTIONS

inde... RUNNING

PROBLEMS

OUTPUT

DEBUG CONSOLE

Filter (e.g. text, lexclude,...)


Ln 19, Col 8


Spaces: 2


UTF-8

CRLF

{ } HTML

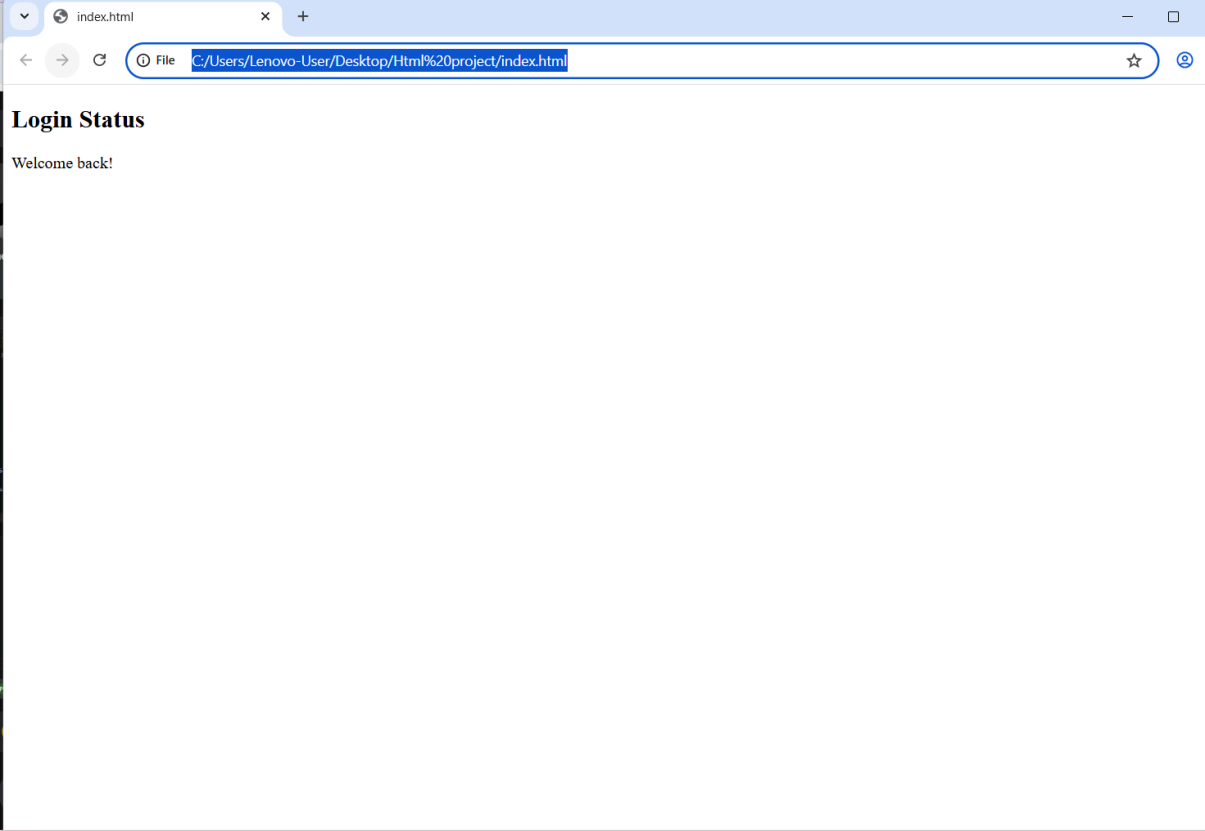

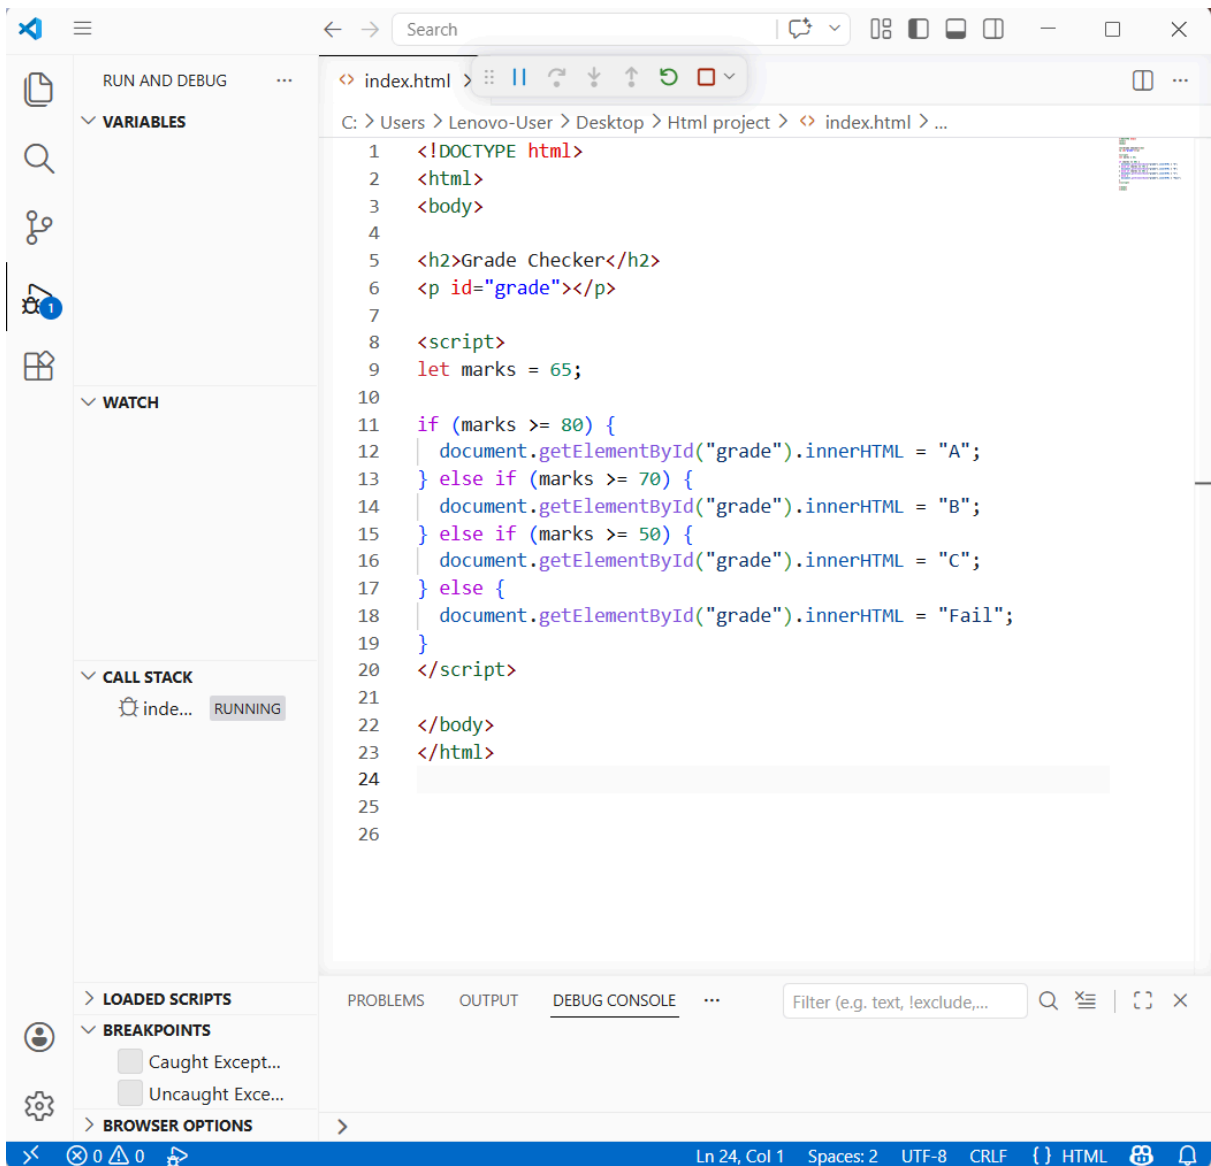



Grade Checker

C

Visual Studio Code interface showing a web project in the RUN AND DEBUG mode.

File Explorer: index.html

Search: Search

Run and Debug: RUN AND DEBUG

VARIABLES:

- index.html: RUNNING

WATCH:

CALL STACK:

LOADED SCRIPTS:

BREAKPOINTS:

- Caught Except...
- Uncaught Exce...

BROWSER OPTIONS:

Code Editor:

```
1 <!DOCTYPE html>
2 <html>
3 <body>
4
5 <h2>Page Info</h2>
6 <p id="info"></p>
7
8 <script>
9 let page = "about";
10
11 switch (page) {
12   case "home":
13     document.getElementById("info").innerHTML = "Welcome to Home Page";
14     break;
15
16   case "about":
17     document.getElementById("info").innerHTML = "About Us Page";
18     break;
19
20   case "contact":
21     document.getElementById("info").innerHTML = "Contact Us Page";
22     break;
23
24   default:
25     document.getElementById("info").innerHTML = "Page not found";
26   }
27 </script>
28
29 </body>
30 </html>
31
```

Debug Console: Filter (e.g. text, lexclude,...)

Status Bar: Ln 31, Col 1 Spaces: 2 UTF-8 CRLF {} HTML



Page Info

About Us Page

Visual Studio Code interface showing a web application running in the browser. The file being edited is `index.html`, located at `C:\Users\Lenovo-User\Desktop\Html project\index.html`.


The code in `index.html` is as follows:

```
1 <!DOCTYPE html>
2 <html>
3 <body>
4
5 <h2>Grade Feedback</h2>
6 <p id="feedback"></p>
7
8 <script>
9   let grade = "B";
10
11   switch (grade) {
12     case "A":
13       document.getElementById("feedback").innerHTML = "Excellent!";
14       break;
15
16     case "B":
17       document.getElementById("feedback").innerHTML = "Good job!";
18       break;
19
20     case "C":
21       document.getElementById("feedback").innerHTML = "You passed";
22       break;
23
24     default:
25       document.getElementById("feedback").innerHTML = "Try again!";
26   }
27 </script>
28
29 </body>
30 </html>
31
```

The left sidebar shows the **RUN AND DEBUG** view with the following sections:

- VARIABLES**: Empty.
- WATCH**: Empty.
- CALL STACK**: Shows `inde...` (likely `index.html`) in a **RUNNING** state.
- LOADED SCRIPTS**: Empty.
- BREAKPOINTS**: Shows ☐ Caught Except... and ☐ Uncaught Exce...
- BROWSER OPTIONS**: Empty.

The bottom status bar indicates the current position is **Ln 31, Col 1**, with **Spaces: 2**, **UTF-8** encoding, **CRLF** line endings, and the file is an **HTML** document.



Grade Feedback

Good job!

VS

☰

← → Search

↺ ↻ ↴ ↵ ↶

🔍 📄 📱 📂

— □ ×

index.html > :: || ↺ ↻ ↴ ↵ ↶

C: > Users > Lenovo-User > Desktop > Html project > <> index.html > ...

1 <!DOCTYPE html>

2 <html>

3 <body>

4

5 <h2>Products</h2>

6 <ul id="list">

7

8 <script>

9 let products = ["Phone", "Laptop", "Tablet"];

10 let output = "";

11

12 for (let i = 0; i < products.length; i++) {

13 | output += "" + products[i] + "";

14 }

15

16 document.getElementById("list").innerHTML = output;

17 </script>

18

19 </body>

20 </html>

21

22

23

24

25

26

📄

🔍

🔗

🔧 1

📁

RUN AND DEBUG ...

▼ VARIABLES

▼ WATCH

▼ CALL STACK

▼ index... RUNNING

> LOADED SCRIPTS

▼ BREAKPOINTS

☐ Caught Except...

☐ Uncaught Exce...

> BROWSER OPTIONS

PROBLEMS

OUTPUT

DEBUG CONSOLE

...

Filter (e.g. text, lexclude,...)

🔍

🔗

📄

×

👤

⚙️

🔍 0 0 0

Ln 21, Col 1

Spaces: 2

UTF-8

CRLF


{ } HTML

🔔



Products


- Phone
- Laptop
- Tablet


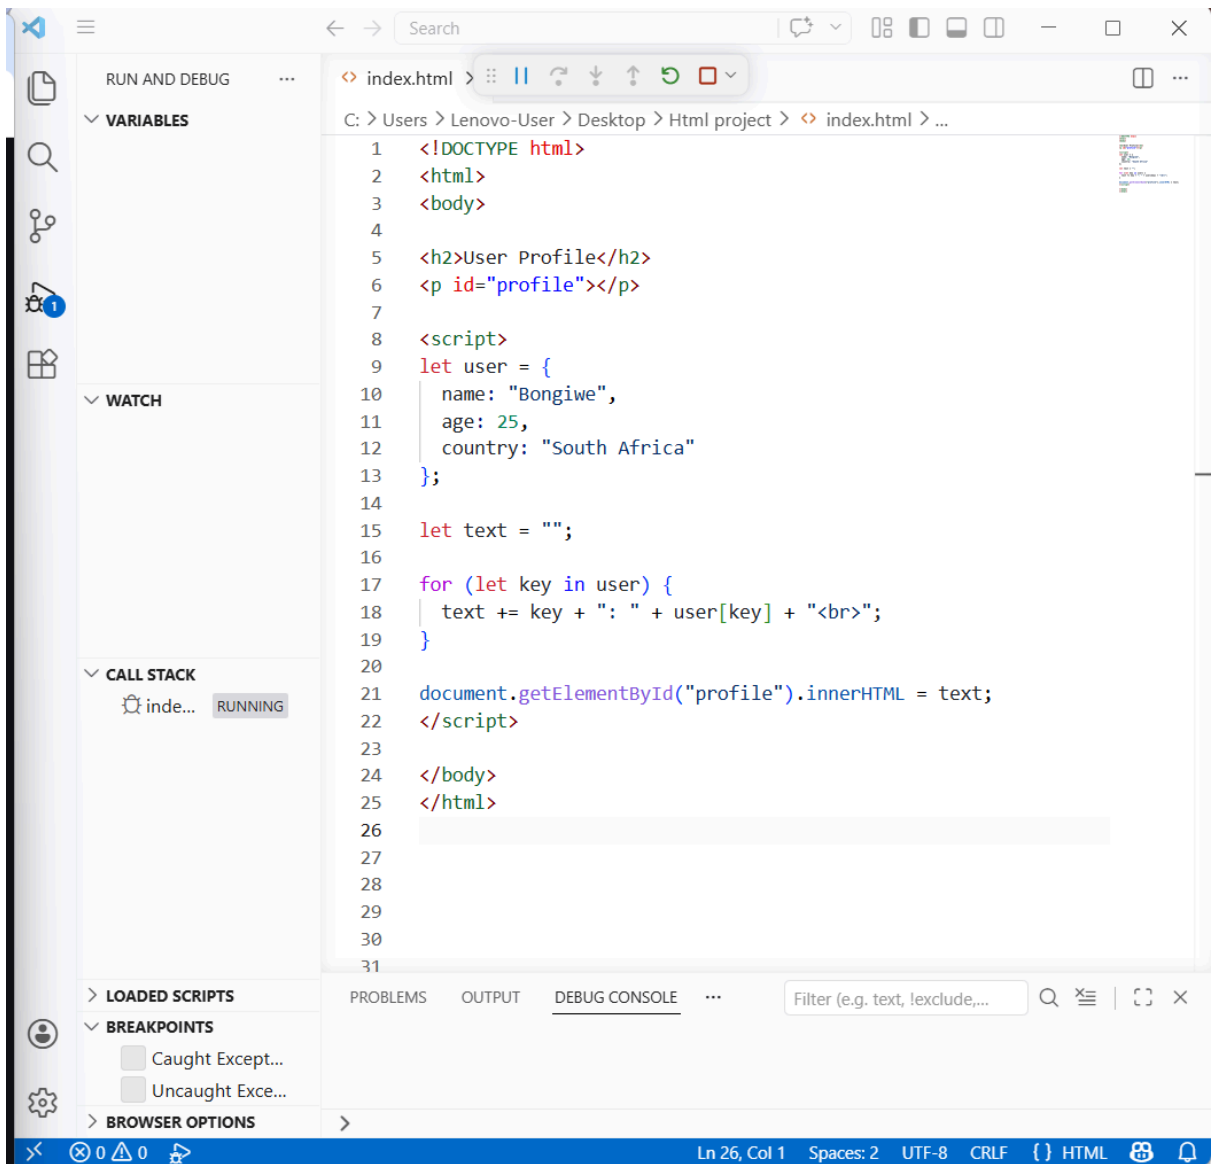







User Profile



name: Bongwiwe
age: 25
country: South Africa

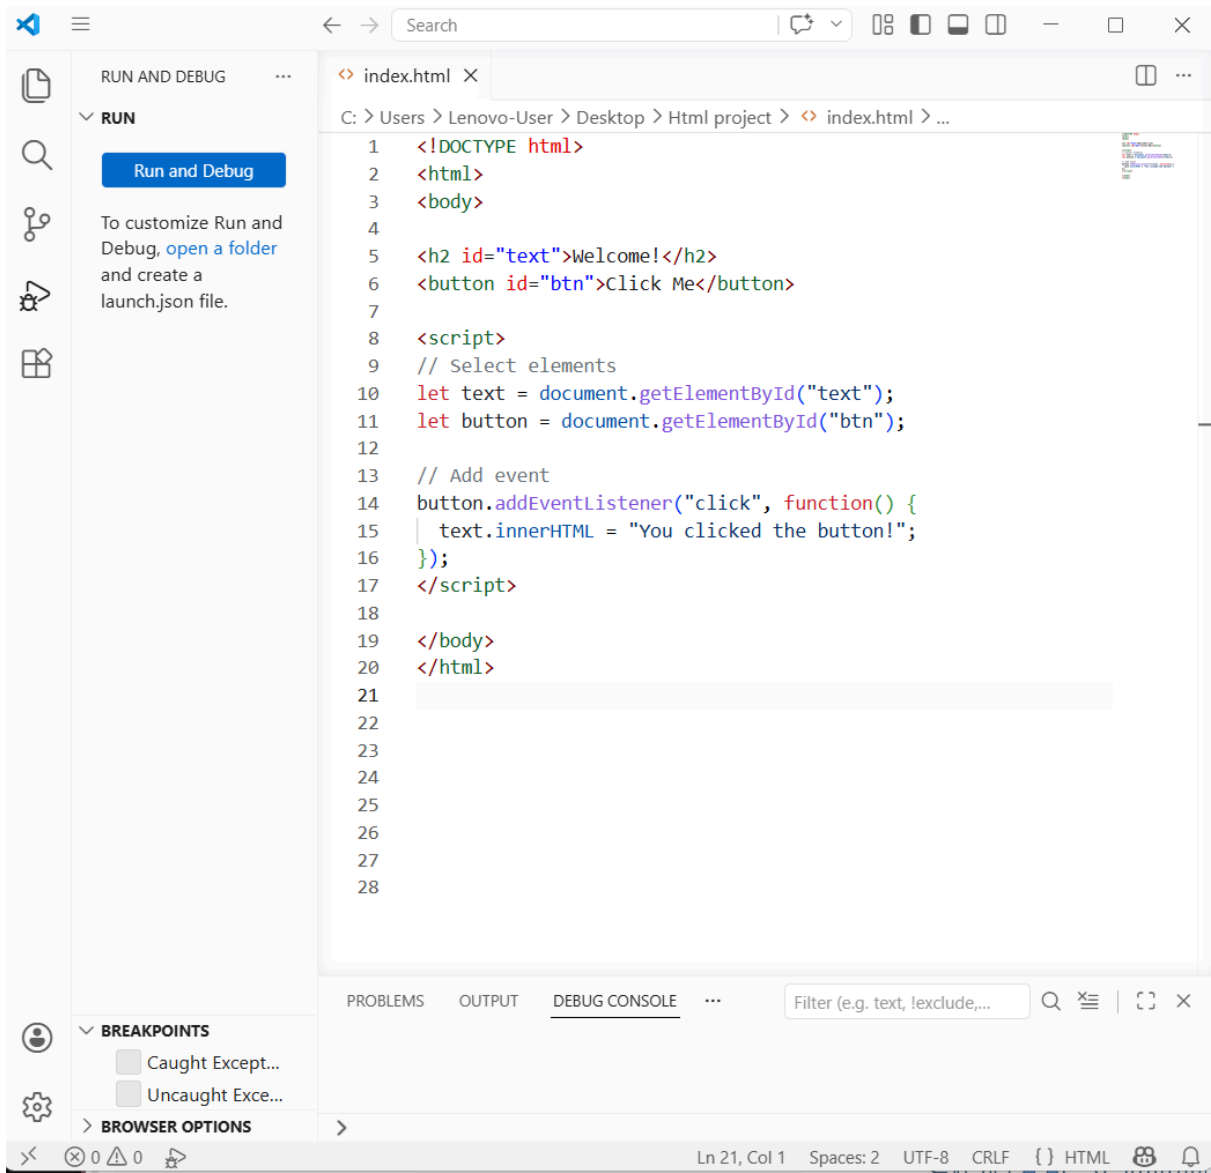


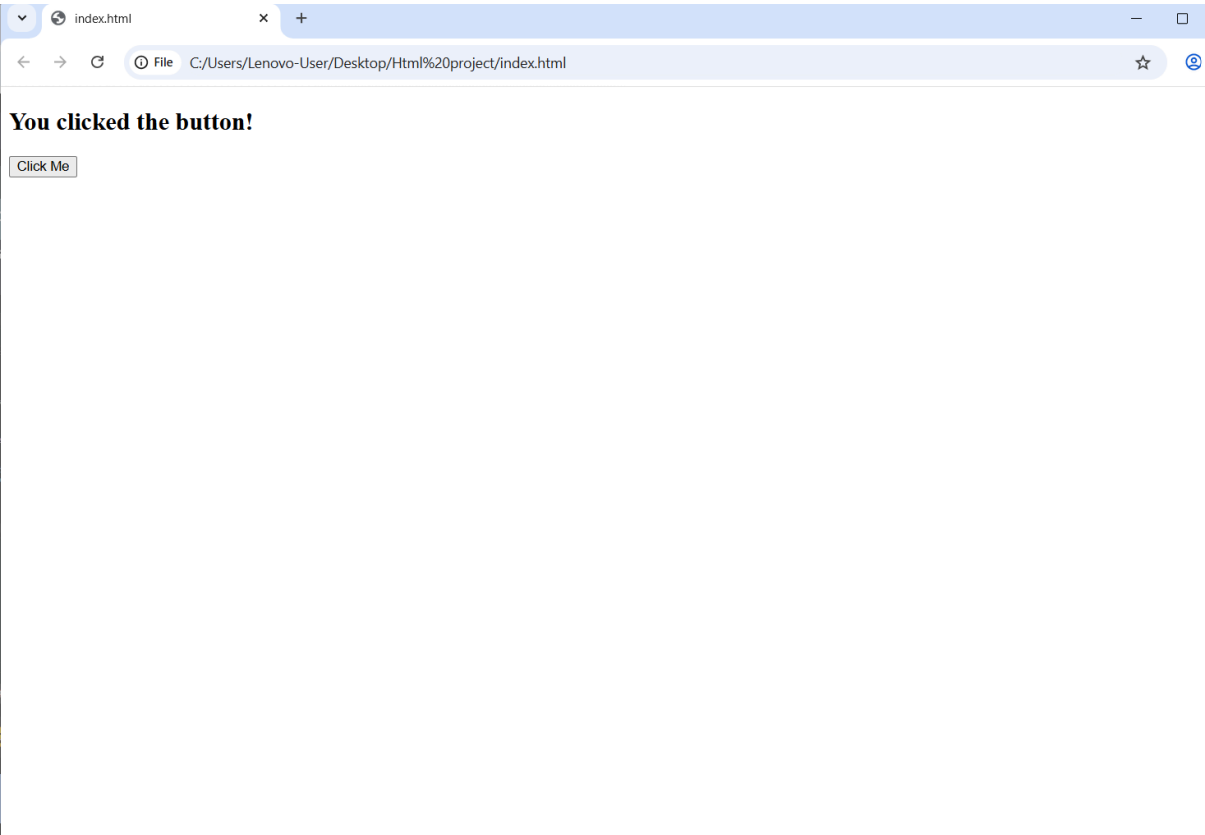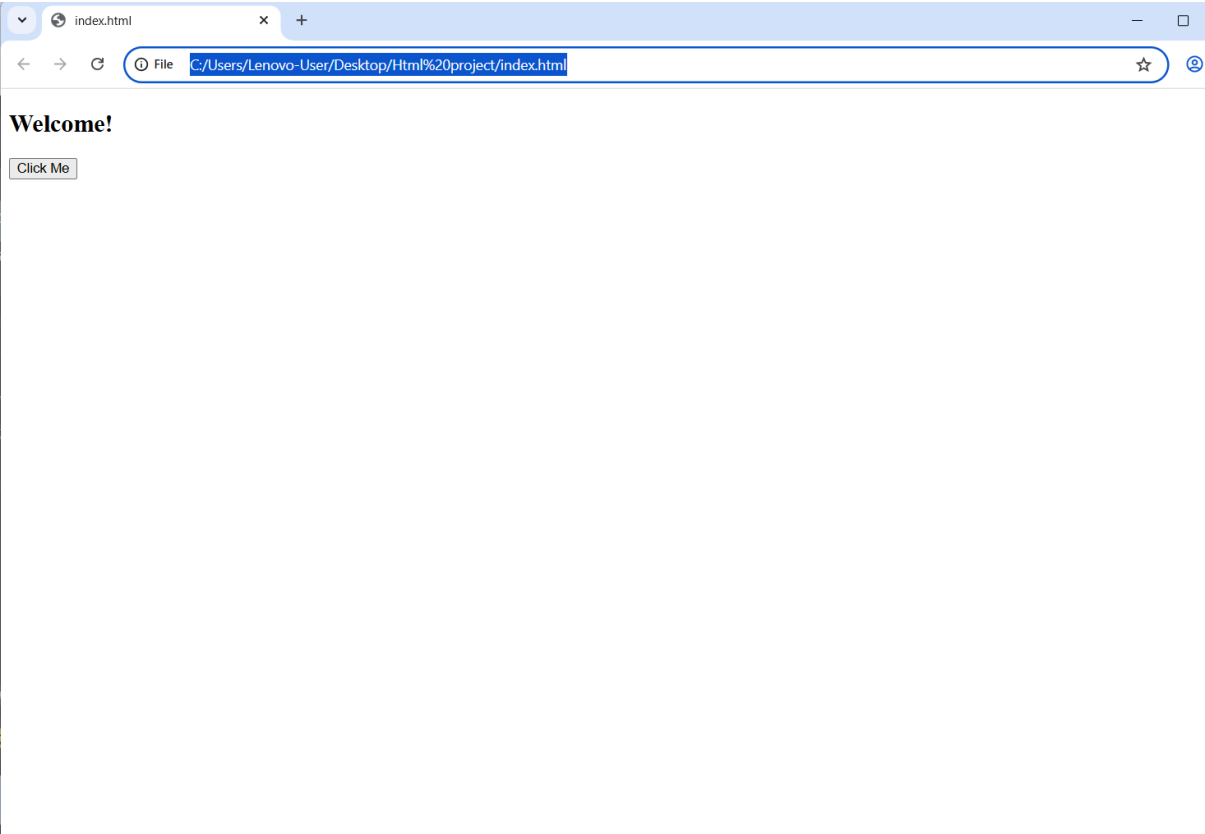


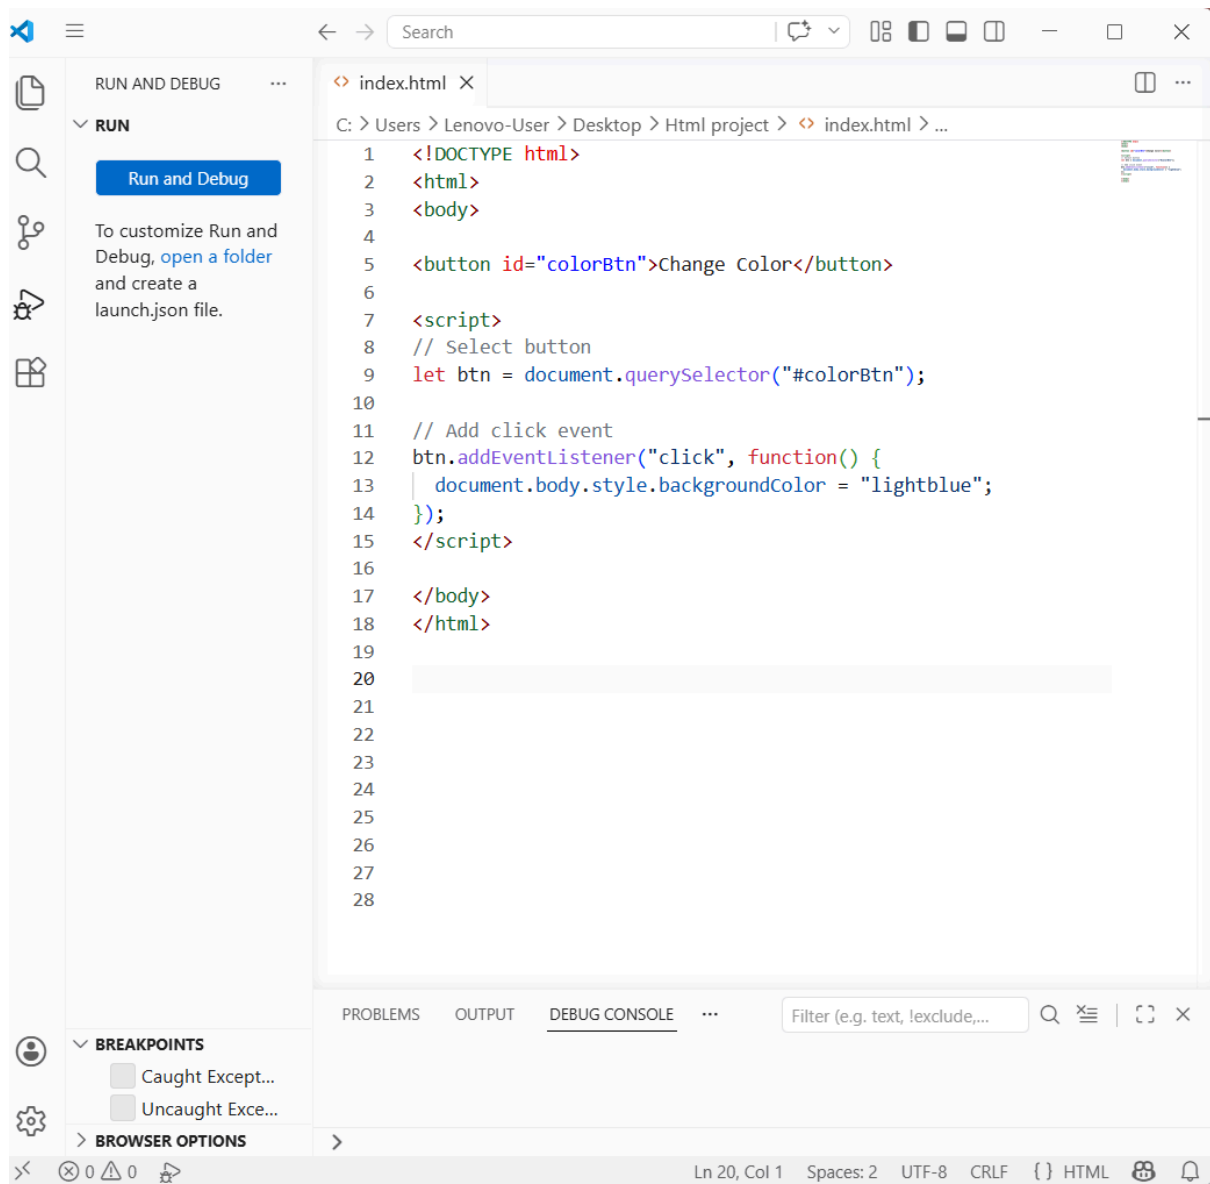


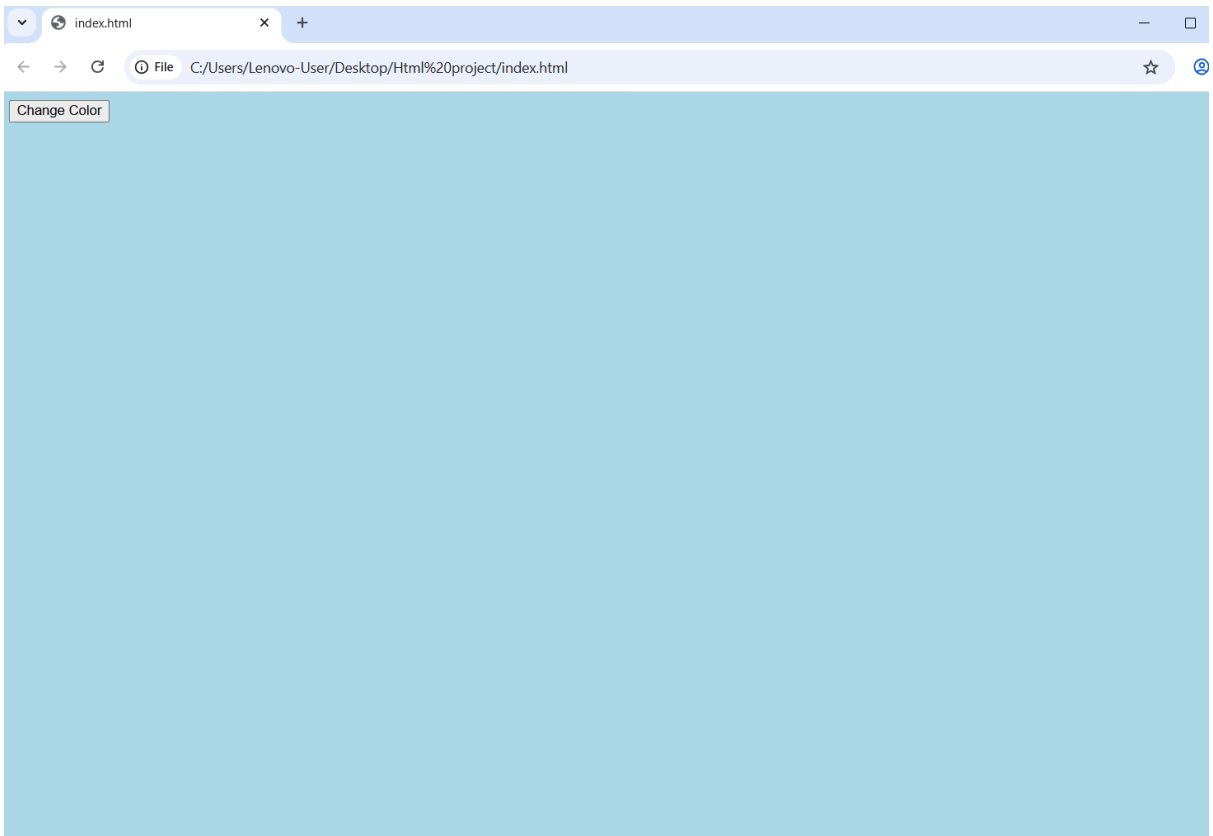
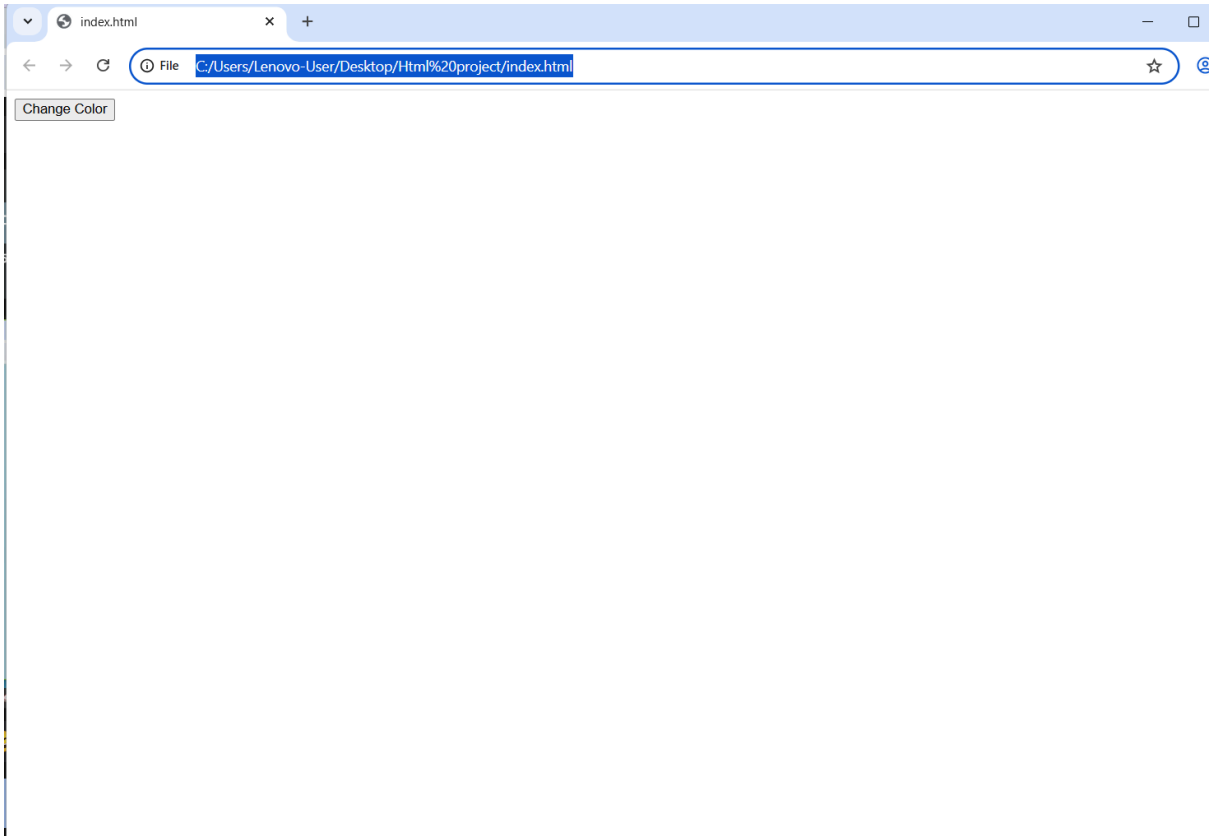


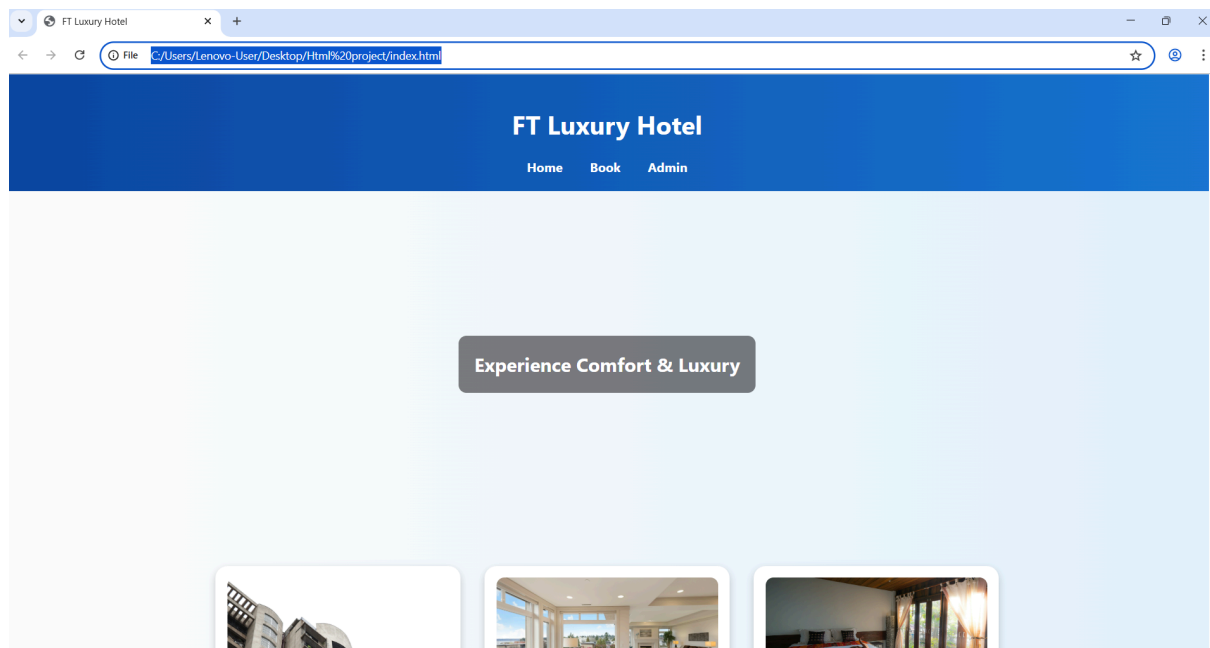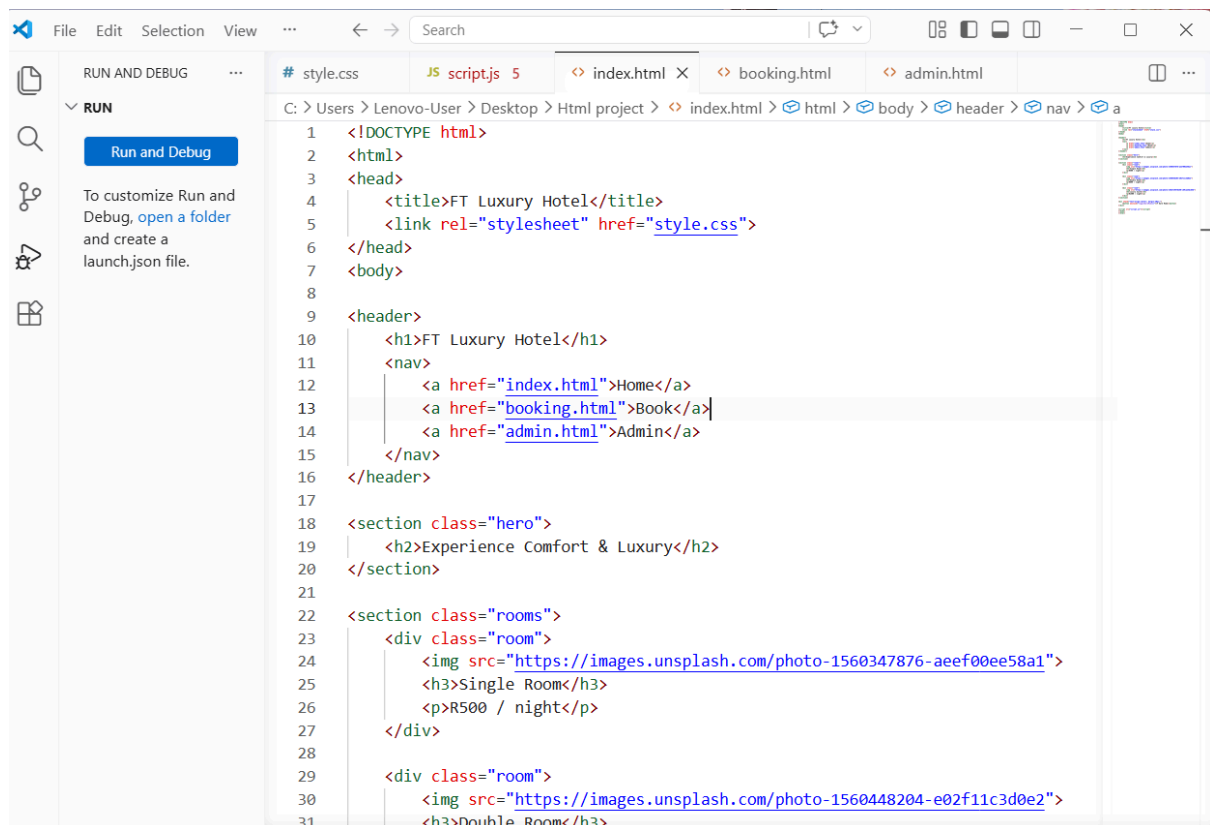

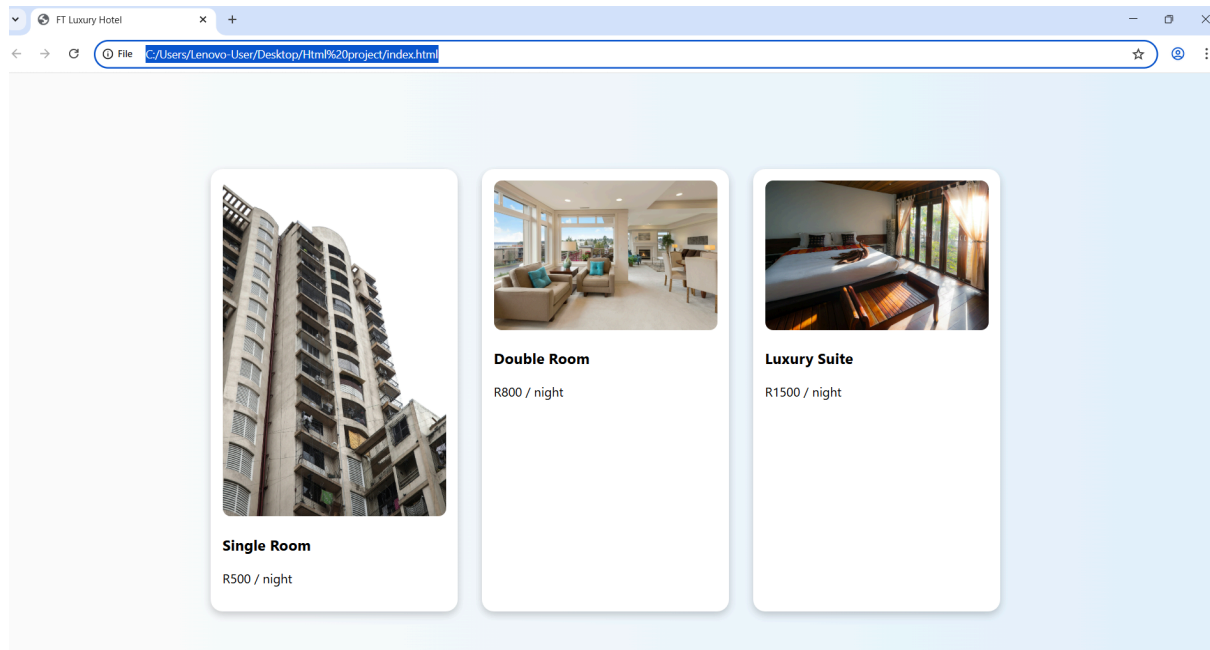

```
File Edit Selection View ... Search
# style.css JS script.js booking.html X admin.html
C: > Users > Lenovo-User > Desktop > Html project > booking.html > html > body > header
1 <!DOCTYPE html>
2 <html>
3 <head>
4 | <title>Book Room - FT Luxury Hotel</title>
5 | <link rel="stylesheet" href="style.css">
6 </head>
7 <body>
8
9 <header>|
10 | <h1>Book Your Stay</h1>
11 </header>
12
13 <form id="bookingForm">
14 | <input type="text" id="name" placeholder="Your Name" required>
15 | <input type="date" id="date" required>
16 | <select id="room">
17 | | <option>Single</option>
18 | | <option>Double</option>
19 | | <option>Suite</option>
20 | </select>
21 | <button type="submit">Book Now</button>
22 </form>
23
24 <div style="text-align:center; margin-top:20px;">
25 | <h3>Payment</h3>
26 | <button onclick="makePayment()"> Pay Now</button>
27 </div>
28
29 <script src="script.js"></script>
30 </body>
31 </html>
```

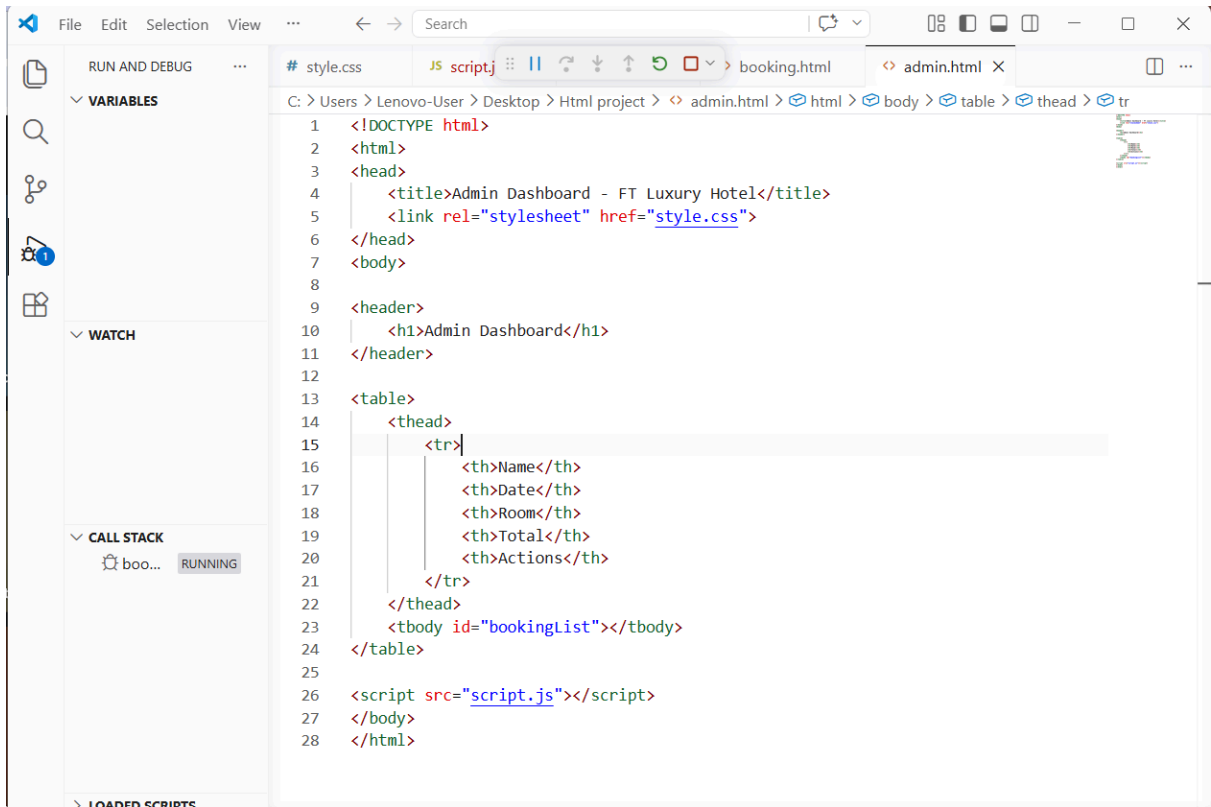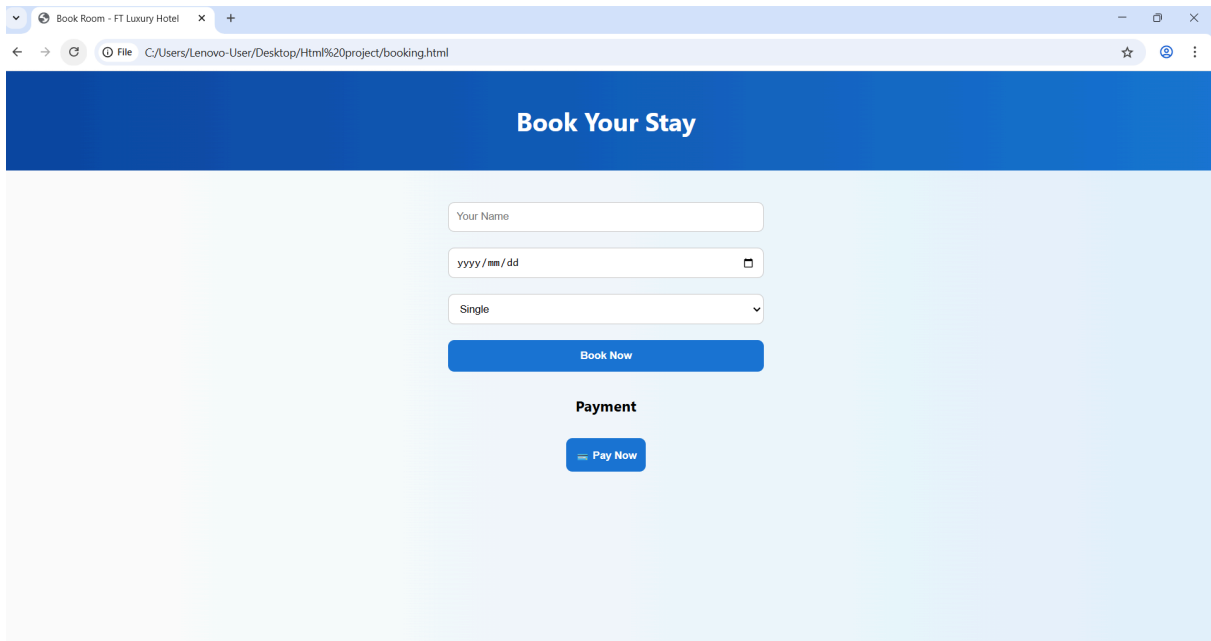

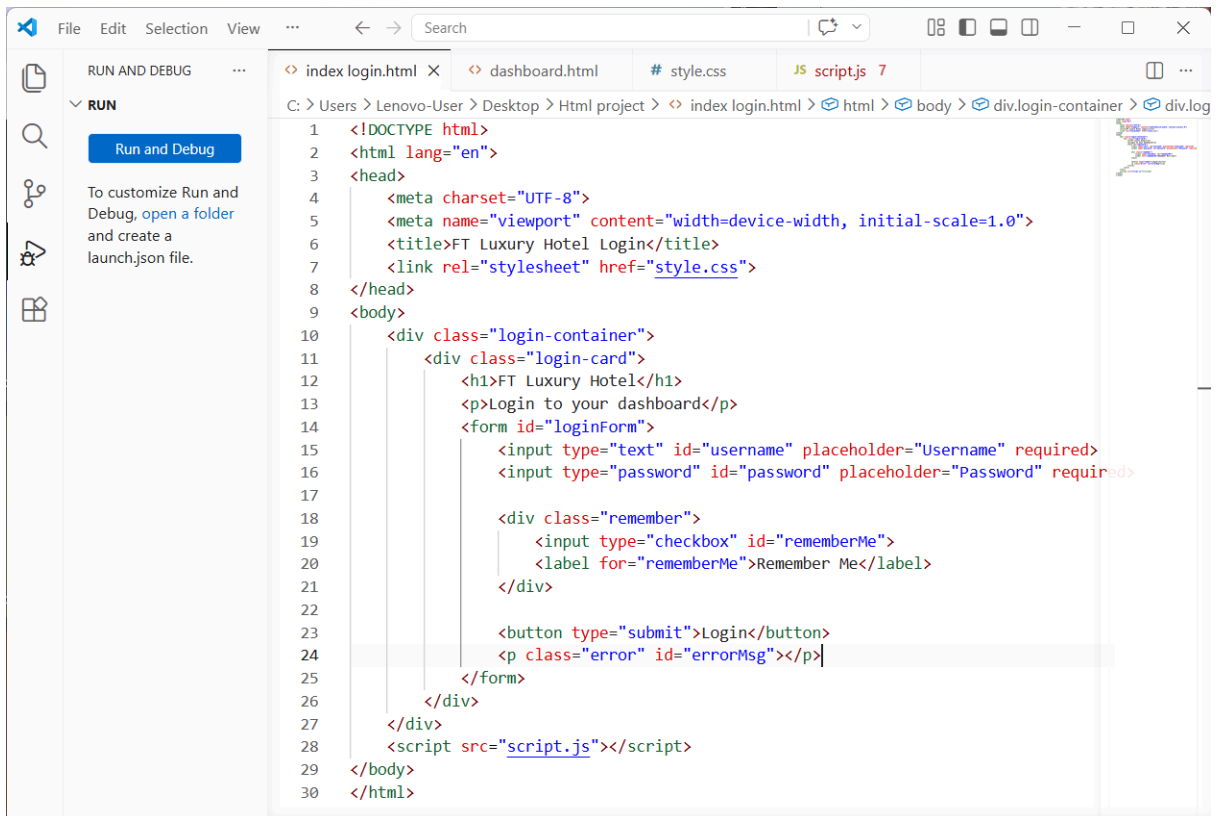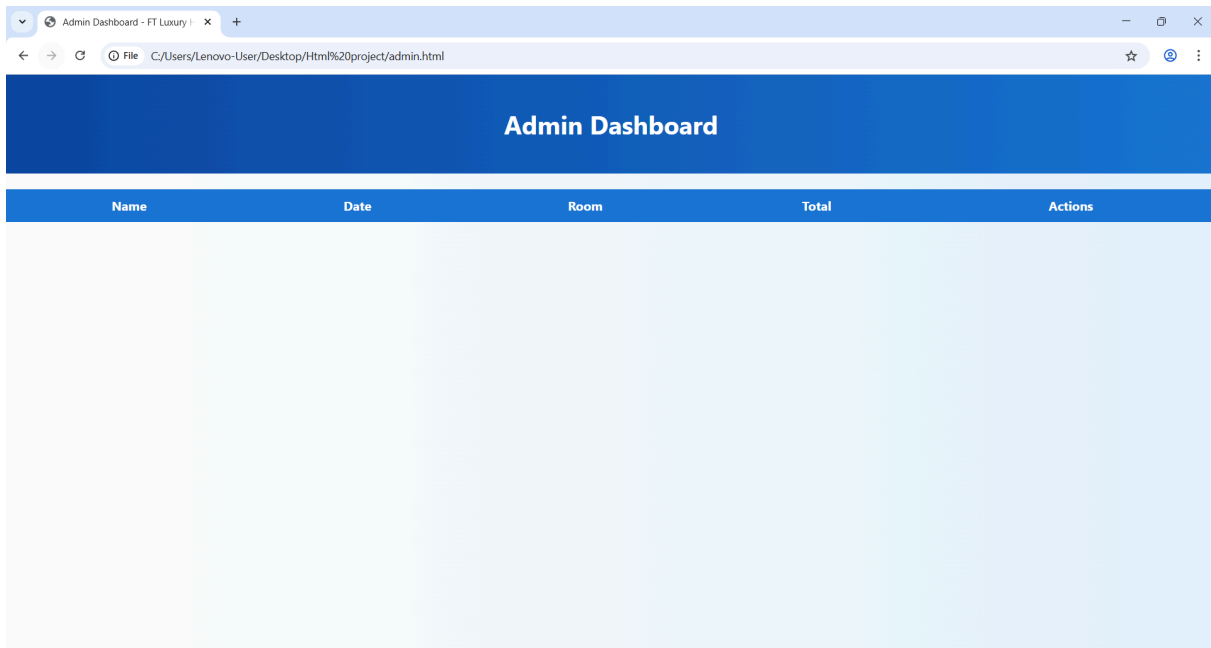


The screenshot shows the Visual Studio Code editor with the 'dashboard.html' file open. The file path is 'C:\Users\Lenovo-User\Desktop\Htm project\dashboard.html'. The code is as follows:

```
1 <!DOCTYPE html>
2 <html lang="en">
3 <head>
4   <meta charset="UTF-8">
5   <meta name="viewport" content="width=device-width, initial-scale=1.0">
6   <title>FT Luxury Hotel Dashboard</title>
7   <link rel="stylesheet" href="style.css">
8 </head>
9 <body>
10   <div class="dashboard-container">
11     <header>
12       <h1>Welcome, <span id="usernameDisplay"></span></h1>
13       <button id="logoutBtn">Logout</button>
14     </header>
15     <section class="dashboard-content">
16       <div class="card">
17         <h2>Bookings</h2>
18         <p>View and manage hotel bookings</p>
19       </div>
20       <div class="card">
21         <h2>Profile</h2>
22         <p>Update your user info</p>
23       </div>
24       <div class="card">
25         <h2>Settings</h2>
26         <p>Manage your account settings</p>
27       </div>
28     </section>
29   </div>
30   <script src="script.js"></script>
31 </body>
```

The screenshot shows the Visual Studio Code editor with the 'style.css' file open. The file path is 'C:\Users\Lenovo-User\Desktop\Htm project\style.css'. The code is as follows:

```
1 /* General Reset */
2 * {
3   box-sizing: border-box;
4   margin: 0;
5   padding: 0;
6   font-family: 'Segoe UI', sans-serif;
7 }
8
9 body {
10   background: url('https://images.unsplash.com/photo-1560347876-aeef00ee58a1?fit=
11   background-size: cover;
12   color: #fff;
13 }
14
15 /* Login Styles */
16 .login-container {
17   display: flex;
18   justify-content: center;
19   align-items: center;
20   height: 100vh;
21 }
22
23 .login-card {
24   background: rgba(0, 0, 0, 0.75);
25   padding: 30px;
26   border-radius: 15px;
27   width: 300px;
28   text-align: center;
29 }
30
31 .login-card h1 {
```

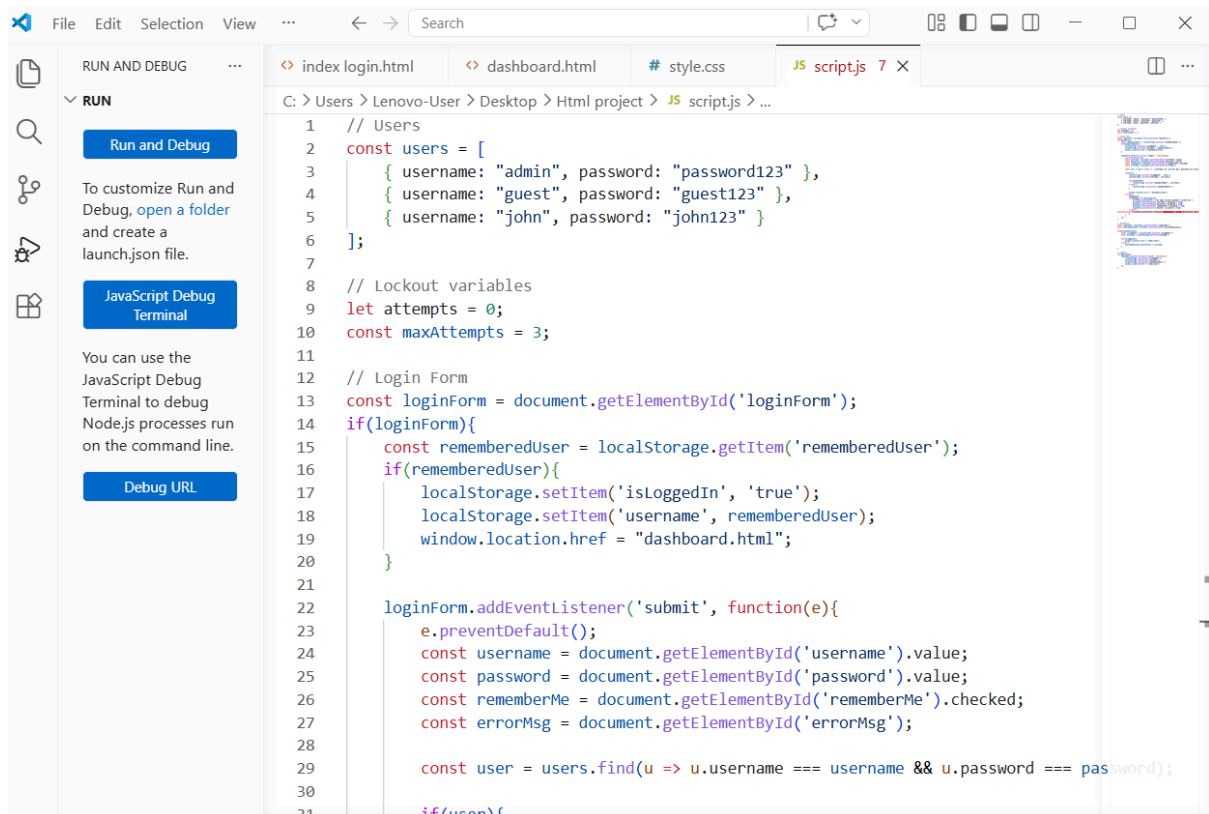The screenshot shows the Visual Studio Code editor with the file `script.js` open. The code defines a list of users, lockout variables, and a login form handler. The login handler checks if a user is remembered, sets login status, and redirects to the dashboard if credentials are correct.

```
1 // Users
2 const users = [
3   { username: "admin", password: "password123" },
4   { username: "guest", password: "guest123" },
5   { username: "john", password: "john123" }
6 ];
7
8 // Lockout variables
9 let attempts = 0;
10 const maxAttempts = 3;
11
12 // Login Form
13 const loginForm = document.getElementById('loginForm');
14 if(loginForm){
15   const rememberedUser = localStorage.getItem('rememberedUser');
16   if(rememberedUser){
17     localStorage.setItem('isLoggedIn', 'true');
18     localStorage.setItem('username', rememberedUser);
19     window.location.href = "dashboard.html";
20   }
21
22   loginForm.addEventListener('submit', function(e){
23     e.preventDefault();
24     const username = document.getElementById('username').value;
25     const password = document.getElementById('password').value;
26     const rememberMe = document.getElementById('rememberMe').checked;
27     const errorMsg = document.getElementById('errorMsg');
28
29     const user = users.find(u => u.username === username && u.password === password);
30
31     if(user){
```

