
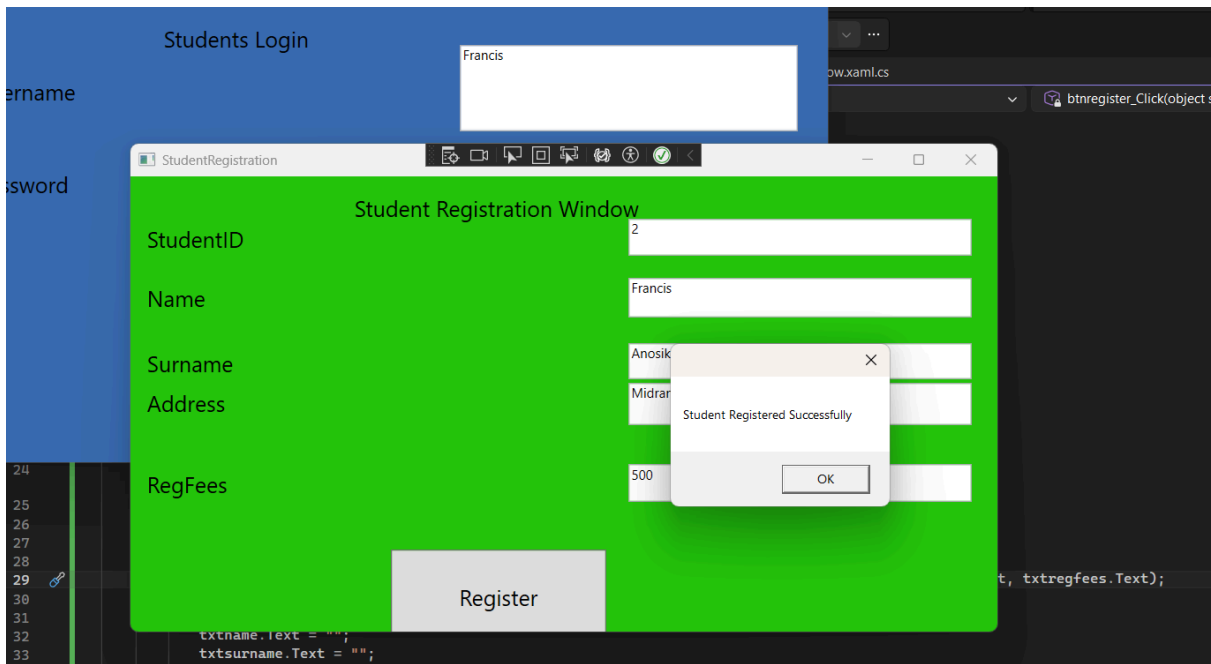


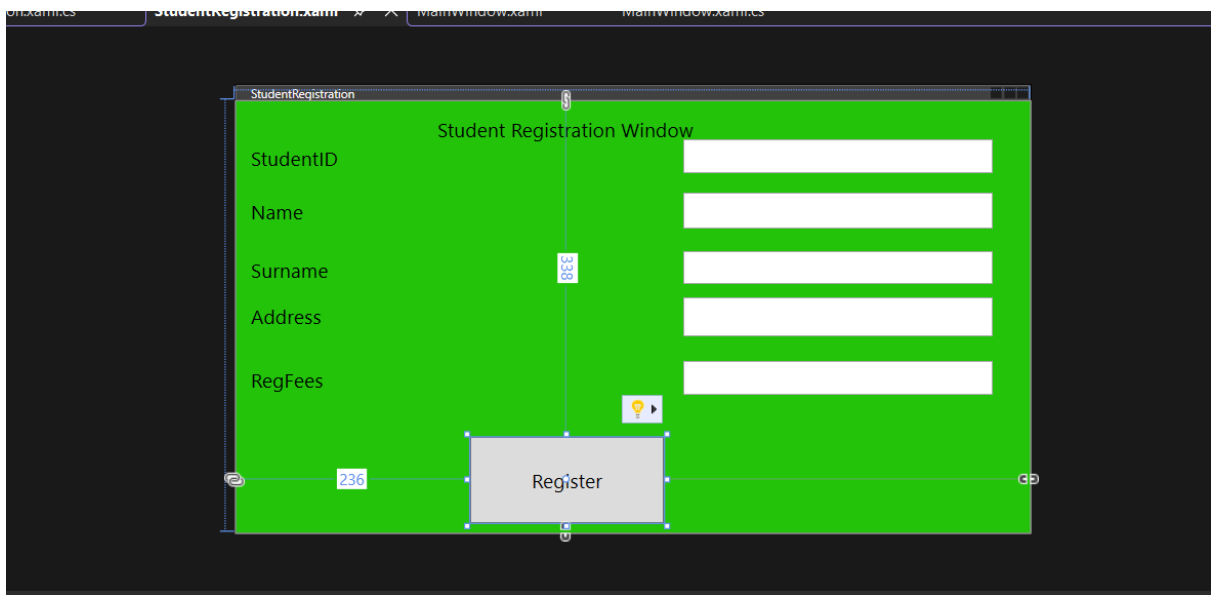

```
BS.cs StudentRegistration.Xaml.cs StudentRegistration.Xaml StudentRegistration.Xaml MainWindow.Xaml MainWindow.XamlCs
Prj_StudentsLogin.StudentRegistration btnregister_Click(object sender, RoutedEventArgs e)

using System.Windows.Documents;
using System.Windows.Input;
using System.Windows.Media;
using System.Windows.Media.Imaging;
using System.Windows.Shapes;

namespace Prj_StudentsLogin
{
    /// <summary>
    /// Interaction logic for StudentRegistration.Xaml
    /// </summary>
    4 references
    public partial class StudentRegistration : Window
    {
        1 reference
        public StudentRegistration()
        {
            InitializeComponent();
        }

        1 reference
        private void btnregister_Click(object sender, RoutedEventArgs e)
        {
            ConnectToDBS dbc = new ConnectToDBS();


            dbc.RegisterStudents(Convert.ToInt32(txtID.Text), txtname.Text, txtsurname.Text, txtaddress.Text, txtregfees.Text);
            MessageBox.Show("Student Registered Successfully");
            txtID.Text = "";
            txtname.Text = "";
            txtsurname.Text = "";
            txtaddress.Text = "";
            txtregfees.Text = "";
        }
    }
}
```

```
BS.cs StudentRegistration.Xaml.cs StudentRegistration.Xaml StudentRegistration.Xaml MainWindow.Xaml MainWindow.XamlCs
Prj_StudentsLogin.ConnectToDBS RegisterStudents(int StudentID, string name, string surname, string address, string regfees)

using System;
using System.Collections.Generic;
using System.Text;
using System.Data;
using System.Data.SqlClient;
using System.Data.Entity;
using System.Data.SqlClient;
using System.Data.SqlTypes;

namespace Prj_StudentsLogin
{
    2 references
    public class ConnectToDBS
    {
        SqlConnection conn = new SqlConnection(@"Data Source=DESKTOP-FBA1F98\FATIMAJ;Initial Catalog=StudentRecorddemoDB;Integrated Security=True;");
        SqlCommand command;
        public DataTable table;
        DataRow row;
        SqlDataReader reader;

        1 reference
        public void RegisterStudents(int StudentID, string name, string surname, string address, string RegFees)
        {
            conn.Open();
            command = new SqlCommand(string.Format("Insert into StudentReg values('{0}', '{1}', '{2}', '{3}', '{4}')" , StudentID, name, surname, address, RegFees), conn);
            command.ExecuteNonQuery();
            conn.Close();
            command.Dispose();
        }
    }
}
```

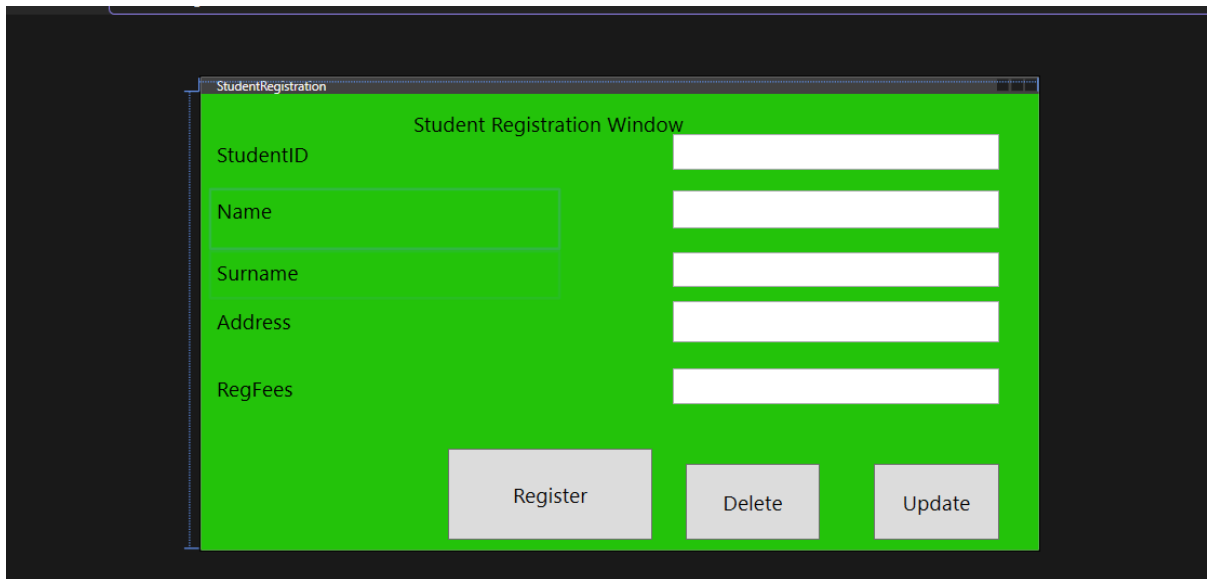

```

StudentRegistration.xaml* StudentRegl...tion.xaml.cs* X MainWindow.xaml MainWindow.xaml.cs
tsLogin
/// ~/ Summary
4 references
public partial class StudentRegistration : Window
{
    1 reference
    public StudentRegistration()
    {
        InitializeComponent();
    }

    1 reference
    private void btnregister_Click(object sender, RoutedEventArgs e)
    {
        ConnectToDBS dbc = new ConnectToDBS();

        dbc.RegisterStudents(Convert.ToInt32(txtID.Text), txtname.Text, txtsurname.Text, txtaddress.Text, txtregfees.Text);
        MessageBox.Show("Student Registered Successfully");
        txtID.Text = "";
        txtname.Text = "";
        txtsurname.Text = "";
        txtaddress.Text = "";
        txtregfees.Text = "";
    }

    0 references
    private void Button_Click(object sender, RoutedEventArgs e)
    {
        ConnectToDBS dbc = new ConnectToDBS();

        dbc.DeleteStudent(Convert.ToInt32(txtID.Text));

        MessageBox.Show("Customer deleted Successfully");
        txtID.Text = "";
    }
}

```

