

10 Linux Commands

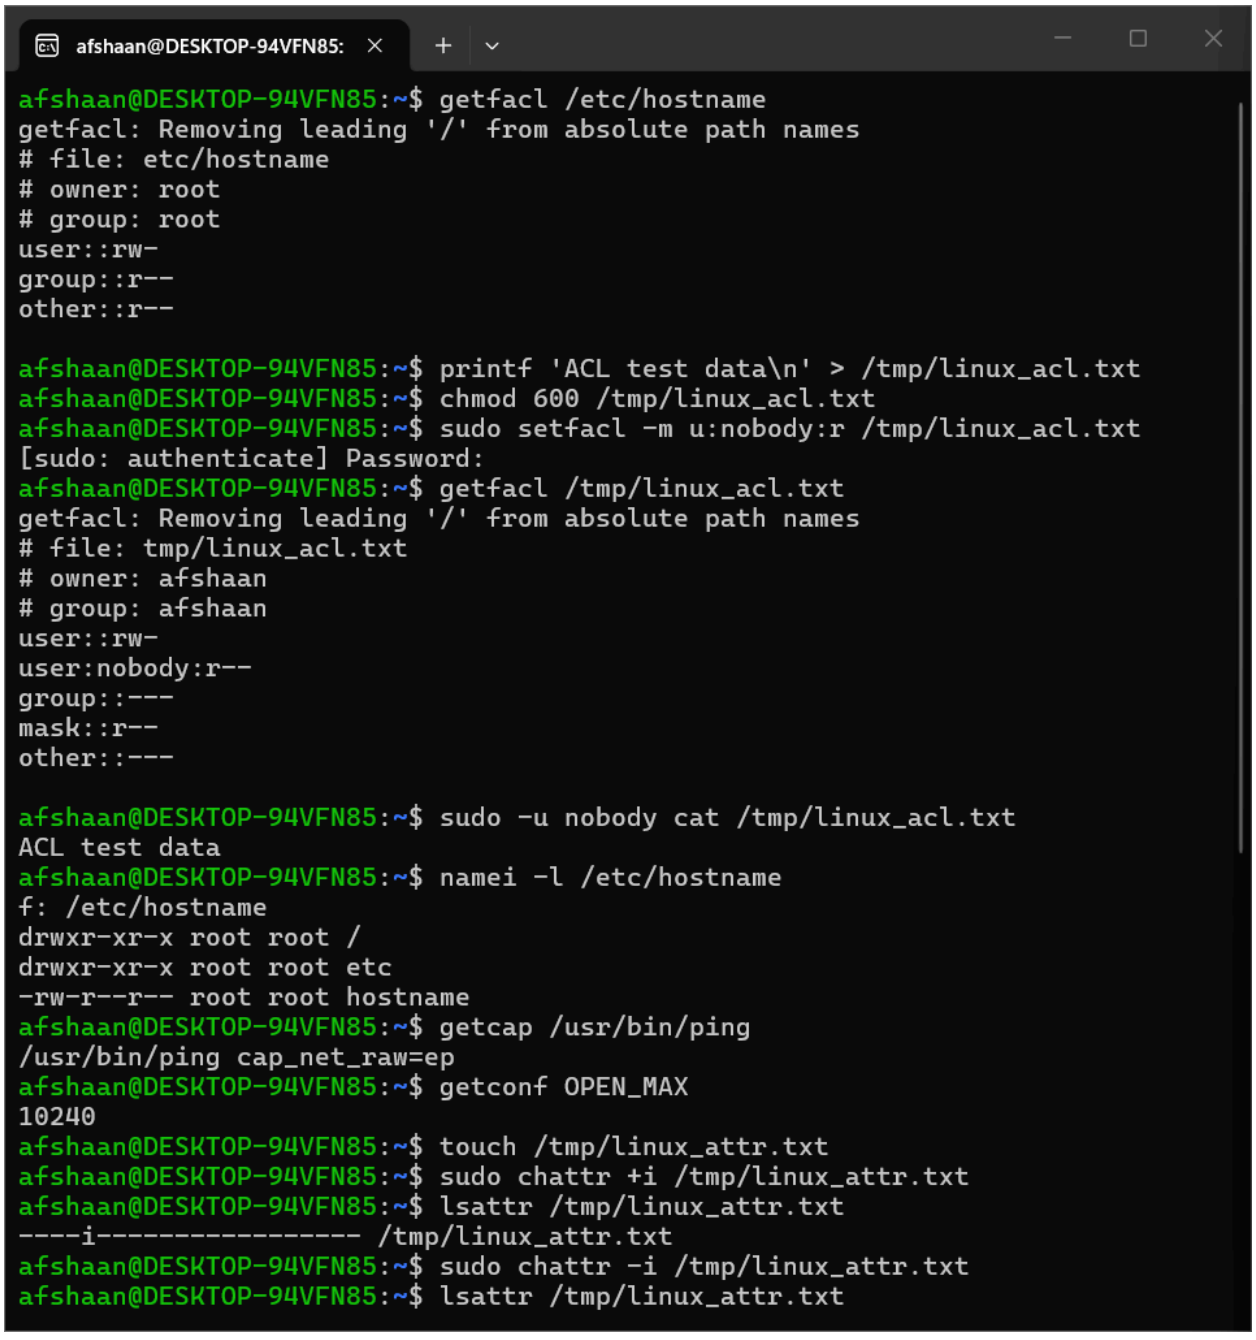

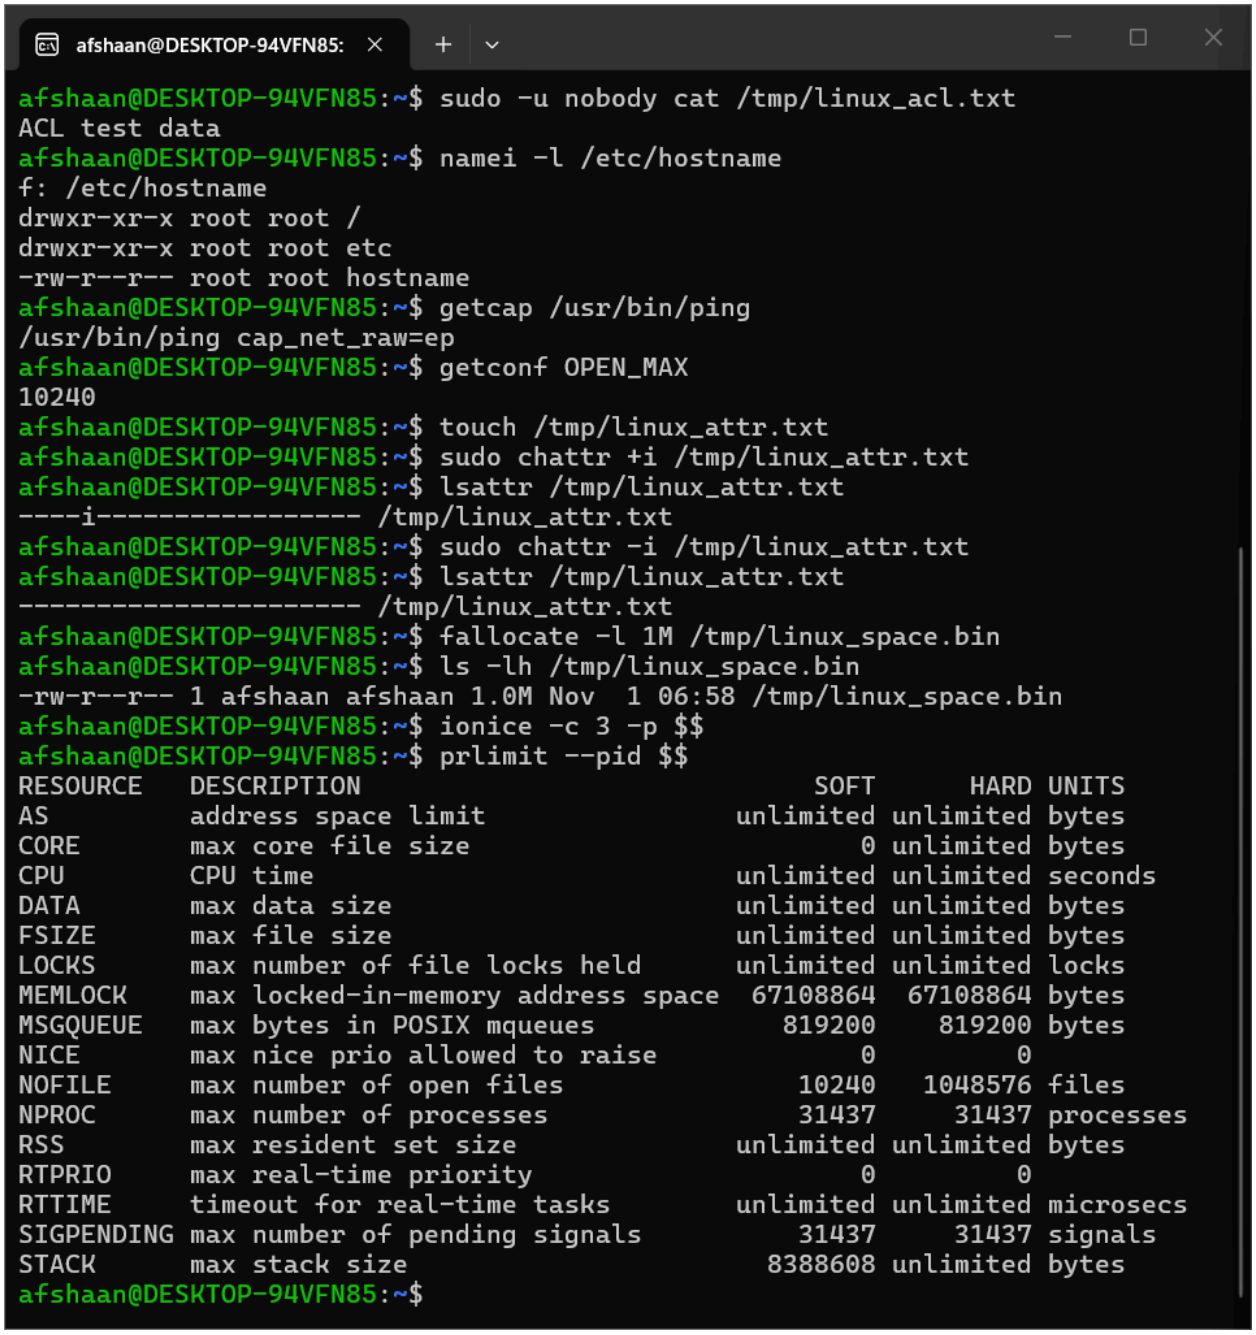

No.	Command	What it does	Practice example
1	getfacl	Inspects access permissions and ACLs of a file	getfacl /etc/hostname
2	setfacl	Grants or modifies permissions for a specific user	sudo setfacl -m u:nobody:r /tmp/linux_acl.txt

3	namei	Inspects permissions along a file path	namei -l /etc/hostname
4	getcap	Inspects executable capabilities	getcap /usr/bin/ping
5	getconf	Displays system configuration limits	getconf OPEN_MAX
6	chattr	Changes filesystem attributes, such as making a file immutable	sudo chattr +i /tmp/linux_attr.txt
7	lsattr	Displays filesystem attributes of files	lsattr /tmp/linux_attr.txt
8	fallocate	Allocates disk space for a file	fallocate -l 1M /tmp/linux_space.bin
9	ionice	Displays or changes a process's I/O scheduling priority	ionice -c 3 -p $$
10	prlimit	Displays or changes process resource limits	prlimit --pid $$

Note:

- chattr +i makes a file immutable (prevents modification or deletion). Use sudo chattr -i to reverse it.
- setfacl modifies permissions, while getfacl displays them.
- fallocate creates a file with allocated disk space.