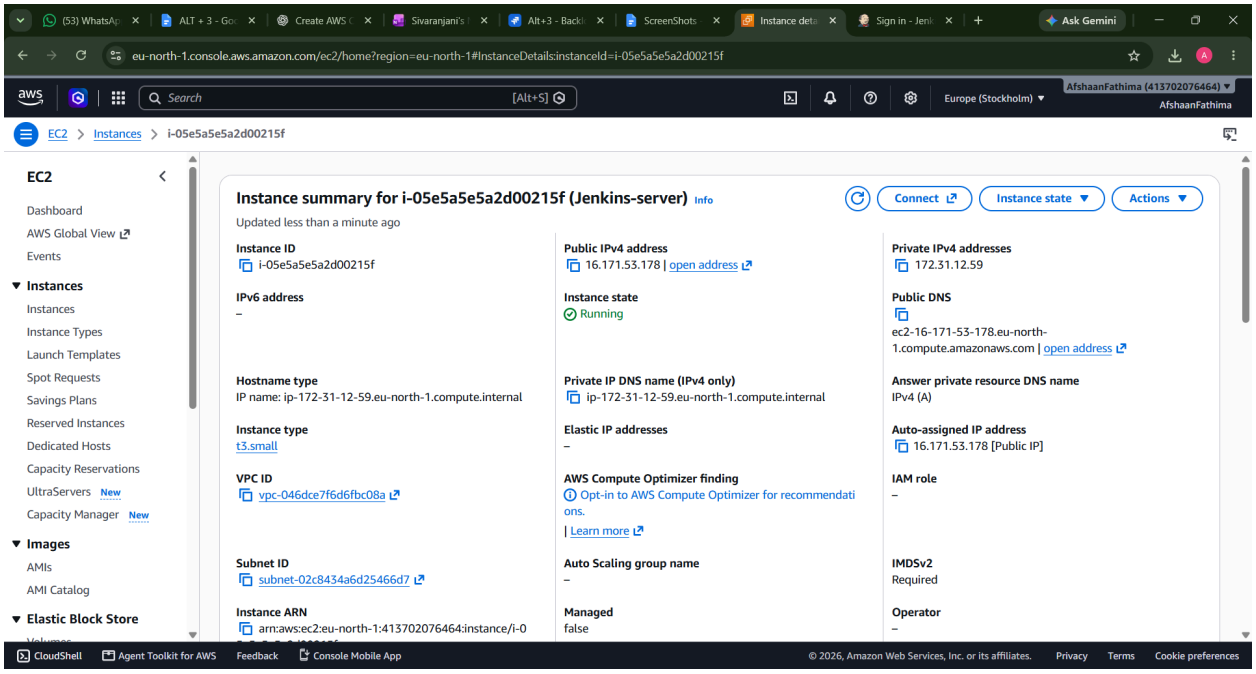
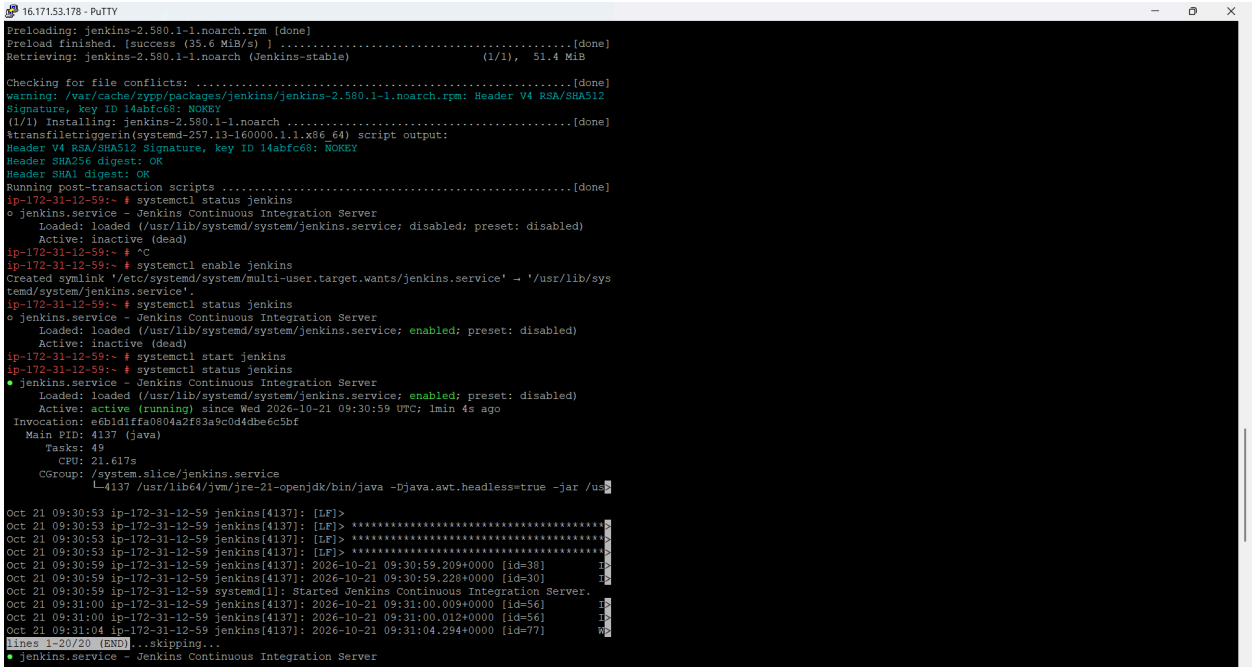
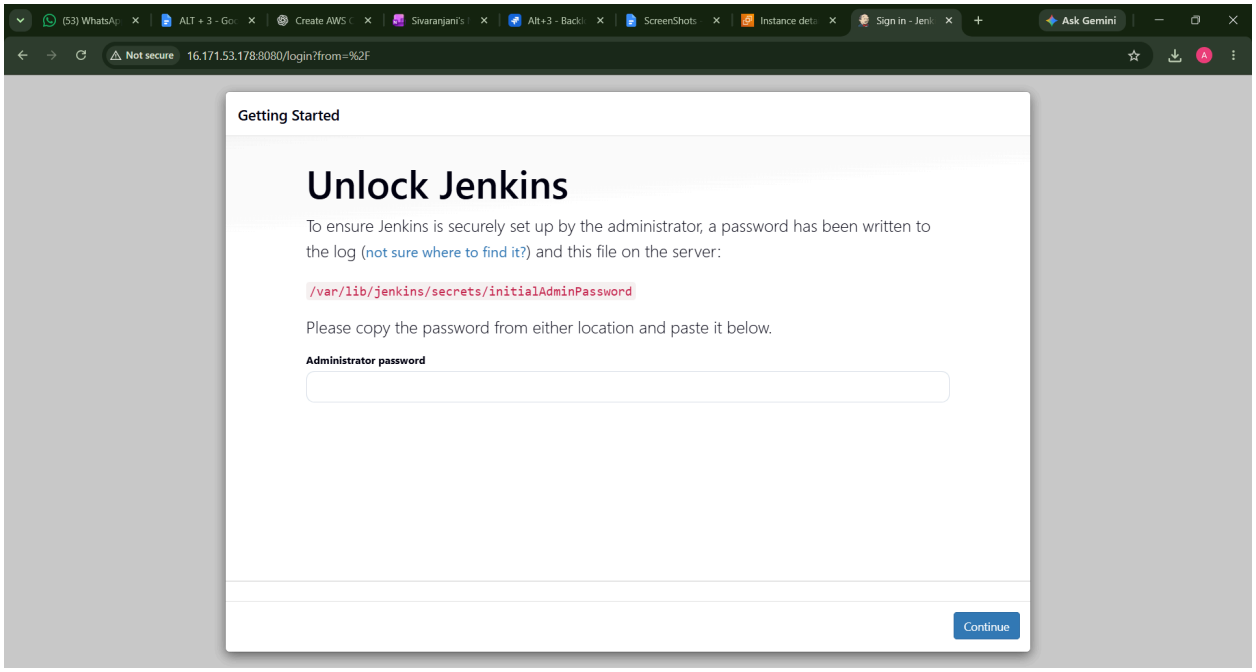

eu-north-1.console.aws.amazon.com/ec2/home?region=eu-north-1#InstanceDetails:instanceId=i-05e5a5e5a2d00215f
Search
[Alt+S]
Europe (Stockholm)
AfshaanFathima (413702076464)
AfshaanFathima
EC2 > Instances > i-05e5a5e5a2d00215f
EC2
Dashboard
AWS Global View
Events
Instances
Instances
Instance Types
Launch Templates
Spot Requests
Savings Plans
Reserved Instances
Dedicated Hosts
Capacity Reservations
UltraServers New
Capacity Manager New
Images
AMIs
AMI Catalog
Elastic Block Store
Instance summary for i-05e5a5e5a2d00215f (Jenkins-server) Info
Updated less than a minute ago
Connect
Instance state
Actions
Instance ID
i-05e5a5e5a2d00215f
Public IPv4 address
16.171.53.178 | open address
Private IPv4 addresses
172.31.12.59
IPv6 address
–
Instance state
Running
Public DNS
ec2-16-171-53-178.eu-north-1.compute.amazonaws.com | open address
Hostname type
IP name: ip-172-31-12-59.eu-north-1.compute.internal
Private IP DNS name (IPv4 only)
ip-172-31-12-59.eu-north-1.compute.internal
Answer private resource DNS name
IPv4 (A)
Instance type
t3.small
Elastic IP addresses
–
Auto-assigned IP address
16.171.53.178 [Public IP]
VPC ID
vpc-046dce7f6d6fbc08a
AWS Compute Optimizer finding
Opt-in to AWS Compute Optimizer for recommendations.
Learn more
IAM role
–
Subnet ID
subnet-02c8434a6d25466d7
Auto Scaling group name
–
IMDSv2
Required
Instance ARN
arn:aws:ec2:eu-north-1:413702076464:instance/i-0
Managed
false
Operator
–
CloudShell
Agent Toolkit for AWS
Feedback
Console Mobile App
© 2026, Amazon Web Services, Inc. or its affiliates.
Privacy
Terms
Cookie preferences


16.171.53.178 - PuTTY
Preloading: jenkins-2.580.1-1.noarch.rpm [done]
Preload finished. [success (35.6 MiB/s)] .....[done]
Retrieving: jenkins-2.580.1-1.noarch (Jenkins-stable) (1/1), 51.4 MiB
Checking for file conflicts: .....[done]
warning: /var/cache/zypp/packages/jenkins/jenkins-2.580.1-1.noarch.rpm: Header V4 RSA/SHA512 Signature, key ID 14abfc68: NOKEY
(1/1) Installing: jenkins-2.580.1-1.noarch .....[done]
%transfiletriggerin(systemd-257.13-160000.1.1.x86_64) script output:
Header V4 RSA/SHA512 Signature, key ID 14abfc68: NOKEY
Header SHA256 digest: OK
Header SHA1 digest: OK
Running post-transaction scripts .....[done]
ip-172-31-12-59:~ # systemctl status jenkins
o jenkins.service - Jenkins Continuous Integration Server
Loaded: loaded (/usr/lib/systemd/system/jenkins.service; disabled; preset: disabled)
Active: inactive (dead)
ip-172-31-12-59:~ # ^C
ip-172-31-12-59:~ # systemctl enable jenkins
Created symlink '/etc/systemd/system/multi-user.target.wants/jenkins.service' → '/usr/lib/systemd/system/jenkins.service'.
ip-172-31-12-59:~ # systemctl status jenkins
o jenkins.service - Jenkins Continuous Integration Server
Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: disabled)
Active: inactive (dead)
ip-172-31-12-59:~ # systemctl start jenkins
ip-172-31-12-59:~ # systemctl status jenkins
● jenkins.service - Jenkins Continuous Integration Server
Loaded: loaded (/usr/lib/systemd/system/jenkins.service; enabled; preset: disabled)
Active: active (running) since Wed 2026-10-21 09:30:59 UTC; 1min 4s ago
Invocation: e6b1d1ffa0804a2f83a9c0d4dbe6c5bf
Main PID: 4137 (java)
Tasks: 49
CPU: 21.617s
CGroup: /system.slice/jenkins.service
└4137 /usr/lib64/jvm/jre-21-openjdk/bin/java -Djava.awt.headless=true -jar /us
Oct 21 09:30:53 ip-172-31-12-59 jenkins[4137]: [LF]>
Oct 21 09:30:53 ip-172-31-12-59 jenkins[4137]: [LF]> **********
Oct 21 09:30:53 ip-172-31-12-59 jenkins[4137]: [LF]> **********
Oct 21 09:30:53 ip-172-31-12-59 jenkins[4137]: [LF]> **********
Oct 21 09:30:59 ip-172-31-12-59 jenkins[4137]: 2026-10-21 09:30:59.209+0000 [id=38] I>
Oct 21 09:30:59 ip-172-31-12-59 jenkins[4137]: 2026-10-21 09:30:59.228+0000 [id=30] I>
Oct 21 09:30:59 ip-172-31-12-59 systemd[1]: Started Jenkins Continuous Integration Server.
Oct 21 09:31:00 ip-172-31-12-59 jenkins[4137]: 2026-10-21 09:31:00.009+0000 [id=56] I>
Oct 21 09:31:00 ip-172-31-12-59 jenkins[4137]: 2026-10-21 09:31:00.012+0000 [id=56] I>
Oct 21 09:31:04 ip-172-31-12-59 jenkins[4137]: 2026-10-21 09:31:04.294+0000 [id=77] W>
lines 1-20/20 (END)...skipping...
● jenkins.service - Jenkins Continuous Integration Server


Not secure
16.171.53.178:8080/login?from=%2F
Getting Started
Unlock Jenkins
To ensure Jenkins is securely set up by the administrator, a password has been written to the log (not sure where to find it?) and this file on the server:
/var/lib/jenkins/secrets/initialAdminPassword
Please copy the password from either location and paste it below.
Administrator password
Continue