

SnappTrip B2B API

Version information

API Version: 2.0

Document Version: 1.4.9

Swagger Link: <https://b2bapiv2.snapptrip.com/swagger/index.html#/>

Base Link: <https://b2bapiv2.snapptrip.com/>

Check Swagger first

Steps to Create an Account for SnappTrip Web Service Users

1. Sign the Agreement

The first step involves signing a contract between both parties to establish the terms of cooperation.

2. Review the Provided Documentation

Users should carefully review the documentation provided by SnappTrip to understand the integration process and service details.

It is vital to prioritize reading and understanding the **Swagger** Documentation.

This step has the highest priority as it provides a clear understanding of the API structure, endpoints, and usage guidelines, which are essential for seamless integration and efficient utilization of the web service.

3. Create a Profile ID

SnappTrip will generate a Profile ID for the user. This serves as a unique identifier for their account.

4. Create Contract ID

SnappTrip will create a Contract ID for the user to formalize the agreement and enable service functionality.

5. Charge the User's Wallet

The user must charge their wallet with the required balance to start using the service.

6. Generate an API Key

Finally, SnappTrip will generate an API Key for the user to enable API access and integration with the web service. (It's possible to have several API Keys. Each API Key has its own wallet ID.)

Warning: The API key has access to the production environment.

By default, each API Key can send 120 requests per minute. If you want the number of requests to increase, make the call with the commercial team.

Technical Support

Our technical support process will be structured as follows:

First Month of Support

After the API Key is generated, we will provide technical support through a dedicated WhatsApp group. This allows for quick and interactive communication to address any immediate issues or questions.

Post One-Month Period

After the first month, if B2B users have no reservations, technical support will be provided via email. Our team will respond to technical issues and assist with any ongoing issues through this channel.

Check the Swagger

Check all data structures for the endpoint in the Swagger link. It is possible to use Swagger online. Just insert your API key in the Authorize part and send requests.

Available authorizations



ApiKeyAuth (apiKey)

Name: api-key

In: header

Value:

Authorize

Close

Test the Apl online and make it easier for your code.

Cities

GET

/cities/ List of cities

⌵

This endpoint present list of cities.

Parameters

Cancel

No parameters

Execute

Clear

Responses

Response content type application/json

Curl

```
curl -X 'GET' \
  'https://b2bapiv2.snaptrip.com/cities/' \
  -H 'accept: application/json' \
  -H 'api-key: ***'
```

Request URL

```
https://b2bapiv2.snaptrip.com/cities/
```

API Integration Workflow: Get Hotel Information

Overview:

Begin with a signed contract and obtain the API Key.

Use the API Key in all API requests.

Utilize the static data endpoints to fetch city and hotel lists.

Use hotel-specific endpoints to retrieve detailed information, including facilities, images, reviews, and room details.

This flow ensures efficient integration and data retrieval from the B2B Hotels API

Accessing Static Data

Endpoint 1: Get Cities

Endpoint: /cities/

Description: Use this endpoint to retrieve a list of cities.

Endpoint 2: Get Hotels in a City

Endpoint: /cities/{city_id}/hotels

Description: Fetch a list of hotels in a specific city by providing the city_id.

Note: These endpoints allow you to retrieve all static data for hotels.

Accessing Hotel Details

Endpoint 1: Get Hotel Primary Information

Endpoint: /hotels/

Infant and Child Age

First, check the baby's age, then evaluate the child's age. If the baby's and the child's ages are the same, consider the child. In specific cases, if the baby is one year old and the child is two years old, a percentage is calculated for each. Also, if the baby is three years old and the child is also three years old, the maximum price related to the child will be considered.

If they are equal, you should show the child's price.

Board Type

There are 4 different board types are valid **"room_only"** , **"bed_breakfast"** , **"half_board"** , **"full_board"**

Description: Retrieve the primary details about hotels.

Endpoint 2: Get Hotel Facilities

Endpoint: /hotels/facilities

Description: Fetch information about facilities available at the hotels.

Endpoint 3: Get Hotel Gallery

Endpoint: /hotels/galleries

Description: Retrieve images and galleries associated with hotels.

Endpoint 4: Get Hotel Reviews

Endpoint: /hotels/reviews


Description: Fetch user reviews for hotels.

Endpoint 5: Get Hotel Rooms Information


Endpoint: /hotels/rooms

Description: Retrieve details about the rooms available in hotels.

We suggest caching hotel details (static endpoints) for 24 hours or more.

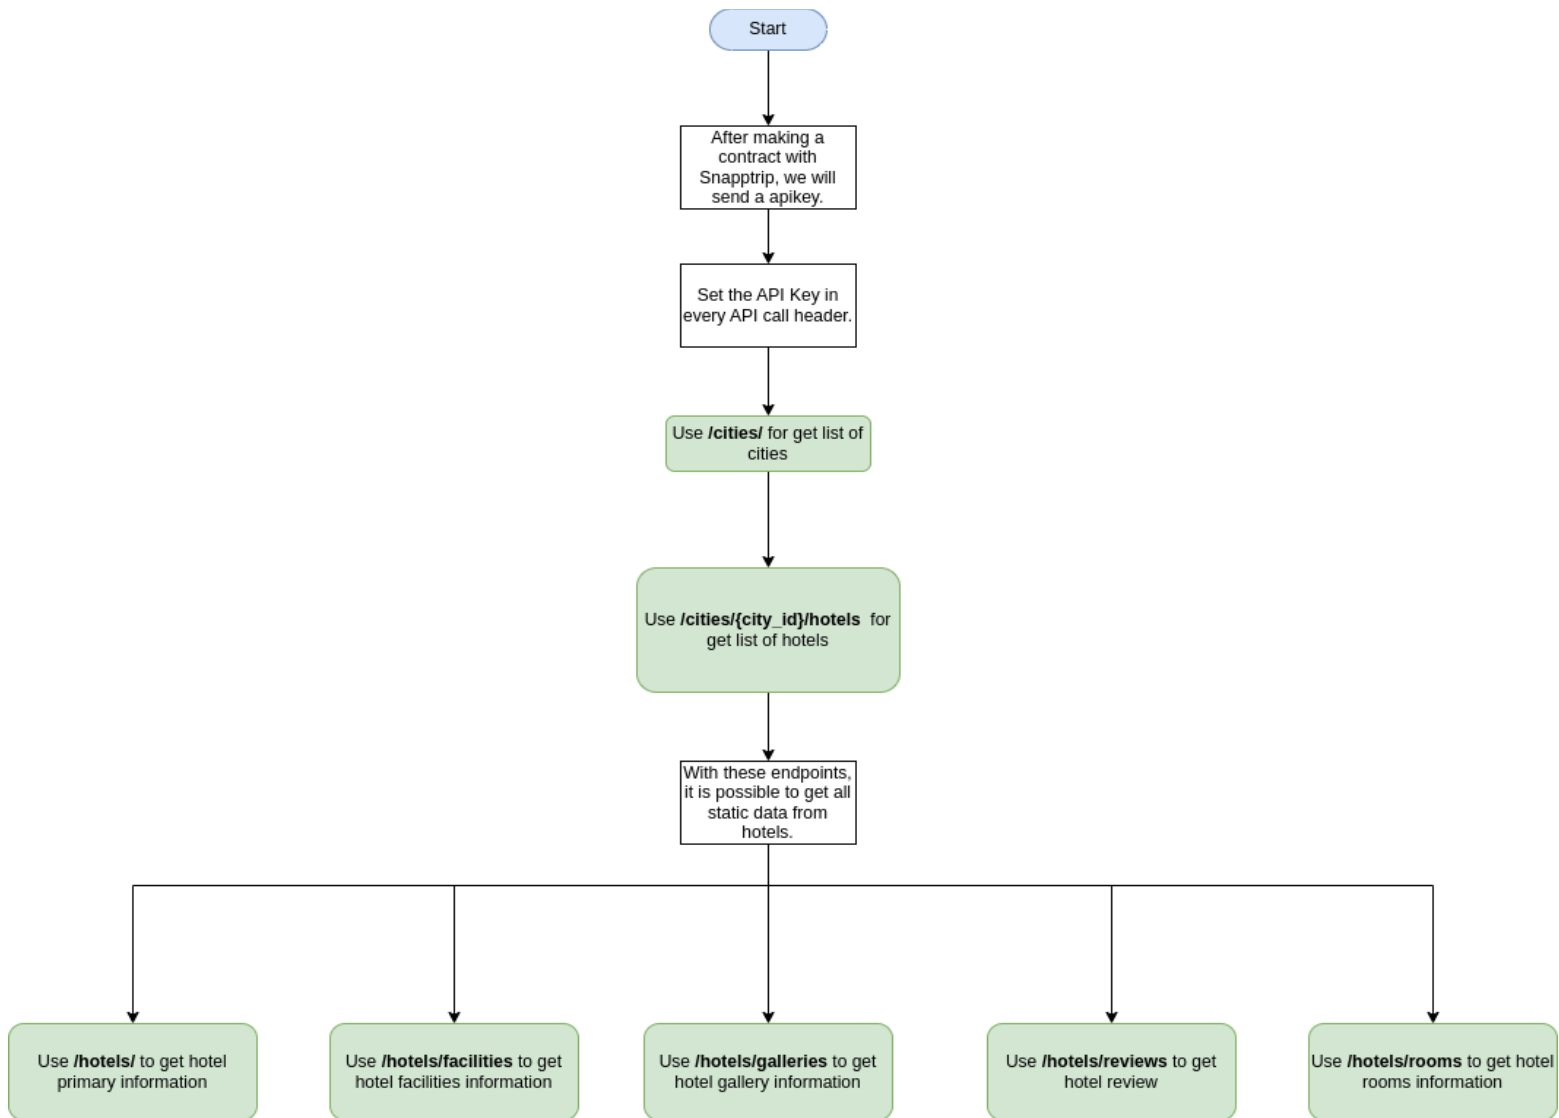

Flow Get Hotel Details

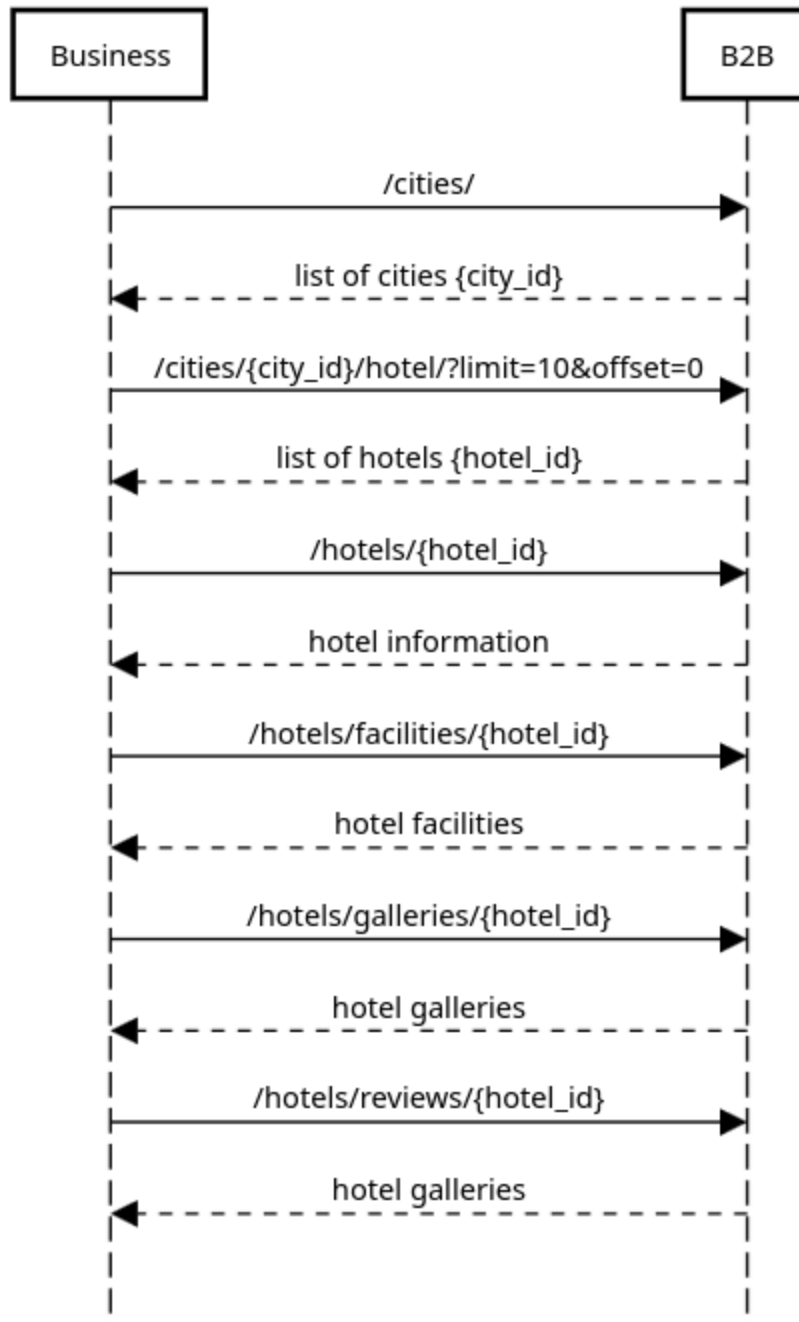

Accessing Account Balance

Endpoint: /balance/

Description: Use this endpoint to retrieve your account's current balance.

API Integration Workflow Check Availability

1. Overview

This document outlines the steps to integrate with the Snapptrip API, including setting up API keys and utilizing endpoints to fetch data like cities, hotels, and room availability.

2. Workflow Steps

1. Start

The process begins with establishing a contract with Snapptrip.

2. API Key Assignment

Upon completing the contract, Snapptrip provides an API key.

This key must be included in the header of every API call to authenticate requests.

3. Fetch City Data

Use the /cities/ endpoint to retrieve a list of available cities.

4. Fetch Hotels in a City

Use /cities/{city_id}/hotels to get a list of hotels in a specific city.

5. Check Hotel Room Availability

Use /availability/hotels to check for available rooms in all hotels.

Use /availability/hotels/{hotel_id} for details on a specific hotel.

If the hotel_id doesn't exist, it will return a 404 error.

If hotel_id exists but all rooms are booked, it will return 200 with an empty availability array.

Example

```
{  
  "hotel_id": 2,  
  "availability": []  
}
```

5.1. Pricing



```
"pricing": {  
  "price": 17328620, // price for your company  
  "discount_amount": 1305380, // discount for your company  
  "child_price": 0,  
  "extra_bed_price": 2090000,  
  "original_sell_price": 17329620 // client price  
},
```

Customer price with discount is 17329620 toman

The discount for your company is 1305380 toman

All prices are in **Toman**.

Pricing Attention

Pricing on SnappTrip is a complex process, and the price displayed on the calendar may differ from the final price presented to the user. Therefore, you can use the following endpoints to retrieve pricing information within a specific range, keeping in mind that these prices might vary from the actual final price:

/availability/cities

This endpoint provides information about available cities and their associated pricing ranges.

/availability/hotels/{id}/calendar

This endpoint allows you to check the pricing calendar for a specific hotel by providing the hotel's ID. The prices shown here are indicative and may not match the final price.

/availability/hotels/{id}/room/{id}/calendar

This endpoint provides pricing details for a specific room within a hotel over a given period. Please note that these prices are subject to change and may not reflect the final price.

It is crucial to note that the actual base price can be confirmed using the endpoint:

/availability/hotels?id

This endpoint will provide the definitive base price for the hotel. Alternatively, you can inform the user of the final price after the create operation is completed, as this will reflect the most accurate and up-to-date pricing information.

In summary, while the calendar endpoints offer a useful overview of pricing trends, the final price should always be verified either through the base price endpoint or after the booking creation process to ensure accuracy and avoid discrepancies.

5.2. Racks

Some hotels, such as Nowruz, have a special package rack at special times. In this case, data from the rack can be used to reserve a room. If the hotel has rack data, it is mandatory to select data check-in and checkout for your clients; otherwise, **creating a booking endpoint** will respond with an **error**.

```
"racks": {
  "title": "پکیج",
  "racks": [
    {
      "checkin": "2025-02-19",
      "checkout": "2025-02-21"
    },
    {
      "checkin": "2025-02-21",
      "checkout": "2025-02-23"
    },
    {
      "checkin": "2025-02-23",
      "checkout": "2025-02-26"
    }
  ]
}
```

Endpoints `availability/hotels/*` have rack data, but consider in `availability/hotels/` and `availability/hotels/{id}` only show rack data when check-in and check-out values conflict with rack check-in and checkout

Rack Data Visibility Rules

1. Base Endpoint (`availability/hotels/*`)
 - Always displays rack data
 - No conditions applied
 - Shows complete inventory information
2. Rack data visibility depends on date conflicts
 - `availability/hotels/`
 - `availability/hotels/{id}`
 - Show rack data **ONLY** when dates overlap
 - Hide rack data when dates don't conflict

There is no issue if a rack is fully matched (complete) or if no racks are broken—the priority is ensuring at least one specific rack is fully matched, even if others are broken. Additionally, reserving multiple racks (e.g., from the first to the fifth or even up to the sixth) is not a problem as long as the matching condition is satisfied, meaning the system remains functional if either a complete match exists or no breakages occur.

6. Fetch Room Calendar

Use `/availability/hotels/{hotel_id}/room/{room_id}/calendar` for the availability of specific rooms within a hotel.


If `hotel_id` or `room_id` doesn't exist, it will return a 404 error.

If `hotel_id` or `room_id` exists but all rooms are booked, it will return 200 with an empty array.

Example




Flow Check Hotel Availability

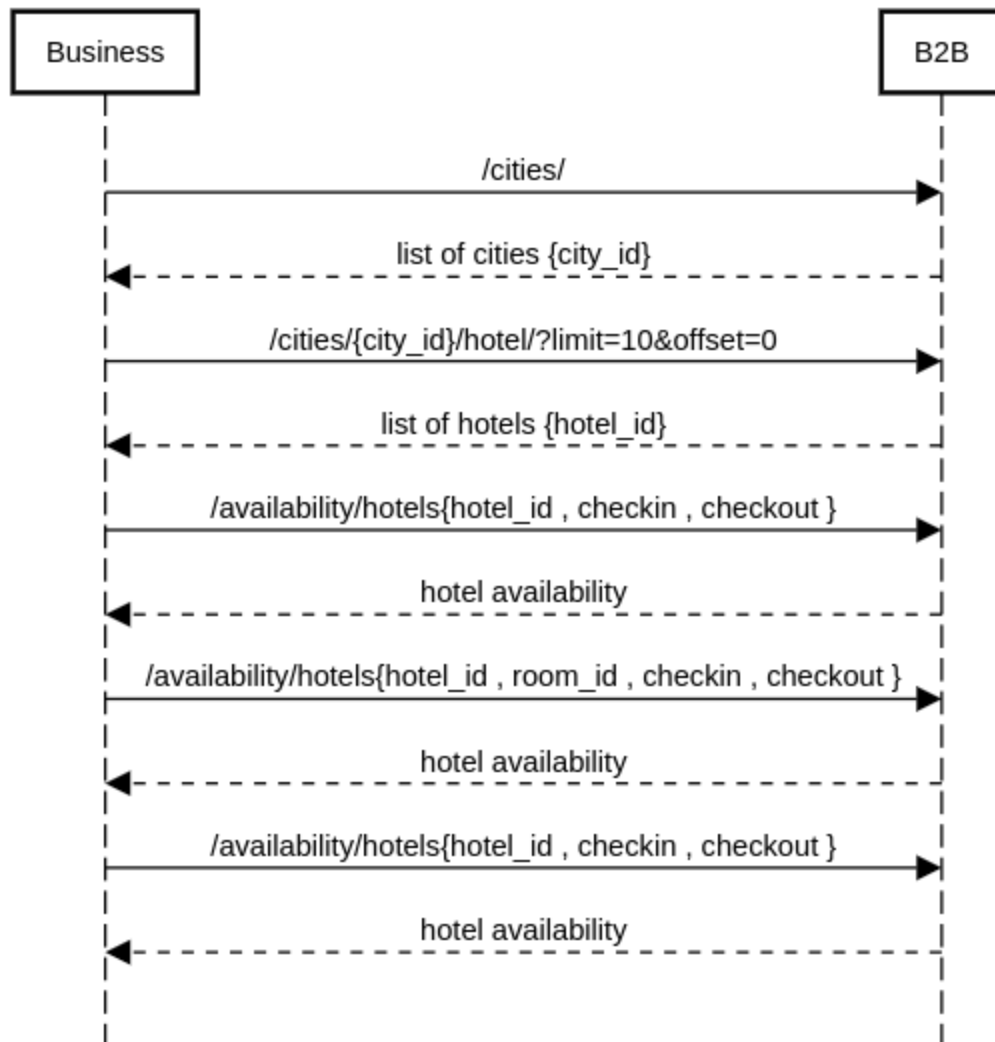

7. City Search

Use `/availability/cities` to search available hotels in the city. Sending the city ID, check-in, and checkout is mandatory. In this endpoint, it is possible to search for the type of accommodations, such as empty string, "Hotel", "Pansion", "Apartments", "Guesthouse", "Motel", "Inn", and "Traditionalhouse" values. This endpoint will send the minimum price of each hotel in the city.

Flow Check City Search

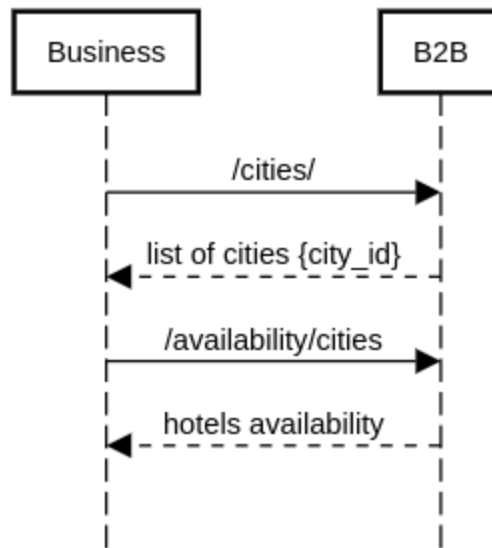



8. Fetch the Calendar by hotel

Use `/availability/hotels/{hotel_id}/calendar` for the availability of hotel rooms.

8.1. Min Stay

It is mandatory to check the **minimum stay requirement**, which refers to the number of days a customer must **stay** at the hotel. This value is sent to the calendar, and it should always be verified before creating a booking. Otherwise, it may result in an **error** for the customer.

Flow Check Hotel Availability

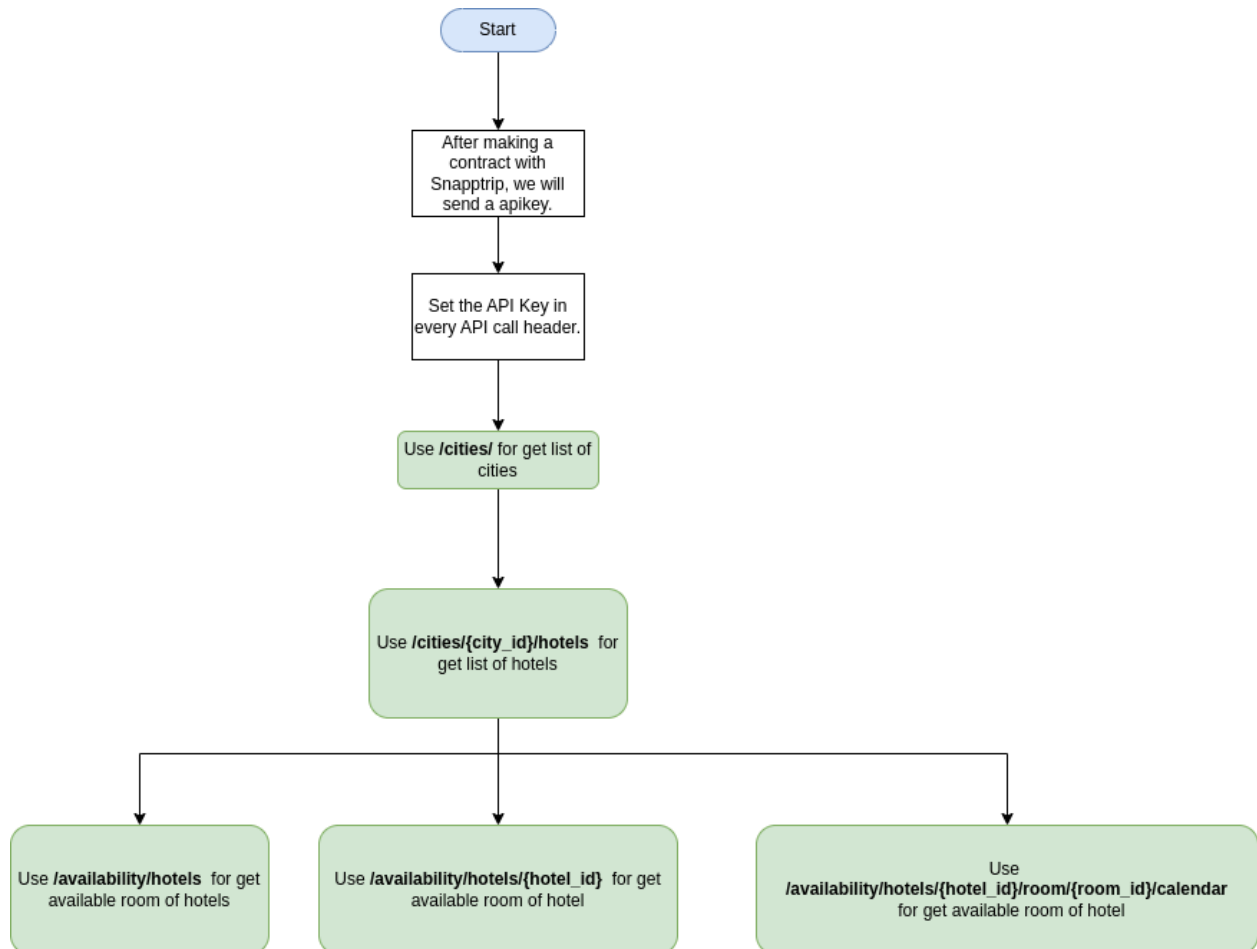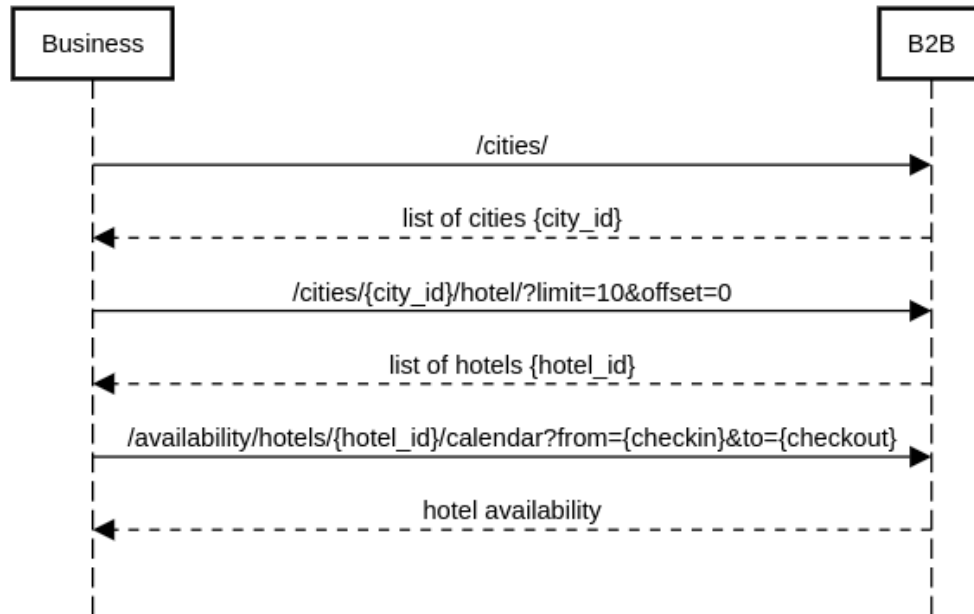


9. Get Balance

Use **/balance** endpoint to retrieve the current balance of your account.

No parameters are required—your API key provided in the request header will be used for authentication and balance retrieval.

You can find this endpoint in the Swagger docs:



This section outlines the response structure returned by the endpoint:



3. Key Points

API Key:

Always include the API key in every request header.

Endpoint Format:

Endpoints include variables like {city_id}, {hotel_id}, and {room_id}, which need to be replaced with actual values during requests.

Sequence:

Follow the workflow: Fetch cities → Fetch hotels → Check availability.

4. Visual Representation

The workflow is depicted as follows:

Start → Receive API Key → Set API Key in Header

API Calls:

/cities/ → List of cities.

/cities/{city_id}/hotels → List of hotels.

/availability/hotels or /availability/hotels/{hotel_id} → Room availability.
/availability/hotels/{hotel_id}/room/{room_id}/calendar → Room calendar.
/availability/hotels/{hotel_id}/calendar → Hotel calendar.
/availability/cities -> City availability

5. Notes

Ensure all requests use the provided API key.

Replace placeholders (e.g., {city_id}) with actual data when making API calls.

For more information, refer to the API documentation.

B2B Booking API Process

1. Overview

This document describes the workflow for integrating and using the B2B booking system. It highlights key steps, API endpoints, and conditions for effectively handling room bookings.

2. Workflow Steps

Step 1: First

Action: The process begins by finding an available room.

Step 2: Find an Available Room

Action: Identify available rooms in the system.

Details: This may involve checking availability using appropriate endpoints (not explicitly shown here).

Step 3: Create Booking

Action: Finalize the booking and generate a booking code.

API Endpoint: /booking/create

When creating a booking (/booking/create) is requested, if the end-user selects multiple rooms with different room IDs, it will give a "room ID should be same as first room ID" error

It is mandatory to insert at least one guest in the guest list. We recommended putting all adults, children, and infants on the guest list.

Step 4: Lock Permission Check

Action: Verify if the contract allows locking rooms before confirmation.

Condition:

If permission is granted, proceed to lock the room.

If permission is not granted, move directly to booking without locking.

API Endpoint: /booking/{code}/lock

Step 4a: Lock the Room (Optional, if lock permission is granted)

Action: Temporarily lock the room for 15 minutes to ensure it isn't double-booked during the confirmation process.

Step 4b: Confirm the Booking

Warning: for testing purposes only, use hotel ID: 2766

Hotel name : "تست اسنپ تریپ"

Hotel ID 2766 has been specifically allocated for testing purposes. This establishment maintains operational parameters identical to those of our production facilities, with the singular distinction that it waives cancellation penalties. This characteristic renders it particularly suitable for conducting comprehensive booking scenario evaluations without incurring monetary obligations. For reference, all active production properties enforce standard **cancellation fee** policies.

Action: Confirm the booking directly (without locking). Locking is not mandatory.

API Endpoint: /booking/{code}/confirm

Please set the **foreigner** field to **false** for **Iranian nationals** and true for all others, as incorrect information may result in penalties for the guest.

For free transfer or corporate arrangements, please include your flight number, arrival time, and number of transfers required in the note field.

Step 6: Save the reservation codes in your database.

Step 7: Check Booking Status

Action: Verify the status of the created booking to ensure it was successfully processed.

It is mandatory to check the status after confirming the booking.

API Endpoint: /booking/{code}

Status Title	Description
draft	Initializing the book has been done.
confirmed	Booking successfully done.
payment_on	Lock booking. Confirm has not been submitted yet.
failed	Booking has failed.
payment_failed	Payment booking has failed.
expired	The payment has expired.
availability_failed	The room isn't available.
availability_checking	Customer support is checking availability.
availability_pending	The room availability is pending.

availability_confirmed	Offline book availability is confirmed.
availability_rejected	Offline book availability is rejected.
overbook	Availability is overbooking.


Summary Steps

Steps	Endpoint	Purpose
Create Booking	/booking/create	Create a new booking.
Lock Room	/booking/{code}/lock	Lock a room temporarily.
Confirm Booking	/booking/{code}/confirm	Confirm a room booking.
Get Booking Status	/booking/{code}	Check the booking's current status.


Ensure that the contract's lock permissions are reviewed before starting the process.

All API requests must include authentication headers (e.g., API keys).

Follow the sequence: Find Room → Lock (if needed) → Confirm → Create → Check Status.

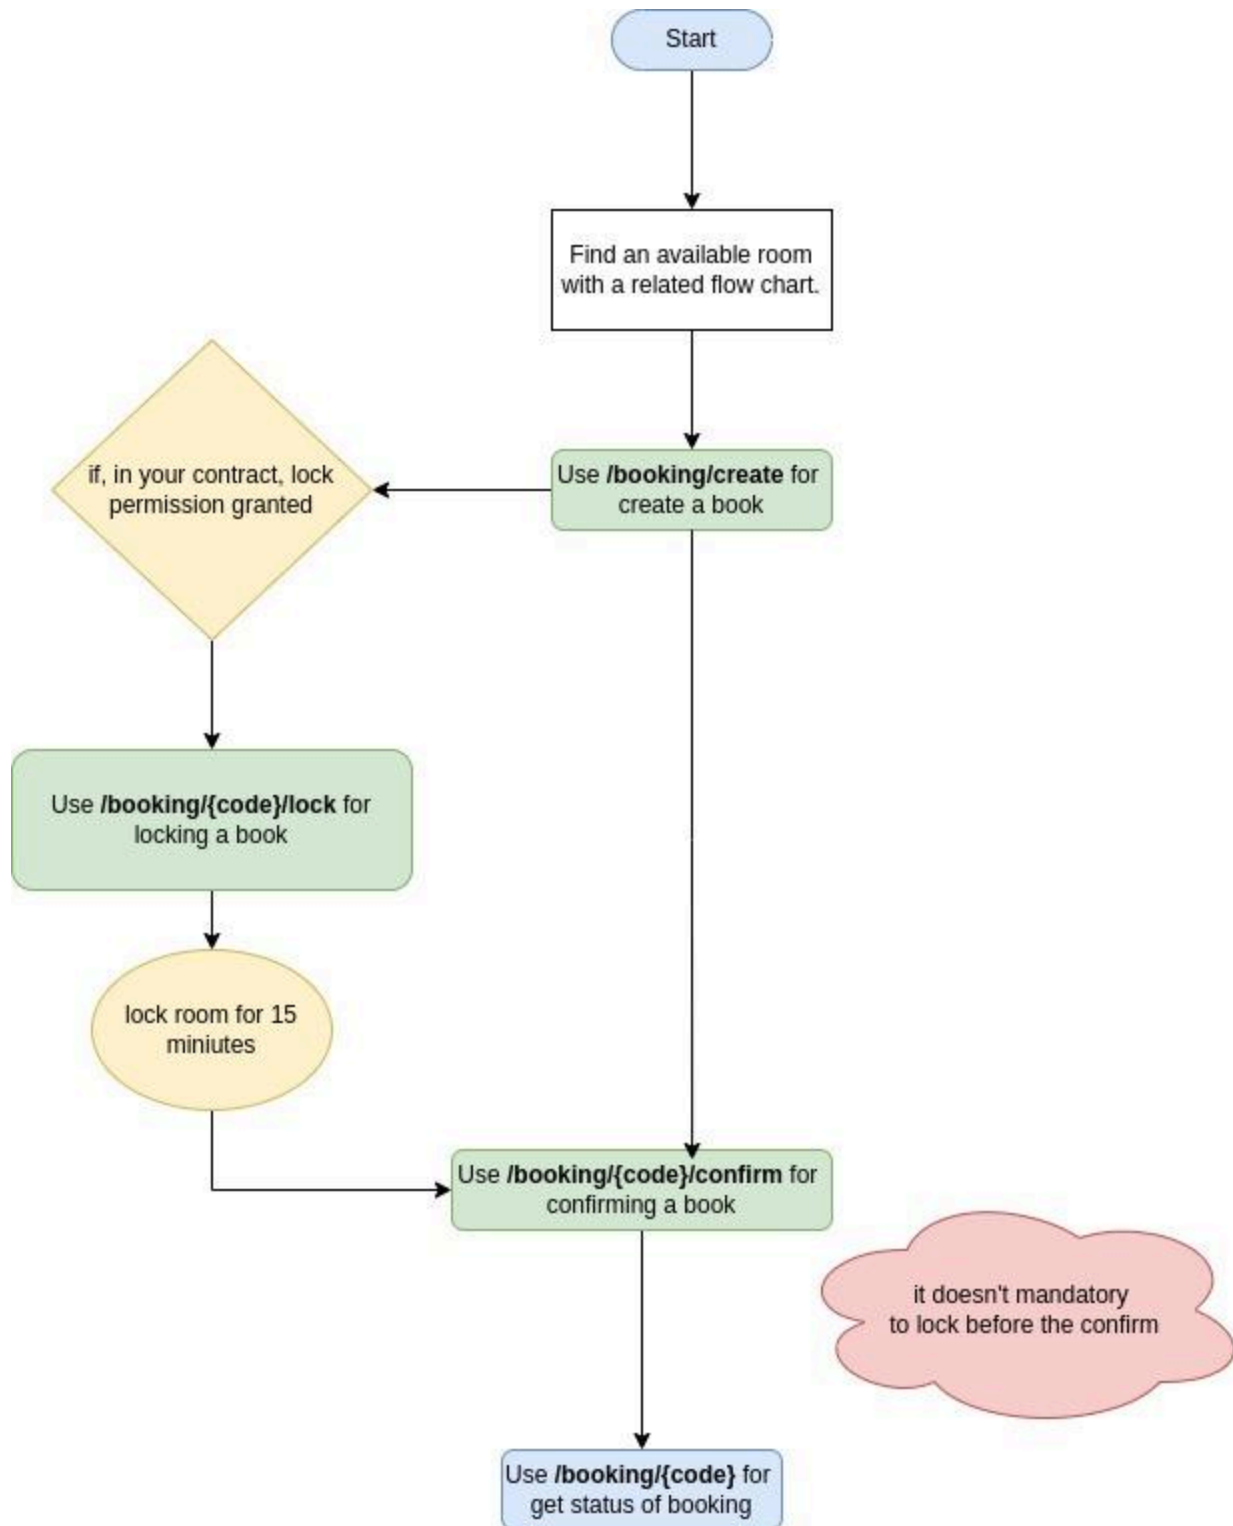

Flow Booking Hotel

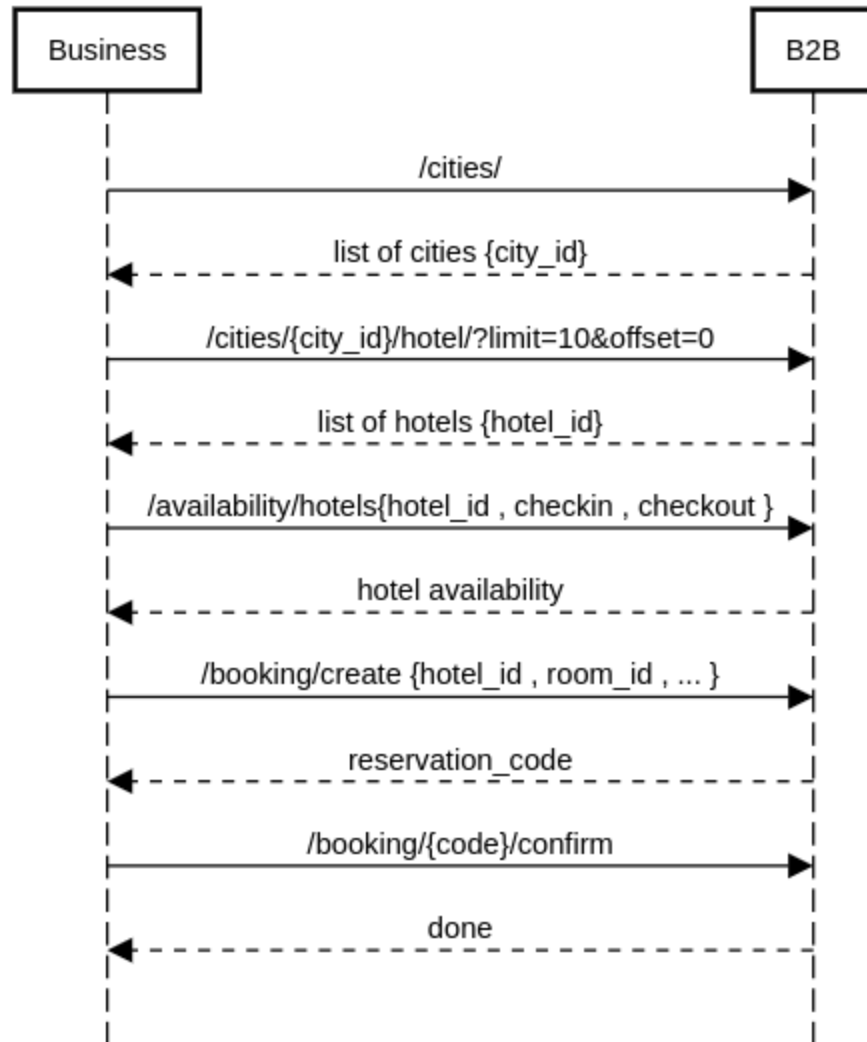

Caching Advice

We recommend caching static endpoints, such as hotel details, for at least 24 hours. For dynamic endpoints, like hotel availability, the cache duration should be adjusted depending on demand. In peak periods, a shorter cache is preferable to keep the information updated, while in off-peak times, a longer cache helps improve performance. This method should reflect user behavior to maintain both accuracy and efficiency.