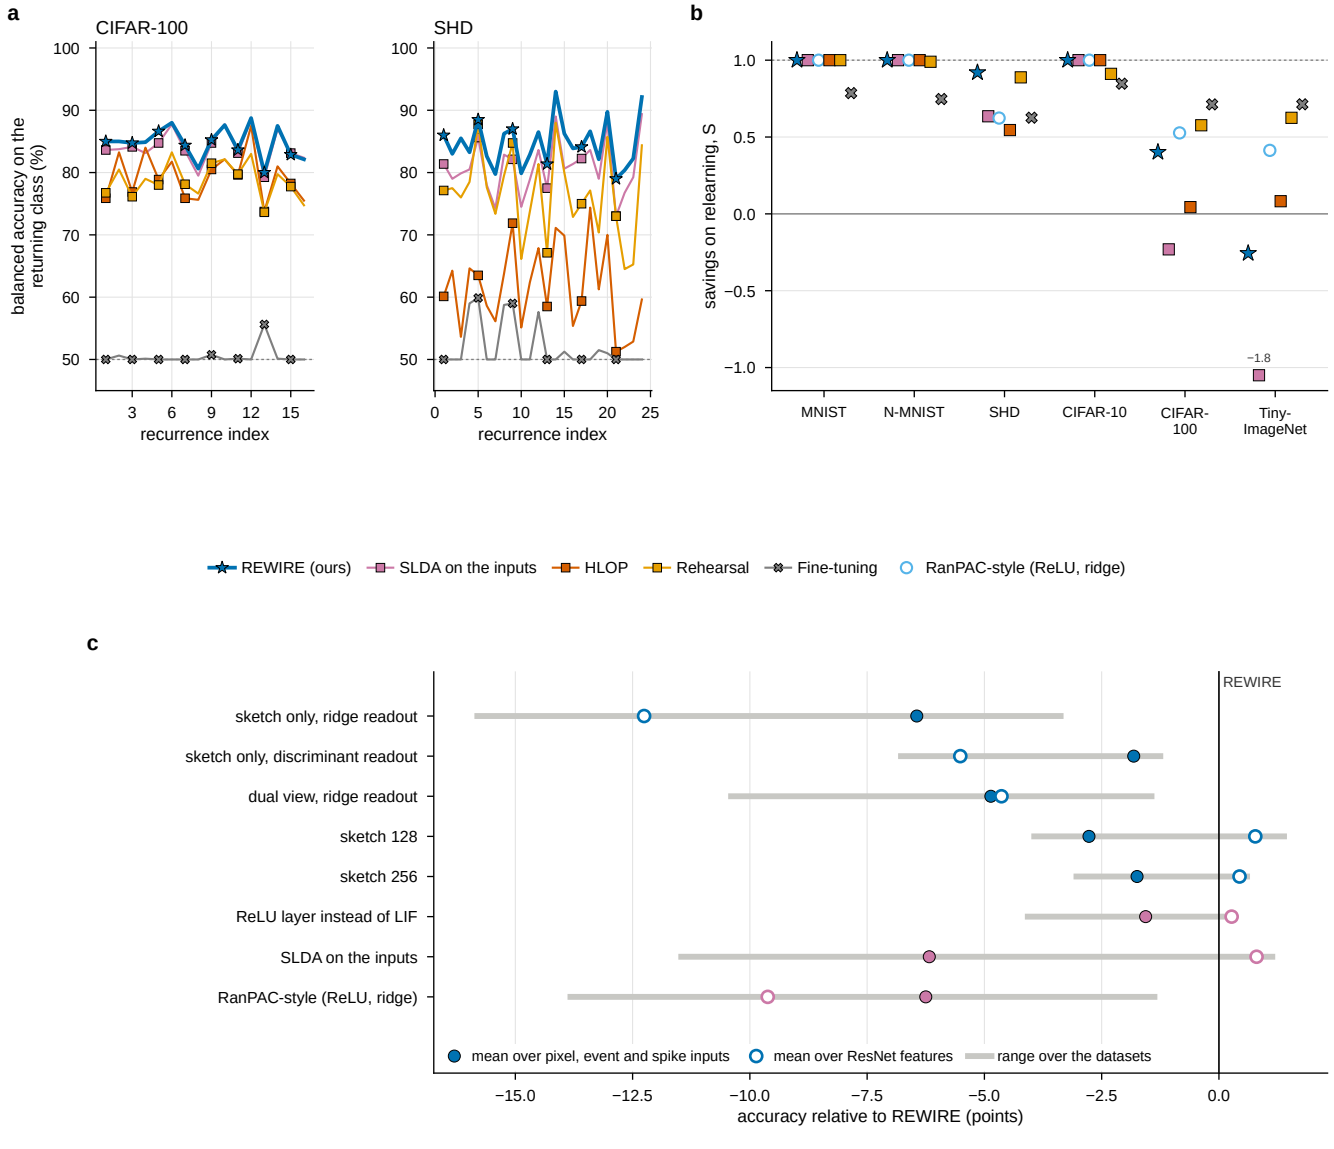
a
CIFAR-100
SHD
balanced accuracy on the returning class (%)
recurrence index
recurrence index
b
savings on relearning, S
−1.8
MNIST
N-MNIST
SHD
CIFAR-10
CIFAR-100
Tiny-ImageNet
REWIRE (ours)
SLDA on the inputs
HLOP
Rehearsal
Fine-tuning
RanPAC-style (ReLU, ridge)
c
REWIRE
sketch only, ridge readout
sketch only, discriminant readout
dual view, ridge readout
sketch 128
sketch 256
ReLU layer instead of LIF
SLDA on the inputs
RanPAC-style (ReLU, ridge)
mean over pixel, event and spike inputs
mean over ResNet features
range over the datasets
accuracy relative to REWIRE (points)