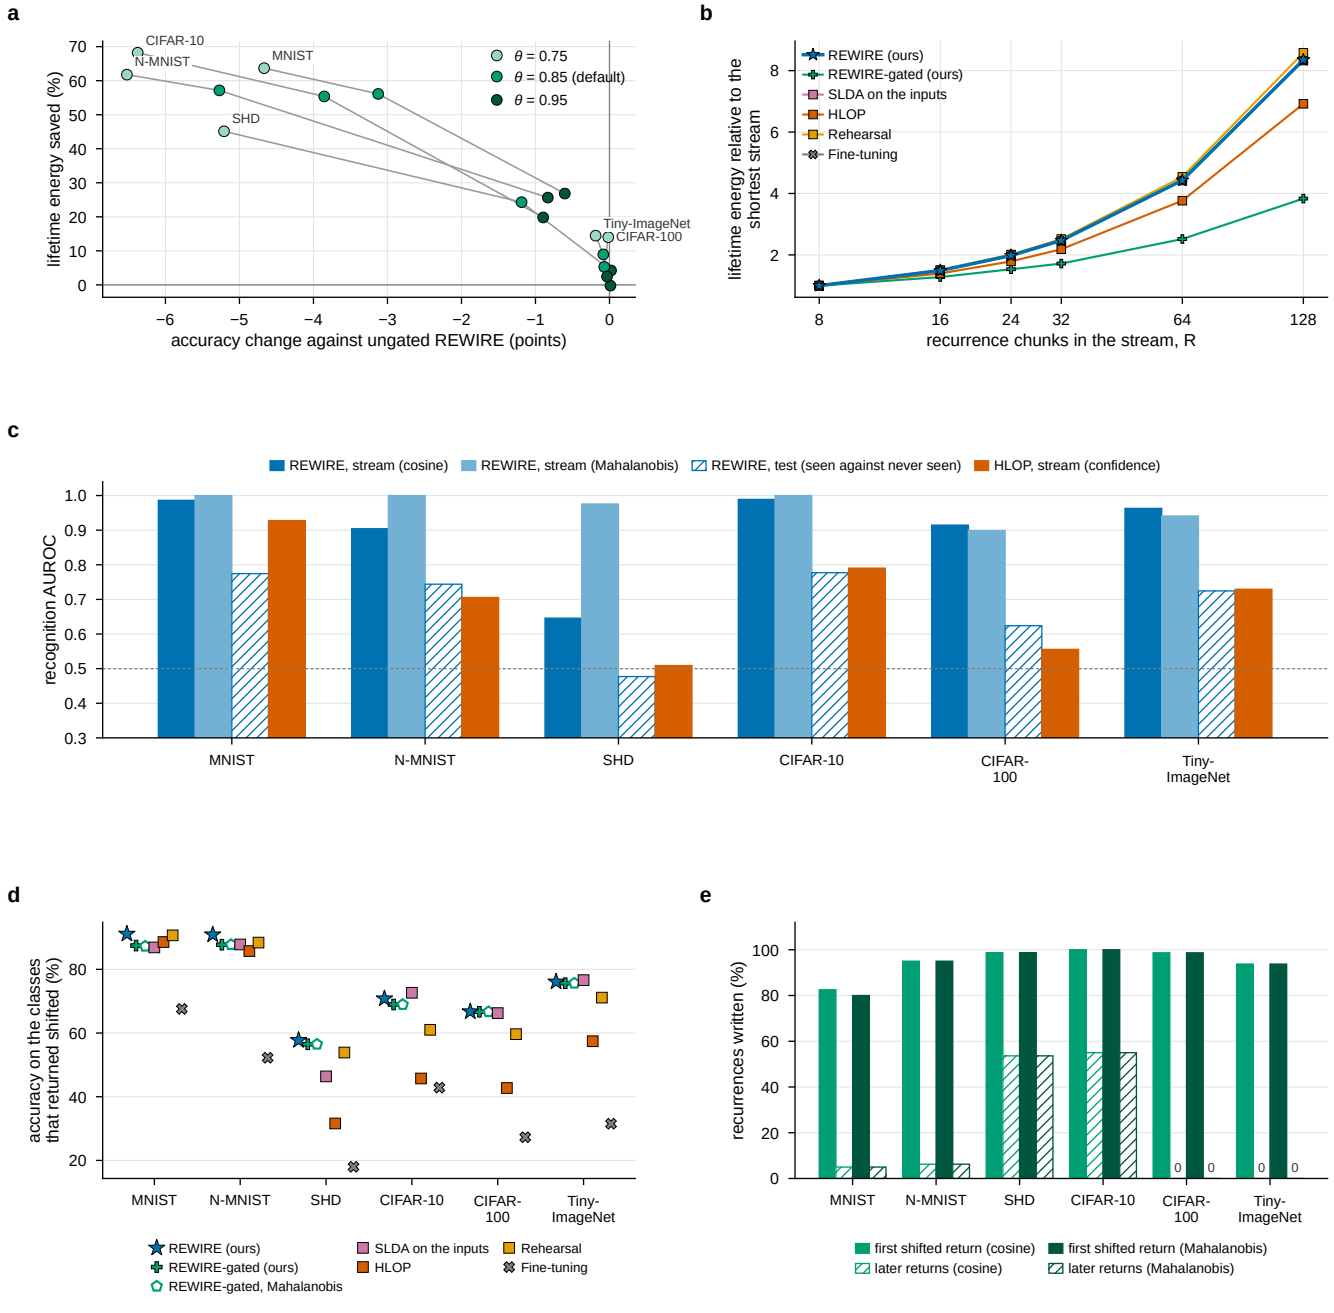
a
lifetime energy saved (%)
accuracy change against ungated REWIRE (points)
CIFAR-10
N-MNIST
MNIST
SHD
Tiny-ImageNet
CIFAR-100
θ = 0.75
θ = 0.85 (default)
θ = 0.95
b
lifetime energy relative to the shortest stream
recurrence chunks in the stream, R
REWIRE (ours)
REWIRE-gated (ours)
SLDA on the inputs
HLOP
Rehearsal
Fine-tuning
c
REWIRE, stream (cosine)
REWIRE, stream (Mahalanobis)
REWIRE, test (seen against never seen)
HLOP, stream (confidence)
recognition AUROC
MNIST
N-MNIST
SHD
CIFAR-10
CIFAR-100
Tiny-ImageNet
d
accuracy on the classes that returned shifted (%)
REWIRE (ours)
REWIRE-gated (ours)
REWIRE-gated, Mahalanobis
SLDA on the inputs
HLOP
Rehearsal
Fine-tuning
e
recurrences written (%)
first shifted return (cosine)
later returns (cosine)
first shifted return (Mahalanobis)
later returns (Mahalanobis)