Getting Started

To use the provided packages in your Bonsai environment, you will need to:

1. Install Bonsai
2. Go to `Package Manager`
3. Select NuGet.org as the `Package source`
4. Look for `AllenNeuralDynamics` for a list of all available packages written and maintained by AIND
5. Install the desired packages. Any dependencies will be automatically installed as well.
6. Some packages are still experimental, so you might need to tick `Include prerelease` to see them.

Version Control

A repository is represented in Bonsai by the `CreateRepository` operator. Several properties are exposed via this object, including the name and hash of the current commit.

In order to make it easier for users to evaluate the state of the local repository, an additional operator, `IsRepositoryClean`, is provided to check if the repository is in a clean state (i.e. are there any untracked or uncommitted changes).

Core - Logging Examples

A simple logging pipeline can be assembled using the Core package.

The first thing that should be defined is the root where all data will be saved to. This can be done using the `GenerateRootLoggingPath`. This Node will instantiate a `Subject` with a unique path in the form of `<RootFolder>/<Subject>/<Date>`.

Harp data

Once this `Subject` is created, other nodes can access to it. For instance, if one would like to save the data from a `Harp Device`:

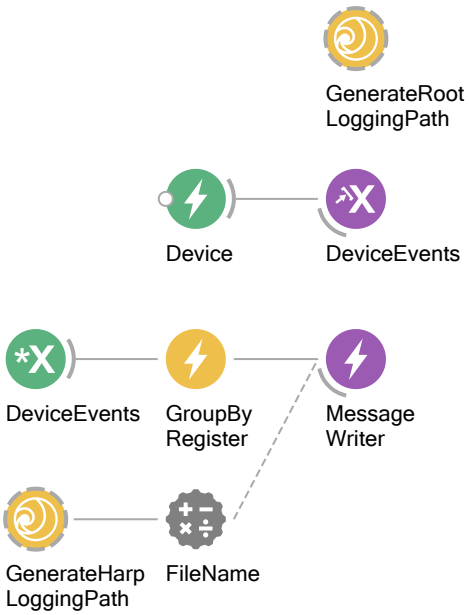

Spinnaker camera

Similarly, for a `Spinnaker Camera`:

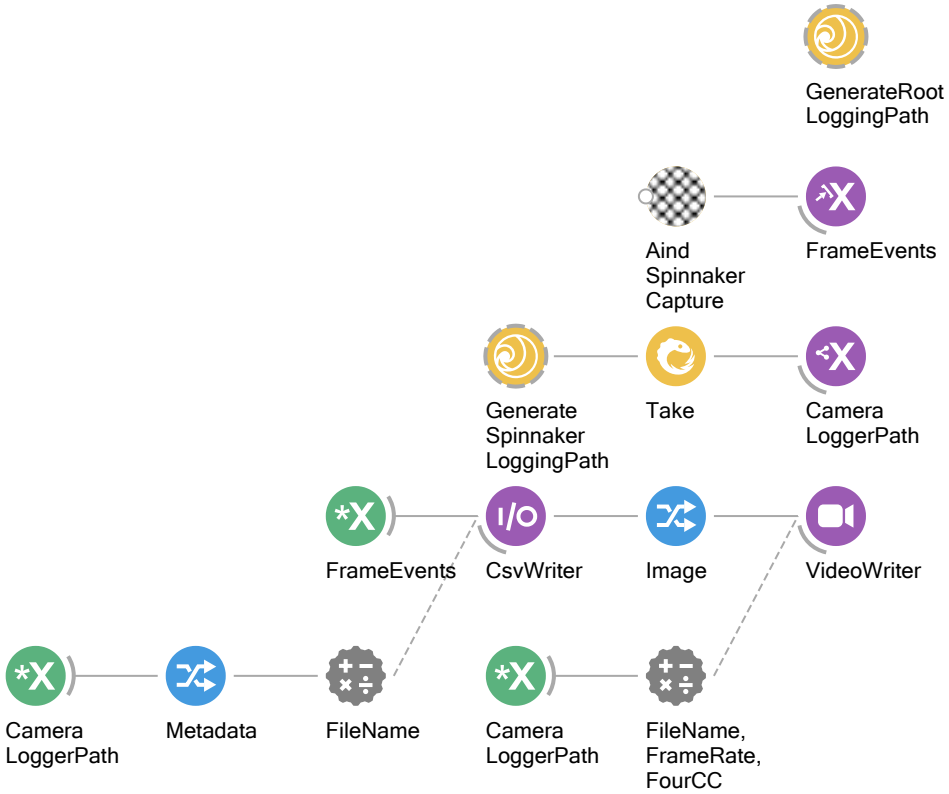

Software events

For software events, one can use the `SoftwareEvent` class and the following pattern:

GenerateRoot LoggingPath
Software Events
KeyDown
Create Software Event
Software Events
Timer
Create Software Event
Software Events
Device
Parse
Harp Timestamp Source
Software Events
WithLatest From
Create Timestamped
Timestamp Software Event
LogSoftware EventsDemux
Workflow Output
Harp Timestamp Source

Harp Utilities

Get device metadata from device

In order to get device metadata from device, use the `GetHarpDeviceMetadata` operator. This operator will connect to an harp device and serialize a `HarpDeviceMetadata` object that can then be saved to a text file. For instance:

LicketySplitLickDetector

The repository of this device can be found here.

Examples

It is advisable to first get familiar with the general Bonsai interface for Harp devices. This documentation can be found at harp-tech.org.

Detecting licks

Licks detected by the board can be `Parse`d from register `LickState` using the following pattern:

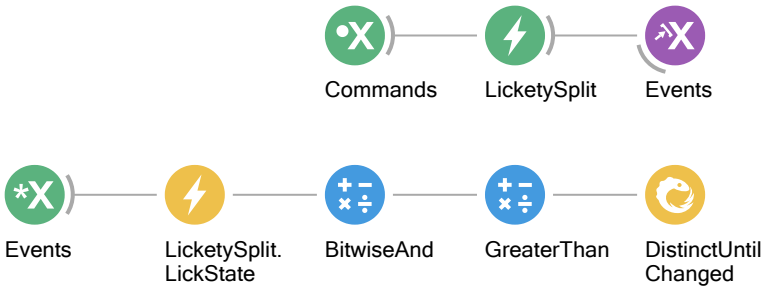

`True` and `False` values will correspond to the onset and offset of lick events, respectively.

SniffDetector

The repository of this device can be found here.

Examples

It is advisable to first get familiar with the general Bonsai interface for Harp devices. This documentation can be found at harp-tech.org.

Parsing sensor data

The thermistor data ca be parsed using the following pattern

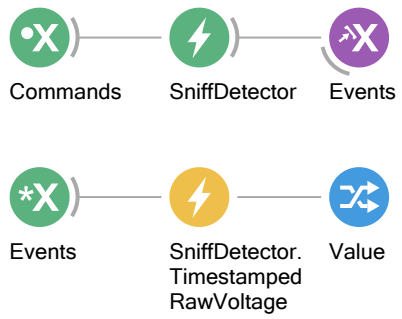

Setting the dispatch rate

The dispatch rate of the sensor data event can be set using the following pattern:



Treadmill

The repository of this device can be found here.

Examples

It is advisable to first get familiar with the general Bonsai interface for Harp devices. This documentation can be found at harp-tech.org.

Parsing sensor data

Device sensor data can be parsed from the individual sensor registers ([`Encoder`, `Torque` and `TorqueLoadCurrent`]). For simplicity, a single register with a packed data structure is also provided. The following pattern can be used to parse the treadmill sensor data:

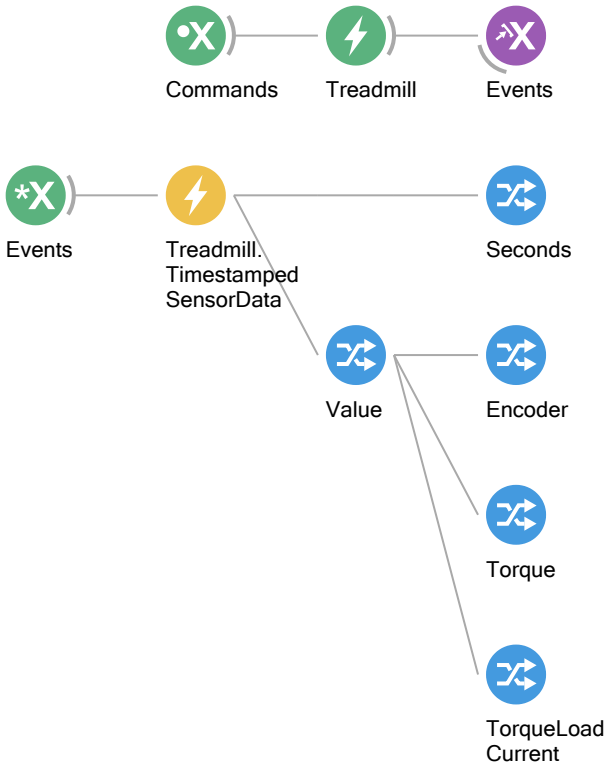

Using the magnetic particle break

The treadmill is fitted with a magnetic particle break that can be used to control the torque of the wheel experiences up to a set point. The following pattern can be used to control the break. In this example we will use a sinusoidal pattern to set the value of the break, but any other numeric input can be used.

Configuring additional settings

Additional settings are available for the treadmill. These include the ability to:

- Set the dispatch rate of the sensor data event;
- Tare the value of all or individual sensors;
- Reset the Tare function of all or individual sensors;
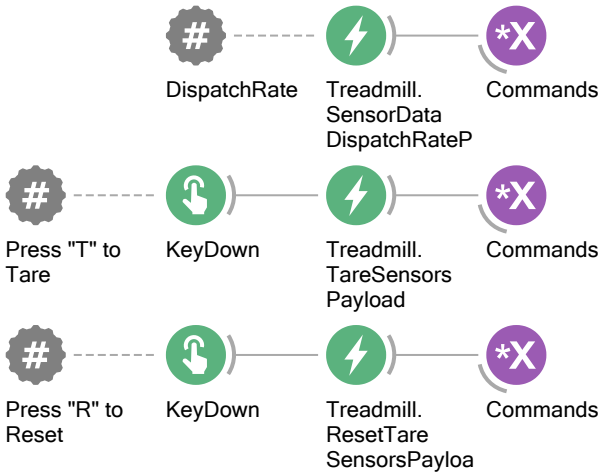
The following example shows how to achieve all the above, respectively: