


EXPERIMENT NO:-02


AIM:- Connecting and Logging on to a Cisco Router along with the introduction to the Basic User Interface.

● STEPS :


1. To select the Router, click on Network Devices then you will find blow of that Router click on it and draw on it screen then click double on it. A window screen will appear like this.

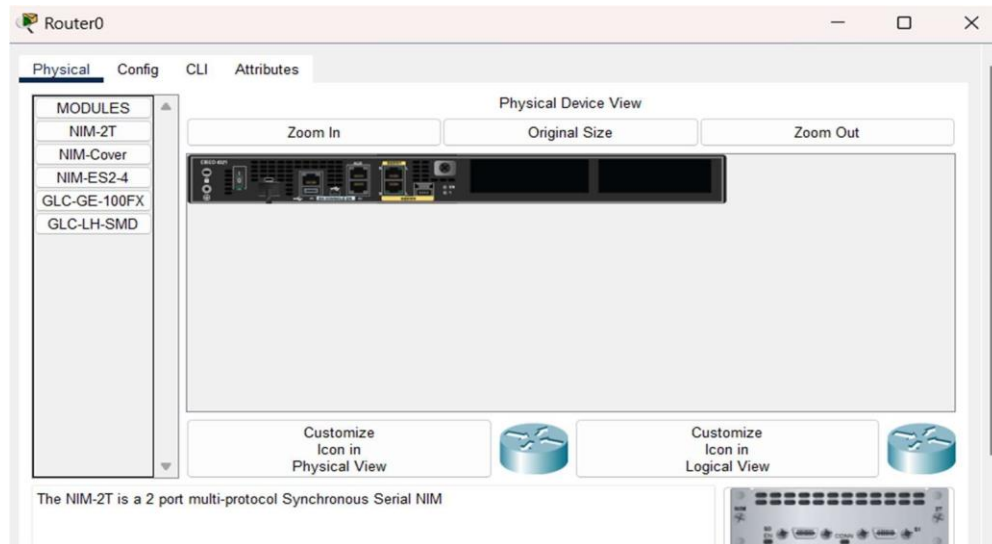

2. After that click on “CLI” tab and then IOS Command Line Interface screen will appear and it will ask to you “would you like to enter the initial configuration dialog ? [yes/no] :” type no then click enter (Return).you will find the Router> which mean you are in user mode.

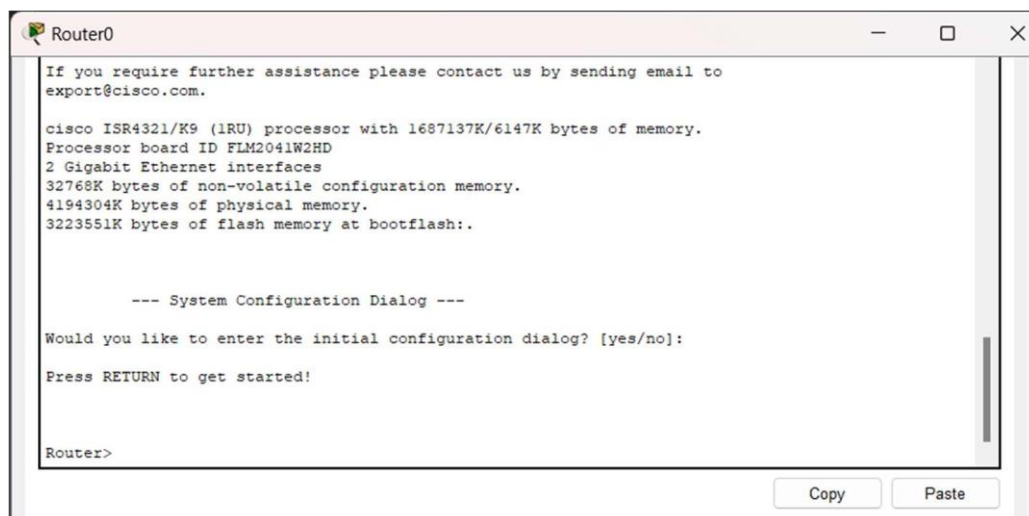

3. if you want to see the all user command. Type “Router> ?” and “Router>show ?” then it will show you all the commands which can be access by users.

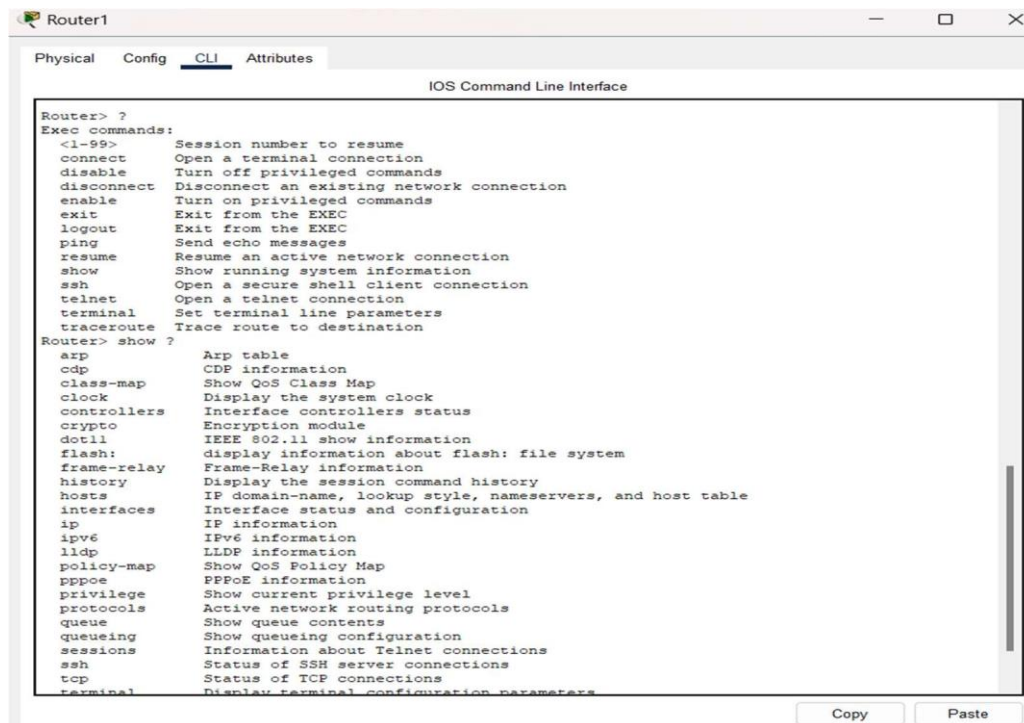

The screenshot shows the Router1 CLI window with the 'CLI' tab selected. The title bar indicates 'IOS Command Line Interface'. The command prompt is 'Router> ?'. Below it, a list of EXEC commands is displayed, including: <1-99>, connect, disable, disconnect, enable, exit, logout, ping, resume, show, ssh, telnet, terminal, and traceroute. Each command is followed by a brief description. The command prompt is then changed to 'Router> show ?', and a second list of commands is displayed, including: arp, cdp, class-map, clock, controllers, crypto, dot11, flash:, frame-relay, history, hosts, interfaces, ip, ipv6, lldp, policy-map, pppoe, privilege, protocols, queue, queueing, sessions, ssh, tcp, and terminal. Each command is followed by a brief description. At the bottom right of the window, there are 'Copy' and 'Paste' buttons.


```
Router1
Physical Config CLI Attributes
IOS Command Line Interface

Router> ?
Exec commands:
<1-99>      Session number to resume
connect     Open a terminal connection
disable     Turn off privileged commands
disconnect  Disconnect an existing network connection
enable      Turn on privileged commands
exit        Exit from the EXEC
logout      Exit from the EXEC
ping        Send echo messages
resume      Resume an active network connection
show        Show running system information
ssh         Open a secure shell client connection
telnet      Open a telnet connection
terminal     Set terminal line parameters
traceroute  Trace route to destination

Router> show ?
arp          Arp table
cdp          CDP information
class-map    Show QoS Class Map
clock        Display the system clock
controllers  Interface controllers status
crypto       Encryption module
dot11        IEEE 802.11 show information
flash:       display information about flash: file system
frame-relay  Frame-Relay information
history      Display the session command history
hosts        IP domain-name, lookup style, nameservers, and host table
interfaces   Interface status and configuration
ip           IP information
ipv6         IPv6 information
lldp         LLDP information
policy-map   Show QoS Policy Map
pppoe        PPPoE information
privilege    Show current privilege level
protocols    Active network routing protocols
queue        Show queue contents
queueing     Show queueing configuration
sessions     Information about Telnet connections
ssh          Status of SSH server connections
tcp          Status of TCP connections
terminal     Display terminal configuration parameters

Copy Paste
```

4. Now if you want to go in privilege mode to user. “Router>enable” then you will enter in privilege mode and it will look like “Router#”. If you want to see all command line of this Type “Router# ?” then

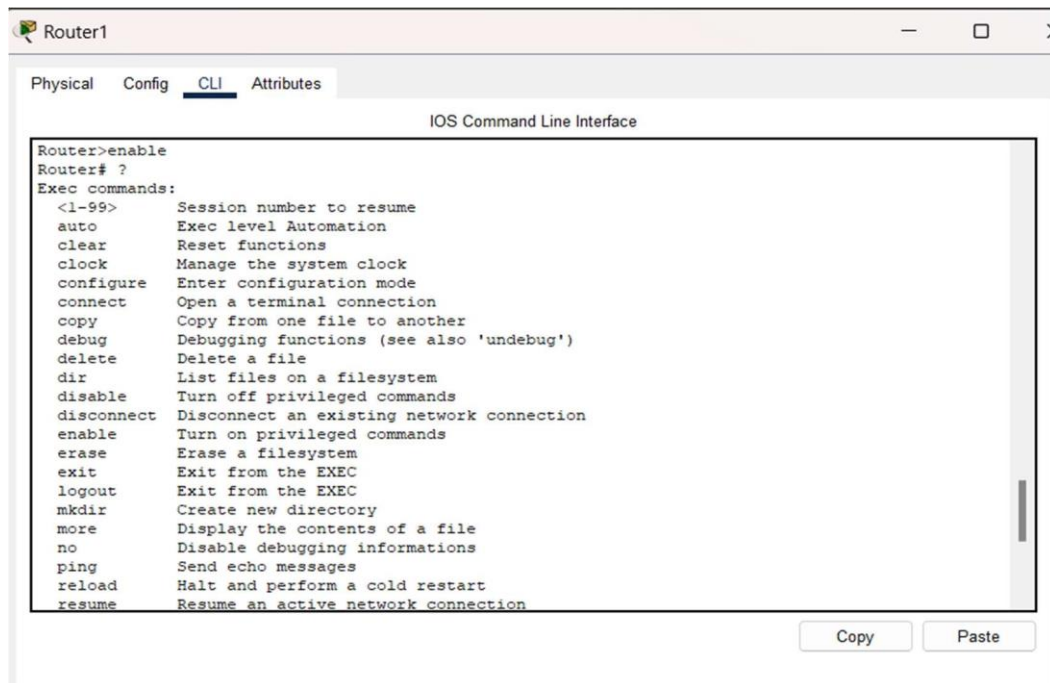


The screenshot shows the Router1 CLI window with the 'CLI' tab selected. The title bar indicates 'IOS Command Line Interface'. The command prompt is 'Router# ?'. Below it, a list of EXEC commands is displayed, including: auto, clear, clock, configure, connect, copy, debug, delete, dir, disable, disconnect, enable, erase, exit, logout, mkdir, more, no, ping, reload, and resume. Each command is followed by a brief description. At the bottom right of the window, there are 'Copy' and 'Paste' buttons.

```
Router1
Physical Config CLI Attributes
IOS Command Line Interface

Router>enable
Router# ?
Exec commands:
auto        Exec level Automation
clear       Reset functions
clock       Manage the system clock
configure    Enter configuration mode
connect     Open a terminal connection
copy        Copy from one file to another
debug       Debugging functions (see also 'undebg')
delete      Delete a file
dir         List files on a filesystem
disable     Turn off privileged commands
disconnect  Disconnect an existing network connection
enable      Turn on privileged commands
erase       Erase a filesystem
exit        Exit from the EXEC
logout      Exit from the EXEC
mkdir       Create new directory
more        Display the contents of a file
no          Disable debugging informations
ping        Send echo messages
reload      Halt and perform a cold restart
resume      Resume an active network connection

Copy Paste
```


5. If you want see more command line Type “Router#show ?”, then you will find out all the commands which can be access in Privilege mode.

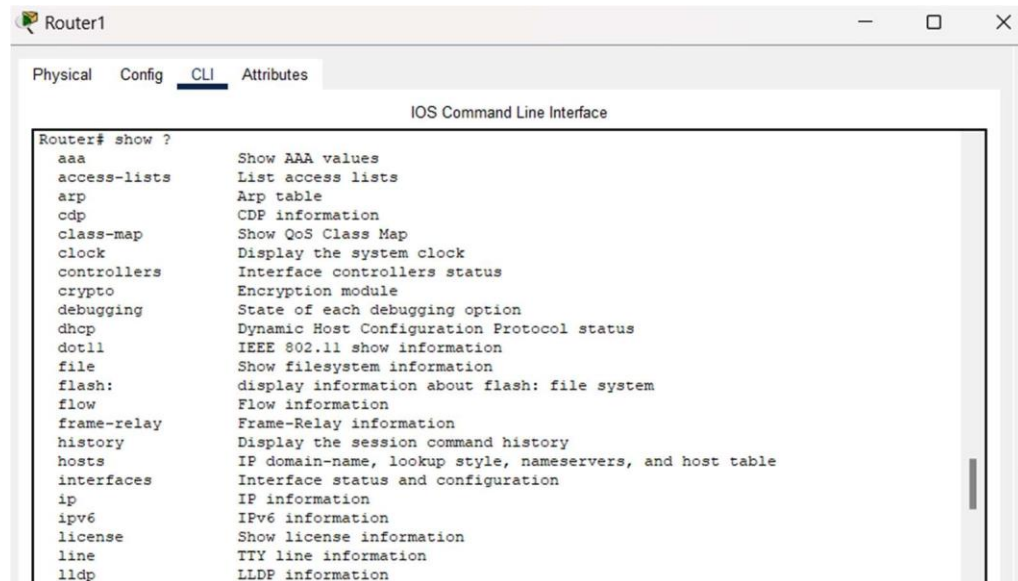

The screenshot shows a window titled 'Router1' with tabs for Physical, Config, CLI, and Attributes. The CLI tab is active, displaying the 'IOS Command Line Interface'. The command 'Router# show ?' has been entered, resulting in a list of available commands and their descriptions:

Command	Description
aaa	Show AAA values
access-lists	List access lists
arp	Arp table
cdp	CDP information
class-map	Show QoS Class Map
clock	Display the system clock
controllers	Interface controllers status
crypto	Encryption module
debugging	State of each debugging option
dhcp	Dynamic Host Configuration Protocol status
dot11	IEEE 802.11 show information
file	Show filesystem information
flash:	display information about flash: file system
flow	Flow information
frame-relay	Frame-Relay information
history	Display the session command history
hosts	IP domain-name, lookup style, nameservers, and host table
interfaces	Interface status and configuration
ip	IP information
ipv6	IPv6 information
license	Show license information
line	TTY line information
lldp	LLDP information

6. If we want to see ‘Current running and active configuration’. Type “ Router# show running-config”. It will show you all the details.

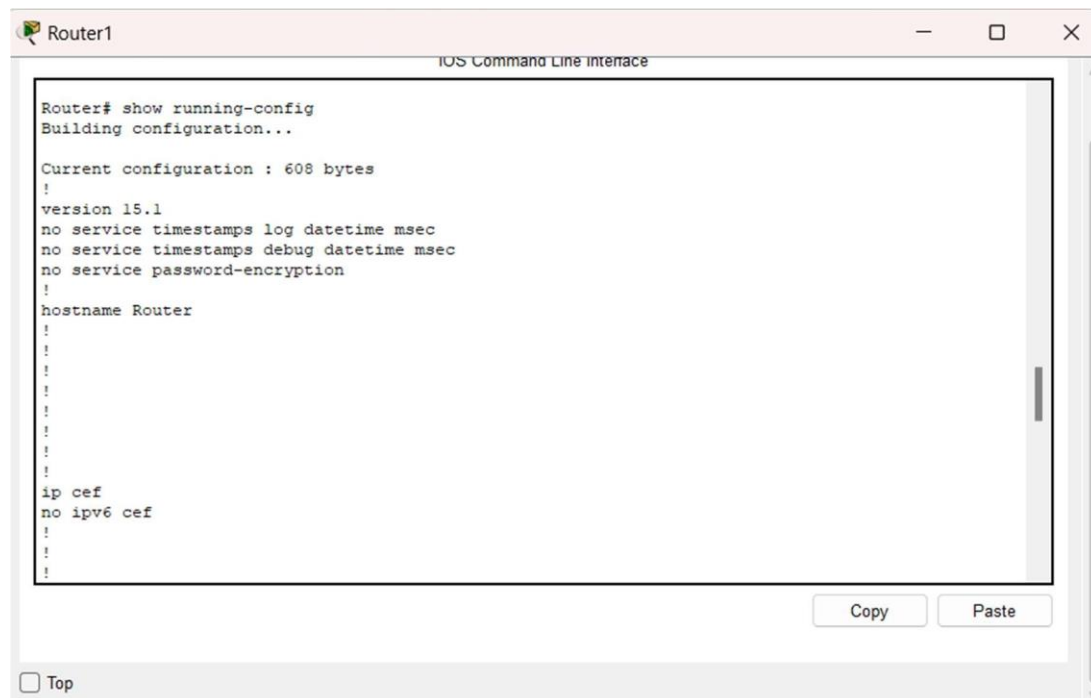

The screenshot shows a window titled 'Router1' with tabs for Physical, Config, CLI, and Attributes. The CLI tab is active, displaying the 'IOS Command Line Interface'. The command 'Router# show running-config' has been entered, resulting in the following output:

```
Router# show running-config
Building configuration...

Current configuration : 608 bytes
!
version 15.1
no service timestamps log datetime msec
no service timestamps debug datetime msec
no service password-encryption
!
hostname Router
!
!
!
!
!
!
!
ip cef
no ipv6 cef
!
!
!
```

At the bottom of the window, there are 'Copy' and 'Paste' buttons, and a 'Top' button with a checkbox.

7. To exit from use “Router#exit” then you will exit the from current interface and return to back to normal.

