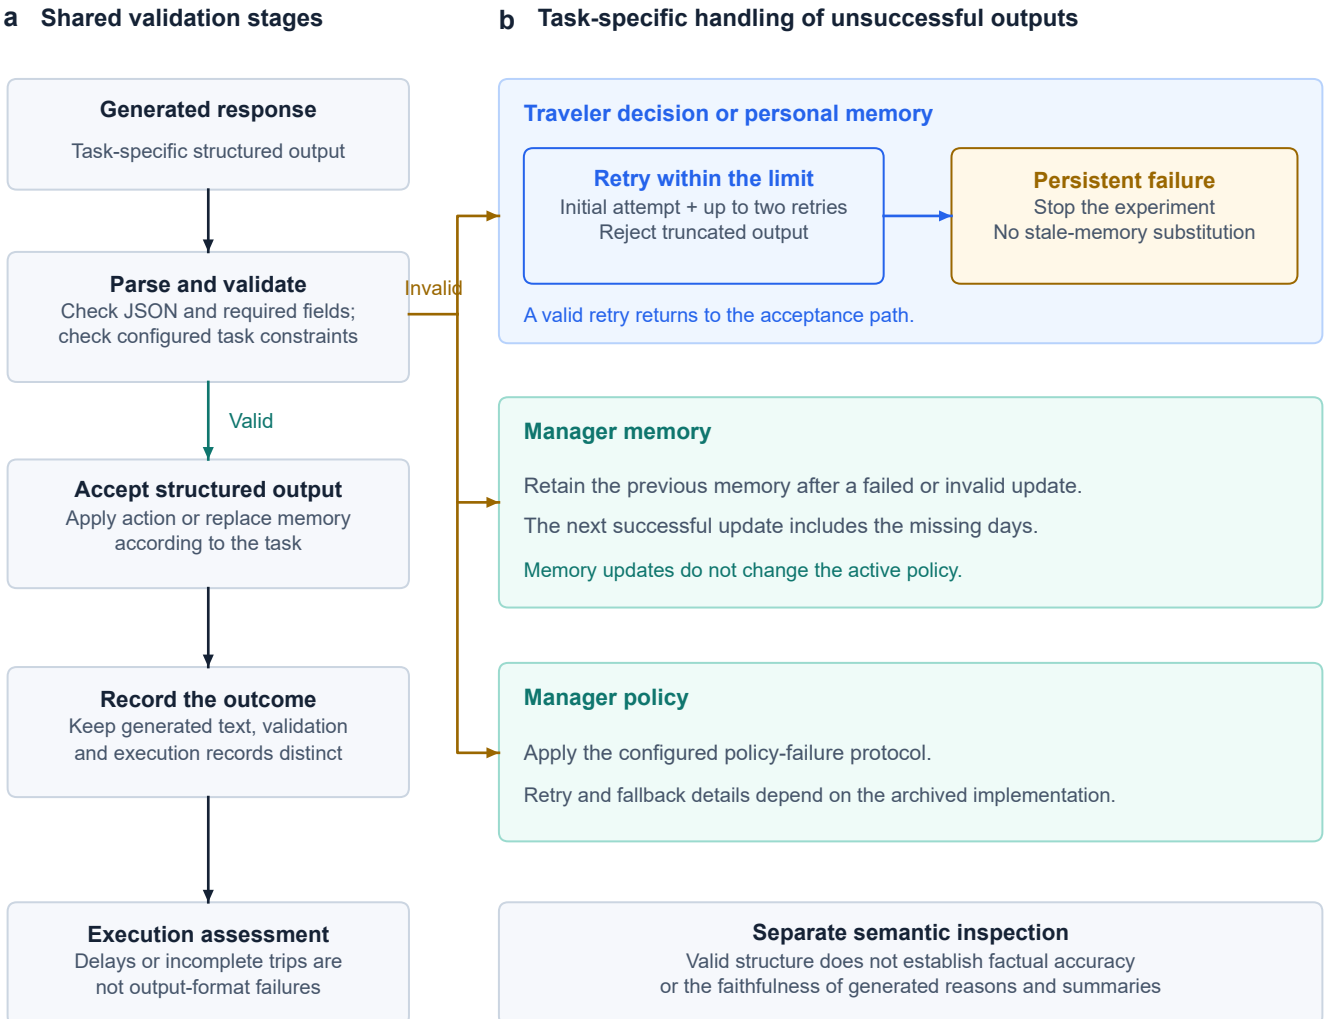

Transport-error handling is separate from output validation; consult the run-specific protocol.