

Efficient Quantum Machine Learning w/ Hybrid Computational Resources

Ara G.



agnosticq.ai



[AgnostiqHQ](https://github.com/AgnostiqHQ)



[@agnosticHQ](https://twitter.com/agnosticHQ)

Ara Ghukasyan, PhD

Quantum Algorithms Researcher.

BSc, McMaster, Math & Physics


PhD, McMaster, Engineering Physics

ara@agnostiq.ai




Outline.

- ❑ What is *Quantum Machine Learning*?
- ❑ A kernel algorithm for QML
- ❑ QML in practice

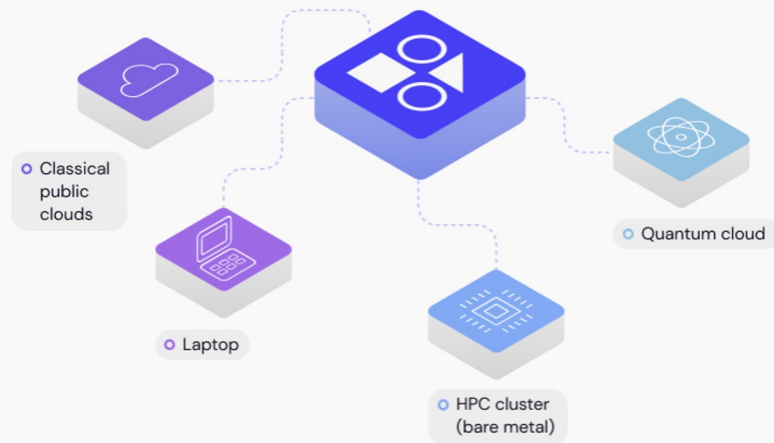

- ❑ **Tutorial:** Running QML workflows with *Covalent*

Quantum Machine Learning

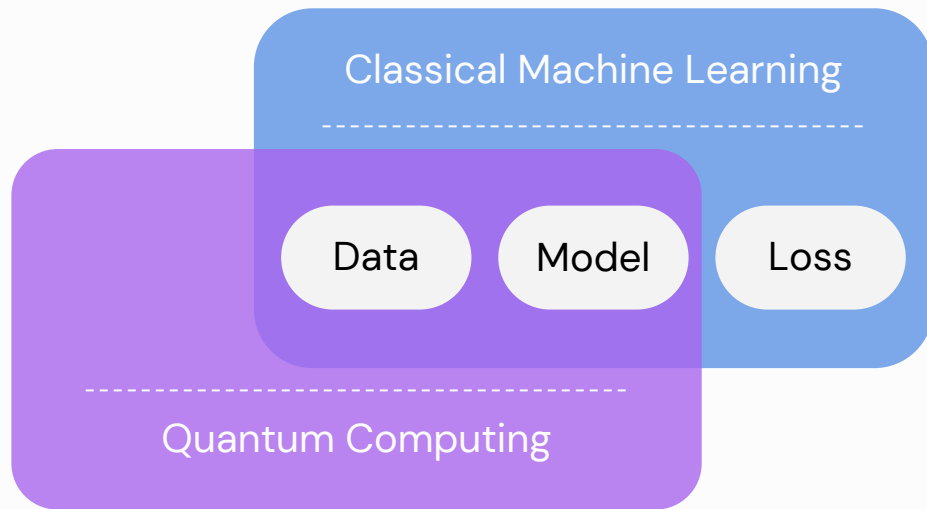

- ❑ Quantum information as input data
- ❑ Quantum computations as ML models


Quantum Computing.

- Processing information using the laws of quantum mechanics.
- Processing information using a quantum system.

3-qubit register
(quantum system)

$$|\phi\rangle|\chi\rangle|\psi\rangle = \alpha_0|000\rangle + \alpha_1|001\rangle + \dots + \alpha_6|110\rangle + \alpha_7|111\rangle = \begin{pmatrix} \alpha_0 \\ \alpha_1 \\ \alpha_2 \\ \alpha_3 \\ \alpha_4 \\ \alpha_5 \\ \alpha_6 \\ \alpha_7 \end{pmatrix} \in \mathbb{C}^8$$

state vector
(superposition over $2^3 = 8$ basis states)

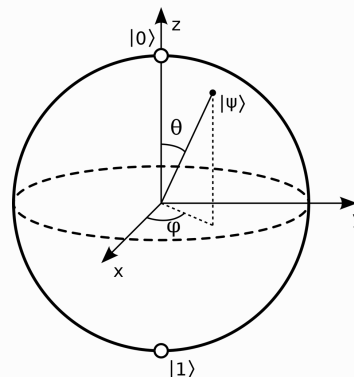


elements of quantum computation

- operations** (*unitary matrices*)
manipulate amplitudes, α_i
- measurements** return
outcomes with probabilities
related to $|\alpha_i|^2$
- algorithms** obtain “desirable”
amplitudes, reveal solutions

Quantum Circuits for ML.

- How to make use of quantum circuits?

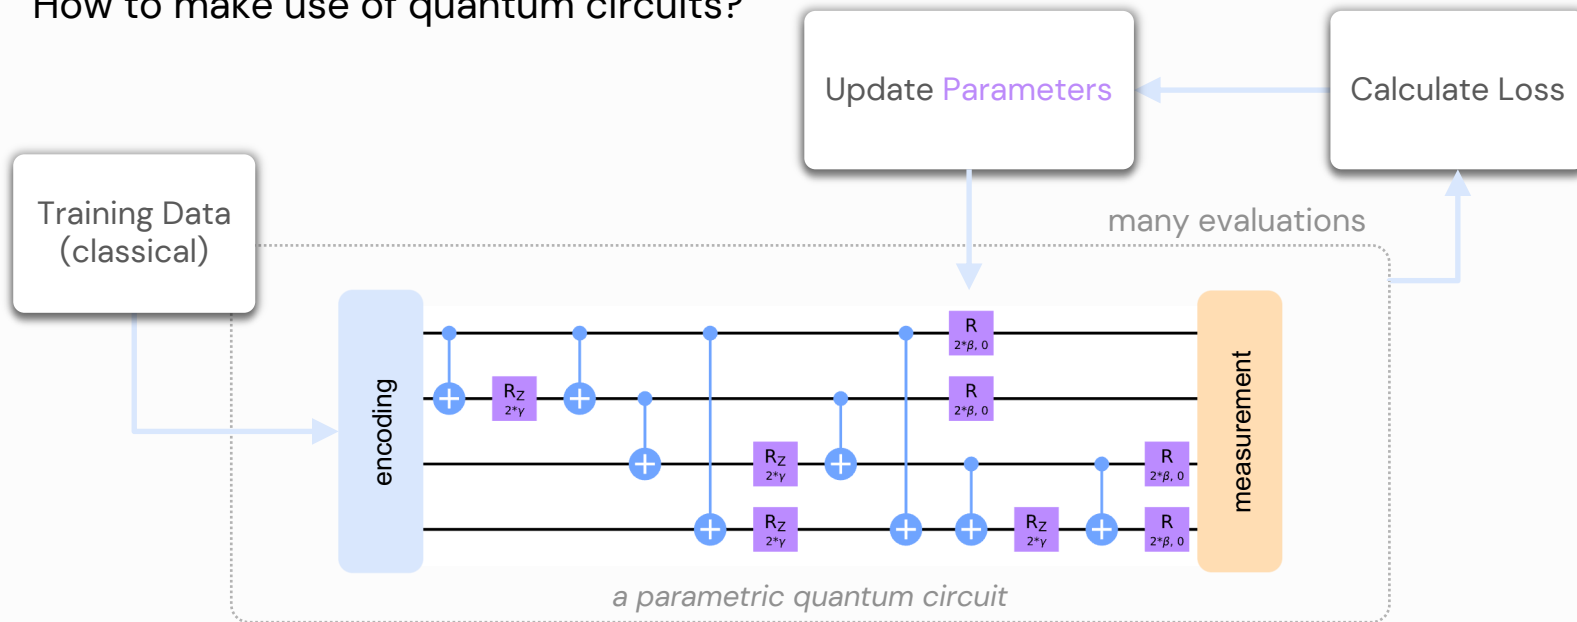

Support-Vector Machines

SVM Overview.


- The naïve SVM is a **linear classifier**.

Objective

find \vec{w} and b , such that

$$\vec{w} \cdot \vec{x} - b = 0$$

determines the line with
largest possible **margin**.

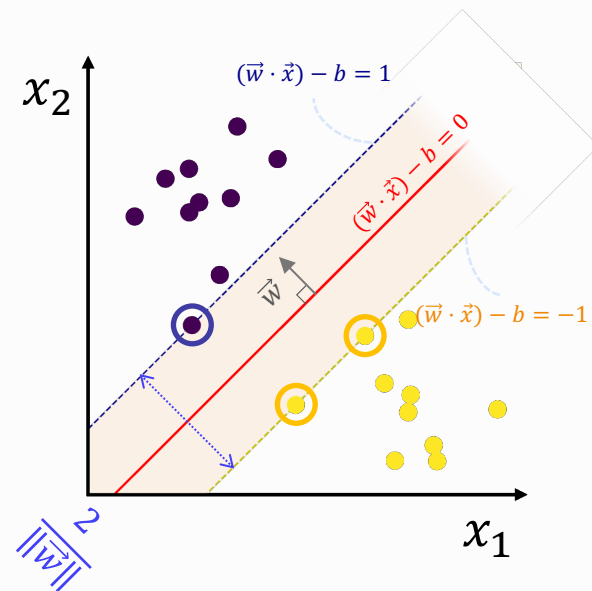

SVM Overview.

Feature Map

$$\begin{pmatrix} x_1 \\ x_2 \end{pmatrix} \rightarrow \begin{pmatrix} x_1 \\ x_2 \\ x_1^2 + x_2^2 \end{pmatrix}$$


□ The non-linear SVM.

Objective


find \vec{w} and b , such that

$$\vec{w} \cdot \vec{x} - b = 0$$

determines the *hyperplane* with
largest possible margin.

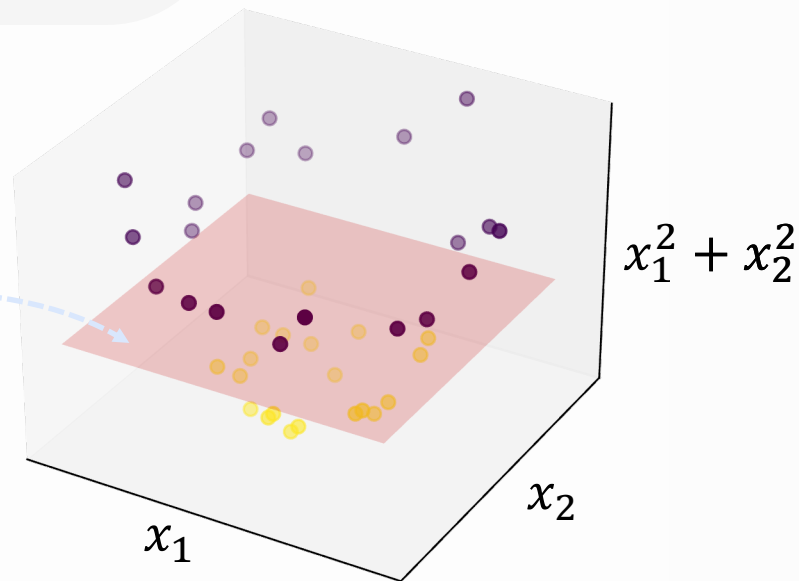

Kernels.

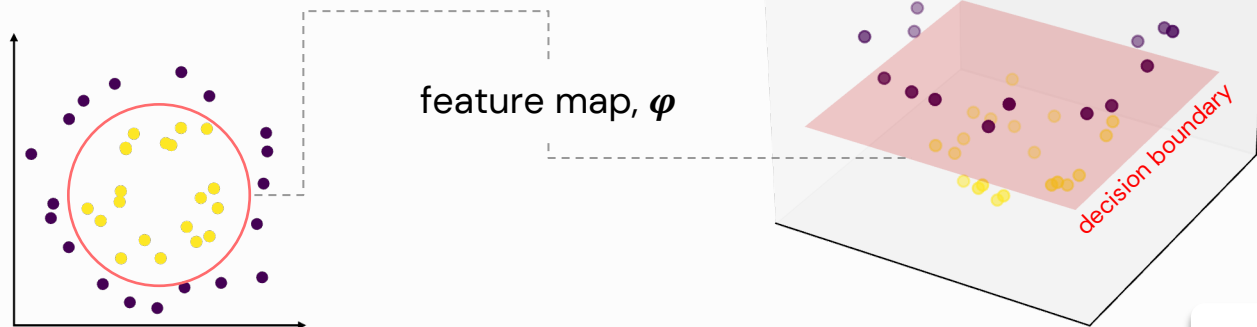

- SVM only cares about **inner products** on the inputs.
- We can transform the inputs as we like.*

$$\vec{x} \cdot \vec{x}' = (x_1, x_2) \cdot (x'_1, x'_2)$$

$$\varphi(\vec{x}) \cdot \varphi(\vec{x}') = (x_1, x_2, x_1^2 + x_2^2) \cdot (x'_1, x'_2, x_1'^2 + x_2'^2)$$




feature map

$$\kappa(\vec{x}, \vec{x}') = \varphi(\vec{x}) \cdot \varphi(\vec{x}')$$


kernel function

Quantum Kernels.

- How to evaluate a **kernel function** on a quantum circuit?

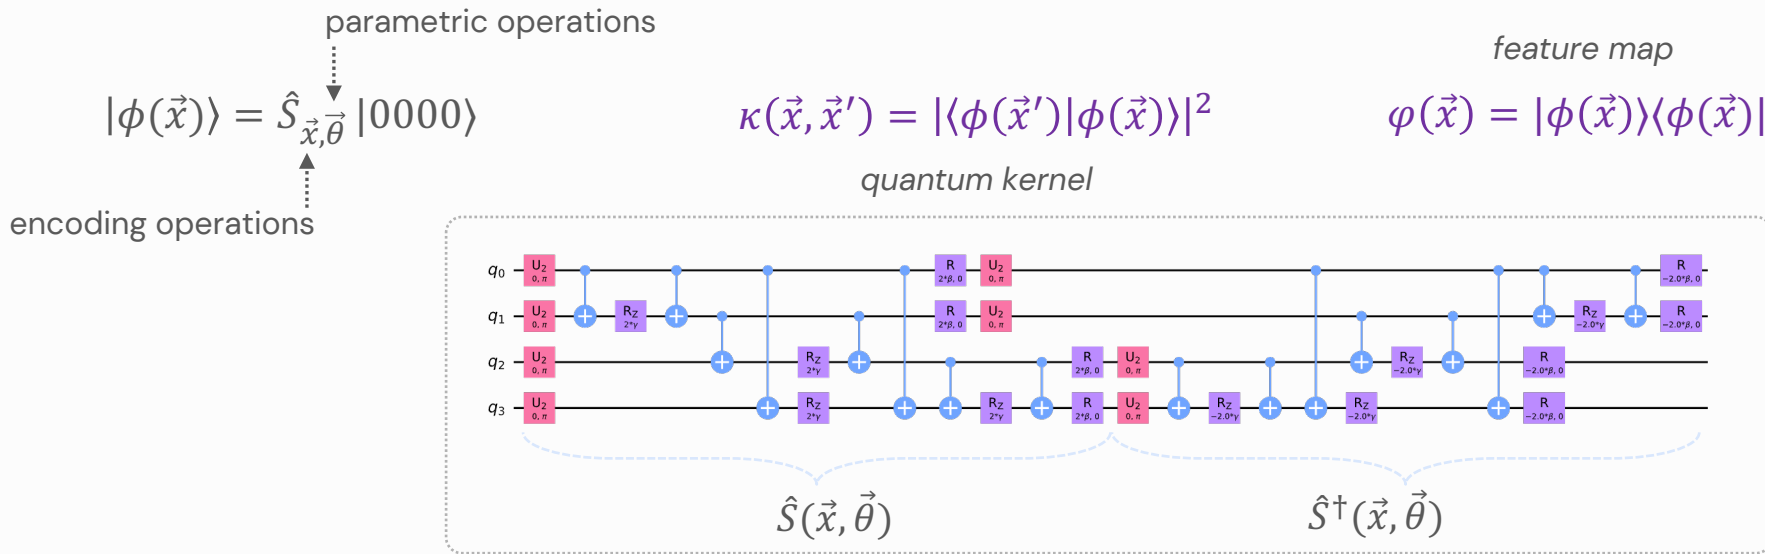


Quantum SVM.

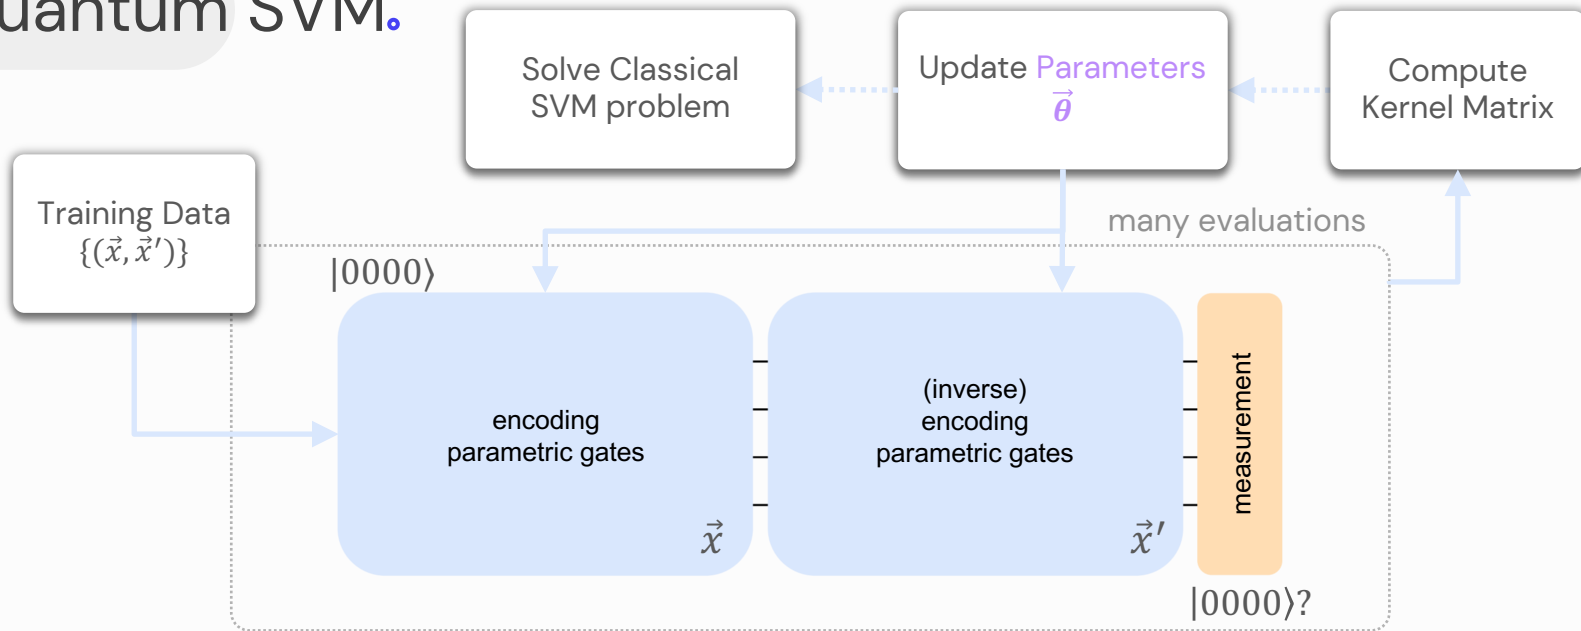

$$(\hat{S}_{\vec{x}', \vec{\theta}})^\dagger \hat{S}_{\vec{x}, \vec{\theta}} |0000\rangle = \begin{cases} |0000\rangle & \text{if } \vec{x}' = \vec{x} \rightarrow \kappa(\vec{x}, \vec{x}') = 1 \\ |\Psi\rangle & \rightarrow 0 \leq \kappa(\vec{x}, \vec{x}') < 1 \end{cases}$$

QML in Practice

Implementing a QML algorithm.

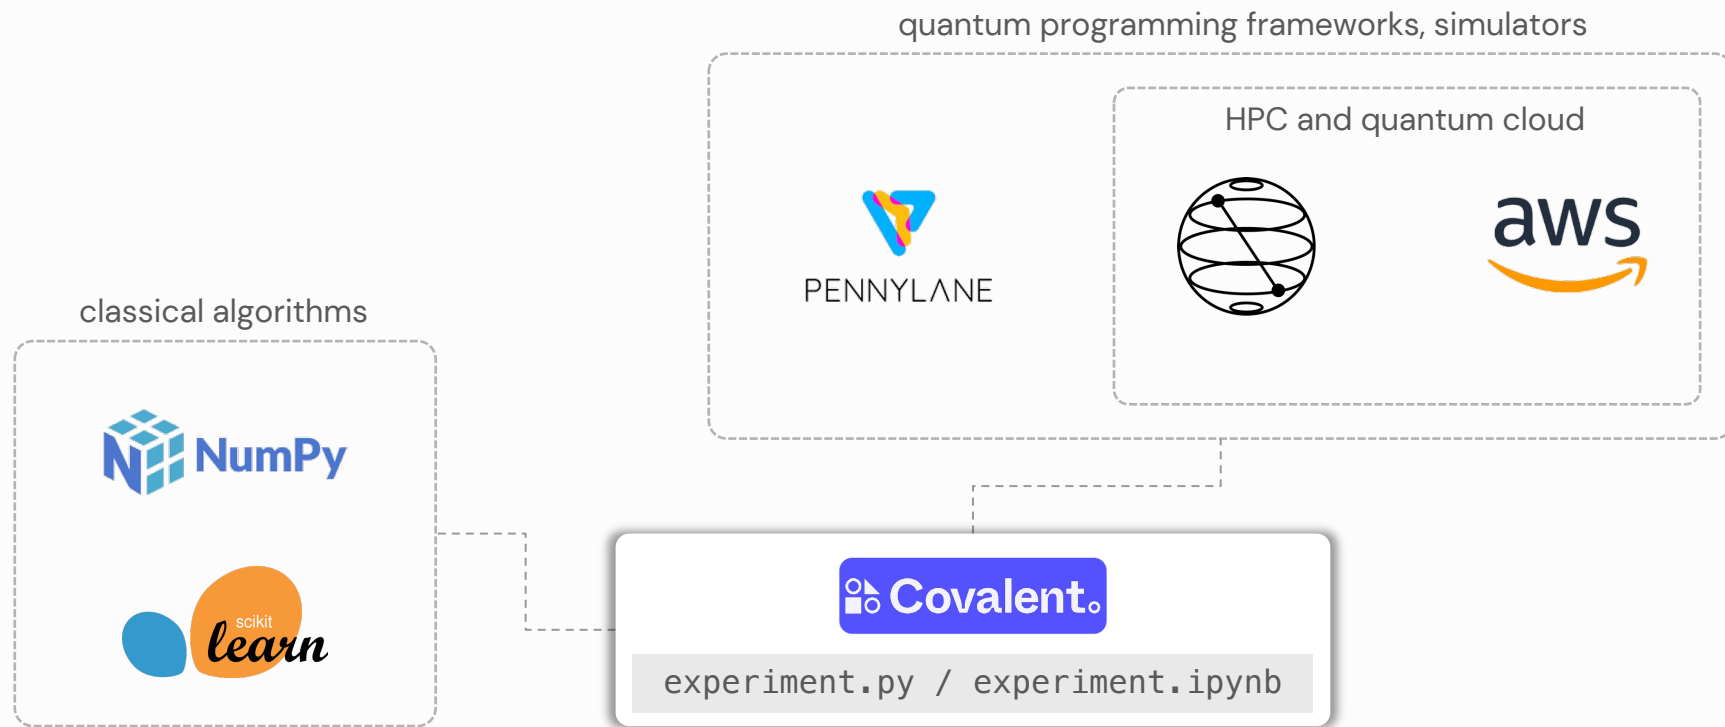


Tutorial

https://github.com/AgnostiqHQ/tutorials_covalent_qsite_2022



AgnostiqHQ

Resources.



Quantum Computing (IBM)



qiskit.org/textbook/preface.html



PENNYLANE

Quantum Machine Learning (Xanadu)



pennylane.ai/qml/



Covalent (Agnostiq)



covalent.xyz



covalent.readthedocs.io